

**MAXIM**

# Improved, 8-Channel/Dual 4-Channel, CMOS Analog Multiplexers

**DG408/DG409**

## General Description

Maxim's redesigned DG408 and DG409 CMOS analog multiplexers now feature guaranteed matching between channels ( $8\Omega$  max) and flatness over the specified signal range ( $9\Omega$  max). These low on-resistance muxes ( $100\Omega$  max) conduct equally well in either direction and feature guaranteed low charge injection ( $15\text{pC}$  max). In addition, these new muxes offer low input off-leakage current over temperature—less than  $5\text{nA}$  at  $+85^\circ\text{C}$ .

The DG408 is a 1-of-8 multiplexer/demultiplexer and the DG409 is a dual 4-channel multiplexer/demultiplexer. Both muxes operate with a  $+4.5\text{V}$  to  $+30\text{V}$  single supply and with  $\pm 4.5\text{V}$  to  $\pm 20\text{V}$  dual supplies. ESD protection is guaranteed to be greater than  $2000\text{V}$  per Method 3015.7 of MIL-STD-883. These improved muxes are pin-compatible plug-in upgrades for the industry standard DG408 and DG409.

## Applications

- Sample-and-Hold Circuits
- Test Equipment
- Guidance and Control Systems
- Communications Systems
- Data-Acquisition Systems
- Audio Signal Routing

## Features

- ◆ Pin-Compatible Plug-In Upgrades for Industry Standard DG408/DG409
- ◆ Guaranteed Matching Between Channels,  $8\Omega$  Max
- ◆ Guaranteed On-Resistance Flatness,  $9\Omega$  Max
- ◆ Guaranteed Low Charge Injection,  $15\text{pC}$  Max
- ◆ Low On-Resistance,  $100\Omega$  Max
- ◆ Input Leakage,  $5\text{nA}$  Max at  $+85^\circ\text{C}$
- ◆ Low Power Consumption,  $1.25\text{mW}$  Max
- ◆ Rail-to-Rail Signal Handling
- ◆ Digital Input Controls TTL/CMOS Compatible
- ◆ ESD Protection  $>2000\text{V}$  per Method 3015.7

## Ordering Information


PART	TEMP. RANGE	PIN-PACKAGE
<b>DG408CJ</b>	$0^\circ\text{C}$ to $+70^\circ\text{C}$	16 Plastic DIP
DG408CY	$0^\circ\text{C}$ to $+70^\circ\text{C}$	16 Narrow SO
DG408C/D	$0^\circ\text{C}$ to $+70^\circ\text{C}$	Dice*
DG408DJ	$-40^\circ\text{C}$ to $+85^\circ\text{C}$	16 Plastic DIP
DG408DY	$-40^\circ\text{C}$ to $+85^\circ\text{C}$	16 Narrow SO
DG408DK	$-40^\circ\text{C}$ to $+85^\circ\text{C}$	16 CERDIP
DG408AK	$-55^\circ\text{C}$ to $+125^\circ\text{C}$	16 CERDIP**

*Ordering Information continued at end of data sheet.*


\* Contact factory for dice specifications.

\*\* Contact factory for availability.

## Pin Configurations

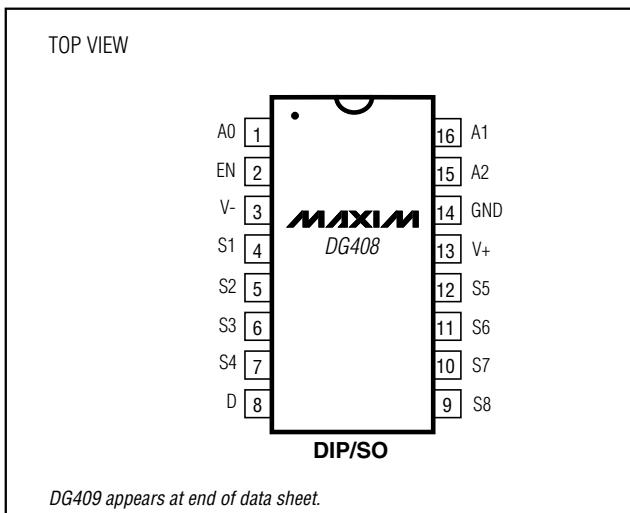

## Functional Diagrams

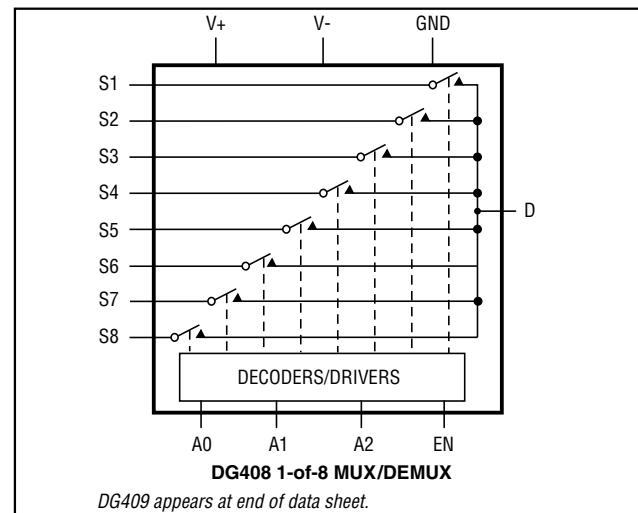**MAXIM**

Maxim Integrated Products 1

For free samples & the latest literature: <http://www.maxim-ic.com>, or phone 1-800-998-8800.  
For small orders, phone 1-800-835-8769.

# Improved, 8-Channel/Dual 4-Channel, CMOS Analog Multiplexers

## ABSOLUTE MAXIMUM RATINGS

Voltage Referenced to V-

V <sub>+</sub> .....	-0.3V, 44V
GND .....	-0.3V, 25V

Digital Inputs, S, D (Note 1).....	(V <sub>-</sub> - 2V) to (V <sub>+</sub> + 2V) or 30mA, (whichever occurs first)
------------------------------------	---

Continuous Current (any terminal) .....	30mA
Peak Current, S, D (pulsed at 1ms, 10% duty cycle max) .....	100mA

**Note 1:** Signals on S<sub>+</sub>, D<sub>+</sub>, EN, A0, A1, or A2 exceeding V<sub>+</sub> or V<sub>-</sub> are clamped by internal diodes. Limit forward current to maximum current ratings.

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

## ELECTRICAL CHARACTERISTICS—Dual Supplies

(V<sub>+</sub> = 15V, V<sub>-</sub> = -15V, GND = 0V, V<sub>AH</sub> = +2.4V, V<sub>AL</sub> = +0.8V, TA = T<sub>MIN</sub> to T<sub>MAX</sub>, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS			MIN	TYP	MAX	UNITS
<b>SWITCH</b>								
Analog Signal Range	V <sub>ANALOG</sub>	(Note 3)			-15	15		V
Drain-Source On-Resistance	r <sub>DS(ON)</sub>	I <sub>S</sub> = -1.0mA, V <sub>D</sub> = ±10V		TA = +25°C	60	100		Ω
				TA = T <sub>MIN</sub> to T <sub>MAX</sub>		125		
On-Resistance Matching Between Channels	Δr <sub>DS(ON)</sub>	I <sub>S</sub> = -1.0mA, V <sub>D</sub> = ±10V (Note 4)		TA = +25°C	1.5	8		Ω
				TA = T <sub>MIN</sub> to T <sub>MAX</sub>		10		
On-Resistance Flatness	r <sub>FLAT</sub>	I <sub>S</sub> = -1.0mA, V <sub>D</sub> = ±5V or 0V		TA = +25°C	1.8	9		Ω
				TA = T <sub>MIN</sub> to T <sub>MAX</sub>		12		
Source-Off Leakage Current (Note 5)	I <sub>S(OFF)</sub>	V <sub>D</sub> = +10V, V <sub>S</sub> = ±10V, V <sub>EN</sub> = 0V		TA = +25°C	-0.5	0.01	0.5	nA
		V <sub>D</sub> = ±10V, V <sub>S</sub> = +10V, V <sub>EN</sub> = 0V	DG408	TA = T <sub>MIN</sub> to T <sub>MAX</sub>	C, D	-5	5	
				A		-50	50	
Drain-Off Leakage Current (Note 5)	I <sub>D(OFF)</sub>	V <sub>D</sub> = ±10V, V <sub>S</sub> = +10V, V <sub>EN</sub> = 0V	DG408	TA = +25°C	-1	0.02	1	nA
				TA = T <sub>MIN</sub> to T <sub>MAX</sub>	C, D	-10	10	
		V <sub>D</sub> = +10V, V <sub>S</sub> = ±10V, V <sub>EN</sub> = 0V	DG409	A		-100	100	
				TA = +25°C	-1	0.02	1	
Drain-On Leakage Current (Note 5)	I <sub>D(ON)</sub>	V <sub>D</sub> = ±10V, V <sub>S</sub> = ±10V, sequence each switch on	DG408	TA = T <sub>MIN</sub> to T <sub>MAX</sub>	C, D	-5	5	nA
				A		-50	50	
				TA = +25°C	-1	0.02	1	
		V <sub>D</sub> = ±10V, V <sub>S</sub> = ±10V, sequence each switch on	DG409	TA = T <sub>MIN</sub> to T <sub>MAX</sub>	C, D	-20	20	
				A		-100	100	
				TA = +25°C	-1	0.02	1	
		V <sub>D</sub> = ±10V, V <sub>S</sub> = ±10V, sequence each switch on	DG409	TA = T <sub>MIN</sub> to T <sub>MAX</sub>	C, D	-10	10	
				A		-50	50	

# Improved, 8-Channel/Dual 4-Channel, CMOS Analog Multiplexers

## ELECTRICAL CHARACTERISTICS—Dual Supplies (continued)

( $V_+ = 15V$ ,  $V_- = -15V$ ,  $GND = 0V$ ,  $V_{AH} = +2.4V$ ,  $V_{AL} = +0.8V$ ,  $T_A = T_{MIN}$  to  $T_{MAX}$ , unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP (Note 2)	MAX	UNITS
<b>INPUT</b>							
Input Current with Input Voltage High	$I_{AH}$	$V_A = 2.4V$ or $15V$		-1.0	1.0	1.0	$\mu A$
Input Current with Input Voltage Low	$I_{AL}$	$V_{EN} = 0V$ or $2.4V$ , $V_A = 0V$		-1.0	1.0	1.0	$\mu A$
<b>SUPPLY</b>							
Power-Supply Range				$\pm 4.5$	$\pm 20$	$\pm 20$	V
Positive Supply Current	$I_+$	$V_{EN} = V_A = 0V$ or $4.5V$		$T_A = +25^\circ C$	16	30	$\mu A$
		$V_{EN} = 2.4V$ , $V_{A(ALL)} = 0V$ or $2.4V$		$T_A = T_{MIN}$ to $T_{MAX}$	75	75	
Negative Supply Current	$I_-$	$V_{EN} = 2.4V$ , $V_{A(ALL)} = 0V$ or $2.4V$		$T_A = +25^\circ C$	0.075	0.5	mA
				$T_A = T_{MIN}$ to $T_{MAX}$	2	2	
Negative Supply Current	$I_-$			$T_A = +25^\circ C$	-1	1	$\mu A$
				$T_A = T_{MIN}$ to $T_{MAX}$	-10	10	
<b>DYNAMIC</b>							
Transition Time	$t_{TRANS}$	Figure 2		$T_A = +25^\circ C$	85	175	ns
				$T_A = T_{MIN}$ to $T_{MAX}$	250	250	
Break-Before-Make Interval	$t_{OPEN}$	Figure 4		$T_A = +25^\circ C$	10	40	ns
Enable Turn-On Time	$t_{ON(EN)}$	Figure 3		$T_A = +25^\circ C$	85	150	ns
				$T_A = T_{MIN}$ to $T_{MAX}$	225	225	
Enable Turn-Off Time	$t_{OFF(EN)}$	Figure 3		$T_A = +25^\circ C$	150	300	ns
				$T_A = T_{MIN}$ to $T_{MAX}$	300	300	
Charge Injection (Note 3)	$Q$	$C_L = 1.0nF$ , $V_S = 0V$ , $R_S = 0\Omega$ , Figure 5		$T_A = +25^\circ C$	2	15	pC
Off Isolation (Note 6)	$V_{ISO}$	$V_{EN} = 0V$ , $R_L = 1k\Omega$ , $f = 100kHz$ , Figure 6		$T_A = +25^\circ C$	-75	-75	dB
Crosstalk Between Input Channels	$V_{CT}$	$V_{EN} = 2.4V$ , $f = 100kHz$ , $V_{GEN} = 1V_{P-P}$ , $R_L = 1k\Omega$ , Figure 7		$T_A = +25^\circ C$	-92	-92	dB
Logic Input Capacitance	$C_{IN}$	$f = 1MHz$		$T_A = +25^\circ C$	8	8	pF
Source-Off Capacitance	$C_{S(OFF)}$	$f = 1MHz$ , $V_{EN} = V_S = 0V$ , Figure 8		$T_A = +25^\circ C$	3	3	pF
Drain-Off Capacitance	$C_{D(OFF)}$	$f = 1MHz$ , $V_{EN} = 0.8V$ , $V_D = 0V$ , Figure 8	$DG408$	$T_A = +25^\circ C$	26	26	pF
			$DG409$		14	14	
Drain-On Capacitance	$C_{D(ON)}$ + $C_{S(ON)}$	$f = 1MHz$ , $V_{EN} = 2.4V$ , $V_D = 0V$ , Figure 8	$DG408$	$T_A = +25^\circ C$	37	37	pF
			$DG409$		25	25	

# Improved, 8-Channel/Dual 4-Channel, CMOS Analog Multiplexers

## ELECTRICAL CHARACTERISTICS—Single Supply

(V<sub>+</sub> = 12V, V<sub>-</sub> = 0V, GND = 0V, V<sub>AH</sub> = +2.4V, V<sub>AL</sub> = +0.8V, T<sub>A</sub> = T<sub>MIN</sub> to T<sub>MAX</sub>, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP (Note 2)	MAX	UNITS
<b>SWITCH</b>							
Analog Signal Range	V <sub>ANALOG</sub>	(Note 3)		0		12	V
Drain-Source On-Resistance	r <sub>DSON</sub>	I <sub>S</sub> = -1.0mA V <sub>D</sub> = 3V or 10V	T <sub>A</sub> = +25°C		120	175	Ω
<b>DYNAMIC</b>							
Transition Time (Note 3)	t <sub>TRANS</sub>	V <sub>S1</sub> = 8V, V <sub>S8</sub> = 0V, V <sub>A</sub> = 0V, Figure 2	T <sub>A</sub> = +25°C		115	450	ns
Enable Turn-On Time (Note 3)	t <sub>ON(EN)</sub>	V <sub>AL</sub> = 0V, V <sub>S1</sub> = 5V, Figure 3	T <sub>A</sub> = +25°C		100	600	ns
Enable Turn-Off Time (Note 3)	t <sub>OFF(EN)</sub>	V <sub>AL</sub> = 0V, V <sub>S1</sub> = 5V, Figure 3	T <sub>A</sub> = +25°C		75	300	ns
Charge Injection	Q	C <sub>L</sub> = 1.0nF, V <sub>S</sub> = 0V, R <sub>S</sub> = 0Ω	T <sub>A</sub> = +25°C		2		pC

**Note 2:** The algebraic convention where the most negative value is a minimum and the most positive value a maximum is used in this data sheet.

**Note 3:** Guaranteed by design.

**Note 4:** ΔR<sub>ON</sub> = R<sub>ON(MAX)</sub> - R<sub>ON(MIN)</sub>. On-resistance match between channels and flatness are guaranteed only with specified voltages. Flatness is defined as the difference between the maximum and minimum value of on-resistance as measured at the extremes of the specified analog signal range.

**Note 5:** Leakage parameters are 100% tested at the maximum rated hot temperature and guaranteed by correlation at +25°C.









**Note 6:** Off isolation = 20log V<sub>D</sub>/V<sub>S</sub>, where V<sub>D</sub> = output and V<sub>S</sub> = input to off switch.

# Improved, 8-Channel/Dual 4-Channel, CMOS Analog Multiplexers

**DG408/DG409**

## Typical Operating Characteristics

( $T_A = +25^\circ\text{C}$ , unless otherwise noted.)

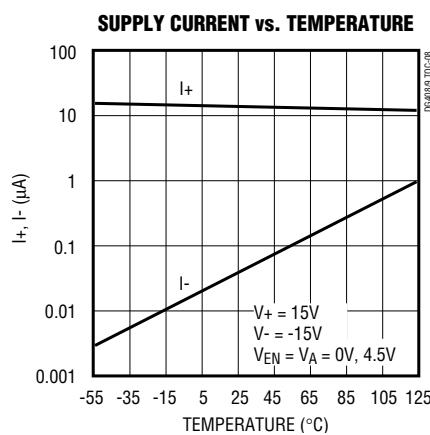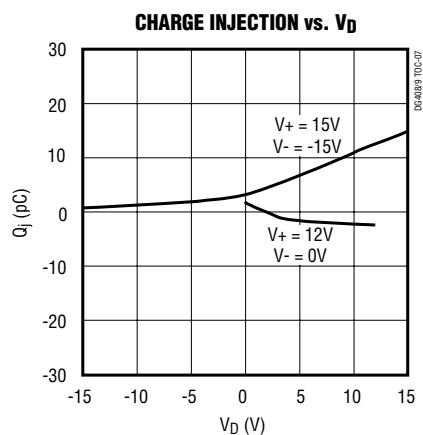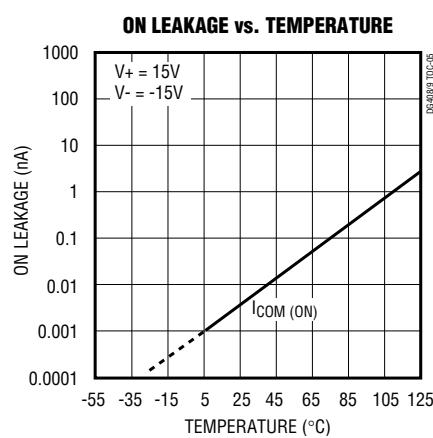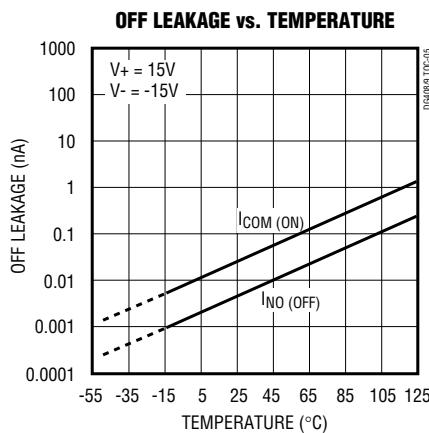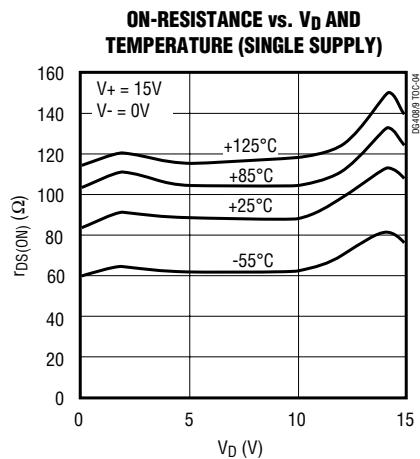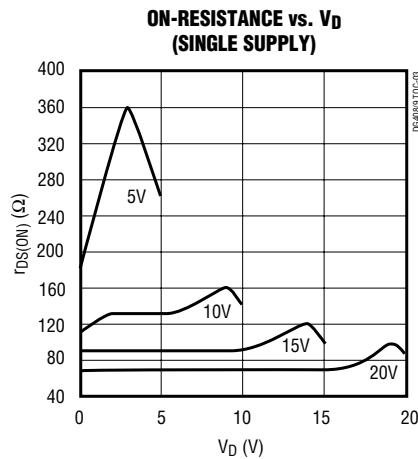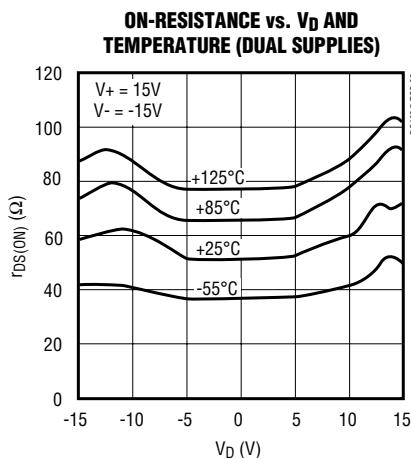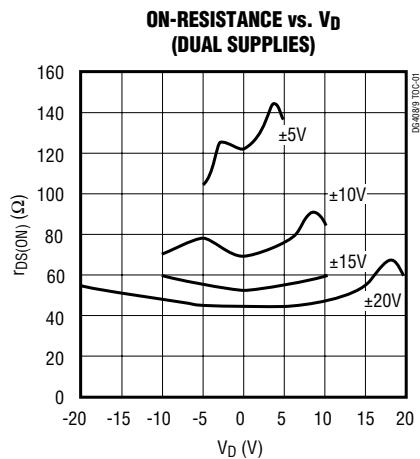

# Improved, 8-Channel/Dual 4-Channel, CMOS Analog Multiplexers

## Pin Description

PIN		NAME	FUNCTION
DG408	DG409		
1, 15, 16	—	A0, A2, A1	Address Inputs
—	1, 16	A0, A1	Address Inputs
2	2	EN	Enable Input
3	3	V-	Negative Supply Voltage Input
4–7	—	S1–S4	Bidirectional Analog Inputs
—	4–7	S1A–S4A	Bidirectional Analog Inputs
8	—	D	Bidirectional Analog Output
—	8, 9	DA, DB	Bidirectional Analog Outputs
9–12	—	S8–S5	Bidirectional Analog Inputs
—	10–13	S4B–S1B	Bidirectional Analog Inputs
13	14	V+	Positive Supply Voltage Input
14	15	GND	Ground

## Applications Information

### Operation with Supply Voltages Other than 15V

Using supply voltages less than  $\pm 15\text{V}$  reduces the analog signal range. The DG408/DG409 switches operate with  $\pm 4.5\text{V}$  to  $\pm 20\text{V}$  bipolar supplies or with a  $+4.5\text{V}$  to  $+40\text{V}$  single supply. Connect V- to GND when operating with a single supply. Both device types can also operate with unbalanced supplies, such as  $+24\text{V}$  and  $-5\text{V}$ . The *Typical Operating Characteristics* graphs show typical on-resistance with  $20\text{V}$ ,  $15\text{V}$ ,  $10\text{V}$ , and  $5\text{V}$  supplies. (Switching times increase by a factor of two or more for operation at  $5\text{V}$ .)

### Overvoltage Protection

Proper power-supply sequencing is recommended for all CMOS devices. Do not exceed the absolute maximum ratings, because stresses beyond the listed ratings may cause permanent damage to the devices. Always sequence V+ on first, then V-, followed by the logic inputs, S or D. If power-supply sequencing is not possible, add two small signal diodes in series with supply pins for overvoltage protection (Figure 1). Adding diodes reduces the analog signal range to  $1\text{V}$  below V+ and  $1\text{V}$  above V-, but does not affect the devices' low switch resistance and low leakage characteristics. Device operation is unchanged, and the difference between V+ and V- should not exceed  $+44\text{V}$ .

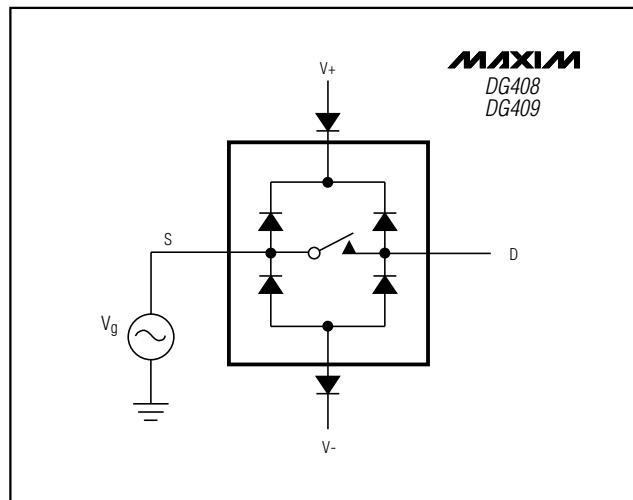


Figure 1. Overvoltage Protection Using External Blocking Diodes

# Improved, 8-Channel/Dual 4-Channel, CMOS Analog Multiplexers

## Test Circuits/Timing Diagrams

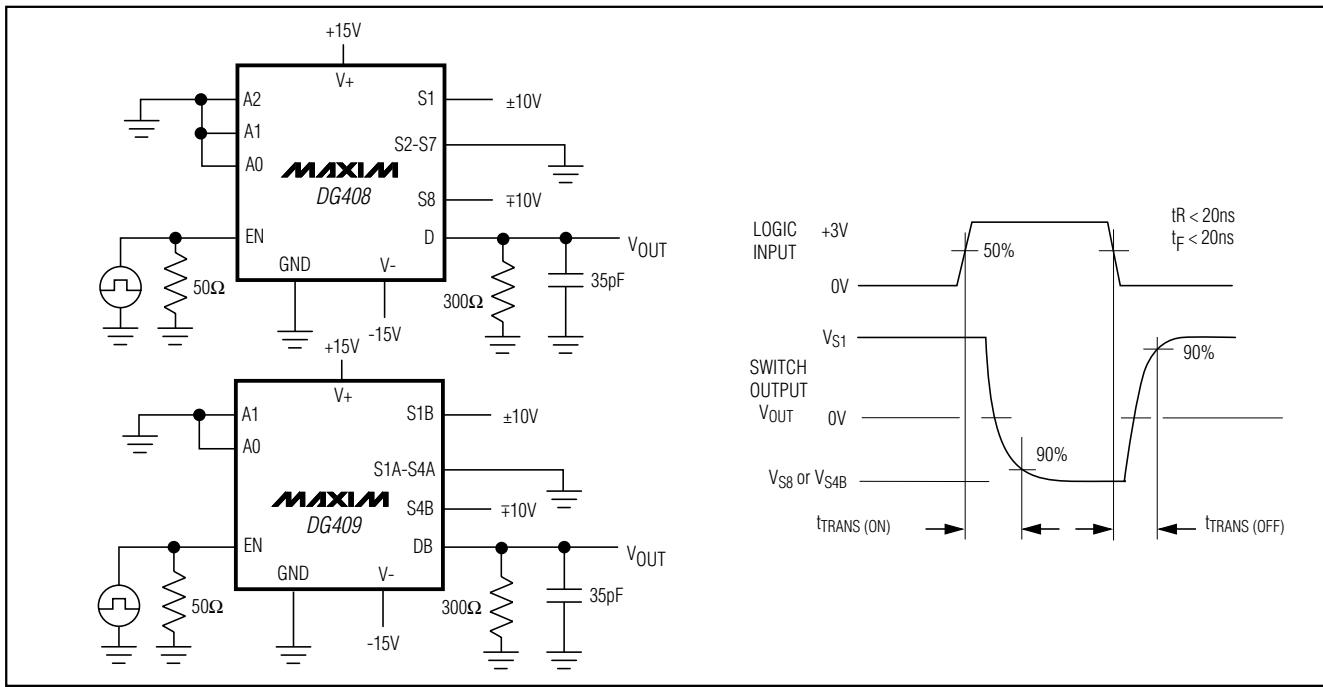


Figure 2. Transition Time

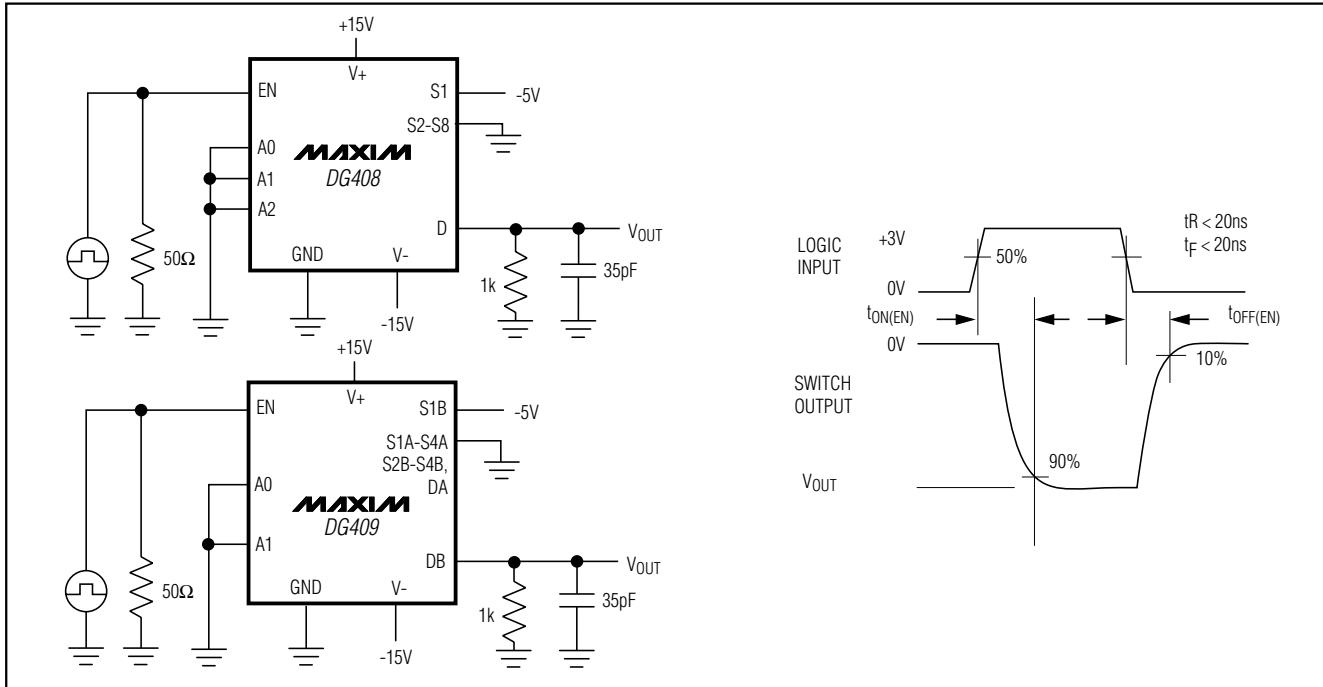


Figure 3. Enable Switching Time

## Improved, 8-Channel/Dual 4-Channel, CMOS Analog Multiplexers

### Test Circuits/Timing Diagrams (continued)

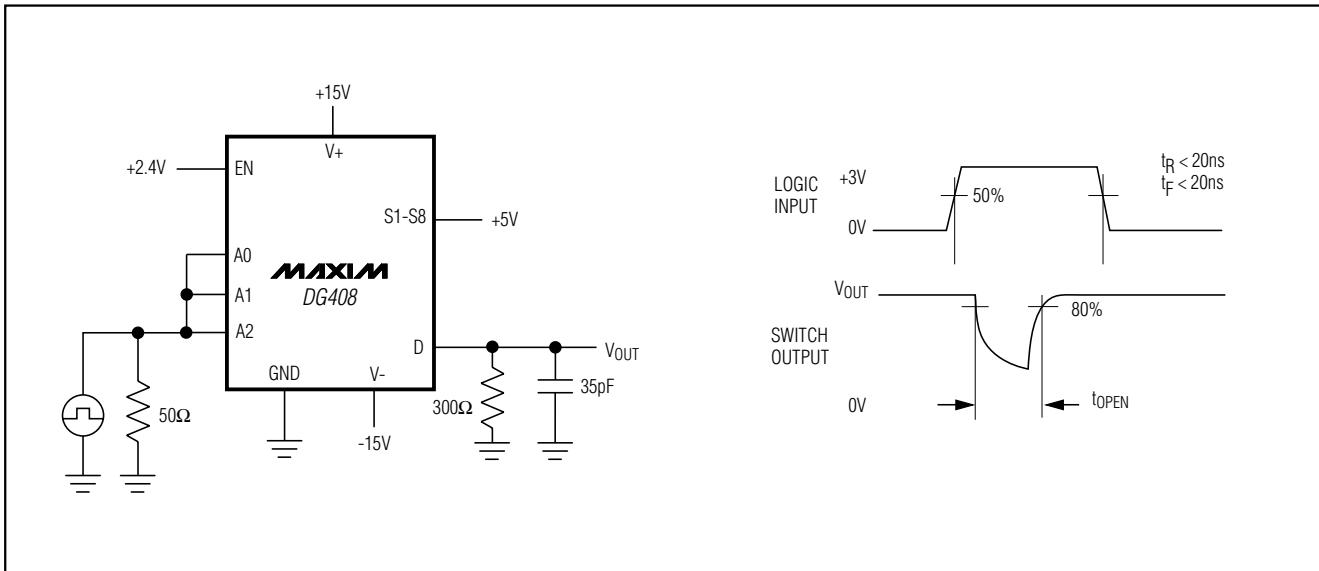


Figure 4. Break-Before-Make Interval

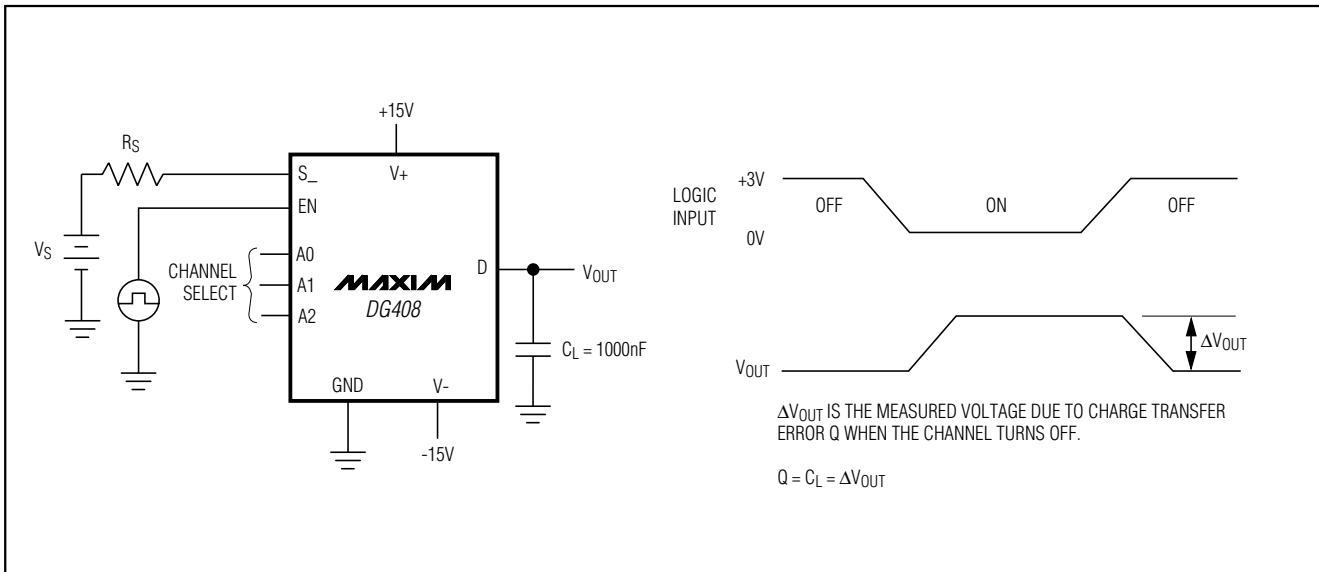


Figure 5. Charge Injection

# Improved, 8-Channel/Dual 4-Channel, CMOS Analog Multiplexers

## Test Circuits/Timing Diagrams (continued)

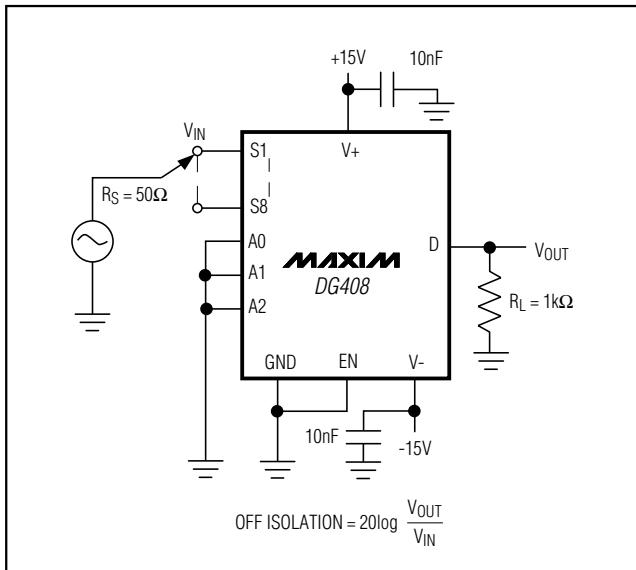


Figure 6. Off Isolation

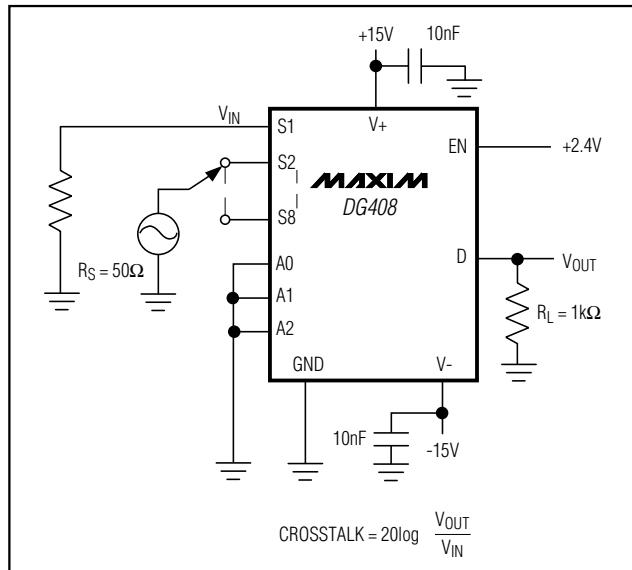


Figure 7. Crosstalk



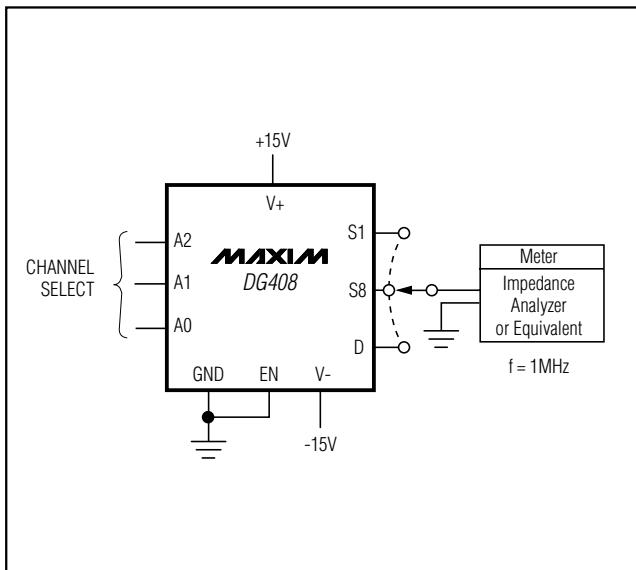


Figure 8. Source/Drain Capacitance

# Improved, 8-Channel/Dual 4-Channel, CMOS Analog Multiplexers

## **Pin Configurations/Functional Diagrams/Truth Tables (continued)**

TOP VIEW

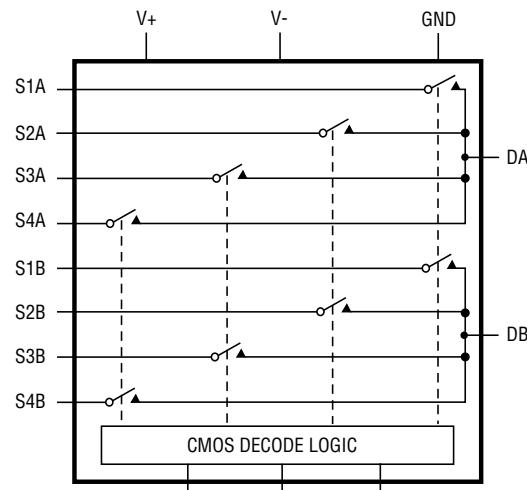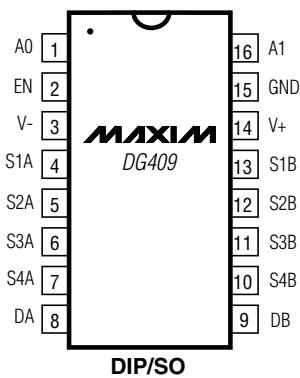

DG409 4-CHANNEL DIFFERENTIAL MUX/DEMUX

A2	A1	A0	EN	ON SWITCH
X	X	X	0	None
0	0	0	1	1
0	0	1	1	2
0	1	0	1	3
0	1	1	1	4
1	0	0	1	5
1	0	1	1	6
1	1	0	1	7
1	1	1	1	8

DG408

LOGIC “0”  $V_{AL} \leq 0.8V$ , LOGIC “1”  $V_{AH} \geq 2.4V$ 

A1	A0	EN	ON SWITCH
X	X	0	None
0	0	1	1
0	1	1	2
1	0	1	3
1	1	1	4

DG409

LOGIC “0”  $V_{AL} \leq 0.8V$ , LOGIC “1”  $V_{AH} \geq 2.4V$

## **Improved, 8-Channel/Dual 4-Channel, CMOS Analog Multiplexers**

### ***Ordering Information (continued)***



PART	TEMP. RANGE	PIN-PACKAGE
DG409CJ	0°C to +70°C	16 Plastic DIP
DG409CY	0°C to +70°C	16 Narrow SO
DG409C/D	0°C to +70°C	Dice*
DG409DJ	-40°C to +85°C	16 Plastic DIP
DG409DY	-40°C to +85°C	16 Narrow SO
DG409DK	-40°C to +85°C	16 CERDIP
DG409AK	-55°C to +125°C	16 CERDIP**

\* Contact factory for dice specifications.

\*\* Contact factory for availability.

# **Improved, 8-Channel/Dual 4-Channel, CMOS Analog Multiplexers**

## **Chip Topographies**

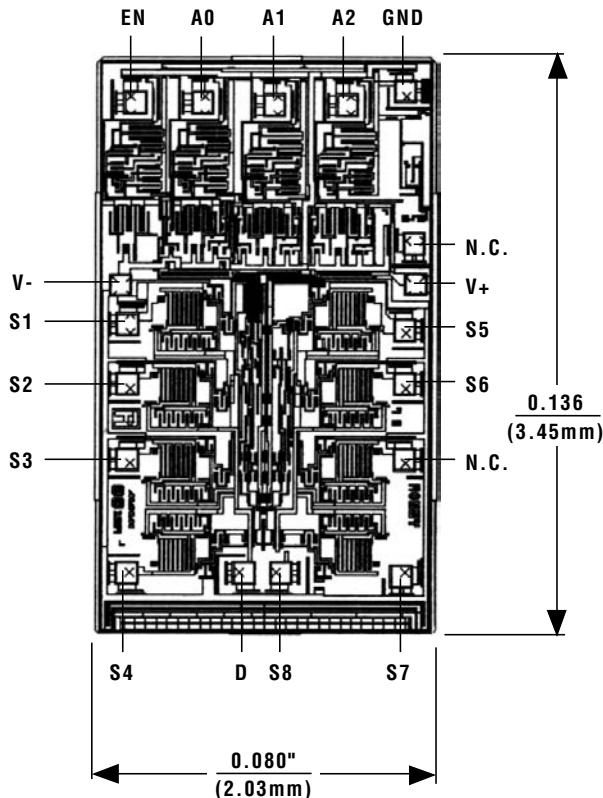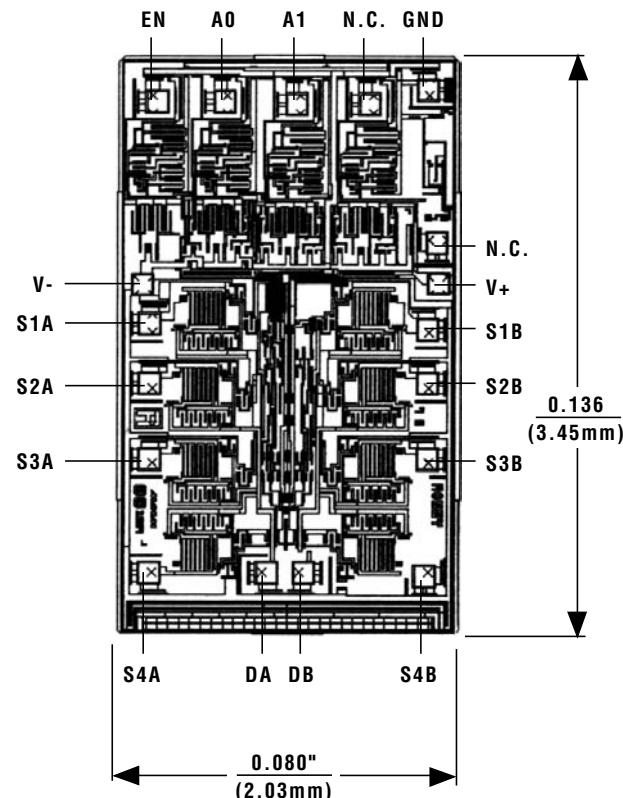**DG408****DG409**

N.C. = NO INTERNAL CONNECTION

TRANSISTOR COUNT: 122

SUBSTRATE CONNECTED TO V+

TRANSISTOR COUNT: 122

SUBSTRATE CONNECTED TO V+

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

12 **Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600**