

CMOS/LVCMOS Very Low Current
S1-XD4XXX-X Series

Rev. D


Description

The S1-XD4XXX Series of quartz crystal oscillators provide LVCMOS output with very low power consumption. The device is packaged in a miniature, FR4 based 9x14mm SMD package.

Applications and Features

- Battery powered equipment
- High Reliability – NEL HALT/HASS qualified for crystal oscillator start-up conditions
- Extremely Low Power consumption
- Frequency stability from ±20 ppm
- High Shock Resistance, to 1000g
- COTS/Dual use


Creating a Part Number

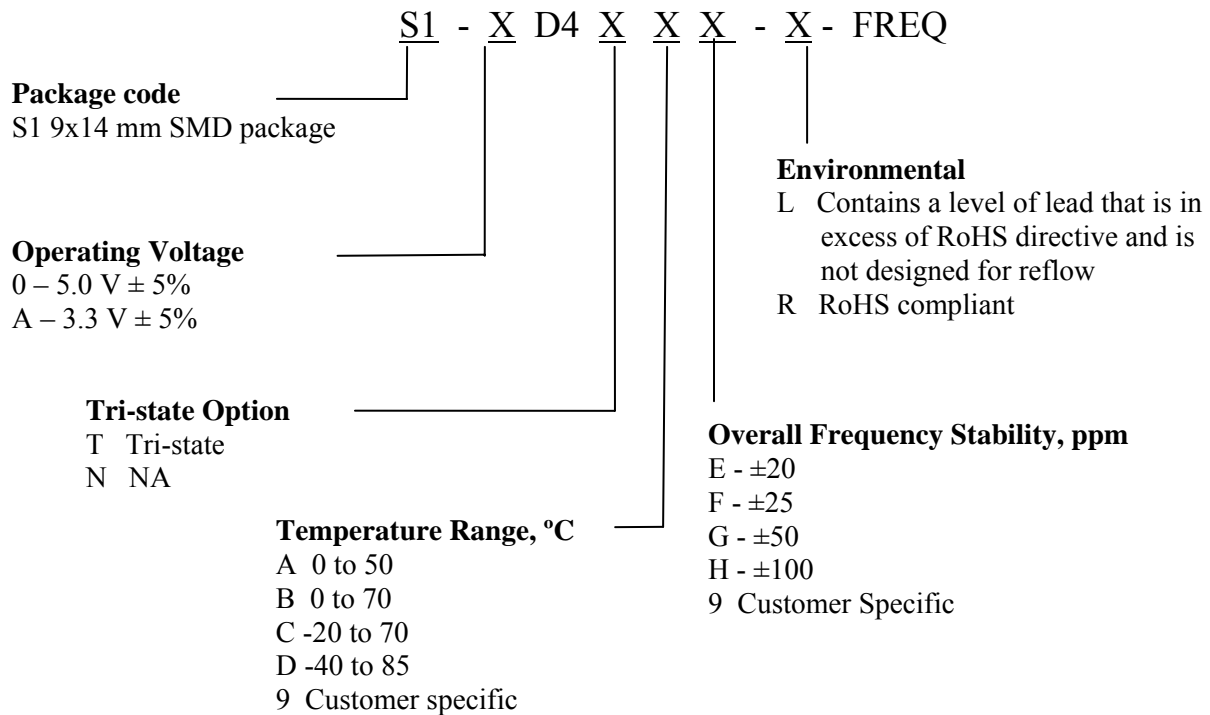

S1- XD4XXX-X Series

Rev.D

Drawing Specification

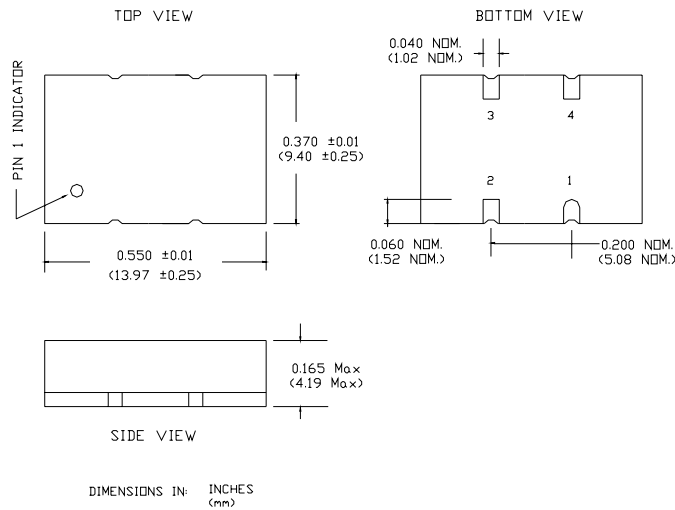

Absolute Maximum Ratings

| Parameter | Symbol | Value | Unit |
|-----------------------------|---------|-------------|------|
| Operating Temperature Range | To | -40 to 85 | °C |
| Storage Temperature Range | Tst | -50 to +90 | °C |
| Supply Voltage | Vcc | -0.5 to 5.5 | V |
| Enable/Disable Voltage | Ven/Dis | 0 to Vcc | V |

S1-XD4XXX-X Series

Rev. D

Electrical Parameters

| Parameter | | Symb | Conditions, Note | MIN | TYP | MAX | Unit |
|-------------------------------|----------------------------|-------------------|--|---|---|---------------|--------|
| Nominal Frequency | | Fo | | 4.0 | | 32 | MHz |
| Supply Voltage | | Vcc | Code 0 Code A | 4.75 3.135 | 5.0 3.3 | 5.25 3.465 | V |
| Supply current ⁽¹⁾ | | Icc | No load, Vcc=5.0V 10MHz | | 1.8 | 2.2 | mA |
| Output Logic Type | | | | | CMOS | | |
| Load | | | | | 15 pF/10 KOhm | | Ohm |
| Output Levels | | Voh Vol | overall | 0.9Vcc | | 0.1 Vcc | V |
| Duty Cycle (Symmetry) | | | At 50% Vcc | 45/55 | 50/50 | 55/45 | % |
| Rise/Fall Time | | Tr/Tf | 0.2Vcc to 0.8 Vcc | | 5 | 10 | ns |
| Jitter @ 10MHz | Integrated, RMS | J | Integrated from Phase Noise, 12KHz to 20MHz, RMS | | 0.3 | 0.5 | ps |
| | | | 100Hz to 80KHz, RMS | | | 0.8 | |
| | | | 50Khz to 80MHz | | 0.3 | | |
| | Wavecrest Characterized | Random period | | 2.5 | | | |
| | | Accumul, pk-to-pk | | 17 | | | |
| | | Deterministic | | 0 | | | |
| Sub-harmonics | | | | | None | | Ps |
| Phase Noise | | £(Δf) | 10MHz | @10Hz @100Hz @1kHz @10kHz @100Khz @>1MHz | -85 -115 -145 -145 -145 -145 | | Dbc/Hz |
| Enable | | | Pin 2 = High, or Floating | Enabled | | | |
| Disable | | | Pin 2 = Low | Tri-stated, output – high Z | | | |

Note:

1) Supply current depends on frequency and supply voltage. It's roughly proportional to the frequency of operation, and supply voltage squared. One can estimate the current for particular application using above information. If more detailed information is needed – please consult factory.


S1-XD4XXX-X Series

Rev. D

Environmental and Mechanical Characteristics

| | |
|------------------------------|--|
| Operating temp. range | See part number table |
| Mechanical Shock | Per MIL-STD-202, Method 213, Cond. A |
| Thermal Shock | Per MIL-STD-883, Method 1011, Cond. A |
| Vibration | Per MIL-STD-883, Method 2007, Cond. A |
| Hermetic Seal | Leak rate less than 5×10^{-8} atm.cc/s of helium |
| Soldering conditions | See MAX reflow profile below; The device may be reflowed once. Reflowing upside down is not allowed. NO CLEAN assembly is recommended. |
| Pin Out | Pin 1 – N/C, Pin 2 – GND, Pin 3, Output, Pin 4 – Vcc |

MAX Reflow Profile

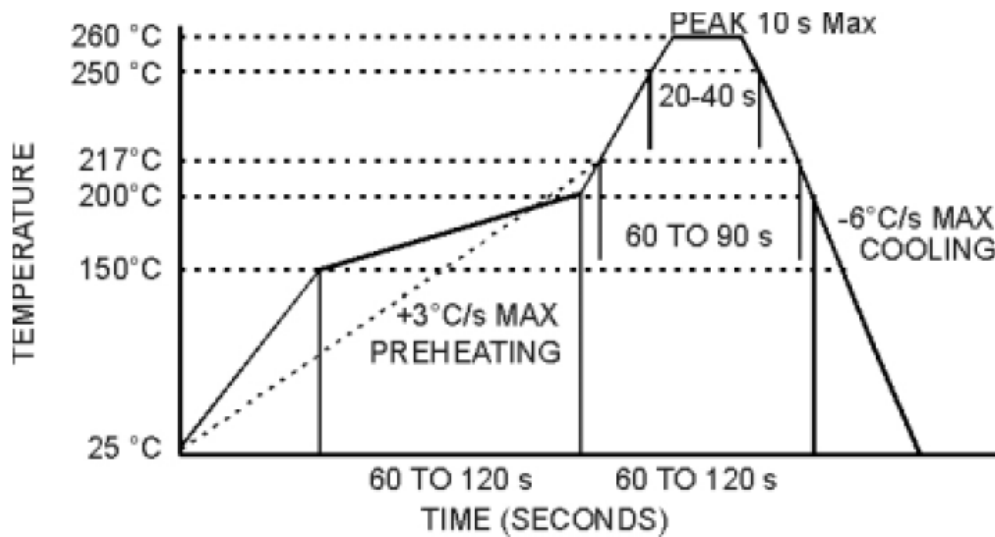

The device may be reflowed once. Reflowing upside down is not allowed. NO CLEAN assembly is recommended.