

**AE-X0A6XX-X Series  
SINEWAVE HF XO**

**Rev. H**


**Description**

The **AE-X0A6XX Series** of crystal oscillators (XO) provides high frequency with Sine-Wave output. The device does not use any frequency multiplication, providing exceptionally low Phase Noise and Jitter. It's packaged in a miniature, FR-4 based 17x14 mm SMD package.

**Applications and Features**

- Fiber Channel; 10 GbE; Infiniband; Network Processors; SONET/SDH
- High Reliability – NEL HALT/HASS qualified for crystal oscillator start-up conditions
- Extremely Low Phase Noise and Jitter
- No Multiplication
- SONET ± 20 ppm overall free-run stability available
- High Shock Resistance, to 1000g
- COTS/Dual use


**Creating a Part Number**

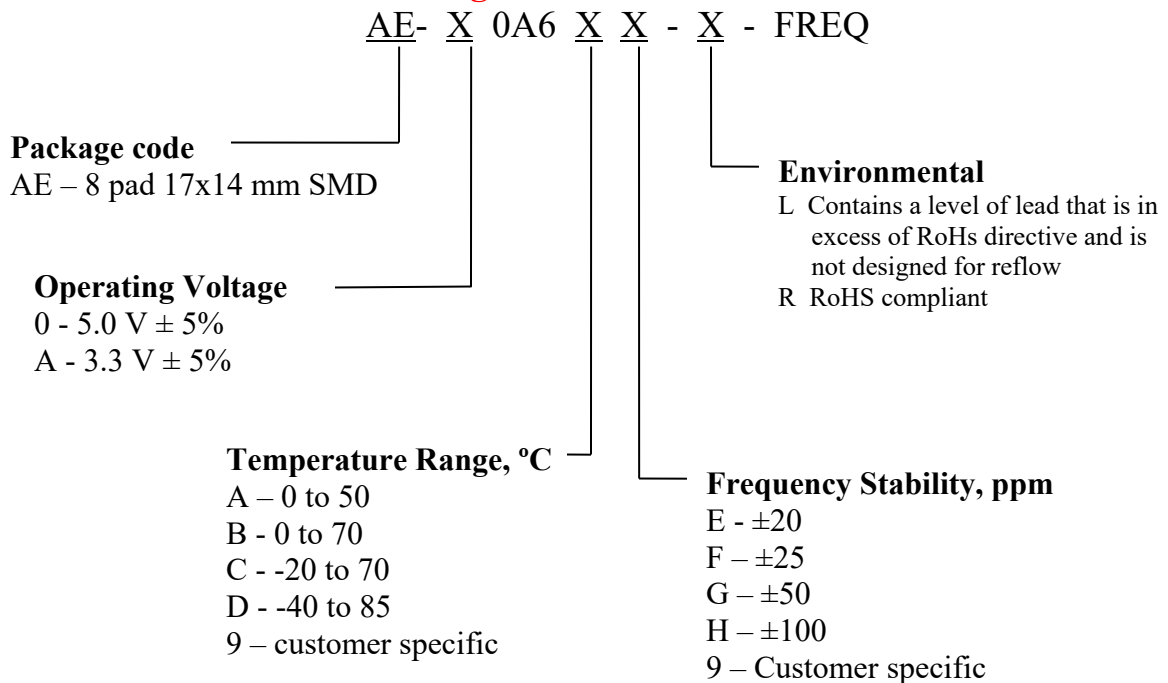

AE-X0A6XX-X Series

Rev. H

**Drawing Specification**

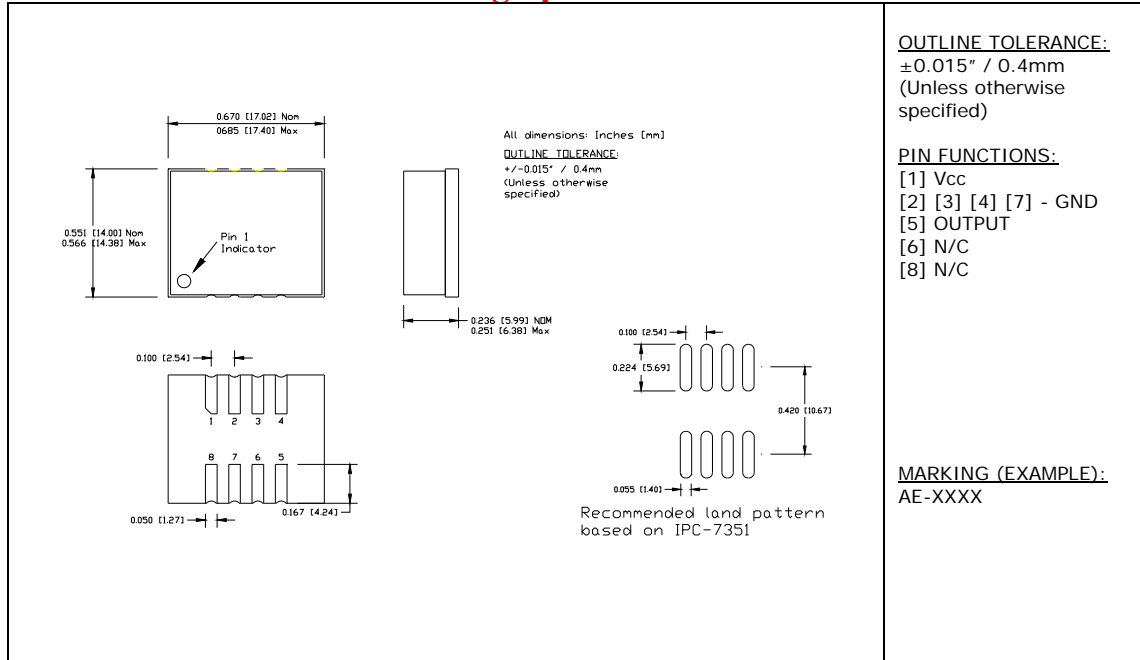

**Absolute Maximum Ratings**

Parameter	Symbol	Value	Unit
Operating Temperature Range	To	-40 to +85	°C
Storage Temperature Range	Tst	-50 to +90	°C
Supply Voltage	Vcc	-0.5 to 5.5	V



**FREQUENCY  
CONTROLS, INC.**

357 Beloit Street, P.O. Box 457, Burlington, WI 53105-0457 U.S.A. Phone 262/763-3591  
FAX 262/763-2881

Email: [nelsales@nelfc.com](mailto:nelsales@nelfc.com) www.nelfc.com

### AE-X0A6XX-X Series

**Rev. H**

### Electrical Parameters (1)

Parameter	Symb	Conditions, Note	MIN	TYP	MAX	Unit	
Nominal Frequency	Fo	See Note below	12		250	MHz	
Supply Voltage	Vcc	Code 0 Code A	4.75 3.135	5.0 3.3	5.25 3.465	V	
Supply current	Icc	No load, Vcc=3.3V 100MHz		60	160	mA	
Output Logic Type				Sine			
Load		Internally AC coupled	45	50	55	Ohm	
Harmonic	Ph				-25	dBc	
Sub-Harmonics			None				
Output Power	Po	Into 50 ohm, 5V 3.3V	7 5	10 7		dBm	
<b>Jitter</b>	Integrated, RMS	J	Integrated from Phase Noise, 12 KHz to 20 MHz RMS		0.1	0.15	ps
			100Hz to 80KHz,RMS			0.5	ps
			50 KHz to 80 MHz		0.2		ps
	Wavecrest characterized	J	Random period,		2.5		ps
			Accumul., pk-to-pk		17		ps
			Determin.		0		ps
Phase Noise	£(Δf)	100 MHz, 3.3V	@ 10 Hz @100 Hz @1 KHz @10KHz @100KHz @>1MHz	-85 -115 -145 -166 -172 -175		dBc/Hz	
Frequency Stability, over all conditions	ΔF/F	See Chart		±50		ppm	

Note 1. All parameters, unless otherwise specified, are at nominal conditions, ie: T=25°C, Nominal Vcc & Nominal Load.



FREQUENCY  
CONTROLS, INC.

357 Beloit Street, P.O. Box 457, Burlington, WI 53105-0457 U.S.A. Phone 262/763-3591  
FAX 262/763-2881

Email: [nelsales@nelfc.com](mailto:nelsales@nelfc.com) www.nelfc.com

AE-X0A6XX-X Series

Rev. H

Typical Phase Noise at 100 MHz



**FREQUENCY  
CONTROLS, INC.**

357 Beloit Street, P.O. Box 457, Burlington, WI 53105-0457 U.S.A. Phone 262/763-3591  
FAX 262/763-2881

Email: [nelsales@nelfc.com](mailto:nelsales@nelfc.com) www.nelfc.com


**AE-X0A6XX-X Series**

Rev. H

**Environmental and Mechanical Characteristics**

<b>Operating temp. range</b>	see part # table
<b>Mechanical Shock</b>	Per MIL-STD-202, Method 213, Cond. A
<b>Thermal Shock</b>	Per MIL-STD-883, Method 1011, Cond. A
<b>Vibration</b>	Per MIL-STD-883, Method 2007, Cond. A
<b>Hermetic Seal</b>	Leak rate less than $5 \times 10^{-8}$ atm.cc/s of helium , crystal only.
<b>Soldering conditions</b>	See MAX reflow profile below; The device may be reflowed once. Reflowing upside down is not allowed. NO CLEAN assembly is recommended.

**MAX Reflow Profile**

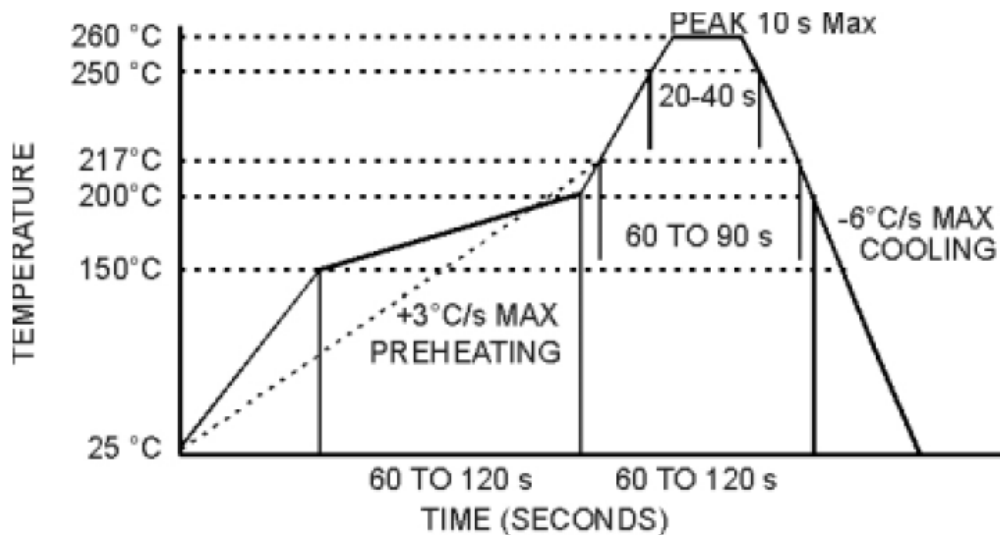

The device may be reflowed once. Reflowing upside down is not allowed. NO CLEAN assembly is recommended.



**FREQUENCY  
CONTROLS, INC.**

357 Beloit Street, P.O. Box 457, Burlington, WI 53105-0457 U.S.A. Phone 262/763-3591  
FAX 262/763-2881

Email: [nelsales@nelfc.com](mailto:nelsales@nelfc.com) www.nelfc.com