

O-CEHXXXXYY-X-XX-X Precision SC-cut OCXO in 36x27mm “Europack”



Product Data Sheet

Features

- SC-cut crystal
- Excellent Stability
- Low Aging (5×10^{-10} /day)
- Very Low Phase Noise (-135 dBc/Hz @ 10 Hz)

Applications

- Instrumentation
- Telecommunication Systems
- Data Communications
- GPS
- COTS/Dual use

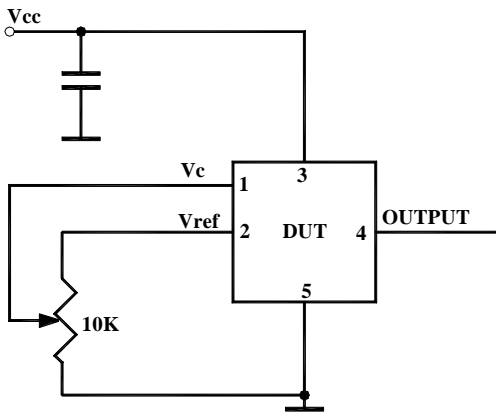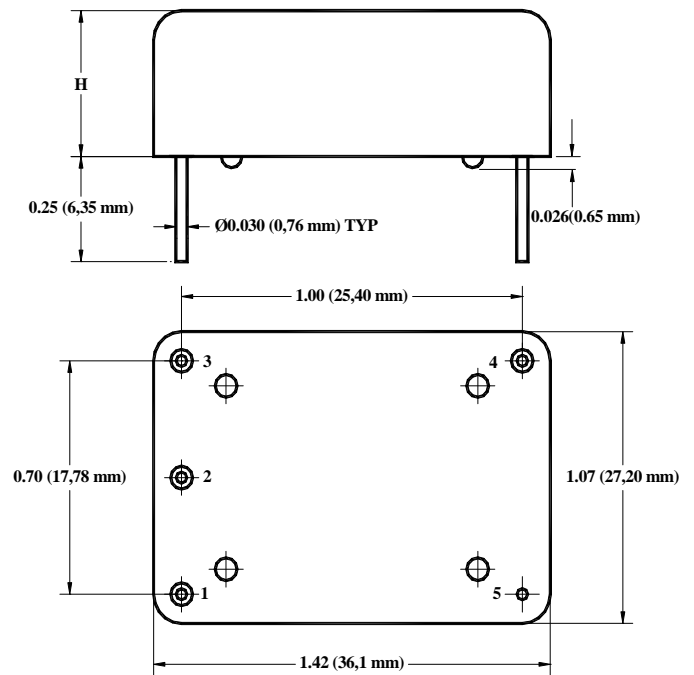

H code	Height, inches, TYP
5	0.5 (12.7 mm)
6	0.63 (16 mm)
7	0.75 (19 mm)

Code 6 is standard unless code 5 is requested. Code 7 is for special requirements.

CRYSTAL OSCILLATORS

Data Sheet 1003D

Rev. E

O-CEHXXXXYY-X-XX-X

Parameter	Symb	Condition	Min	Typ	Max	Unit	Note
Absolute Maximum Ratings							
Input Break Down Voltage	V _{cc}		-0.5		13.0	V	V _{cc} = 12 V V _{cc} = 5 V
Storage temper.	T _s		-40		85	°C	
Control Voltage	V _c		-1		12	V	

Electrical (3)

Frequency	F		8.0	10.000	20.000	MHz	
Frequency stability	ΔF/F	vs. Temp., total excursion		10		ppb	Peak-to-peak See chart below
		vs. Supply		1	2	ppb/5% V _{cc}	
Aging		per day		5E-10			after 30 days
		per year, first year 10 years		1E-7	3.5E-7		5E-8 available! *
Allan Deviation		.1s to 1s		5E-12			
SSB Phase Noise		1Hz		-105	-100	dBc/Hz	2*
		10 Hz		-140	-135		
		100 Hz		-156	-155		
		1 KHz		-163	-162		
		10 KHz		-169	-168		
		100 KHz		-170	-169		
Retrace		After 30 minutes			±10	ppb	24 hrs off
G-sensitivity		worst direction			±1.0	ppb/G	
Input Voltage	V _{cc}		4.75 11.4	5.0 12.0	5.25 12.6	V	See chart below to specify
Power consumption	P	steady state, 25°C steady state, -30°C start-up @ -30°C		0.7 1.5 2.5	1.0 3.2	W	Standard Operating Temperature, for Op Temp. 85 °C ad 20% Still air for all
Spectral Purity		Subharmonics Spurious Harmonics		none -35	-80 -30	dBc	
Load		10KOhm//15pF (HCMOS/TTL), AC-coupled 50 Ohm (Sine-wave)					Output Code T Output Code S
Warm-up time	τ	to 0.1ppm accuracy		3	5	minutes	
Output Power			+7	+10		dBm	Output Code S
Logic 1 (CMOS)	V _{oh}		0.7 V _{ref}			V	Output Code T
Logic 0 (CMOS)	V _{ol}				0.1 V _{ref}	V	Output Code T
Control voltage	V _c		0		10	V	Option "L"
			0		4.5	V	Option "P"
Reference Voltage	V _{ref}			4.5		V	Option "P"
Pull range		from nominal F	±0.6	±0.8		ppm	Option "L"
			±0.4	±0.6			Option "P"
Deviation slope		Monotonic, posit.		0.16 0.27		ppm/V	Option "L" Option "P"
Input impedance	Z _{in}	At V _c pin	10			KOhm	
Modulation bandwidth	F _m		DC		1	KHz	Note 4
Setability	V _{c0}	@25°C, F _{nom} .	4.5 2.0	5.0 2.25	5.5 2.5	V	Op."L", No internal bias Option "P"
Initial Calibration		@25°C			±100	ppb	

All parameters for 10 MHz

Environmental and Mechanical

Operating temp. range	0°C to 70°C Standard, Other options – see chart below
Mechanical Shock	Per MIL-STD-202, 30G, 11ms
Vibration	Per MIL-STD-202, 5G to 2000 Hz
Soldering Conditions	260°C for 10s Max leads only



357 Beloit Street, Burlington, WI 53105 U.S.A. Phone 262/763-3591 FAX 262/763-2881

Email: nelsales@nelfc.com www.nelfc.com

O-CEHXXXXYY-X-XX-X

Rev. E

Electrical Connections

Pin Out	Pin #1-- Vc ; Pin#2 – Vref; Pin #3 – Vcc; Pin #4 – Output; Pin #5 - GND
----------------	---

Notes:

1. Aging rates are proportional to the operating frequency. Pull range will be adjusted accordingly to provide for lifetime possibility to set on frequency
2. Close to the carrier phase noise deteriorates with increase in frequency.
3. All parameters, unless otherwise specified, are at nominal conditions, ie: T=25°C, Nominal Vcc & Nominal Load.
4. Older and stock units may have MBW of 150 Hz Max.

Creating a Part Number

O - C E H X X XX YY - X -XX - X **10.000 MHz**

OCXO
Conventional Power Package Code
E 5 pin 36x27mm

Height code per drawing

Supply Voltage

Code	Specification
0	5 V TYP
F	12V TYP

Output

Code	Specification
S	Sinewave
T	HCMOS/TTL

Temperature Stability, Total excursion, pk-pk

Code	Specification
17	1x10 ⁻⁷
58	5x10 ⁻⁸
28	2x10 ⁻⁸
18	1x10 ⁻⁸
YZ	Yx10 ^{-Z}

Environmental

Code	Specification
L	Contains a level of lead that is in excess of RoHS directive and is not designed for reflow
R	RoHS compliant, not designed for reflow

Aging per year, 1st year

Insert value per year x 1E-8	
Examples	
05	5E-8
10	1E-7

Control Voltage

Code	Specification
L	0 to 10 V
P	0 to 4.5 V

Temperature Range

Code	In 5°C steps **
First letter	Lowest temperature from A = -40°C
Second letter	Highest temperature to Z = 85°C
Examples	
IS	0°C to 50°C
GU	-10°C to 60°C
EW	-20°C to 70°C

****Temperature Code Table**

Letter	Temp °C	Letter	Temp °C	Letter	Temp °C	Letter	Temp °C	Letter	Temp °C	Letter	Temp °C
A	-40	F	-15	K	10	P	35	U	60	Z	85
B	-35	G	-10	L	15	Q	40	V	65		
C	-30	H	-5	M	20	R	45	W	70		
D	-25	I	0	N	25	S	50	X	75		
E	-20	J	5	O	30	T	55	Y	80		