

## AN-XA7XUXXX-X Series

Rev. H

### SMD TCXO/VCTCXO

#### Ultra-Low Phase Noise with Low G Sensitivity


**Description:** The AN-XA7UXXXX Series of SMD temperature compensated crystal oscillators (TCXO), provides High Frequency with excellent temperature stability, extremely low phase noise and jitter with Sine-wave or CMOS output in a small surface mount FR4 based package.



## Features

- Small, Low Profile SMD Package
- Ultra-Low Phase Noise
- Excellent Frequency Stability
- Low G sensitivity
- No Multiplication – no sub-harmonics
- Stratum3 available
- COTS/Dual use

### Creating a Part Number

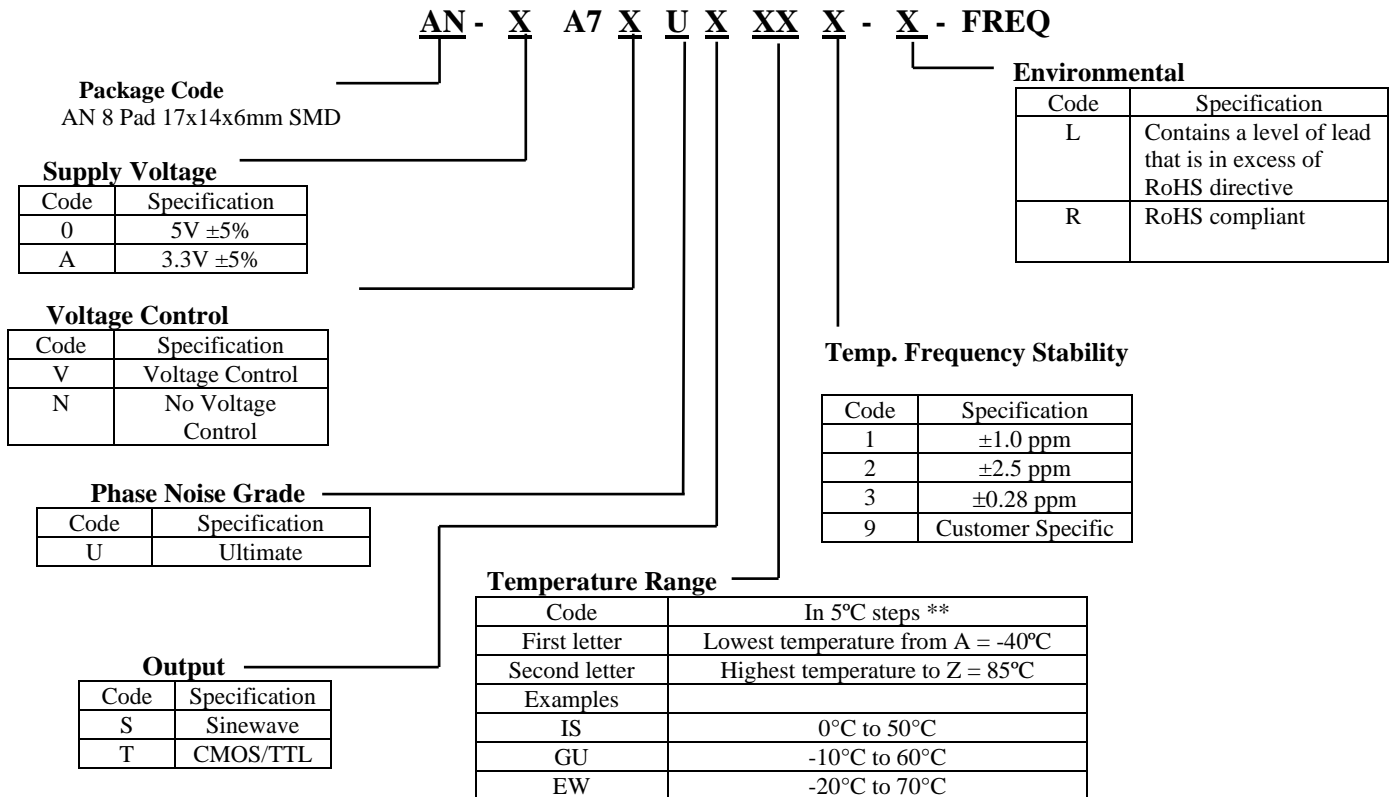


**\*\*Temperature Code Table**


Letter	Temp °C	Letter	Temp °C	Letter	Temp °C	Letter	Temp °C	Letter	Temp °C	Letter	Temp °C
A	-40	F	-15	K	10	P	35	U	60	Z	85
B	-35	G	-10	L	15	Q	40	V	65		
C	-30	H	-5	M	20	R	45	W	70		
D	-25	I	0	N	25	S	50	X	75		
E	-20	J	5	O	30	T	55	Y	80		

\*Note: Not all combinations are available

100 MHz example

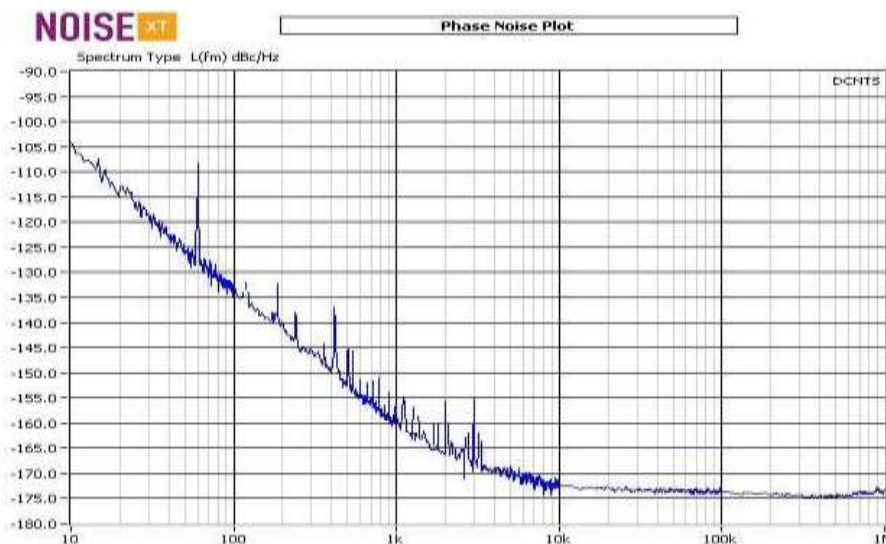

12 MHz example

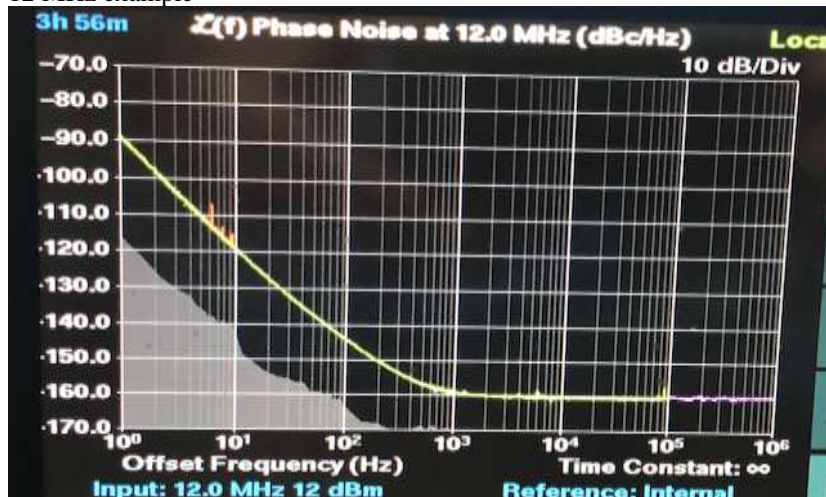

## AN-XA7UXXXX-X Series

Rev. H

Note 1) All parameters, unless otherwise specified, are at nominal conditions, i.e.: T=25°C, Nominal Vcc & Nominal Load

### Specifications

Parameter	Symb	Condition	Min	Typ	Max	Unit	Note
-----------	------	-----------	-----	-----	-----	------	------

<i>Electrical</i>							
Frequency Range	F	Sine-wave	10		125	MHz	
Input Voltage	Vcc		3.135 4.75	3.30 5.0	3.465 5.25	V	A 0
Input Current	Icc	Sine			40 10	mA	@100MHz, 3.3V @10 MHz, 3.3 V
Frequency Stab.	ΔF/F	Overall, available			±4.6		20 years
Frequency Stability	ΔF/F	vs. Temperature vs. Vcc aging		±0.5 ±0.1 ±1 ±2.5 ±3.5	±1	ppm ppm/V ppm/year ppm ppm	See chart First Year 7 years 10 years
G-sensitivity		Worst Direction		0.2 0.5		ppb/G	100 MHz 10 MHz
Calibration	ΔF/F	As shipped, 25°C		±0.5	±1	ppm	
Load		Sine CMOS	Internally AC-coupled 50 Ohm 10 KOhm // 15 pF				
Output power (output code "S")	P	Sine-wave Into 50 Ohms	7 10	10 13		dBm	3.3V 5.0V
Logic 1 (CMOS)	Voh		0.7Vcc			V	Output Code T
Logic 0 (CMOS)	Vol				0.1V	V	Output Code T
Duty Cycle			45/55		55/45	%	Output Code T
Rise/Fall Time	Tr/Tf			2	3		Output Code T
Spurious		Not setup related			-80	dBc	
Harmonics		Sine-wave		-30	-25	dBc	
SSB Phase Noise	£(Δf)	@ 10 Hz @ 100 Hz @ 1 KHz @ 10 KHz @ 100 KHz		-95 -125 -152 -165 -170		dBc/Hz	@ 100MHz, Grade U
		@ 1 Hz @ 10 Hz @ 100 Hz @ 1 KHz @ 10 KHz @ 100 KHz		-90 -120 -143 -158 -160 -160			@ 10 MHz, Grade U
ADEV		0.1 s to 1 s		1E-11			@ 10 MHz, Grade U
Input Impedance				>10K Ohm			
Control voltage	Vc		0		3.0	V	
Modulation bandwidth	MB				1.5	Hz	100 MHz 10 MHz
					0.1		
Deviation	ΔF/F	Vc=0V to 3.3V,25°C	±5	±7		ppm	

### Absolute Maximum Ratings


Input Break Down Voltage	Vcc		-0.5		5.5	V	
Storage temper.	Ts		-55		105	°C	
Control Voltage	Vc		-1		4	V	

## AN-XA7XUXXX-X Series

Rev. H

### Environmental and Mechanical


<b>Operating temp. range</b>	-20°C to 70°C MAX, for wider range only 5V Vcc option is available, contact factory, see table to specify.
<b>Mechanical Shock</b>	Per MIL-STD-202, Method 213, Cond. E
<b>Thermal Shock</b>	Per MIL-STD-883, Method 1011, Cond. A
<b>Vibration</b>	Per MIL-STD-883, Method 2007, Cond. A
<b>Soldering Conditions</b>	See MAX reflow profile; The device may be reflowed once. Reflowing upside down is not allowed. NO CLEAN assembly is recommended.
<b>Hermetic Seal</b>	Leak rate less than $1 \times 10^{-8}$ atm.cc/s of helium (crystal only)

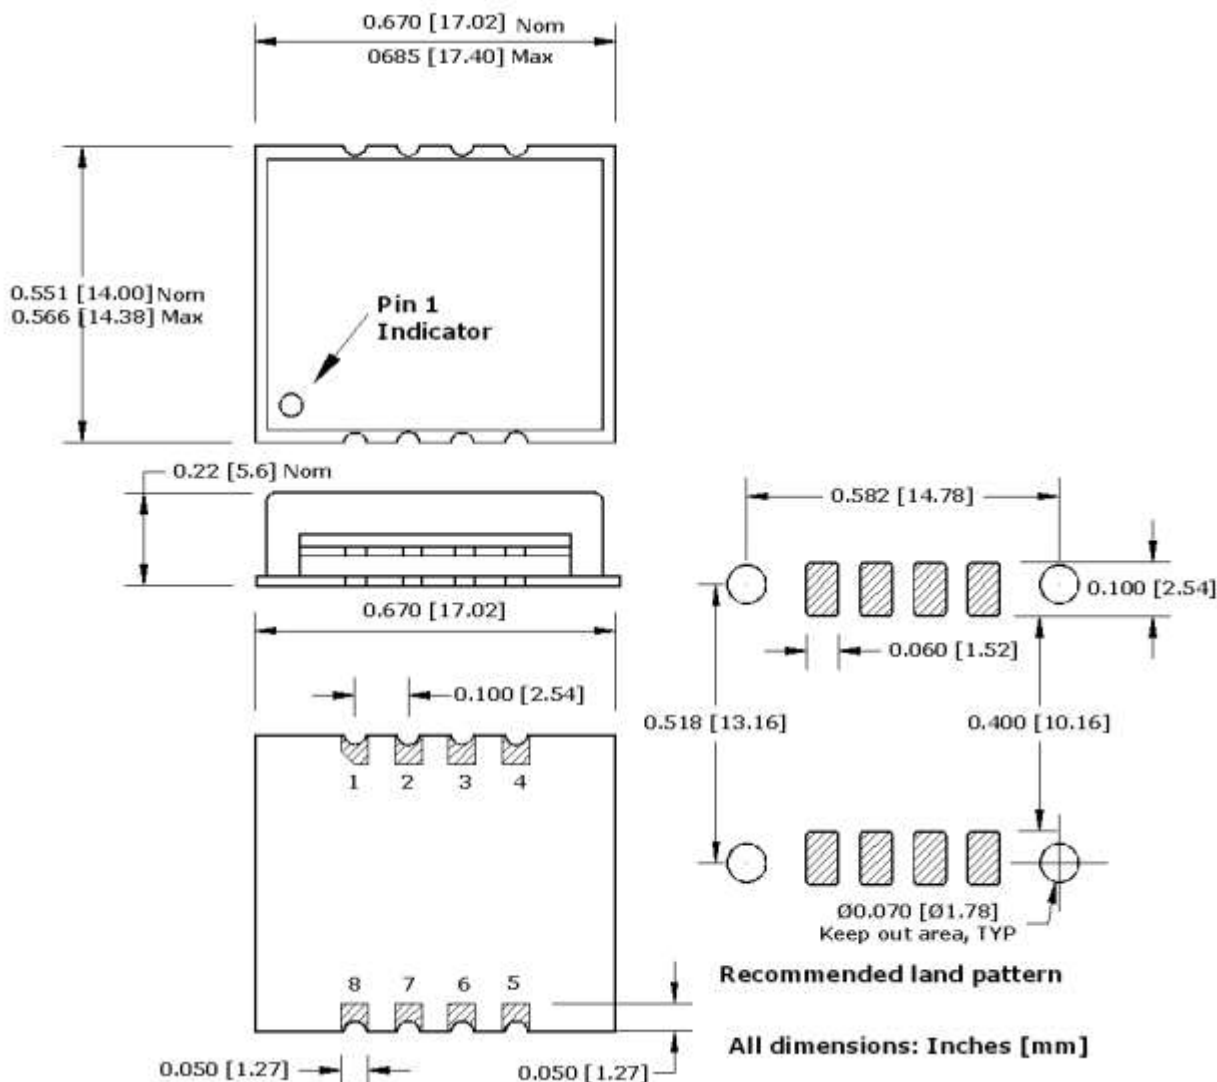

### Electrical Connections

Pin out	Pin 1=Vcc; Pin 2, Pin 3, Pin 4, Pin 8 = GND; Pin 5=Output; Pin 6= Optional Voltage Control; Pin 7 Do Not Connect
---------	--

## Maximum solder reflow profile

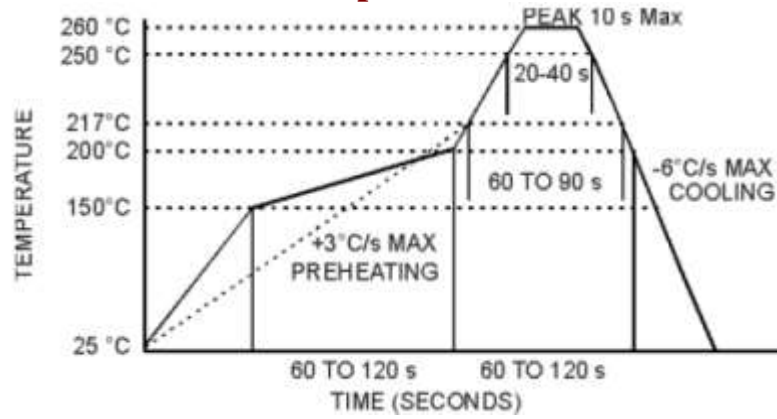

The device may be reflowed once. Reflowing upside down is not allowed. NO CLEAN assembly is recommended.