

# Very Low Phase Noise Divider by 2<sup>N</sup>

DS3738 - 2.1 March 1994

The SP8402 is a very low phase noise divider which divides by powers of two. The S0, S1, S2 data inputs select the division ratio in the range  $2^1$  to  $2^8$ . Special circuits techniques have been used to reduce the phase noise considerably below that produced by standard dividers. The data inputs are CMOS or TTL compatible.

The SP8402 is packaged in a 28 pin plastic SO package to be compatible with the SP8400 and SP8401 devices.

### **FEATURES**

- Very low Phase Noise (Typically -155 to 160dBc/Hz at 1kHz offset)
- Supply Voltage 5V

### **ABSOLUTE MAXIMUM RATINGS**

Supply Voltage 6.5V
Output Current 20mA
Storage Temperature Range -55°C to +125°C
Maximum Clock Input Voltage 2.5V p-p

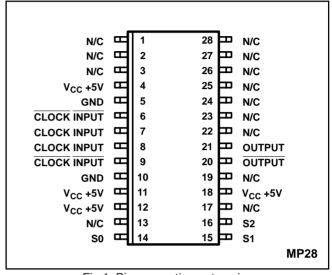


Fig.1 Pin connections - top view

### **ORDERING INFORMATION**

SP8402 KG MPES (Commercial Grade)

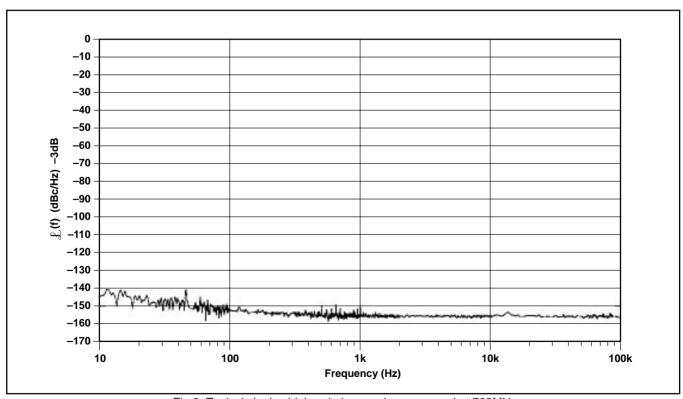


Fig.2 Typical single sideband phase noise measured at 768MHz

### **ELECTRICAL CHARACTERISTICS**

Guaranteed over: Supply voltage  $V_{CC}$  = +4.75V to +5.25V Temperature  $T_{amb}$  = -10°C to +75°C Tested at +4.75V and +5.25V at  $T_{amb}$  = +25°C

Characteristic	Pin	Value			Units	Conditions	
Cital acteristic		Min.	Тур.	Max.		Conditions	
Supply current Output voltage swing Input sensitivity 200MHz to 1.5GHz	4, 11, 12, 18 20, 21 7, 8	82 320	92 410	102 140 (-4)	mA mV mV dBm	Output loaded with 300R See Fig.5 p-p @ 1.4GHz input ÷ 256 mode outputs loaded with 330R See Fig.5 RMS Sine wave into 50 Ohms (dBm equivalent) See Fig.3	
Data Inputs Logic high voltage Low low voltage Input current		2.2		0.8 180	V V μΑ	5V Data input voltage	

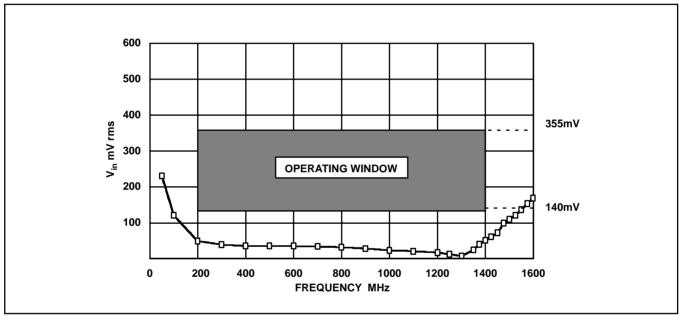


Fig.3 Typical input sensitivity

S0	S1	S2	DIVISION RATIO
L	L	L	2
Н	L	L	4
L	н	L	8
Н	н	L	16
L	L	Н	32
н	L	Н	64
L	н	Н	128
Н	н	Н	256

Fig.4 Truth table

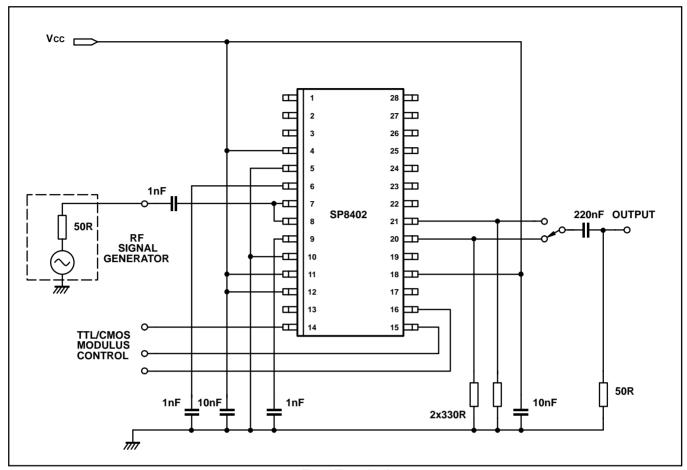


Fig.5 Test circuit


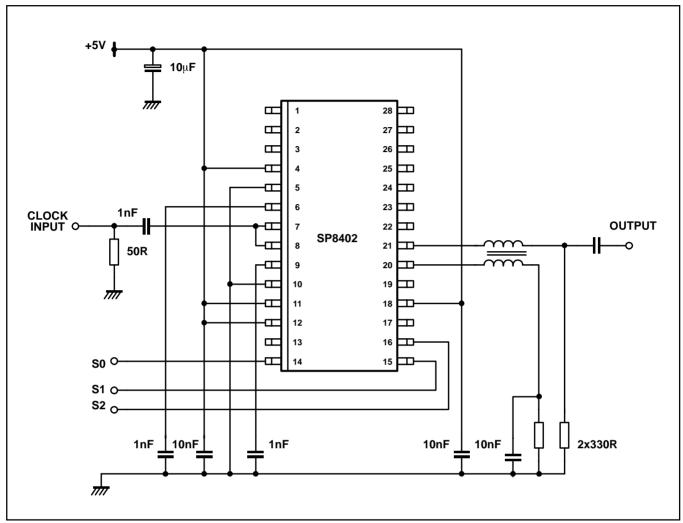


Fig.5 Typical application combining output to increase signal and retain low phase noise

### **PACKAGE DETAILS**

Dimensions are shown thus: mm (in).



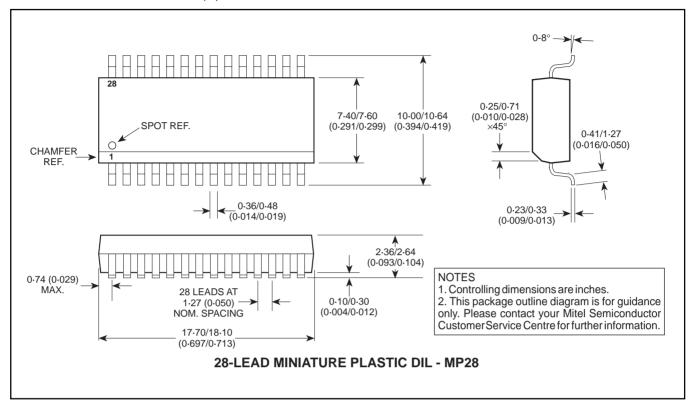

### **SEMICONDUCTOR**

# HEADQUARTERS OPERATIONS

### MITEL SEMICONDUCTOR

Cheney Manor, Swindon, Wiltshire SN2 2QW, United Kingdom.

Tel: (01793) 518000 Fax: (01793) 518411

### MITEL SEMICONDUCTOR

1500 Green Hills Road, Scotts Valley, California 95066-4922 United States of America. Tel (408) 438 2900 Fax: (408) 438 5576/6231

# Internet: http://www.mitelsemi.com

CUSTOMER SERVICE CENTRES

- FRANCE & BENELUX Les Ulis Cedex Tel: (1) 69 18 90 00 Fax: (1) 64 46 06 07
- GERMANY Munich Tel: (089) 419508-20 Fax: (089) 419508-55
- ITALY Milan Tel: (02) 6607151 Fax: (02) 66040993
- JAPAN Tokyo Tel: (03) 5276-5501 Fax: (03) 5276-5510
- KOREA Seoul Tel: (2) 5668141 Fax: (2) 5697933
- NORTH AMERICA Scotts Valley, USA Tel: (408) 438 2900 Fax: (408) 438 5576/6231
- SOUTH EAST ASIA Singapore Tel:(65) 3827708 Fax: (65) 3828872
- SWEDEN Stockholm Tel: 46 8 702 97 70 Fax: 46 8 640 47 36
- TAIWAN, ROC Taipei Tel: 886 2 25461260 Fax: 886 2 27190260
- UK, EIRE, DENMARK, FINLAND & NORWAY
   Swindon Tel: (01793) 726666 Fax: (01793) 518582

These are supported by Agents and Distributors in major countries world-wide. © Mitel Corporation 1998 Publication No. DS3738 Issue No. 2.1 March 1994

TECHNICAL DOCUMENTATION - NOT FOR RESALE. PRINTED IN UNITED KINGDOM

This publication is issued to provide information only which (unless agreed by the Company in writing) may not be used, applied or reproduced for any purpose nor form part of any order or contract nor to be regarded as a representation relating to the products or services concerned. No warranty or guarantee express or implied is made regarding the capability, performance or suitability of any product or service. The Company reserves the right to alter without prior notice the specification, design or price of any product or service. Information concerning possible methods of use is provided as a guide only and does not constitute any guarantee that such methods of use will be satisfactory in a specific piece of equipment. It is the user's responsibility to fully determine the performance and suitability of any equipment using such information and to use user is used to use user is the user's responsibility to fully determine the performance and suitability of any equipment using such information and to use user is used to use user is used to use user is user in any medical products whose failure to perform may result in significant injury or death to the user. All products and materials are sold and services provided subject to the Company's conditions of sale, which are available on request.