



ON Semiconductor®

<http://onsemi.com>

LB11862MC

Monolithic Digital IC Single-Phase Full-Wave Fan Motor Driver

Overview

The LB11862MC is a single-phase bipolar drive motor driver that easily implements direct PWM motor drive systems with excellent efficiency. The LB11862MC is optimal for fan motor drive in personal computer power supply systems and CPU cooling fan systems.

Features

- Single-phase full-wave drive
- Built-in thermal shutdown circuit.
- Built-in lock protection and automatic recovery circuits

Specifications

Absolute Maximum Ratings at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings	Unit
Supply voltage	V_{CC} max		17	V
Output current	I_{OUT} max		0.8	A
Output withstand voltage	V_{OUT} max		17	V
Output withstand voltage on RD output pin	V_R max		17	V
RD output current	I_R max		5	mA
HB output current	I_B max		10	mA
Input voltage ST pin	V_{ST} max		15	V
Allowable power dissipation	P_d max	When mounted on a circuit board *1	0.75	W
Operating temperature	T_{opr}		-40 to +85	$^\circ\text{C}$
Storage temperature	T_{stg}		-55 to +150	$^\circ\text{C}$

*1 Specified circuit board : $114.3 \times 76.1 \times 1.6\text{mm}^3$, glass epoxy.

Caution 1) Absolute maximum ratings represent the value which cannot be exceeded for any length of time.

Caution 2) Even when the device is used within the range of absolute maximum ratings, as a result of continuous usage under high temperature, high current, high voltage, or drastic temperature change, the reliability of the IC may be degraded. Please contact us for the further details.

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

LB11862MC

Recommended Operating Conditions at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings	Unit
Supply voltage	V_{CC}		3.8 to 16.8	V
ST input High-level voltage	V_{STH}		3 to 14	V
ST input Low-level voltage	V_{STL}		-0.3 to 0.4	V
Hall input common-mode input voltage range	VICM		0.2 to $V_{CC}-1.5$	V



Electrical Characteristics Unless otherwise specified $T_a = 25^\circ\text{C}$, $V_{CC} = 5\text{V}$

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Circuit current	I_{CC1}	Operation mode (CT=L, ST=L)		12	17	mA
	I_{CC2}	Lock protection mode (CT=H, ST=L)		2.5	4.0	mA
	I_{CC2}	Standby mode (ST=H)		110	150	μA
Lock detection capacitor charging current	I_{CT1}	$V_{CT} = 0.2\text{V}$	1.5	2.1	3.0	μA
Capacitor discharging current	I_{CT2}	$V_{CT} = 3.0\text{V}$	0.21	0.35	0.50	μA
Capacitor charging / discharging current ratio	R_{CT}	$R_{CD} = I_{CT1}/I_{CT2}$	5.0	6.0	8.0	
CT charging voltage	V_{CT1}		2.55	2.75	2.95	V
CT discharging voltage	V_{CT2}		1.6	1.8	2.0	V
Output Low-level voltage	V_{OL}	$I_O = 200\text{mA}$		0.2	0.3	V
Output High-level voltage	V_{OH}	$I_O = 200\text{mA}$	3.9	4.1		V
Hall input sensitivity	V_{HN}	Zero peak value (including offset hysteresis)		7	15	mA
RD output pin Low-level voltage	$V_{RD L}$	$I_{RD} = 5\text{mA}$		0.1	0.3	V
RD output pin leakage current	$I_{RD L}$	$V_{RD} = 15\text{V}$			30	μA
HB output Low-level voltage	V_{HBL}	$I_{HB} = 5\text{mA}$		1.0	1.3	V
ST pin input current	I_{ST}	$V_{ST} = 5\text{V}$		75	100	μA

Package Dimensions


unit : mm (typ)

3426A

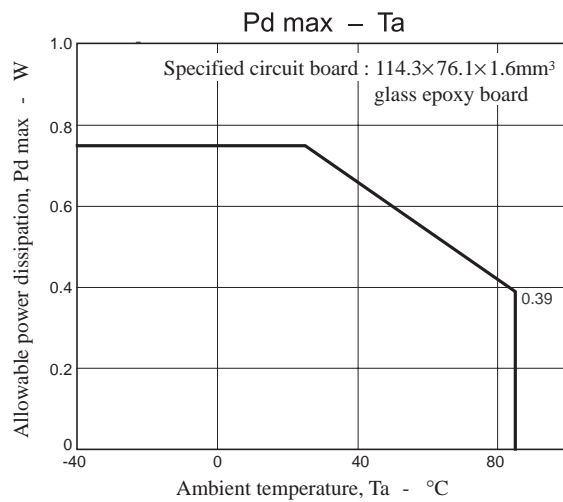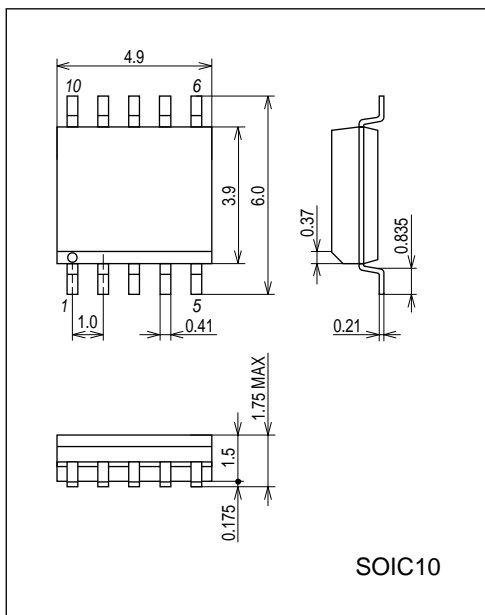

LB11862MC

Pin Assignment

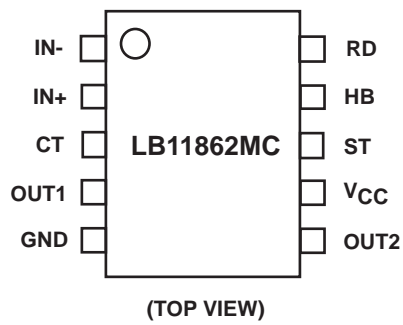


Truth Table


ST	IN-	IN+	CT	OUT1	OUT2	RD	HB	Mode
High	-	-	-	OFF	OFF	OFF	OFF	Standby
Low	High	Low	Low	High	Low	Low	Low	Operating
	Low	High		Low	High			
			High	OFF	OFF	OFF	Low	Lock protection

(The RD output is latched at "Low"-level in operating mode and "High"-level in stop mode.)

Block Diagram

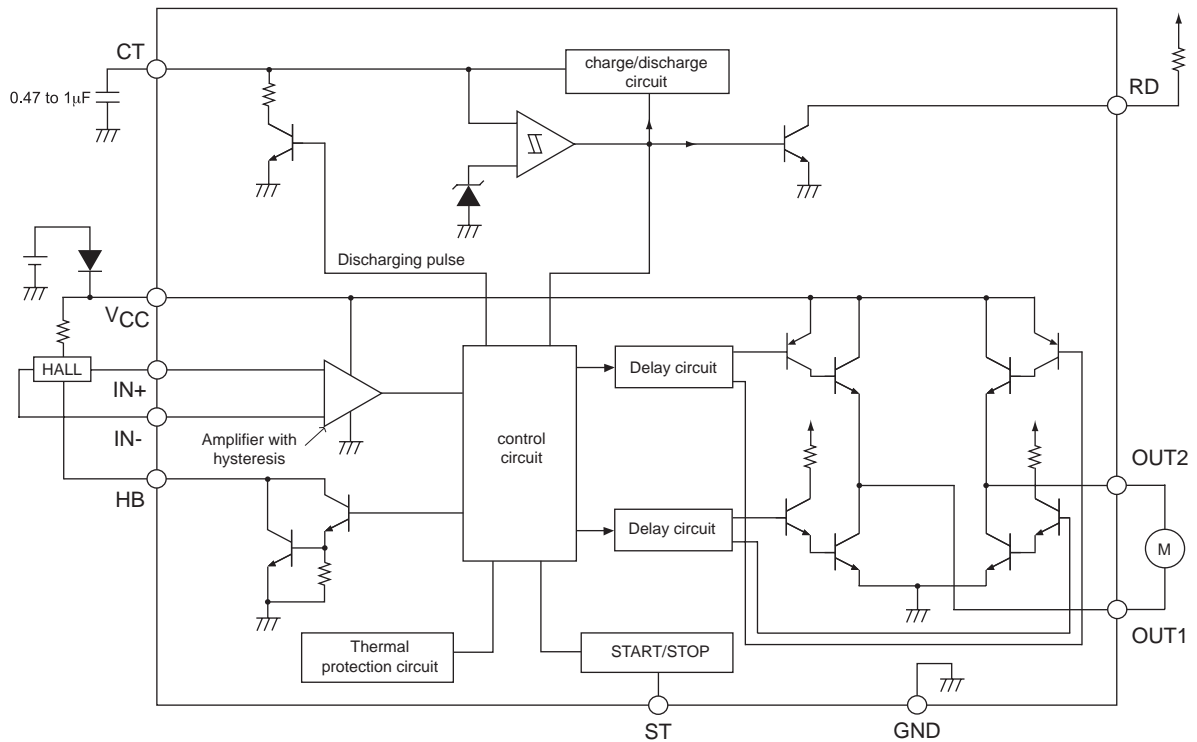

Application Circuit Example

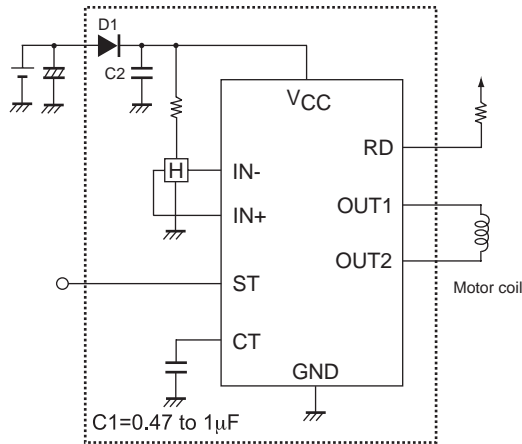

1. D1 is for protection against breakdown in case of reverse connection of power supply and mat is deleted when there is no problem.
2. C2 is necessary to allow the kick-back regenerative current to flow when C2 is to be used with the coil current of 500mA or more.
3. CT to be connected to GND when not used.
4. RD, ST and HB pins to be OPEN when not used.

ON Semiconductor and the ON logo are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.