

# PHILIPS

Data handbook



Electronic  
components  
and materials

## Electron tubes

Part 1b August 1974

Transmitting tubes for communication

Tubes for r.f. heating

Amplifier circuit assemblies





# ELECTRON TUBES

Part 1b

August 1974

---

General section

---

Transmitting tubes for communication  
Tubes for r.f. heating

---

Amplifier circuit assemblies

---

Associated accessories

---

Index

---

**Argentina**

FAPESA I.y.C.  
Av. Crovara 2550  
Tel. 652-7438/7478  
BUENOS AIRES

**Australia**

Philips Industries Ltd.  
Elcoma Division  
67-71 Mars Road  
Tel. 42 1261  
LANE COVE, 2066, N.S.W.

**Austria**

Österreichische Philips  
Bauelemente Industrie G.m.b.H.  
Zieglergasse 6  
Tel. 93 26 22  
A-1072 VIENNA

**Belgium**

M.B.L.E.  
80, rue des Deux Cases  
Tel. 23 00 00  
B-1070 BRUSSELS

**Brazil**

IBRAPE S.A.  
Av. Paulista 2073-S/Loja  
Tel. 278-1111  
SAO PAULO, SP.

**Canada**

Philips Electron Devices  
116 Vanderhoof Ave.  
Tel. 425-5161  
TORONTO 17, Ontario

**Chile**

Philips Chilena S.A.  
Av. Santa Maria 0760  
Tel. 39-40-01  
SANTIAGO

**Colombia**

SADAPE S.A.  
Calle 19, No. 5-51  
Tel. 422-175  
BOGOTA D.E. 1

**Denmark**

Miniwatt A/S  
Emdrupvej 115A  
Tel. (01) 69 16 22  
DK-2400 KØBENHAVN NV

**Finland**

Oy Philips Ab  
Elcoma Division  
Kaivokatu 8  
Tel. 1 72 71  
SF-00100 HELSINKI 10

**France**

R.T.C.  
La Radiotechnique-Compelec  
130 Avenue Ledru Rollin  
Tel. 357-69-30  
F-75540 PARIS 11

**Germany**

Valvo G.m.b.H.  
Valvo Haus  
Burchardstrasse 19  
Tel. (040) 3296-1  
D-2 HAMBURG 1

**Greece**

Philips S.A. Hellénique  
Elcoma Division  
52, Av. Syngrou  
Tel. 915 311  
ATHENS

**Hong Kong**

Philips Hong Kong Ltd.  
Components Dept.  
11th Fl., Din Wai Ind. Bldg  
49 Hoi Yuen Rd  
Tel. K-42 82 05-8  
KWUNTONG

**India**

INBELEC Div. of  
Philips India Ltd.  
Band Box House  
254-D, Dr. Annie Besant Rd  
Tel. 457 311-5  
Prabhadevi, BOMBAY-25-DD

**Indonesia**

P.T. Philips-Ralin Electronics  
Elcoma Division  
Djalan Gadjah Mada 18  
Tel. 44 163  
DJAKARTA

**Ireland**

Philips Electrical (Ireland) Ltd.  
Newstead, Clonskeagh  
Tel. 69 33 55  
DUBLIN 14

**Italy**

Philips S.p.A.  
Sezione Elcoma  
Piazza IV Novembre 3  
Tel. 69 94  
I-20124 MILANO

**Japan**

NIHON PHILIPS  
32nd Fl., World Trade Center Bldg.  
5, 3-chome, Shiba Hamamatsu-cho  
Minato-ku  
Tel. (435) 5204-5  
TOKYO

**Mexico**

Electrónica S.A. de C.V.  
Varsovia No. 36  
Tel. 5-33-11-80  
MEXICO 6, D.F.

**Netherlands**

Philips Nederland B.V.  
Afd. Elonco  
Boschdijk 525  
Tel. (040) 79 33 33  
NL-4510 EINDHOVEN

**New Zealand**

EDAC Ltd.  
70-72 Kingsford Smith Street  
Tel. 873 159  
WELLINGTON

**Norway**

Electronica A.S.  
Middelthunggate 27  
Tel. 46 39 70  
OSLO 3

**Peru**

CADESA  
Jr. Ilo, No. 216  
Apartado 10132  
Tel. 27 73 17  
LIMA

**Philippines**

EDAC  
Philips Industrial Dev. Inc.  
2246 Pason Tambo Street  
Tel. 88 94 53 (to 56)  
MAKATI-RIZAL

**Portugal**

Philips Portuguesa S.A.R.L.  
Av. Eng. Duharte Pacheco 6  
Tel. 68 31 21  
LISBOA 1

**Singapore**

Philips Singapore Private Ltd.  
8th Fl., International Bldg  
360 Orchard Road  
Tel. 37 22 11  
SINGAPORE-9

**South Africa**

EDAC (Pty.) Ltd.  
South Park Lane  
New Doornfontein  
Tel. 24/6701-2  
JOHANNESBURG

**Spain**

COPRESA S.A.  
Balmes 22  
Tel. 232 66 80  
BARCELONA 7

**Sweden**

ELCOMA A.B.  
Lidingövägen 50  
Tel. 08/67 97 80  
S-10 250 STOCKHOLM 27

**Switzerland**

Philips A.G.  
Edenstrasse 20  
Tel. 01/44 22 11  
CH-8027 ZUERICH

**Taiwan**

Philips Taiwan Ltd.  
3rd Fl., San Min Building  
57-1, Chung Shan N. Rd., Section 2  
P.O. Box 22978  
Tel. 553101-5  
TAIPEI

**Turkey**

Türk Philips Ticaret A.S.  
EMET Department  
Gümüşsuyu Cad. 78-80  
Tel. 45.32.50  
Beyoğlu, ISTANBUL

**United Kingdom**

Mullard Ltd.  
Mullard House  
Torrington Place  
Tel. 01-580 6633  
LONDON WC1E 7HD

**United States**

North American Philips  
Electronic Component Corp.  
230, Duffy Avenue  
Tel. (516) 931-6200  
HICKSVILLE, N.Y. 11802

**Uruguay**

Luzilectron S.A.  
Rondeau 1567, piso 5  
Tel. 9 43 21  
MONTEVIDEO

**Venezuela**

C.A. Philips Venezolana  
Elcoma Dept.  
Av. Principal de los Ruices  
Edif. Centro Colgate, Apdo 1167  
Tel. 36.05.11  
CARACAS

# DATA HANDBOOK SYSTEM

Our Data Handbook System is a comprehensive source of information on electronic components, subassemblies and materials; it is made up of three series of handbooks each comprising several parts.

**ELECTRON TUBES**

**BLUE**

**SEMICONDUCTORS AND INTEGRATED CIRCUITS**

**RED**

**COMPONENTS AND MATERIALS**

**GREEN**

The several parts contain all pertinent data available at the time of publication, and each is revised and reissued periodically.

Where ratings or specifications differ from those published in the preceding edition they are pointed out by arrows. Where application information is given it is advisory and does not form part of the product specification.

If you need confirmation that the published data about any of our products are the latest available, please contact our representative. He is at your service and will be glad to answer your inquiries.

---

This information is furnished for guidance, and with no guarantee as to its accuracy or completeness; its publication conveys no licence under any patent or other right, nor does the publisher assume liability for any consequence of its use; specifications and availability of goods mentioned in it are subject to change without notice; it is not to be reproduced in any way, in whole or in part without the written consent of the publisher.

---

# ELECTRON TUBES (BLUE SERIES)

This series consists of the following parts, issued on the dates indicated.

<b>Part 1a</b>	<b>Transmitting tubes for communications</b> and Tubes for r.f. heating	Types PB2/500 ÷ TBW15/125	<b>April 1973</b>
<b>Part 1b</b>	<b>Transmitting tubes for communication</b> Tubes for r.f. heating Amplifier circuit assemblies		<b>August 1974</b>
<b>Part 2</b>	<b>Microwave products</b> Communication magnetrons Magnetrons for micro-wave heating Klystrons Traveling-wave tubes	Diodes Triodes T-R Switches Microwave Semiconductor devices Isolators Circulators	<b>August 1973</b>
<b>Part 3</b>	<b>Special Quality tubes;</b> Miscellaneous devices		<b>March 1972</b>
<b>Part 4</b>	<b>Receiving tubes</b>		<b>September 1973</b>
<b>Part 5a</b>	<b>Cathode-ray tubes</b>		<b>November 1973</b>
<b>Part 5b</b>	<b>Camera tubes; Image intensifier tubes</b>		<b>December 1973</b>
<b>Part 6</b>	<b>Products for nuclear technology</b> Photodiodes Photomultiplier tubes Channel electron multipliers Geiger-Mueller tubes	Neutron tubes Photo diodes	<b>January 1974</b>
<b>Part 7</b>	<b>Gas-filled tubes</b> Voltage stabilizing and reference tubes Counter, selector, and indicator tubes Trigger tubes Switching diodes	Thyratrons Ignitrons Industrial rectifying tubes High-voltage rectifying tubes	<b>February 1974</b>
<b>Part 8</b>	<b>T.V. Picture tubes</b>		<b>May 1974</b>



# SEMICONDUCTORS AND INTEGRATED CIRCUITS (RED SERIES)

This series consists of the following parts, issued on the dates indicated.

**Part 1a Rectifier diodes and thyristors** **June 1974**

- |                             |                           |
|-----------------------------|---------------------------|
| Rectifier diodes            | Thyristors, diacs, triacs |
| Voltage regulator diodes    | Rectifier stacks          |
| Transient suppressor diodes |                           |

**Part 1b Diodes** **July 1974**

- |                               |                          |
|-------------------------------|--------------------------|
| Small signal germanium diodes | Voltage regulator diodes |
| Small signal silicon diodes   | Voltage reference diodes |
| Special diodes                | Tuner diodes             |

**Part 2 Low frequency and deflection transistors** **July 1974**

**Part 3 High frequency and switching transistors** **February 1973**

**Part 4a Special semiconductors** **March 1973**

- |                          |   |
|--------------------------|---|
| Transmitting transistors | Dual transistors  |
| Microwave devices        | Microminiature devices for<br>thick- and thin-film circuits |
| Field effect transistors |   |

**Part 4b Devices for opto-electronics** **March 1973**

- |                                       |                         |
|---------------------------------------|-------------------------|
| Photosensitive diodes and transistors | Photocouplers           |
| Light emitting diodes                 | Photoconductive devices |
| Infra-red sensitive devices           |                         |

**Part 5 Linear integrated circuits** **July 1973**

**Part 6 Digital integrated circuits** **April 1974**

- |                 |                 |
|-----------------|-----------------|
| DTL (FC family) | MOS (FD family) |
| CML (GX family) | MOS (FE family) |

# COMPONENTS AND MATERIALS (GREEN SERIES)

These series consists of the following parts, issued on the dates indicated.

<b>Part 1</b>	<b>Circuit Blocks, Input/Output Devices, Electro-mechanical Components Peripheral Devices</b>	<b>June 197</b>
	High noise immunity logic FZ/30-Series Circuit blocks 40-Series and CSA70 Counter modules 50-Series Norbits 60-Series, 61-Series	Circuit blocks 90-Series Input/output devices Electro-mechanical components Peripheral devices
<b>Part 2</b>	<b>Resistors, Capacitors</b>	<b>April 197</b>
	Electrolytic capacitors Paper capacitors and film capacitors Ceramic capacitors Variable capacitors	Fixed resistors Variable resistors Non-linear resistors (VDR, LDR, NTC, PTC)
<b>Part 3</b>	<b>Radio, Audio, Television</b>	<b>June 197</b>
	FM tuners Loudspeakers Television tuners, aerial input assemblies	Components for black and white TV Components for colour television Deflection assemblies for camera tubes
<b>Part 4a</b>	<b>Soft ferrites</b>	<b>October 197</b>
	Ferrites for radio, audio and television Small coils	Ferroxcube potcores and square cores Ferroxcube transformer cores
<b>Part 4b</b>	<b>Piezoelectric Ceramics, Permanent magnet materials</b>	<b>October 197</b>
<b>Part 5</b>	<b>Ferrite core memory products</b>	<b>January 197</b>
	Ferroxcube memory cores Matrix planes and stacks	Core memory systems
<b>Part 6</b>	<b>Electric Motors and Accessories</b>	<b>March 197</b>
	Small synchronous motors Stepper motors	Miniature direct current motors
<b>Part 7</b>	<b>Circuit Blocks</b>	<b>September 19</b>
	Circuit blocks 100 kHz -Series Circuit blocks-1-Series Circuit blocks 10-Series	Circuit blocks for ferrite core memory drive

General section







# TRANSMITTING TUBES FOR COMMUNICATION TUBES FOR R.F. HEATING

## LIST OF SYMBOLS

### 1. Symbols denoting electrodes and electrode connections

Anode	a
Beam plates	bp
Filament or heater	f
Filament or heater tap or starpoint of three star-connected filaments	f <sub>c</sub>
Filament ( and cathode ) R.F. connection	f(k)
Grid	g
Tube pin which must not be connected externally	i.c.
Cathode	k
External conductive coating	m
Internal shield	s

### Remarks

- a. Similar electrodes of the same electrode system are distinguished by means of an additional numeral; the electrode nearest to the cathode has the smallest number. Example: with pentodes:  $g_1, g_2, g_3$ .
- b. Equivalent electrodes of a multi-unit tube are distinguished by means of an apostrophe; e.g. the anodes of a double tetrode are indicated by a and a'.

### 2. Symbols denoting voltages

#### Remarks

- a. In the case of indirectly heated tubes the voltages on the various electrodes are with respect to the cathode; in case of d.c. fed, directly heated tubes with respect to the negative side of the filament, and in case of a.c. fed, directly heated tubes with respect to the electrical centre of the filament, unless otherwise stated.
- b. The symbols quoted below represent the average, or mean, values of the concerning voltages, unless otherwise stated.

Anode voltage	V <sub>a</sub>
Anode a.c. voltage	V <sub>a~</sub>
Anode voltage in cut-off or cold condition	V <sub>a<sub>o</sub></sub>
Supply voltage of tube electrodes	V <sub>b</sub>

2. Symbols denoting voltages (continued)

Filament or heater voltage	$V_f$
Grid voltage	$V_g$
Grid a. c. voltage	$V_{g\sim}$
A. C. input voltage	$V_i$
Voltage between heater and cathode	$V_{kf}$
Peak value of a voltage	$V_p$
RMS value of a voltage	$V_{RMS}$
Secondary transformer voltage	$V_{tr}$

3. Symbols denoting currents

Remarks

- The positive electrical current is directed opposite to the direction of the electron current.
- The symbols quoted below represent the average values of the concerning currents, unless otherwise stated.

Anode current	$I_a$
Filament or heater current	$I_f$
Grid current	$I_g$
Cathode current	$I_k$
Peak value of a current	$I_p$
RMS value of a current	$I_{RMS}$
Saturation current	$I_{sat}$

4. Symbols denoting powers

Anode dissipation	$W_a$
Driver output power	$W_{dr}$
Grid dissipation	$W_g$
Input power	$W_i$
Anode supply d. c. power	$W_{ia}$
Output power in the load	$W_{load}$
Modulation power	$W_{mod}$
Tube output power	$W_o$
Peak envelope output power	$W_{oPEP}$
Oscillator output power	$W_{osc}$

7Z2 4155

## 5. Symbols denoting capacitances

In general the published capacitance values refer to the cold tube

Capacitance between the anode and all other elements except the control grid	$C_a$
Capacitance between anode and filament (all other elements being earthed)	$C_{af}$
Capacitance between anode and grid (all other elements being earthed)	$C_{ag}$
Capacitance between anode and cathode (all other elements not connected to the cathode being earthed)	$C_{ak}$
Capacitance between grid and filament (all other elements being earthed)	$C_{gf}$
Capacitance between control grid and all other elements except anode	$C_g$
Capacitance between two grids (all other elements being earthed)	$C_{g1g2}$
Capacitance between grid and cathode (all other elements not connected to the cathode being earthed)	$C_{gk}$
Input capacitance of a push-pull circuit	$C_i$
Capacitance between cathode and all other elements	$C_k$
Output capacitance of a push-pull circuit	$C_o$

## 6. Symbols denoting resistances

External a. c. resistance in an anode lead or matching resistance	$R_{a\sim}$
Matching resistance of a push-pull amplifier (anode to anode)	$R_{aa\sim}$
Filament or heater resistance	$R_f$
Filament or heater resistance in cold condition	$R_{f0}$
External resistor in a grid lead	$R_g$
External resistor in a cathode lead	$R_k$

## 7. Symbols denoting various quantities

Bandwidth	$B$
Harmonic distortion factor	$d$
n-th harmonic distortion	$d_n$
Total harmonic distortion	$d_{tot}$

7Z2 4156

7. Symbols denoting various quantities (continued)

Intermodulation distortion	$d_i$
n-th order intermodulation distortion	$d_{in}$
Frequency	$f$
Pulse repetition rate	$f_{imp}$
Height above sea level	$h$
Modulation factor	$m$
Pressure drop of cooling air or cooling water	$p_i$
Required flow of cooling air or cooling water	$q$
Thermal resistance	$R_{th}$
Mutual conductance	$S$
Temperature of anode or anode block	$t_a$
Ambient temperature	$t_{amb}$
Bulb temperature	$t_{bulb}$
Cathode heating time	$T_h$
Inlet temperature of cooling air or cooling water	$t_i$
Pulse duration	$T_{imp}$
Outlet temperature of cooling air or cooling water	$t_o$
Seal temperature	$t_s$
Waiting time (= time which has to pass between switching on of the filament or heater voltage and switching on of the other voltages)	$T_w$
Duty factor	$\delta$
Efficiency	$\eta$
Wavelength	$\lambda$
Amplification factor	$\mu$
Amplification factor of grid No.2 with respect to grid No.1	$\mu_{g2g1}$



# GENERAL OPERATIONAL RECOMMENDATIONS TRANSMITTING TUBES FOR COMMUNICATION TUBES FOR R.F. HEATING

## 1. GENERAL

1.1 In this Handbook data and curves are given for transmitting tubes and tubes for R. F. heating.

1.2 The tubes are classified into groups:

Preferred types - Recommended for new equipment design.

Current types - Available for equipment production and maintenance.  
No longer recommended for new equipment design.

Maintenance types - Available for equipment maintenance.  
No longer recommended for equipment production.

Obsolescent types - Available until present stocks are exhausted.

Obsolete types - No longer available.

For the status of each type please refer to the "Catalogue Transmitting tubes" or consult your tube supplier.

Full details are given of Preferred types and Current types, Data on maintenance and obsolescent types is generally given in condensed form.

## 2. CHARACTERISTIC DATA

2.1 The characteristic data given in the data sheets is general and independent of specific application. This data (e.g. filament/heater current, amplification factor, trans-conductance, capacitances etc.) is applicable to a typical tube and deviations from the stated value are likely to occur in practice.

### 2.2 Filament/heater supply.

The published value of filament/heater voltage is generally that which should be present directly at the tube terminals. Filaments fed with direct current should have their supply polarity reversed at regular intervals (say monthly), to ensure uniform wear of the filament with consequent longer life.

Reduction of filament/heater voltage is sometimes recommended to compensate e.g. the heating by back-bombardment at high frequencies; see the relevant data sheets. Special precautions must be taken when operating the filaments/heaters of transmitting tubes in series and the manufacturer should be consulted before doing so.

#### 2.2.1 Pure tungsten cathodes (filaments)

The published value of filament voltage is the maximum voltage required for a new tube to supply the rated output power. A lower voltage (giving longer life) will often suffice and every tube with a pure tungsten cathode is supplied together with a list stating the saturation current at various filament voltages. Thus, knowing the required emission current, the most suitable filament voltage can be selected.

Alternatively the filament voltage can be adjusted until the required output power, or maximum distortion, is reached

and, (to obtain peak output power) further adjusted after modulation is applied. Regular adjustment (say monthly) will be necessary to maintain the required conditions and, towards the end of tube life, the filament voltage may be raised above the nominal.

To compensate for mains supply fluctuations, automatic or manual control of the filament voltage should be exercised, especially when operating at nominal, or higher than nominal, filament voltage.

#### 2.2.2 Thoriated tungsten cathodes (filaments)

The maximum working life from these cathodes is obtained when the filament voltage is held within 1% of the nominal. Underheating and overheating may be harmful so temporary deviations from the nominal voltage must not exceed  $\pm 5\%$ , unless otherwise specified.

#### 2.2.3 Quick heating cathodes (filaments)

In general, tubes with quick heating cathodes should have their filaments in parallel only. When a sinusoidal voltage is used for heating the filament, the frequency must not be in the range 200 Hz to 5000 Hz.

When a non-sinusoidal voltage from a d.c. -a.c. converter is used the r.m.s. value should be adjusted to the published value of filament voltage.

If required the heating time can be further reduced by applying a higher value for a short time. The manufacturer should be consulted before doing so.

#### 2.2.4 Indirectly heated oxide coated cathodes

For maximum life the heater voltage should be as near as possible to the nominal value and the maximum permissible deviation must not exceed 10%, unless otherwise specified.

R.F. voltages between heater and cathode may induce faulty r.f. insulation with resultant r.f. power losses. To overcome these losses an increase in the driving power would be required resulting in an increase of cathode temperature with a consequent reduction of tube life. Such r.f. voltages should therefore be avoided e.g. by using one of the following techniques:

- by-passing the heater to cathode insulation and decoupling the heater at v.h.f. and u.h.f.
- r.f. blocking with series chokes in heater supply leads and decoupling with capacitors.

#### 2.2.5 Switching on the filament voltage

Unless a maximum switch-on value of filament current is stated in the data sheet, switching on at full filament voltage is permissible. The published values of the maximum permissible filament current during switch on, refer to the absolute maximum of the instantaneous value under worst case conditions. With a.c. feed this will exist when switching on at the instantaneous peak voltage of the highest mains voltage that may occur. In practice the filament current during switching on can be limited by means of a filament transformer with high magnetic leakage or a series choke or resistor in the primary of the

transformer. If necessary this choke or resistor may be short circuited by means of a relay after a delay of, say, 15 seconds.

#### 2.2.6 By-passing the filament

Tubes with directly heated cathodes must have the filament terminals at the same r.f. potential. For this purpose it is usual to connect a capacitor, that has low reactance with respect to the operating frequency, near to and between the filament terminals. As an added safety precaution it should be established that the resonance of this capacitor together with the inductance of the filament structure falls well below the operating frequency.

#### 2.3 Switching on of the electrode voltages

Unless prescribed otherwise simultaneous switching on of filament, anode, control-grid, and screen-grid voltages is permissible for tubes with an internal anode. Tubes with an external anode should in general not have their positive voltages applied until the cathode has reached its operating temperature. This can be checked by monitoring the filament current.

#### 2.4 Effective cathode

If both filament limbs are marked "f" in the data sheets, the filament may be regarded as being symmetrical in its function as cathode. If such a filament is fed with d.c. the anode return lead should be connected to the negative end of the filament. All other decoupling and circuit returns must then also be connected to this point.

If the filament is fed with a.c. the anode return lead should be connected to the centre-tap of the filament transformer or to a tapped resistor shunted across the filament. The filament decoupling will then be symmetrical with regard to this point and all other circuit returns must also be made to this point.

If one filament limb is marked "f" and the other "f(k)", only the one marked "f(k)" may be used as the circuit cathode. If such a filament is fed with d.c., the negative side of the filament supply should be connected to this point.

For either d.c. or a.c. filament supply, the anode supply as well as de-coupling and other circuit returns must be connected to "f(k)" only.

#### 2.5 Inter-electrode capacitances

The published values of capacitances are average values measured on the cold tube with no operating voltages; individual deviations may however occur.

The definitions of the capacitance symbols are given in the appropriate list in I.E.C. Publication 100.

#### 2.6 Amplification factor $\mu$ and transconductance S

The published values are average values and individual deviations may occur. Normally the conditions at which the values have been measured, are stated.

2.7 Saturation current  $I_{sat}$

Each large tube with a pure tungsten cathode is marked with the value of filament voltage at which the saturation current has the value specified in the data sheet.

2.8 Accessories

Proper functioning of the tubes can be guaranteed only if accessories (sockets, cooling devices etc.) have been supplied, or approved, by the tube manufacturer.

3. **LIMITING VALUES**

3.1 Limiting values mean the maximum, or minimum, permissible values of the parameters listed. These limits are given either for all operating conditions together, or for a particular application.

3.2 The limiting values are applicable up to the maximum frequency stated. When operating at higher frequencies the limiting values must be decreased in accordance with the published data or curves.

3.3 Derating the limiting values

If no limiting values have been published for a specific application the derating factors listed in the following table must be applied. The values for class C telegraphy have been expressed as unity; the limiting values for other applications have been expressed as a factor of this unity.

A rectified 3-phase supply with or without filtering is equivalent to a d.c. supply.

The derating factors are determined by the physical limits of the tube and contain no safety margins. Where mains voltage fluctuations occur further derating must be applied (see section 3.5). The nature of operation, e.g. the industrial application of heating generators may necessitate further safety derating (see section 5.4).



Wo = tungsten filament

Th = thoriated tungsten filament

		V <sub>a</sub>	I <sub>a</sub>	I <sub>g</sub>	W <sub>ia</sub>	W <sub>a</sub>	W <sub>g2</sub>
R.F. class C telegraphy		1	1	1	1	1	1
Anode mod.	Th	0.8	0.833	1	0.67	0.67	0.67
	Wo	0.8	0.5	1	0.4	0.4	0.4
R.F. class B	Th	1	0.833	1	0.833 <sup>1)</sup>	1	0.67
	Wo	1	0.5	1	0.5	1	0.5
A.F. class B		1	1	1	1	1	1
A.F. class AB		1	1	1	1	1	1
A.F. class A		1	1		W <sub>a</sub>	1	1
Self-rectifying oscillator	Th	1.13	0.53	0.53	0.665	1	
	Wo	1.13	0.32	0.32	0.4	1	
Two-phase half-wave without filter	Th	0.9	0.89	0.89	1	1	
	Wo	0.9	0.6	0.6	1	1	

1) or 1.5 W<sub>a</sub>.

### 3.4 Rating system

The limiting values should be used in accordance with the "Absolute maximum rating system" as defined by I. E. C. Publication 134.

### 3.5 Absolute maximum rating system

Absolute maximum ratings are limiting values of operating and environmental conditions applicable to any electronic device of a specified type as defined by its published data, and should not be exceeded under the worst probable conditions.

These values are chosen by the device manufacturer to provide acceptable serviceability of the device, taking no responsibility for equipment variations, environmental variations, and the effects of changes in operating conditions due to variations in the characteristics of the device under consideration and of all other electronic devices in the equipment.

The equipment manufacturer should design so that, initially and throughout life, no absolute maximum value for the intended service is exceeded with any device under the worst probable operating conditions with respect to supply voltage variation, equipment components variation, equipment control adjustment, load variations, signal variation, environmental conditions, and variations in characteristics of the device under consideration and of all other electronic devices in the equipment.

- 3.6 Each limiting value should be regarded independently of other values; under no circumstances is any limiting value to be exceeded (e.g. if the anode voltage is decreased to a value lower than its limiting value, it is not permissible to exceed the limiting value of anode current or anode dissipation). Unless otherwise stated, the limiting values for currents and voltages are measured with a moving coil instrument.

### 3.7 Electrode voltages

The voltages ( $V_a$ ,  $V_{g1}$ ,  $V_{g2}$  etc.) listed under limiting values should not be exceeded even with a cold tube. Special attention should be paid to this point when a screen-grid is supplied via a series resistor.

When designing equipment to be supplied from non-stabilized mains, the maximum mains voltage occurring determines the nominal operating voltages of the tube. These nominal voltages must be lower than the limiting values. Should the transmitting tubes, and thus the voltage supply, be temporarily under a lower load their voltages will increase and these increased values, occurring at the highest mains voltage, determine the nominal operating voltages.

The limiting values of voltage are d.c. values. If an a.c. or an unsmoothed d.c. supply is used, the limiting values must be decreased in accordance with the derating factors shown in the table (section 3.3).

### 3.8 Anode dissipation

The limiting value of the anode dissipation  $W_a$  should not be exceeded when mains voltage fluctuations occur, or when grid drive fails. To prevent damage to the tube, in the latter case, adequate fixed bias or a quick action relay in the anode lead should be provided. When forced-air or water-cooling is sufficient only for an anode dissipation smaller than the absolute maximum, the smaller value must be regarded as the limiting value.

### 3.9 Anode input power

Usually the data sheets show the limiting value of input power  $W_{i_a}$  to be smaller than the product of limiting values of anode voltage and anode current; the latter two limits should not therefore occur simultaneously.

In practice the input power  $W_{i_a}$  is not always the product of the d.c. values of  $I_a$  and  $V_a$ . For pulsating supply voltages the form factor should be taken into account.

3.10 For the screen-grid dissipation the product of screen-grid voltage and current can always be taken.

The screen-grid should be protected against failure of anode voltage.

### 3.11 Control-grid dissipation

The control-grid dissipation  $W_g$  or  $W_{g1}$  can be approximated, by taking the power supplied to the grid bias source ( $-V_g \times I_g$ ) from the grid driving power (approx.  $0.95 \times V_{gp} \times I_g$ ). When an a.c., or unsmoothed d.c., voltage supply is used the form factor should be taken into account.

### 3.12 Grid resistance

By the maximum permissible grid resistance  $R_g$  is meant the d.c. resistance in the grid circuit. A higher value may cause instability.

## 4. OPERATING CONDITIONS

### 4.1 General

In the published data, operating conditions for various applications have been given, stating the maximum frequency at which the conditions apply. If it is required to operate a tube at higher frequencies the manufacturer should be consulted. The published values of operating conditions are average values derived from measurements made on nominal tubes working under optimum conditions. Thus, small deviations from the published value can occur if measurements are made on a particular tube. However some of the measured values of voltage or current must be adjusted to give the published figure. As an example, the published value of output power is an average value which can be reached in practice by adjusting e.g. the r.f. or a.f. input voltage  $V_{gp}$ , when the published value of output power is not obtained at the nominal value of  $V_{gp}$ . When designing a multi-stage transmitter it is good practice to leave a margin in the output power and input voltage to allow for adjustments similar to that just described. The published output power  $W_o$  of transmitting tubes is the tube output, which means the anode dissipation  $W_a$  taken from the anode input  $W_{ia}$ . When a tube is used in a common grid circuit (grounded grid circuit), the published value of the output power includes the power transferred from the input.

Unless otherwise stated losses in the anode circuit and coupling losses are not taken into account.

The quoted grid input power is assumed to be  $0.9 \times$  the product of the average grid current  $I_g$  and the peak value of the grid voltage  $V_{gp}$ . Losses in the grid circuit and the bleeder are sometimes accounted for by stating the required driver output power.

At high frequencies where reduced ratings have to be applied, the required driving power will often be considerably higher than the grid input power, and in some cases, may be determined almost exclusively by circuit losses.

### 4.2 R.F. class C telegraphy and F.M. telephony

A class C amplifier or oscillator is one in which the grid bias is appreciably greater than the cut-off voltage so that current flows for less than one half of each cycle of the alternating grid voltage. Working to the values published in the data sheets will ensure good output power and efficiency.

If a grid resistor is used for obtaining automatic bias, care must be taken that the anode current does not become too high if the r.f. driving power should fail. A safety device in the anode or screen-grid lead should be incorporated for this purpose.

### 4.3 R.F. class C anode and screen-grid modulation

In an r.f. class C anode modulated stage the anode voltage is modulated with a.f., and at 100% modulation the voltage is varied from zero to twice the d.c. value. With tetrodes or pentodes the screen-grid should also be modulated to prevent it being overloaded. The average values of the grid bias and r.f. driving voltage remain constant during modulation. With 100% modulation the average anode dissipation is 1.5 times the value without modulation and this is taken into account although the published limiting value of anode dissipation refers to the unmodulated power. Automatic grid bias by means of a grid leak can be used, but, to obtain minimum distortion, some fixed bias is recommended.

The modulation power published is the power required by the modulated r.f. stage. When the modulating stage is being calculated 5% to 10% must be added to allow for losses in transformer and choke.

#### 4.4 R.F. class B telephony

A class B amplifier is one in which the grid is biased to the cut-off voltage so that the anode current flows for approximately one half of each cycle of the alternating grid voltage. The published data for r.f. class B telephony has been determined, by trial and error, to give a straight modulation characteristic.

#### 4.5 R.F. class AB SSB amplifier

The given operating conditions are from measurements made in a circuit without feedback and with constant screen-grid voltage. They show the best compromise between output power and linearity. Linearity is measured with a double tone test signal in which the two tones have equal amplitude and lie 1000 Hz apart in frequency. The amplitudes of the distortion products  $d_3$  and  $d_5$  are in dB referred to the amplitude of either of the two equal tones. The published values of  $d_3$  and  $d_5$  are the worst encountered at any driving level and occur usually slightly below full output power. Distortion products of orders other than  $d_3$  and  $d_5$  are, in general, negligible. If the amplitudes of the distortion products are referred to the peak envelope amplitude, the figures for  $d_3$  and  $d_5$  go down 6 dB.

#### 4.6 A.F. class B amplifier

With this amplifier the anode dissipation is dependent on the input signal voltage so that maximum anode dissipation is obtained when the signal is about 60% of the value at full drive. When this is not present continuously, as is the case with broadcast and telephony services, it is permissible for the limiting value of anode dissipation to be exceeded by 10%.

To suppress even harmonics, separate controllable grid bias for each tube, or a balancing circuit, should be incorporated. This data is purely arbitrary, i.e. the same output can be obtained with less modulation of the anode current (with smaller load resistance and lower peak grid current) although the efficiency would be lower. The requirements of the complete a.f. amplifier determines which kind of operation is preferred.

#### 4.7 Industrial operating conditions

Section 5.4 gives some general information on the application of power tubes in industrial apparatus. With a single phase mains connection a hum filter will sometimes be omitted as is normal in three phase mains connection. Operating conditions and derating factors are given for this kind of operation (section 3.3). It must be ensured that no limiting values are exceeded because of fluctuations in the mains supply or by tolerances in other components. The published value of  $W_0$  is the actual tube output power. The output power of a self-oscillating circuit  $W_{OSC}$  is obtained by deducting the grid dissipation  $W_g$  and the losses in the grid resistor  $W_{Rg}$  from the output power  $W_0$ . The power in the load  $W_l$  is obtained by deducting the losses in the output circuit from  $W_{OSC}$ . A favourable load output characteristic may be obtained by automatically controlling the grid voltage and current, depending on the matching. A non-linear device e.g. a tungsten lamp or an P.T.C. resistor may perform this function

adequately and help to prevent overloading the grid.

With self oscillating circuits the frequency must be held within the available frequency band. This may be done by having large circuit capacitance, small stable self inductance, undercritical inductive coupling with the output circuit, electrostatic screening between oscillator and output circuit etc.

If the frequency of an industrial oscillator has to be limited to a narrow frequency band, crystal controlled driving stages may be used, then however, it is rather difficult to obtain matching between the tube input and output. A greater safety margin in the tube will be necessary with the output still depending on the load, or special measures, such as automatic tuning and/or matching control, will have to be taken.

For smaller tubes in industrial applications operating conditions have been given for when power is supplied from a single phase full-wave rectifier, a three phase half-wave rectifier (which is nearly equivalent to d.c.) and with raw a.c. In the latter case the output is about 0.6 times that obtained with d.c. and the peak inverse voltage is equal to the full anode voltage (this is of special importance as the grid voltage is in anti-phase to the anode voltage). With a single-phase, half-wave rectified anode voltage the useful output is nearly equal to that with a d.c. supply. To obtain the most favourable mains loading when using a self rectifying oscillator, a quasi push-pull circuit can be used, in which two tubes function alternately on each half wave. The best mains loading for three-phase, self rectification is obtained by using 6 tubes in a triple push-pull circuit.

#### 4.8 Intermittent service

When data concerning intermittent service is published it is conditional that, although the cathode may be heated continuously, the on-period is no more than 5 minutes and that the off-period is equally long or longer.

### 5. APPLICATION OF THE OPERATING CONDITIONS

#### 5.1 General

It is not always possible to operate the tube under the specified operating conditions. In some applications deviations from the published values are likely to occur causing the limiting values to be exceeded. Depending on the kind of service the following classification can be made:

- Fixed transmitters for broadcasting and telecommunication service, operated by a trained staff. (5.2)
- Mobile transmitters. (5.3)
- Equipment for industrial applications (r.f. heating, supersonics etc.) (5.4)
- Amateur transmitters and special applications. (5.5)
- Pulse operated equipment. (5.6)

### 5.2 Fixed transmitters

With fixed transmitters it is usually possible to use the tubes under ideal working conditions viz.

- only very small mains voltage deviations as the supply is derived from a special high tension line.
- stabilized mains voltage supply.
- a fairly constant and optimum transmitter load.
- the presence of safety devices which prevent tube damage under any circumstances.
- the presence of a well trained staff for the immediate repair of faults.

and thus it is permissible to operate near the limiting values.

### 5.3 Mobile transmitters

Mobile transmitters are transmitters which can be operated whilst mobile; they often have to function with widely varying supply voltages and with loads that are neither constant nor optimum. Safety devices are usually poor, especially in small transmitters, so the use of the tube at the published maximum operating conditions is not recommended. The actual operating conditions chosen will depend upon specific circumstances. Because the electrode system in the smaller quick heating or oxide coated transmitting tubes is rugged and can withstand the vibration and occasional shocks experienced in normally used road vehicles the tubes are ideal for mobile transmitters.

However in aircraft and vehicles used over rough ground it is advisable to shockmount the tubes. The oxide coated cathode is fairly insensitive to heater voltage variation and the high specific emission allows lower anode voltages to be used. Generally, when used in any apparatus that is likely to be subjected to shocks or vibration, tubes with thoriated tungsten cathodes require shock damping. If a special device is used to clamp a tube into its socket it must be ensured that the maximum permissible temperature is not exceeded in any part of the envelope.

### 5.4 Industrial application, r.f. heating, supersonics etc.

For the following reasons, in industrial equipment the tube seldom operates under ideal conditions.

- Large, uncompensated mains voltage fluctuations.
- Voltage supply with no provision against hum.
- Variable load.
- Relative large tolerances on the stability of the operating frequency.
- Intermittent service.
- Service personnel often untrained in the servicing of the electronic power equipment.

Thus the design of industrial equipment differs from that of fixed transmitters and generally demands the use of self oscillating triodes. The most reliable operation of the tube, and hence the equipment, is obtained by selecting a nominal supply potential which, at the maximum mains voltage, does not exceed the limiting value.

In equipment powered by a.c. or unsmoothed d.c., the pulsating waveform is such that the average values of voltage and current chosen must be lower than if they were supplied by a normal d.c. supply.

Special attention should be paid to the grid current and dissipation since, in most cases, they are critical values.

Special cases of intermittent service make it possible to increase the limiting values and information on these possibilities will be supplied on request.

#### 5.4.1 Multiple tube operation

Since industrial generators are largely self oscillating, single tube operation is generally preferred. This mode of operation minimizes the risk of interaction between the tube and circuit stray reactances that could lead to parasitic oscillations. Whenever, for various reasons, such as the suppression of the even harmonics or the need for higher power at higher frequencies, push-pull or parallel operation is chosen, increased attention must be paid to the prevention of interaction between the tubes, be they in push-pull or parallel, through their connections or other stray circuit reactances.

#### 5.5 Amateur transmitters and special adjustments

The maximum permissible load of a tube is determined by the physical maxima of the tube incorporated in the limiting values. No guaranteed tube life can be given if the limiting values are exceeded although this does not imply that exceeding the limits will always result in an immediate breakdown of the tube. In the case of I.C.A.S. (Intermittent Commercial and Amateur Service) for instance, higher operating conditions have been given (see section 4.8) but generally no guarantee of tube life is given. Information about special circuits, adjustments and operating conditions will be supplied on request.

#### 5.6 Pulsed operation

When a tube is used under pulsed operation the pulse duration must be so short that no part of the tube reaches an abnormally high temperature and flash-overs do not develop. In general the average load will be considerably less than the maximum limiting load value.

General information on this kind of information is not available but, if requested, information will be given on specific applications.

6. Conditioning


After transit or a period of storage it is recommended that power tubes should be operated for not less than 15 minutes with only the filaments/heaters energized before putting into full service.

In addition, for tubes operating normally with anode voltages in excess of 5 kV, it is recommended that the anode voltage and input power should be increased gradually or in several steps for a further period of 15 minutes, or longer, until normal operation is achieved.

This treatment will remove any traces of gases which might cause premature failure of the tube.




Pee Wee 3-pin base  
(IEC 67-I-19a)

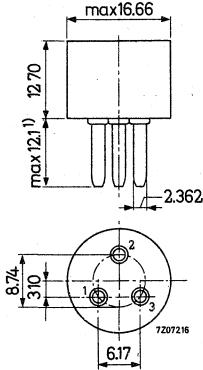


1) Including solder

Super Jumbo 4-pin base  
(IEC 67-I-28a)

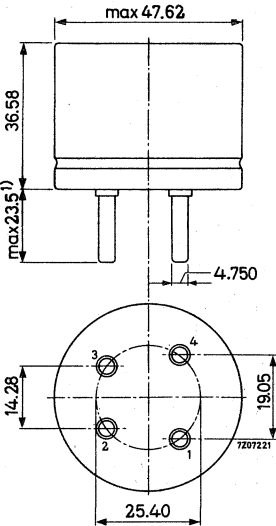


1) Including solder

Jumbo 4-pin base  
(IEC 67-I-23)

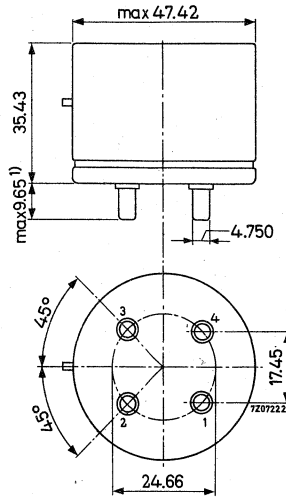

1) Including solder


Super Jumbo 4-pin base with bayonet  
(IEC 67-I-24)

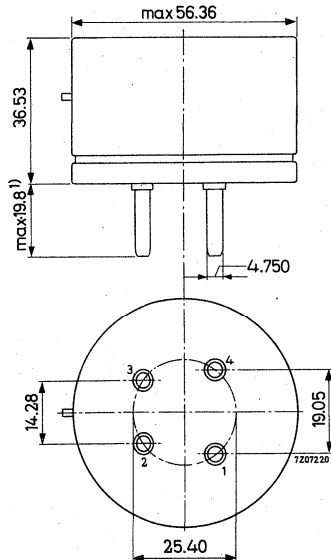

1) Including solder


# BASES

Medium 4-pin base  
(IEC 67-I-2)

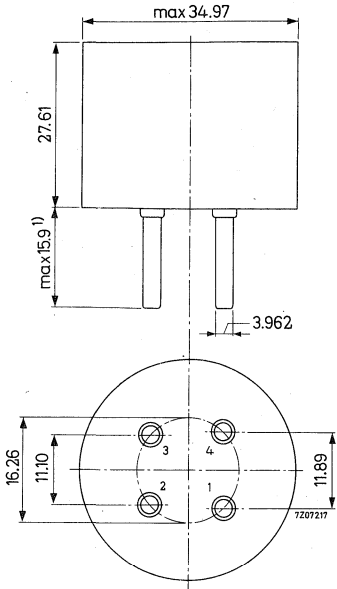


1) Including solder

Giant 5-pin base  
(IEC 67-I-21c)

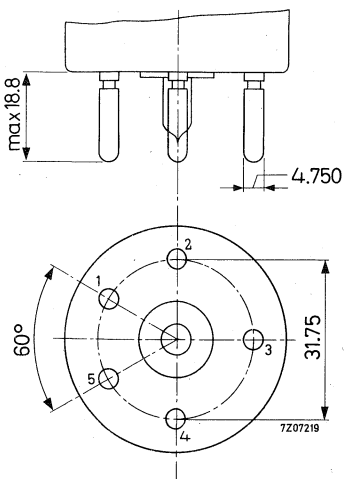


Medium 4-pin base with bayonet  
(IEC 67-I-3)

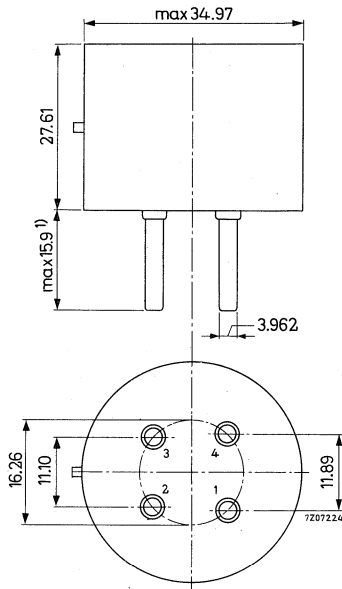


1) Including solder

Super Giant 5-pin base  
(IEC 67-I-22a)

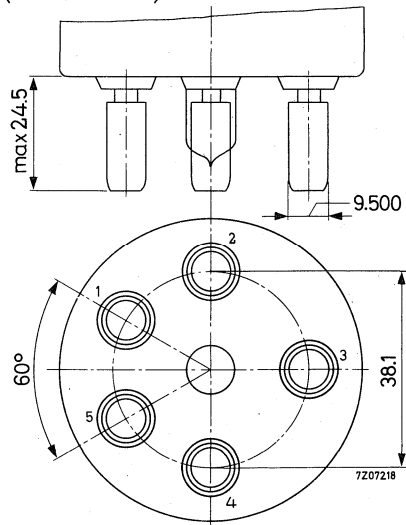


Medium shell Giant 5-pin base  
with bayonet  
(IEC 67-I-21a)

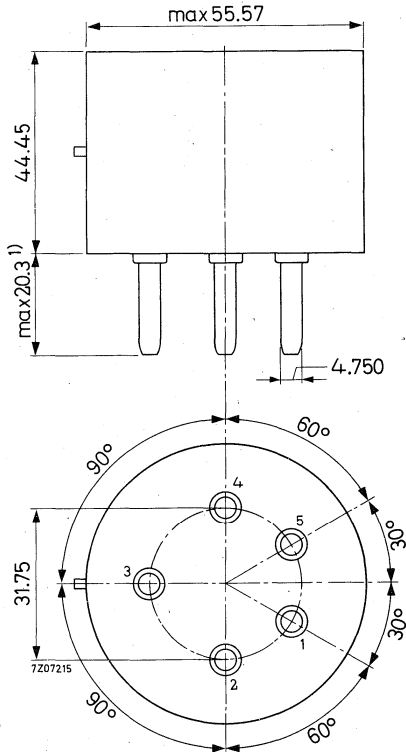


1) Including solder

Medium 5-pin base  
(IEC 67-I-4a)

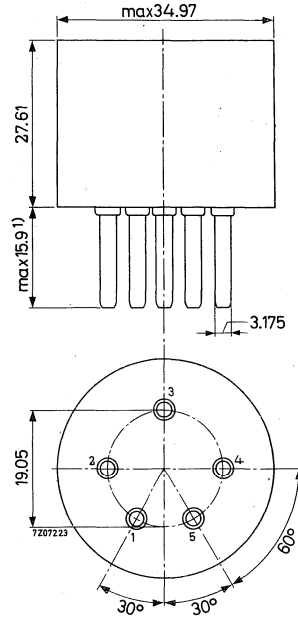

1) Including solder

Septar 7-pin base  
(IEC 67-I-20a)

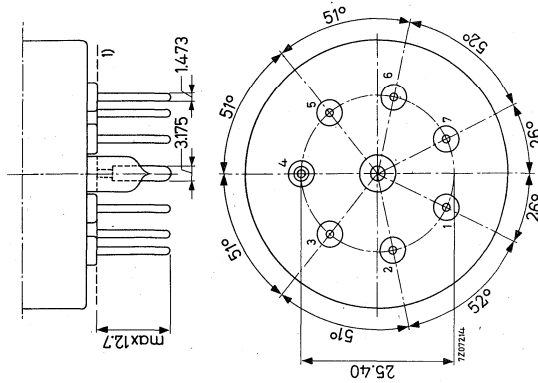

1) The reference line is established by the seating plane of the base and is determined by the three highest bosses.



Transmitting tubes for communication  
Tubes for r.f. heating





**WATER COOLED R.F. POWER TRIODE**

QUICK REFERENCE DATA								
Frequency (MHz)	C telegraphy		C anode mod.		RF class B		AF class B Two tubes	
	V <sub>a</sub> (kV)	W <sub>o</sub> (kW)	V <sub>a</sub> (kV)	W <sub>o</sub> (kW)	V <sub>a</sub> (kV)	W <sub>o</sub> (kW)	V <sub>a</sub> (kV)	W <sub>o</sub> (kW)
10	15	120			15	110	12	78
30	12	90	11	66	12	110	10	78

**HEATING:** direct by A.C. or D.C.; filament thoriated tungsten

Filament voltage  $V_f = 12.6$  V  
 Filament current  $I_f = 160$  A

**CAPACITANCES**

Grid to filament  $C_{gf} = 120$  pF  
 Anode to filament  $C_{af} = 1.4$  pF  
 Anode to grid  $C_{ag} = 50$  pF

**TYPICAL CHARACTERISTICS**

Anode voltage  $V_a = 3$  kV  
 Anode current  $I_a = 1$  A  
 Amplification factor  $\mu = 58$   
 Mutual conductance  $S = 60$  mA/V

**TEMPERATURE LIMITS** (Absolute limits)

Bulb temperature  $t = \text{max. } 220$  °C  
 Seal temperature  $t = \text{max. } 220$  °C

**COOLING**

For cooling data see cooling curves.




For water inlet temperatures between 20 °C and 50 °C the required quantity of water can be found by proportional interpolation.

At frequencies higher than 10 MHz a low velocity air flow should be directed to the grid and filament seals.

MECHANICAL DATA

Dimensions in mm

Net weight: 6.2 kg

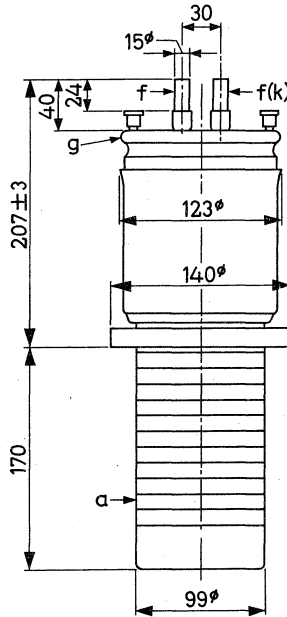

Mounting position: vertical with anode down

ACCESSORIES

- |                    |       |
|--------------------|-------|
| Water jacket       | K724  |
| Filament connector | 40670 |



R.F. CLASS C TELEGRAPHY or F.M. TELEPHONY

LIMITING VALUES (Absolute limits)

Frequency	f	up to 10	up to 30	MHz
Anode voltage	$V_a$	= max. 16	max. 12.5	kV
Anode dissipation	$W_a$	= max. 45	max. 45	kW
Negative grid voltage	$-V_g$	= max. 1000	max. 1000	V
Grid dissipation	$W_g$	= max. 1.3	max. 1.3	kW
Anode current	$I_a$	= max. 13	max. 13	A
Grid current	$I_g$	= max. 3.3	max. 3.3	A

OPERATING CONDITIONS

Frequency	f	= 10	30	30	30	MHz
Anode voltage	$V_a$	= 15	12	10	8	kV
Grid voltage	$V_g$	= -600	-550	-500	-450	V
Anode current	$I_a$	= 9.75	9.25	9.0	8.75	A
Grid current	$I_g$	= 2.2	2.2	2.1	1.85	A
Peak grid driving voltage	$V_{gp}$	= 1000	940	875	810	V
Grid driving power	$W_{dr}$	= 2.1	1.9	1.7	1.55	kW
Anode input power	$W_{ia}$	= 146	111	90	70	kW
Anode dissipation	$W_a$	= 26	21	18	15	kW
Output power	$W_o$	= 120	90	72	55	kW
Efficiency	$\eta$	= 82	81	80	78.5	%



**R.F. CLASS B AMPLIFIER**

**LIMITING VALUES** (Absolute limits)

Frequency	f	up to	10	up to	30	MHz
Anode voltage	$V_a$	= max.	16	max.	12.5	kV
Anode dissipation	$W_a$	= max.	45	max.	45	kW
Negative grid voltage	$-V_g$	= max.	1000	max.	1000	V
Grid dissipation	$W_g$	= max.	1.3	max.	1.3	kW
Anode current	$I_a$	= max.	13	max.	13	A
Grid current	$I_g$	= max.	3.3	max.	3.3	A

**OPERATING CONDITIONS**

Frequency	f	=	10	10	30	30	MHz
Anode voltage	$V_a$	=	15	15	12	12	kV
Grid voltage	$V_g$	=	-260	-260	-210	-210	V
Anode current	$I_a$	=	10.1	7.75	12.7	9.85	A
Grid current	$I_g$	=	2.0	1.3	3.0	1.9	A
Peak grid driving voltage	$V_{gp}$	=	600	520	650	520	V
Grid driving power	$W_{dr}$	=	1080	610	1770	880	W
Anode input power	$W_{i_a}$	=	151	116.3	153	118	kW
Anode dissipation	$W_a$	=	41	31.3	43	33	kW
Output power	$W_o$	=	110	85	110	85	kW
Efficiency	$\eta$	=	73	73	72	72	%

R.F. CLASS C ANODE MODULATION

**LIMITING VALUES** (Absolute limits)

Frequency	f	up to	30	MHz
Anode voltage	$V_a$	= max.	11.5	kV
Anode dissipation	$W_a$	= max.	30	kW
Negative grid voltage	$-V_g$	= max.	1000	V
Grid dissipation	$W_g$	= max.	1.3	kW
Anode current	$I_a$	= max.	9	A
Grid current	$I_g$	= max.	3.3	A

**OPERATING CONDITIONS**

Frequency	f	=	30	30	MHz
Anode voltage	$V_a$	=	11	10	kV
Grid voltage	$V_g$	=	-480	-440	V <sup>1)</sup>
Anode current	$I_a$	=	7.6	6.9	A
Grid current	$I_g$	=	3.1	3.1	A
Grid resistor	$R_g$	=	90	80	$\Omega$
Peak grid driving voltage	$V_{gp}$	=	880	810	V
Grid driving power	$W_{dr}$	=	2.7	2.4	kW
Anode input power	$W_{i_a}$	=	83.6	69	kW
Anode dissipation	$W_a$	=	17.6	14	kW
Output power	$W_o$	=	66	55	kW
Efficiency	$\eta$	=	79	79	%
Modulation depth	m	=	100	100	%
Modulation power	$W_{mod}$	=	41.8	34.5	kW

<sup>1)</sup> Partially obtained by the grid resistor and grid current.


**A.F. CLASS B AMPLIFIER AND MODULATOR**



**LIMITING VALUES** (Absolute limits)

Anode voltage	$V_a$	=	max.	12	kV
Anode dissipation	$W_a$	=	max.	45	kW
Negative grid voltage	$-V_g$	=	max.	1000	V
Grid dissipation	$W_g$	=	max.	1.3	kW
Anode current	$I_a$	=	max.	13	A
Grid current	$I_g$	=	max.	3.3	A

**OPERATING CONDITIONS** (two tubes in push-pull)

Anode voltage	$V_a$	=	12	10	kV		
Grid voltage	$V_g$	=	-205	-170	V		
Load resistance	$R_{aa\sim}$	=	2720	1810	$\Omega$		
Peak grid driving voltage	$V_{ggp}$	=	0	710	0	710	V
Anode current	$I_a$	=	2x0.4	2x4.75	2x0.4	2x5.75	A
Average grid current	$I_g$	=	0	2x0.45	0	2x0.72	A
Peak grid current	$I_{gp}$	=	0	2x2.9	0	2x4.0	A
Grid driving power	$W_{dr}$	=	0	2x150	0	2x235	W
Anode input power	$W_{i_a}$	=	2x4.0	2x57	2x4.0	2x57.5	kW
Anode dissipation	$W_a$	=	2x4.0	2x18	2x4.0	2x18.5	kW
Output power	$W_o$	=	0	78	0	78	kW
Efficiency	$\eta$	=	-	68.5	-	68	%

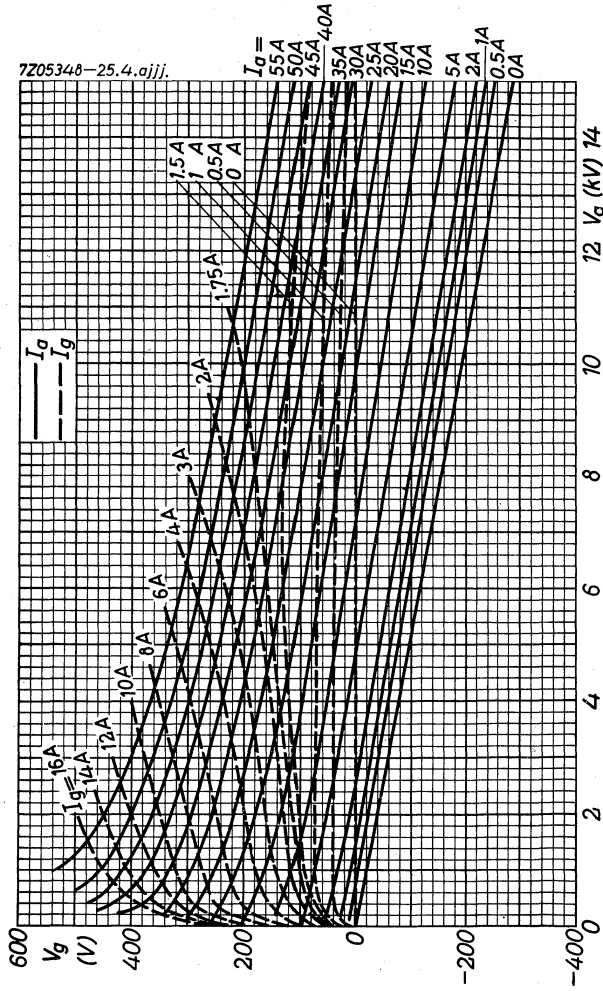

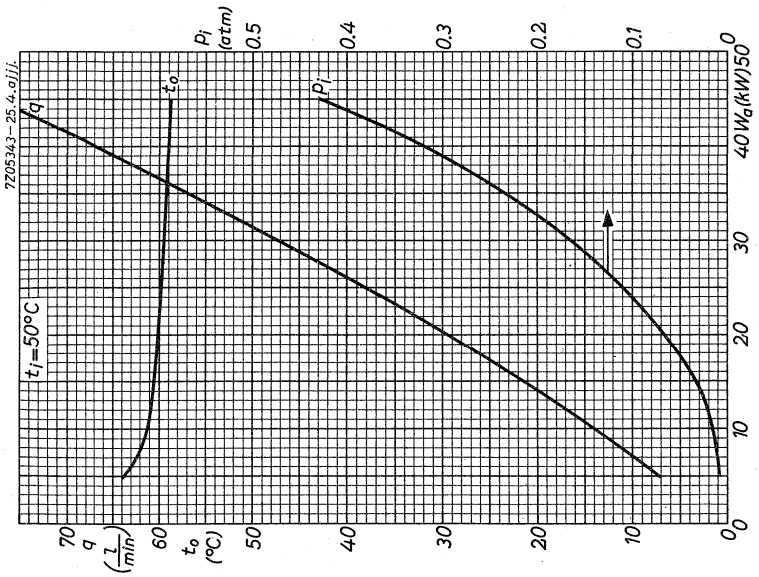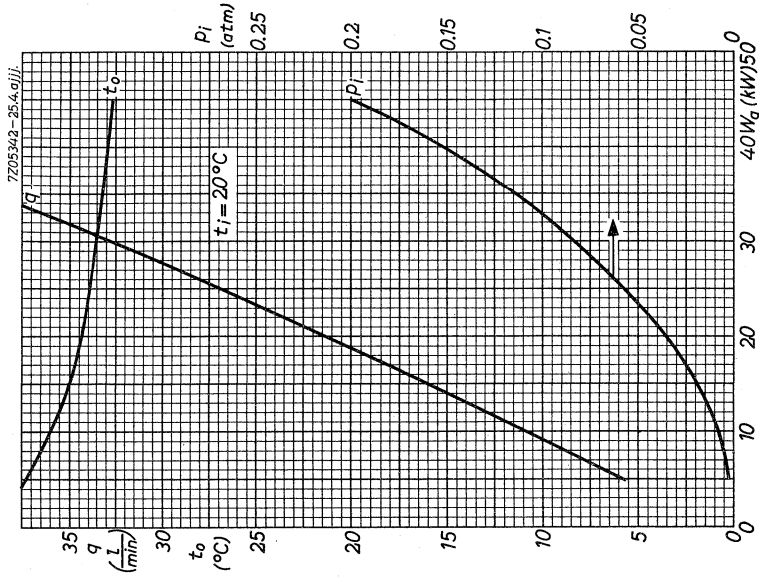

## AIR COOLED R.F. POWER TRIODE

QUICK REFERENCE DATA								
Frequency (MHz)	C telegraphy		C anode mod.		RF class B		AF class B Two tubes	
	$V_a$ (kV)	$W_o$ (kW)	$V_a$ (kV)	$W_o$ (kW)	$V_a$ (kV)	$W_o$ (kW)	$V_a$ (kV)	$W_o$ (kW)
10	15	120			15	110	12	78
30	12	90	11	66	12	110	10	78

**HEATING:** direct by A.C. or D.C.; filament thoriated tungsten

Filament voltage  $V_f = 12.6$  V

Filament current  $I_f = 160$  A

**CAPACITANCES**

Grid to filament  $C_{gf} = 120$  pF

Anode to filament  $C_{af} = 1.4$  pF

Anode to grid  $C_{ag} = 50$  pF

**TYPICAL CHARACTERISTICS**

Anode voltage  $V_a = 3$  kV

Anode current  $I_a = 1$  A

Amplification factor  $\mu = 58$

Mutual conductance  $S = 60$  mA/V

**TEMPERATURE LIMITS (Absolute limits)**

Bulb temperature  $t = \text{max. } 220$  °C

Seal temperature  $t = \text{max. } 220$  °C

**COOLING**

For cooling data see cooling curves. These curves are for an air inlet temperature of 25 °C.

At lower temperatures the amount of air should be the same.

At higher temperatures the amount of air should be increased so that the outlet air temperature is not higher than at  $t_i = 25$  °C.



At frequencies higher than 10 MHz a low velocity air flow should be directed to the grid and filament seals.



**MECHANICAL DATA**

Net weight: 39 kg

Dimensions in mm

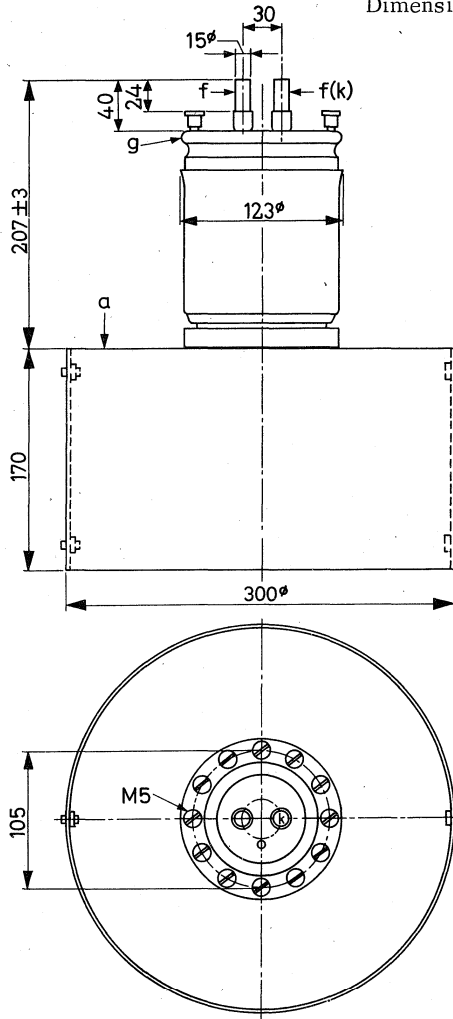

**ACCESSORIES**

- |                     |       |
|---------------------|-------|
| Insulating pedestal | 40672 |
| Filament connector  | 40670 |

Mounting position: vertical  
with anode down



**R.F. CLASS C TELEGRAPHY or F.M. TELEPHONY**

**LIMITING VALUES (Absolute limits)**

Frequency	f	up to	10	up to	30	MHz
Anode voltage	$V_a$	= max.	16	max.	12.5	kV
Anode dissipation	$W_a$	= max.	35	max.	35	kW
Negative grid voltage	$-V_g$	= max.	1000	max.	1000	V
Grid dissipation	$W_g$	= max.	1.3	max.	1.3	kW
Anode current	$I_a$	= max.	13	max.	13	A
Grid current	$I_g$	= max.	3.3	max.	3.3	A

**OPERATING CONDITIONS**

Frequency	f	=	10	30	30	30	MHz
Anode voltage	$V_a$	=	15	12	10	8	kV
Grid voltage	$V_g$	=	-600	-550	-500	-450	V
Anode current	$I_a$	=	9.75	9.25	9.0	8.75	A
Grid current	$I_g$	=	2.2	2.2	2.1	1.85	A
Peak grid driving voltage	$V_{gp}$	=	1000	940	875	810	V
Grid driving power	$W_{dr}$	=	2.1	1.9	1.7	1.55	kW
Anode input power	$W_{i_a}$	=	146	111	90	70	kW
Anode dissipation	$W_a$	=	26	21	18	15	kW
Output power	$W_o$	=	120	90	72	55	kW
Efficiency	$\eta$	=	82	81	80	78.5	%

**R.F. CLASS B AMPLIFIER**

**LIMITING VALUES (Absolute limits)**

Frequency	f	up to	10	up to	30	MHz
Anode voltage	$V_a$	= max.	16	max.	12.5	kV
Anode dissipation	$W_a$	= max.	35	max.	35	kW
Negative grid voltage	$-V_g$	= max.	1000	max.	1000	V
Grid dissipation	$W_g$	= max.	1.3	max.	1.3	kW
Anode current	$I_a$	= max.	13	max.	13	A
Grid current	$I_g$	= max.	3.3	max.	3.3	A

**OPERATING CONDITIONS**

Frequency	f	=	10	10	30	30	MHz
Anode voltage	$V_a$	=	15	15	12	12	kV
Grid voltage	$V_g$	=	-260	-260	-210	-210	V
Anode current	$I_a$	=	10.1	7.75	12.7	9.85	A
Grid current	$I_g$	=	2.0	1.3	3.0	1.9	A
Peak grid driving voltage	$V_{gp}$	=	600	520	650	520	V
Grid driving power	$W_{dr}$	=	1080	610	1770	880	W
Anode input power	$W_{i_a}$	=	151	116.3	153	118	kW
Anode dissipation	$W_a$	=	41	31.3	43	33	kW
Output power	$W_o$	=	110	85	110	85	kW
Efficiency	$\eta$	=	73	73	72	72	%

R.F. CLASS C ANODE MODULATION

**LIMITING VALUES** (Absolute limits)

Frequency	f	up to	30 MHz
Anode voltage	$V_a$	= max.	11.5 kV
Anode dissipation	$W_a$	= max.	30 kW
Negative grid voltage	$-V_g$	= max.	1000 V
Grid dissipation	$W_g$	= max.	1.3 kW
Anode current	$I_a$	= max.	9 A
Grid current	$I_g$	= max.	3.3 A

**OPERATING CONDITIONS**

Frequency	f	=	30	30 MHz
Anode voltage	$V_a$	=	11	10 kV
Grid voltage	$V_g$	=	-480	-440 V <sup>1)</sup>
Anode current	$I_a$	=	7.6	6.9 A
Grid current	$I_g$	=	3.1	3.1 A
Grid resistor	$R_g$	=	90	80 $\Omega$
Peak grid driving voltage	$V_{gp}$	=	880	810 V
Grid driving power	$W_{dr}$	=	2.7	2.4 kW
Anode input power	$W_{i_a}$	=	83.6	69 kW
Anode dissipation	$W_a$	=	17.6	14 kW
Output power	$W_o$	=	66	55 kW
Efficiency	$\eta$	=	79	79 %
Modulation depth	m	=	100	100 %
Modulation power	$W_{mod}$	=	41.8	34.5 kW

<sup>1)</sup> Partially obtained by the grid resistor and grid current.


**A.F. CLASS B AMPLIFIER AND MODULATOR**


**LIMITING VALUES (Absolute limits)**

Anode voltage	$V_a$	=	max.	12	kV
Anode dissipation	$W_a$	=	max.	35	kW
Negative grid voltage	$-V_g$	=	max.	1000	V
Grid dissipation	$W_g$	=	max.	1.3	kW
Anode current	$I_a$	=	max.	13	A
Grid current	$I_g$	=	max.	3.3	A

**OPERATING CONDITIONS (two tubes in push-pull)**

Anode voltage	$V_a$	=	12	10	kV
Grid voltage	$V_g$	=	-205	-170	V
Load resistance	$R_{aa\sim}$	=	2720	1810	$\Omega$
Peak grid driving voltage	$V_{ggp}$	=	0      710	0      710	V
Anode current	$I_a$	=	2x0.4    2x4.75	2x0.4    2x5.75	A
Average grid current	$I_g$	=	0    2x0.45	0    2x0.72	A
Peak grid current	$I_{gp}$	=	0    2x2.9	0    2x4.0	A
Grid driving power	$W_{dr}$	=	0    2x150	0    2x235	W
Anode input power	$W_{i_a}$	=	2x4.0    2x57	2x4.0    2x57.5	kW
Anode dissipation	$W_a$	=	2x4.0    2x18	2x4.0    2x18.5	kW
Output power	$W_o$	=	0      78	0      78	kW
Efficiency	$\eta$	=	-      68.5	-      68	%

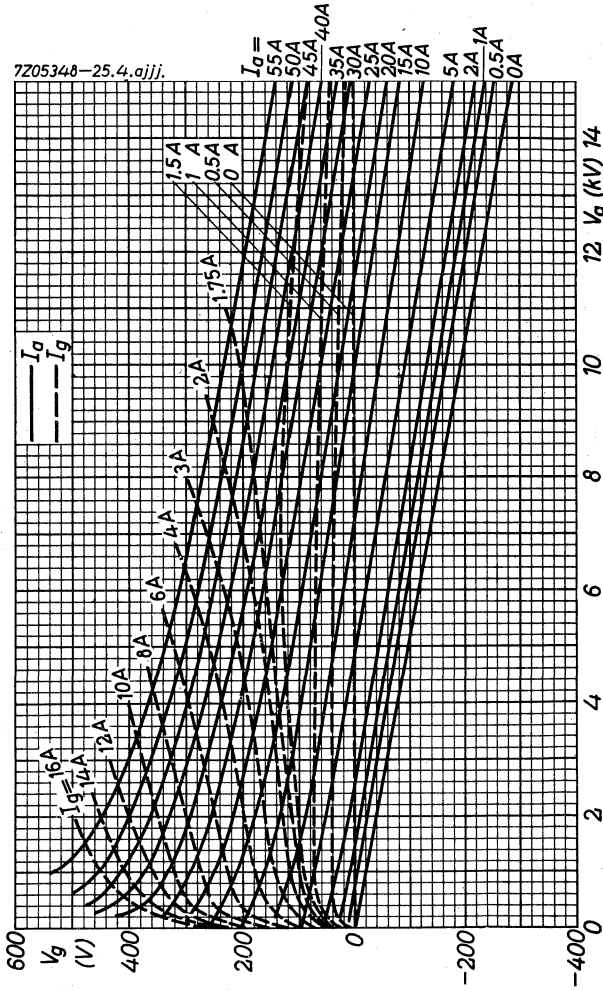

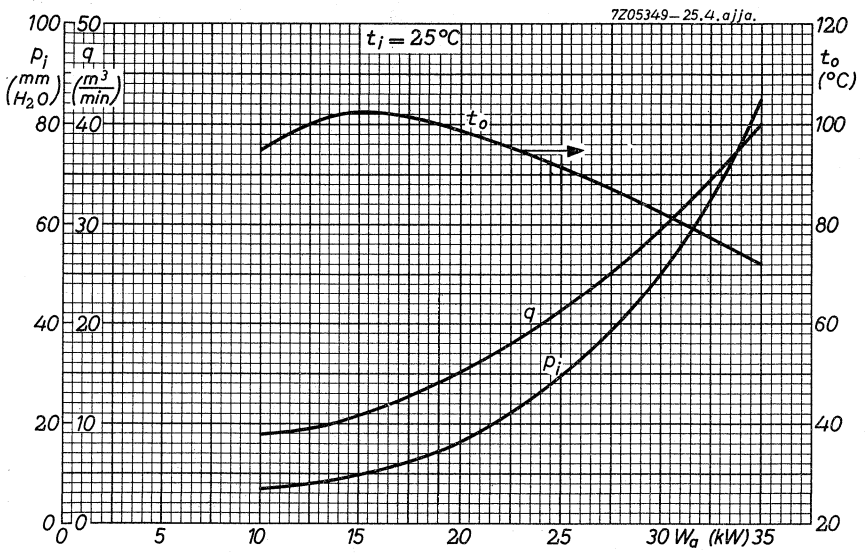

**VAPOUR COOLED R.F. POWER TRIODE**

QUICK REFERENCE DATA								
Frequency (MHz)	C telegraphy		C anode mod.		RF class B		AF class B Two tubes	
	V <sub>a</sub> (kV)	W <sub>o</sub> (kW)	V <sub>a</sub> (kV)	W <sub>o</sub> (kW)	V <sub>a</sub> (kV)	W <sub>o</sub> (kW)	V <sub>a</sub> (kV)	W <sub>o</sub> (kW)
10	15	120			15	110	12	78
30	12	90	11	66	12	110	10	78

**HEATING:** direct by A.C. or D.C.; filament thoriated tungsten

Filament voltage  $V_f = 12.6$  V  
 Filament current  $I_f = 160$  A

**CAPACITANCES**

Grid to filament  $C_{gf} = 120$  pF  
 Anode to filament  $C_{af} = 1.4$  pF  
 Anode to grid  $C_{ag} = 50$  pF

**TYPICAL CHARACTERISTICS**

Anode voltage  $V_a = 3$  kV  
 Anode current  $I_a = 1$  A  
 Amplification factor  $\mu = 58$   
 Mutual conductance  $S = 60$  mA/V

**TEMPERATURE LIMITS**

Bulb temperature  $t = \text{max. } 220$  °C  
 Seal temperature  $t = \text{max. } 220$  °C

**COOLING**

Cooling data for anode dissipation  $W_a = 60$  kW  
 Total dissipation to be transferred by cooling system  
 $(W_a + W_g + 0.8 W_f) = 63$  kW  
 equivalent to  $900$  kcal/min  
 Volume of produced vapour  
 at back flow water temperature of 20 °C  $2.5$  m<sup>3</sup>/min  
 at back flow water temperature of 90 °C  $2.8$  m<sup>3</sup>/min





R.F. CLASS C TELEGRAPHY or F.M. TELEPHONY

LIMITING VALUES (Absolute limits)

Frequency	f	up to	10	up to	30	MHz
Anode voltage	$V_a$	= max.	16	max.	12.5	kV
Anode dissipation	$W_a$	= max.	60	max.	60	kW
Negative grid voltage	$-V_g$	= max.	1000	max.	1000	V
Grid dissipation	$W_g$	= max.	1.3	max.	1.3	kW
Anode current	$I_a$	= max.	13	max.	13	A
Grid current	$I_g$	= max.	3.3	max.	3.3	A

OPERATING CONDITIONS

Frequency	f	=	10	30	30	30	MHz
Anode voltage	$V_a$	=	15	12	10	8	kV
Grid voltage	$V_g$	=	-600	-550	-500	-450	V
Anode current	$I_a$	=	9.75	9.25	9.0	8.75	A
Grid current	$I_g$	=	2.2	2.2	2.1	1.85	A
Peak grid driving voltage	$V_{gp}$	=	1000	940	875	810	V
Grid driving power	$W_{dr}$	=	2.1	1.9	1.7	1.55	kW
Anode input power	$W_{ia}$	=	146	111	90	70	kW
Anode dissipation	$W_a$	=	26	21	18	15	kW
Output power	$W_o$	=	120	90	72	55	kW
Efficiency	$\eta$	=	82	81	80	78.5	%

**R.F. CLASS B AMPLIFIER**

**LIMITING VALUES (Absolute limits)**

Frequency	f	up to	10	up to	30	MHz
Anode voltage	$V_a$	= max.	16	max.	12.5	kV
Anode dissipation	$W_a$	= max.	60	max.	60	kW
Negative grid voltage	$-V_g$	= max.	1000	max.	1000	V
Grid dissipation	$W_g$	= max.	1.3	max.	1.3	kW
Anode current	$I_a$	= max.	13	max.	13	A
Grid current	$I_g$	= max.	3.3	max.	3.3	A

**OPERATING CONDITIONS**

Frequency	f	=	10	10	30	30	MHz
Anode voltage	$V_a$	=	15	15	12	12	kV
Grid voltage	$V_g$	=	-260	-260	-210	-210	V
Anode current	$I_a$	=	10.1	7.75	12.7	9.85	A
Grid current	$I_g$	=	2.0	1.3	3.0	1.9	A
Peak grid driving voltage	$V_{gp}$	=	600	520	650	520	V
Grid driving power	$W_{dr}$	=	1080	610	1770	880	W
Anode input power	$W_{i_a}$	=	151	116.3	153	118	kW
Anode dissipation	$W_a$	=	41	31.3	43	33	kW
Output power	$W_o$	=	110	85	110	85	kW
Efficiency	$\eta$	=	73	73	72	72	%

R.F. CLASS C ANODE MODULATION

LIMITING VALUES (Absolute limits)

Frequency	f	up to	30 MHz
Anode voltage	$V_a$	= max.	11.5 kV
Anode dissipation	$W_a$	= max.	30 kW
Negative grid voltage	$-V_g$	= max.	1000 V
Grid dissipation	$W_g$	= max.	1.3 kW
Anode current	$I_a$	= max.	9 A
Grid current	$I_g$	= max.	3.3 A

OPERATING CONDITIONS

Frequency	f	=	30	30 MHz
Anode voltage	$V_a$	=	11	10 kV
Grid voltage	$V_g$	=	-480	-440 V <sup>1)</sup>
Anode current	$I_a$	=	7.6	6.9 A
Grid current	$I_g$	=	3.1	3.1 A
Grid resistor	$R_g$	=	90	80 $\Omega$
Peak grid driving voltage	$V_{gp}$	=	880	810 V
Grid driving power	$W_{dr}$	=	2.7	2.4 kW
Anode input power	$W_{i_a}$	=	83.6	69 kW
Anode dissipation	$W_a$	=	17.6	14 kW
Output power	$W_o$	=	66	55 kW
Efficiency	$\eta$	=	79	79 %
Modulation depth	m	=	100	100 %
Modulation power	$W_{mod}$	=	41.8	34.5 kW

<sup>1)</sup> Partially obtained by the grid resistor and grid current.


**A.F. CLASS B AMPLIFIER AND MODULATOR**

**LIMITING VALUES (Absolute limits)**

Anode voltage	$V_a$	= max.	12	kV
Anode dissipation	$W_a$	= max.	60	kW
Negative grid voltage	$-V_g$	= max.	1000	V
Grid dissipation	$W_g$	= max.	1.3	kW
Anode current	$I_a$	= max.	13	A
Grid current	$I_g$	= max.	3.3	A

**OPERATING CONDITIONS (two tubes in push-pull)**

Anode voltage	$V_a$	=	12	10	kV		
Grid voltage	$V_g$	=	-205	-170	V		
Load resistance	$R_{aa\sim}$	=	2720	1810	$\Omega$		
Peak grid driving voltage	$V_{ggp}$	=	0	710	0	710	V
Anode current	$I_a$	=	2x0.4	2x4.75	2x0.4	2x5.75	A
Average grid current	$I_g$	=	0	2x0.45	0	2x0.72	A
Peak grid current	$I_{gp}$	=	0	2x2.9	0	2x4.0	A
Grid driving power	$W_{dr}$	=	0	2x150	0	2x235	W
Anode input power	$W_{i_a}$	=	2x4.0	2x57	2x4.0	2x57.5	kW
Anode dissipation	$W_a$	=	2x4.0	2x18	2x4.0	2x18.5	kW
Output power	$W_o$	=	0	78	0	78	kW
Efficiency	$\eta$	=	-	68.5	-	68	%

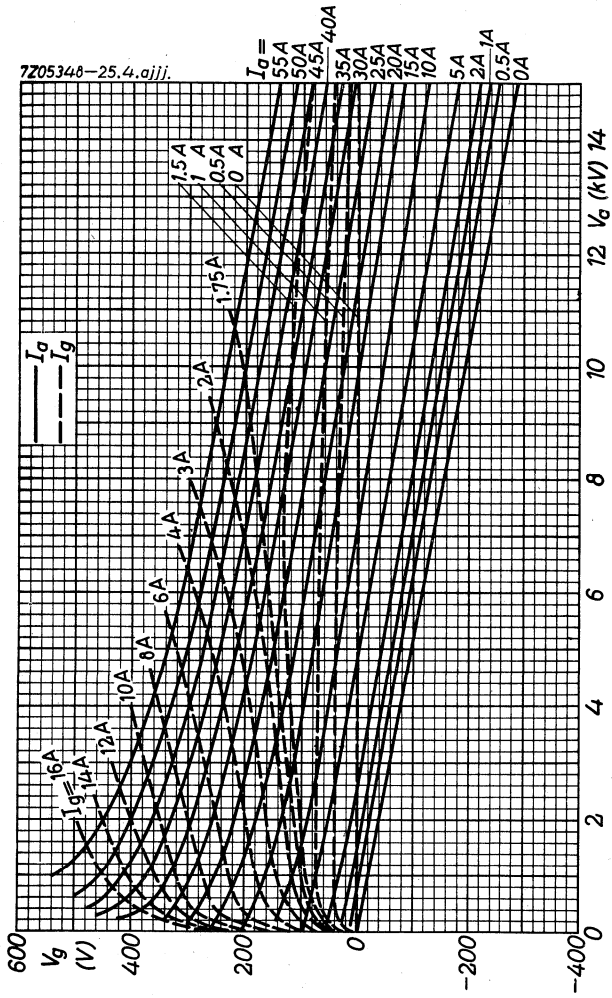





**TEMPERATURE LIMITS** (Absolute limits)

Bulb temperature = max. 180 °C

Seal temperature = max. 180 °C

**COOLING CHARACTERISTICS** . See also cooling curves

$W_a$ (kW)	$t_i$ (°C)	$q_{min}$ (l/min)	$P_i$ (atm)
10	20	12	0.003
	50	17	0.005
40	20	37	0.03
	50	54	0.07
80	20	75	0.12
	50	112	0.26
120	20	120	0.3
	50	179	0.6

For inlet temperatures  $t_i$  between 20 °C and 50 °C the required quantity of water can be found by proportional interpolation.

At frequencies higher than 10 MHz a low velocity air flow should be directed to the seals of grid and filament.





**MECHANICAL DATA**

Dimensions in mm

Net weight of tube : 32.5 kg

Net weight of water jacket: 30.5 kg

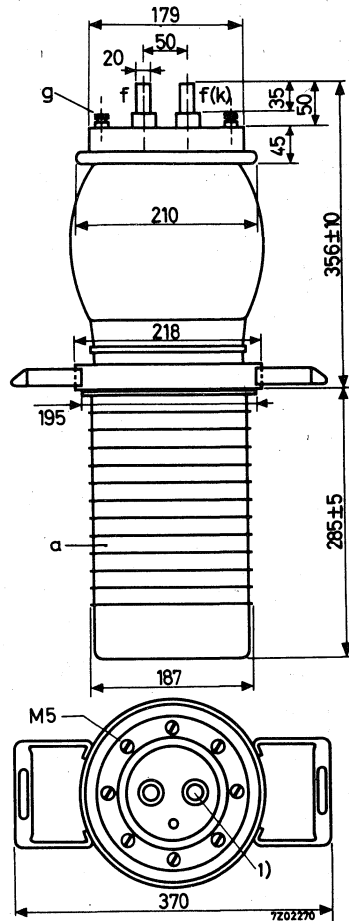

Mounting position: vertical with anode down

**ACCESSORIES**

Water jacket : K723

Filament connectors with cable: 40667

<sup>1)</sup> This pin should be used for connecting the anode return lead.

**R.F. CLASS C TELEGRAPHY**

**LIMITING VALUES (Absolute limits)**

Frequency	f		up to 10	up to 30	MHz
Anode voltage	$V_a$	= max.	15	12	kV
Anode dissipation	$W_a$	= max.	120	120	kW
Negative grid voltage	$-V_g$	= max.	1200	1200	V
Grid dissipation	$W_g$	= max.	4	4	kW
Anode current	$I_a$	= max.	33	33	A
Grid current	$I_g$	= max.	8	8	A

**OPERATING CONDITIONS**

Frequency	f	=	10	10	30	30	MHz
Anode voltage	$V_a$	=	15	15	12	12	kV
Grid voltage	$V_g$	=	-520	-800	-480	-720	V
Anode current	$I_a$	=	29.3	24.7	29.3	24.7	A
Grid current	$I_g$	=	5.4	5.2	5.9	5.5	A
Peak driving voltage	$V_{gp}$	=	1090	1370	1050	1290	V
Driving power	$W_{dr}$	=	5.5	6.6	5.7	6.6	kW
Anode input power	$W_{ia}$	=	440	371	353	296	kW
Anode dissipation	$W_a$	=	80	61	68	51	kW
Output power	$W_o$	=	360	310	285	245	kW
Efficiency	$\eta$	=	81.8	83.5	80.8	82.6	%

**R.F. CLASS C ANODE MODULATION**

**LIMITING VALUES (Absolute limits)**

Frequency	f	up to 30 MHz	
Anode voltage	$V_a$	= max.	11 kV
Anode dissipation	$W_a$	= max.	80 kW
Negative grid voltage	$-V_g$	= max.	1000 V
Grid dissipation	$W_g$	= max.	4 kW
Anode current	$I_a$	= max.	22 A
Grid current	$I_g$	= max.	8 A

**OPERATING CONDITIONS**

Frequency	f	= 30	30	30 MHz
Anode voltage	$V_a$	= 11	10	8 kV
Grid voltage	$V_g$	= -170	-140	-100 V
Grid resistor	$R_g$	= 40	44	33 $\Omega$
Anode current	$I_a$	= 19	17.3	18 A
Grid current	$I_g$	= 7.4	6.9	7.6 A
Peak driving voltage	$V_{gp}$	= 1000	930	855 V
Driving power	$W_{dr}$	= 7.1	6	6 kW
Anode input power	$W_{ia}$	= 209	173	144 kW
Anode dissipation	$W_a$	= 44	38	34 kW
Output power	$W_o$	= 165	135	110 kW
Efficiency	$\eta$	= 79	78	76.5 %
<hr/>				
Modulation depth	m	= 100	100	100 %
Modulation power	$W_{mod}$	= 105	87	72 kW

R.F. CLASS B TELEPHONY

LIMITING VALUES (Absolute limits)

Frequency	f		up to 10	up to 30	MHz
Anode voltage	$V_a$	= max.	15	12	kV
Anode dissipation	$W_a$	= max.	120	120	kW
Negative grid voltage	$-V_g$	= max.	800	800	V
Grid dissipation	$W_g$	= max.	4	4	kW
Anode current	$I_a$	= max.	27	27	A
Grid current	$I_g$	= max.	8	8	A

OPERATING CONDITIONS

Frequency	f	=	30	30	30	MHz
Anode voltage	$V_a$	=	10	8	6	kV
Grid voltage	$V_g$	=	-150	-115	-82	V
Anode current	$I_a$	=	17	18.2	17.9	A
Grid current	$I_g$	=	0.8	1.2	1.5	A
Peak driving voltage	$V_{gp}$	=	338	338	321	V
Driving power	$W_{dr}$	=	0.25	0.36	0.43	kW
Anode input power	$W_{ia}$	=	170	146	108	kW
Anode dissipation	$W_a$	=	110	96	73	kW
Output power	$W_o$	=	60	50	35	kW
Efficiency	$\eta$	=	35.3	34.3	32.6	%
Modulation depth	m	=	100	100	100	%
Grid current	$I_g$	=	5.9	6.8	7.2	A
Driving power	$W_{dr}$	=	3.6	4.1	4.1	kW

**A.F. CLASS B AMPLIFIER**

**LIMITING VALUES (Absolute limits)**

Anode voltage	$V_a$	= max.	12	kV
Anode dissipation	$W_a$	= max.	120	kW
Negative grid voltage	$-V_g$	= max.	800	V
Grid dissipation	$W_g$	= max.	4	kW
Anode current	$I_a$	= max.	33	A
Grid current	$I_g$	= max.	8	A


**OPERATING CONDITIONS, two tubes in push-pull**



Anode voltage	$V_a$	=	12	10	kV
Grid voltage	$V_g$	=	-180	-150	V
Load resistance	$R_{aa\sim}$	=	552	410	$\Omega$
Peak driving voltage	$V_{ggp}$	=	0 1210	0 1205	V
Anode current	$I_a$	=	2x2 2x26	2x1.8 2x28	A
Grid current	$I_g$	=	0 2x4.4	0 2x4.8	A
Peak grid current	$I_{gp}$	=	0 2x23	0 2x24	A
Driving power	$W_{dr}$	=	0 2x2.4	0 2x2.6	kW
Anode input power	$W_{ia}$	=	2x24 2x312	2x18 2x280	kW
Anode dissipation	$W_a$	=	2x24 2x87	2x18 2x80	kW
Output power	$W_o$	=	0 450	0 400	kW
Efficiency	$\eta$	=	- 72	- 71.4	%

OPERATING CONDITIONS, two tubes in push-pull (continued)

Anode voltage	$V_a$	=	8		6	kV
Grid voltage	$V_g$	=	-115		-82	V
Load resistance	$R_{aa\sim}$	=	338		268	$\Omega$
Peak driving voltage	$V_{ggp}$	=	0	1110	0	990 V
Anode current	$I_a$	=	2x1.6	2x27	2x1.4	2x25 A
Grid current	$I_g$	=	0	2x5	0	2x4.9 A
Peak grid current	$I_{gp}$	=	0	2x24	0	2x22 A
Driving power	$W_{dr}$	=	0	2x2.5	0	2x2.2 kW
Anode input power	$W_{ia}$	=	2x12.8	2x216	2x8.4	2x150 kW
Anode dissipation	$W_a$	=	2x12.8	2x66	2x8.4	2x50 kW
Output power	$W_o$	=	0	300	0	200 kW
Efficiency	$\eta$	=	-	69.5	-	67 %

7Z05640-25.4.ajaj

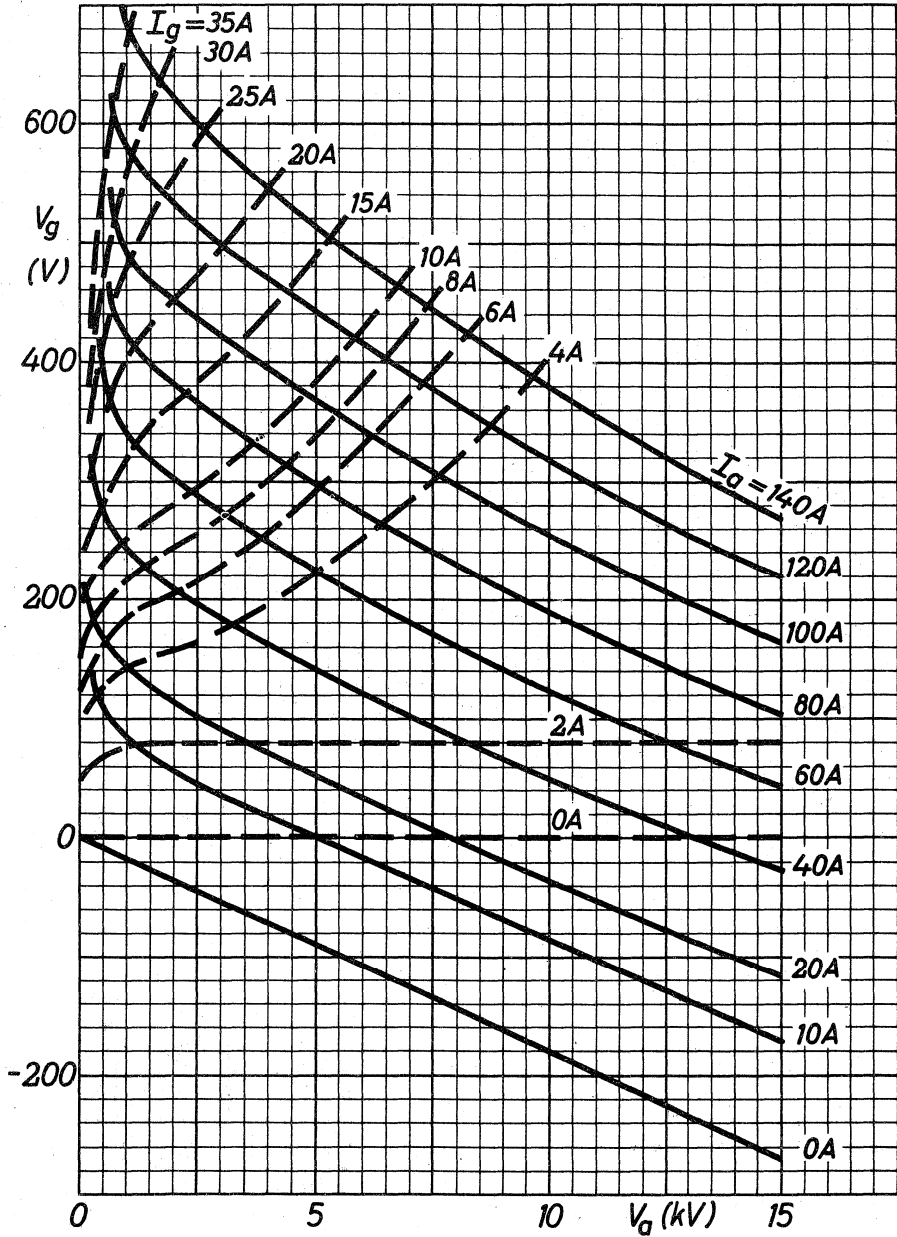

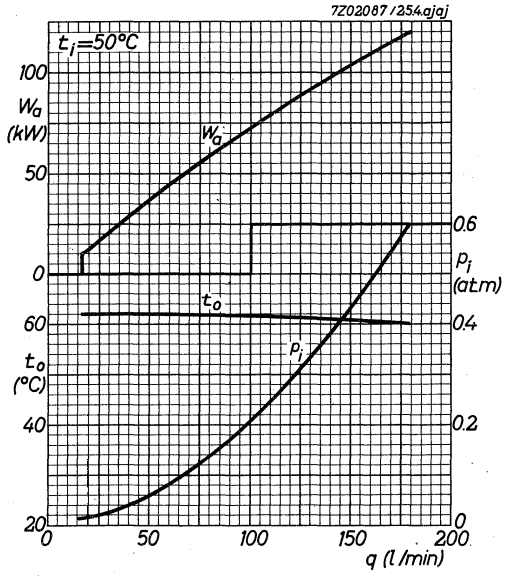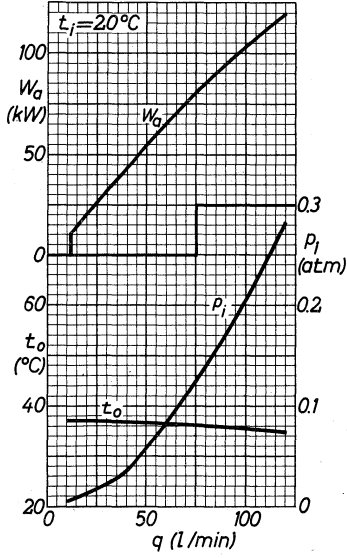



## VAPOUR COOLED R.F. POWER TRIODE

QUICK REFERENCE DATA								
Frequency (MHz)	C telegraphy		C anode mod.		B telephony		AF class B Two tubes	
	V <sub>a</sub> (kV)	W <sub>o</sub> (kW)	V <sub>a</sub> (kV)	W <sub>o</sub> (kW)	V <sub>a</sub> (kV)	W <sub>o</sub> (kW)	V <sub>a</sub> (kV)	W <sub>o</sub> (kW)
10	15	360					12	450
30	12	285	11	165	10	60	10	400
			10	135	8	50	8	300
			8	110	6	35	6	200

**HEATING:** direct by A.C. or D.C.; filament thoriated tungsten

Filament voltage  $V_f = 18$  V

Filament current  $I_f = 280$  A

### CAPACITANCES

Grid to filament  $C_{gf} = 240$  pF

Anode to filament  $C_{af} = 7.5$  pF

Anode to grid  $C_{ag} = 120$  pF

### TYPICAL CHARACTERISTICS

Anode voltage  $V_a = 4$  kV

Anode current  $I_a = 5$  A

Amplification factor  $\mu = 55$

Mutual conductance  $S = 130$  mA/V

### TEMPERATURE LIMITS (Absolute limits)

Bulb temperature  $t = \text{max. } 180$  °C

Seal temperature  $t = \text{max. } 180$  °C

**COOLING**

Cooling data for anode dissipation  $W_a = 180$  kW

Total dissipation to be transferred by cooling system

$$(W_a + W_g + 0.8 W_f)$$

188 kW

equivalent to

2700 kcal/min

Volume of produced vapour

at back flow water temperature of 20 °C

7.3 m<sup>3</sup>/min

at back flow water temperature of 90 °C

8.3 m<sup>3</sup>/min

Amount of back flowing water

at back flow water temperature of 20 °C

4.4 l/min

at back flow water temperature of 90 °C




5.1 l/min



**MECHANICAL DATA**

Net weight: 51.5 kg

Dimensions in mm

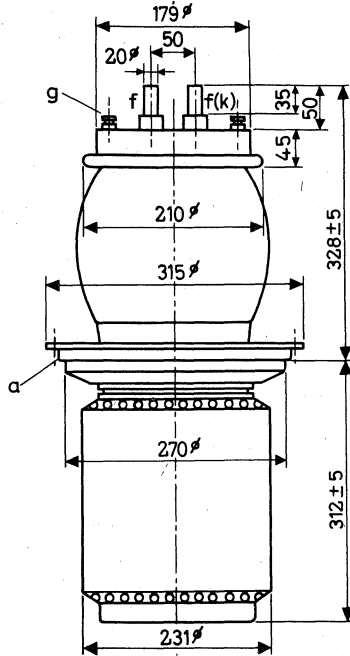

Mounting position: vertical with anode down

**ACCESSORIES**

Vapour cooling system K729

Filament connectors with cable 40667

1) This pin should be used for connecting the anode return lead

R.F. CLASS C TELEGRAPHY

LIMITING VALUES (Absolute limits)

Frequency	f	up to	10	up to	30	MHz
Anode voltage	$V_a$	= max.	15		12	kV
Anode dissipation	$W_a$	= max.	180		180	kW
Negative grid voltage	$-V_g$	= max.	1200		1200	V
Grid dissipation	$W_g$	= max.	4		4	kW
Anode current	$I_a$	= max.	33		33	A
Grid current	$I_g$	= max.	8		8	A

OPERATING CONDITIONS

Frequency	f	=	10	10	30	30	MHz
Anode voltage	$V_a$	=	15	15	12	12	kV
Grid voltage	$V_g$	=	-520	-800	-480	-720	V
Anode current	$I_a$	=	29.3	24.7	29.3	24.7	A
Grid current	$I_g$	=	5.4	5.2	5.9	5.5	A
Peak driving voltage	$V_{gp}$	=	1090	1370	1050	1290	V
Driving power	$W_{dr}$	=	5.5	6.6	5.7	6.6	kW
Anode input power	$W_{i_a}$	=	440	371	353	296	kW
Anode dissipation	$W_a$	=	80	61	68	51	kW
Output power	$W_o$	=	360	310	285	245	kW
Efficiency	$\eta$	=	81.8	83.5	80.8	82.6	%

R.F. CLASS C ANODE MODULATION

LIMITING VALUES (Absolute limits)

Frequency	f	up to	30	MHz
Anode voltage	$V_a$	= max.	11	kV
Anode dissipation	$W_a$	= max.	120	kW
Negative grid voltage	$-V_g$	= max.	1000	V
Grid dissipation	$W_g$	= max.	4	kW
Anode current	$I_a$	= max.	22	A
Grid current	$I_g$	= max.	8	A

OPERATING CONDITIONS

Frequency	f	=	30	30	30	MHz
Anode voltage	$V_a$	=	11	10	8	kV
Grid voltage	$V_g$	=	-170	-140	-100	V
Grid resistor	$R_g$	=	40	44	33	$\Omega$
Anode current	$I_a$	=	19	17.3	18	A
Grid current	$I_g$	=	7.4	6.9	7.6	A
Peak driving voltage	$V_{gp}$	=	1000	930	855	V
Driving power	$W_{dr}$	=	7.1	6.0	6.0	kW
Anode input power	$W_{ia}$	=	209	173	144	kW
Anode dissipation	$W_a$	=	44	38	34	kW
Output power	$W_o$	=	165	135	110	kW
Efficiency	$\eta$	=	79	78	76.5	%
Modulation depth	m	=	100	100	100	%
Modulation power	$W_{mod}$	=	105	87	72	kW

**R.F. CLASS B TELEPHONY**

**LIMITING VALUES (Absolute limits)**

Frequency	f	up to 10	up to 30	MHz
Anode voltage	$V_a$	= max. 15	12	kV
Anode dissipation	$W_a$	= max. 180	180	kW
Negative grid voltage	$-V_g$	= max. 800	800	V
Grid dissipation	$W_g$	= max. 4	4	kW
Anode current	$I_a$	= max. 27	27	A
Grid current	$I_g$	= max. 8	8	A

**OPERATING CONDITIONS**

Frequency	f	= 30	30	30	MHz
Anode voltage	$V_a$	= 10	8	6	kV
Grid voltage	$V_g$	= -150	-115	-82	V
Anode current	$I_a$	= 17	18.2	17.9	A
Grid current	$I_g$	= 0.8	1.2	1.5	A
Peak driving voltage	$V_{gp}$	= 338	338	321	V
Driving power	$W_{dr}$	= 0.25	0.36	0.43	kW
Anode input power	$W_{ia}$	= 170	146	108	kW
Anode dissipation	$W_a$	= 110	96	73	kW
Output power	$W_o$	= 60	50	35	kW
Efficiency	$\eta$	= 35.3	34.3	32.6	%
Modulation depth	m	= 100	100	100	%
Grid current	$I_g$	= 5.9	6.8	7.2	A
Driving power	$W_{dr}$	= 3.6	4.1	4.1	kW

A.F. CLASS B AMPLIFIER AND MODULATOR

LIMITING VALUES (Absolute limits)

Anode voltage	$V_a$	=	max.	12	kV
Anode dissipation	$W_a$	=	max.	180	kW
Negative grid voltage	$-V_g$	=	max.	800	V
Grid dissipation	$W_g$	=	max.	4	kW
Anode current	$I_a$	=	max.	33	A
Grid current	$I_g$	=	max.	8	A

OPERATING CONDITIONS (Two tubes in push-pull)

Anode voltage	$V_a$	=	12	10	kV
Grid voltage	$V_g$	=	-180	-150	V
Load resistance	$R_{aa\sim}$	=	552	410	$\Omega$
Peak driving voltage	$V_{ggp}$	=	0 1210	0 1205	V
Anode current	$I_a$	=	2x2.0 2x26	2x1.8 2x28	A
Average grid current	$I_g$	=	0 2x4.4	0 2x4.8	A
Peak grid current	$I_{gp}$	=	0 2x23	0 2x24	A
Driving power	$W_{dr}$	=	0 2x2.4	0 2x2.6	kW
Anode input power	$W_{i_a}$	=	2x24 2x312	2x18 2x280	kW
Anode dissipation	$W_a$	=	2x24 2x87	2x18 2x80	kW
Output power	$W_o$	=	0 450	0 400	kW
Efficiency	$\eta$	=	- 72	- 71.4	%


A.F. CLASS B AMPLIFIER AND MODULATOR

OPERATING CONDITIONS (Two tubes in push-pull; continued)

Anode voltage	$V_a$	=	8	6	kV
Grid voltage	$V_g$	=	-115	-82	V
Load resistance	$R_{aa\sim}$	=	338	268	$\Omega$
Peak driving voltage	$V_{ggp}$	=	0 1110	0 990	V
Anode current	$I_a$	=	2x1.6 2x27	2x1.4 2x25	A
Average grid current	$I_g$	=	0 2x5.0	0 2x4.9	A
Peak grid current	$I_{gp}$	=	0 2x24	0 2x22	A
Driving power	$W_{dr}$	=	0 2x2.5	0 2x2.2	kW
Anode input power	$W_{i_a}$	=	2x12.8 2x216	2x8.4 2x150	kW
Anode dissipation	$W_a$	=	2x12.8 2x66	2x8.4 2x50	kW
Output power	$W_o$	=	0 300	0 200	kW
Efficiency	$\eta$	=	- 69.5	- 67	%



7Z0564-0-25.4.ajaj

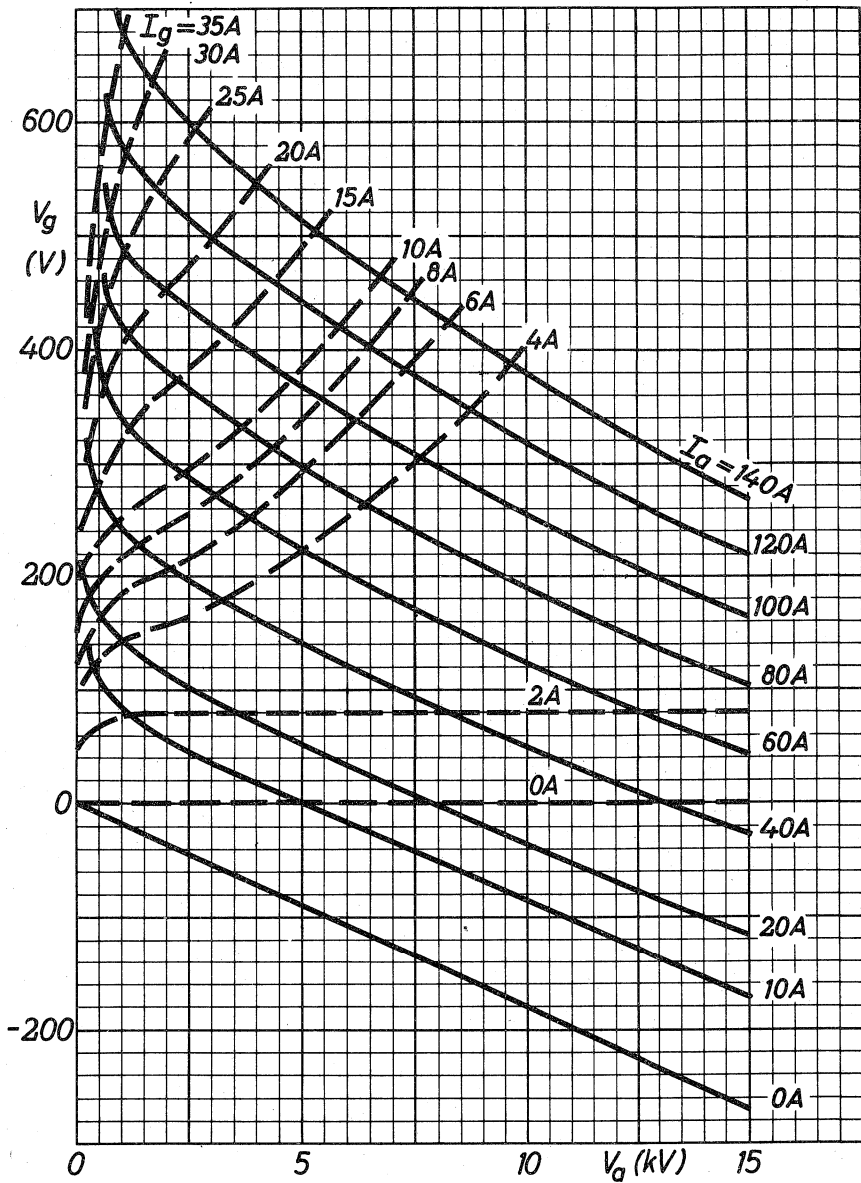



**AIR COOLED R.F. POWER TRIODE**

QUICK REFERENCE DATA								
Frequency (MHz)	C telegraphy		C anode mod.		C television Two tubes		AF class B Two tubes	
	V <sub>a</sub> (kV)	W <sub>o</sub> (kW)	V <sub>a</sub> (kV)	W <sub>o</sub> (kW)	V <sub>a</sub> (kV)	W <sub>o</sub> (kW)	V <sub>a</sub> (kV)	W <sub>o</sub> (kW)
30	4	4.0					6	13.3
	5	5.6						
	6	6.9						
75			5	4.7				
110	5	4.8	4	2.8				
220	3	2.65						
48 to 75					5	9.5		

**HEATING :** direct; filament thoriated tungsten

Filament voltage	V <sub>f</sub>	12.6	V
Filament current	I <sub>f</sub>	33	A

The connection f<sub>c</sub> is intended for use as cathode return. It is not an electrical centre tap and must not be used for filament current supply. At frequencies above 30 MHz the three filament leads should be interconnected by suitable capacitors.

**CAPACITANCES**

Anode to filament	C <sub>af</sub>	0.3	pF
Grid to filament	C <sub>gf</sub>	16	pF
Anode to grid	C <sub>ag</sub>	11	pF

**TYPICAL CHARACTERISTICS**

Anode voltage	V <sub>a</sub>	4	kV
Anode current	I <sub>a</sub>	1	A
Amplification factor	μ	32	
Mutual conductance	S	17	mA/V

**TEMPERATURE LIMITS** (Absolute limits)

Temperature of anode and grid seals	t	max. 180	°C
Temperature of pin seals	t	max. 220	°C
Air inlet temperature	t <sub>i</sub>	max. 45	°C

COOLING


$W_a$ (kW)	$h$ (m)	$t_i$ (°C)	$q_{min}$ (m <sup>3</sup> /min)	$P_i$ (mm H <sub>2</sub> O)
1	0	35	3.0	8
	0	45	3.1	8
	1500	35	3.7	9
	3000	25	4.1	10
3	0	35	5.2	23
	0	45	6.1	29
	1500	35	6.2	26
	3000	25	6.6	26
5	0	35	9.2	68
	0	45	10.7	90
	1500	35	11.2	81
	3000	25	11.6	79

It may be necessary to direct an airflow to the seals to keep them within the temperature limits.

MECHANICAL DATA

Net weight: 3.4 kg

Mounting position: vertical  
with base up or down

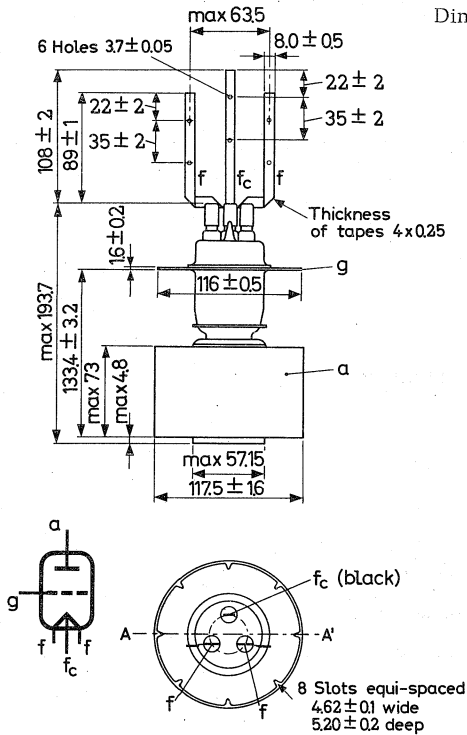

Dimensions in mm

The plane of the filament is parallel to AA' to within  $3\frac{1}{2}^\circ$ .

## R.F. CLASS C TELEGRAPHY or F.M. TELEPHONY


## LIMITING VALUES (Absolute limits)

Frequency	f	up to	75	110	220	MHz
Anode voltage	$V_a$	max.	6.2	5.5	4.0	kV
Anode current	$I_a$	max.	1.5	1.5	1.5	A
Anode input power	$W_{ia}$	max.	9.3	8.2	6.0	kW
Anode dissipation	$W_a$	max.	5.0	5.0	5.0	kW
Negative grid voltage	$-V_g$	max.	1000	1000	1000	V
Grid current	$I_g$	max.	350	350	350	mA

## OPERATING CONDITIONS

Frequency	f	30	30	30	110	220 <sup>1)</sup>	MHz
Anode voltage	$V_a$	6.0	5.0	4.0	5.0	3.0	kV
Grid voltage	$V_g$	-400	-300	-200	-300	-160	V
Anode current	$I_a$	1.5	1.5	1.37	1.25	1.25	A
Grid current	$I_g$	310	330	300	300	250	mA
Driver output power	$W_{dr}$	275	240	190	250	510	W
Anode input power	$W_{ia}$	9.0	7.5	5.5	6.25	3.75	kW
Anode dissipation	$W_a$	2.1	1.9	1.5	1.45	1.6	kW
Output power	$W_o$	6.9	5.6	4.0	4.8	2.65	kW
Tube efficiency	$\eta$	76.5	75	73	77	70	%
Output power in the load	$W_l$	5.5	4.5	3.2	3.9	2.15	kW

<sup>1)</sup> In grounded grid circuit

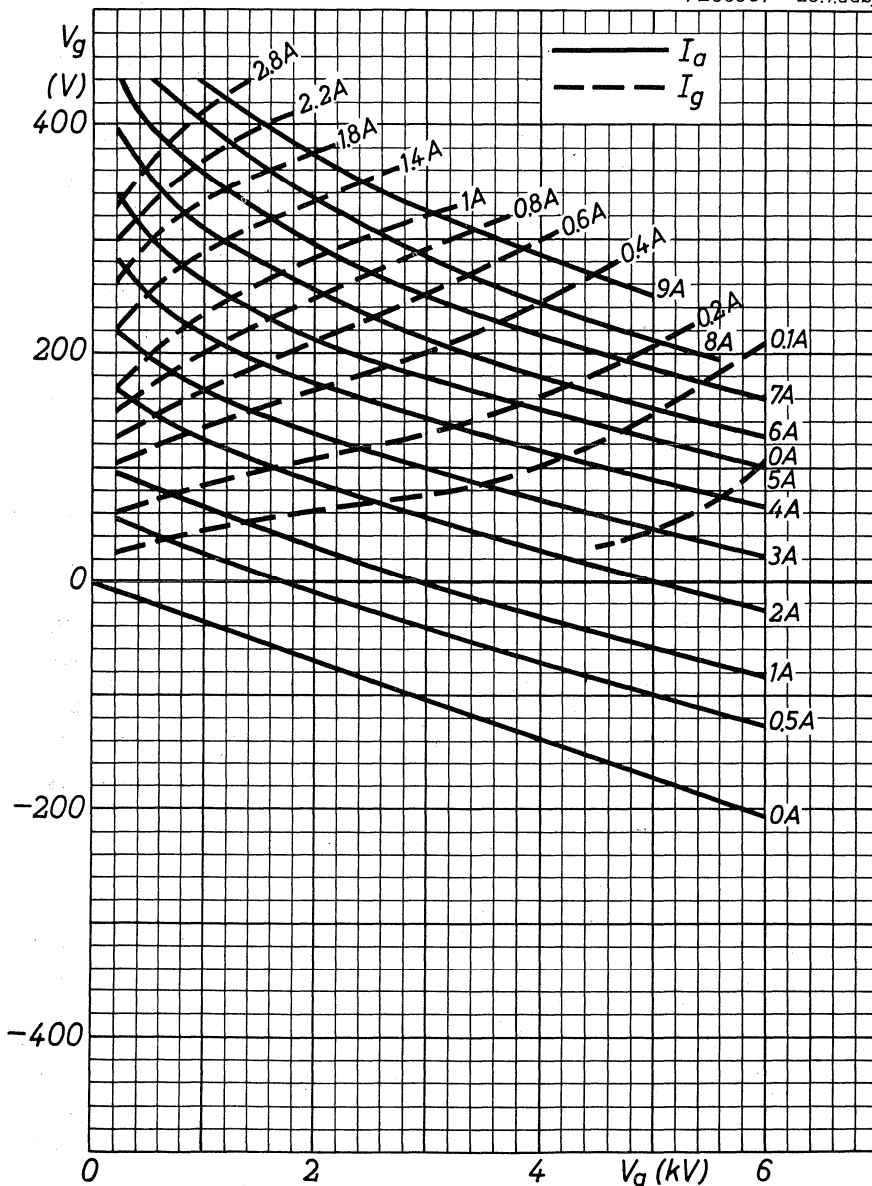

## R.F. POWER TRIODE

R.F. zero bias power triode intended for use as linear S.S.B. amplifier and A.F. class B amplifier

QUICK REFERENCE DATA				
Class B SSB			B mod. Two tubes	
Frequency (MHz)	$V_a$ (V)	$W_{load}$ (PEP) (W)	$V_a$ (V)	$W_o$ (W)
30	2500	580	3000	1310

**HEATING:** direct by A.C. or D.C.; filament thoriated tungsten

Filament voltage  $V_f = 5.0$  V  
 Filament current  $I_f = 14.1$  A

### CAPACITANCES

Anode to filament  $C_{af} = 0.033$  pF  
 Grid to filament  $C_{gf} = 8.0$  pF  
 Anode to grid  $C_{ag} = 5.0$  pF

### TYPICAL CHARACTERISTICS

Anode voltage  $V_a = 5$  kV  
 Anode current  $I_a = 80$  mA  
 Mutual conductance  $S = 11$  mA/V  
 Amplification factor  $\mu = 350$

### TEMPERATURE LIMITS (Absolute limits)

Anode seal temperature  $t = \text{max. } 220$  °C  
 Pin seal temperature  $t = \text{max. } 180$  °C  
 Bulb temperature  $t = \text{max. } 350$  °C




### COOLING

Radiation and low velocity air flow

**MECHANICAL DATA**

Net weight: 210 g

Base : Giant 5p.

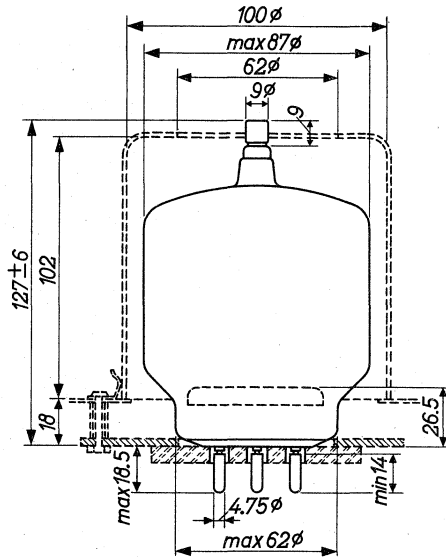

Mounting suggestion of tube with chimney

Dimensions in mm

Mounting position: vertical with base up or down

In order to prevent overheating of the grid pins by high-frequency current it is recommended to include the three grid socket connections in the circuit.

**ACCESSORIES**

Anode connector	40624
Socket	2422 512 01001
Chimney	40666



**R. F. CLASS B LINEAR POWER AMPLIFIER SINGLE SIDE BAND**

suppressed carrier, zero bias, grounded grid

**LIMITING VALUES** (Absolute limits)

Frequency	f	up to	110	MHz
Anode voltage	$V_a$	=	max. 3000	V
Anode input power	$W_{i_a}$	=	max. 1200	W
Anode dissipation	$W_a$	=	max. 400	W
Anode current	$I_a$	=	max. 400	mA
Grid dissipation	$W_g$	=	max. 20	W

**OPERATING CHARACTERISTICS**

Frequency	f	=	30	MHz		
Anode voltage	$V_a$	=	2500	V		
Grid voltage	$V_g$	=	0	V		
			<div style="display: flex; justify-content: space-around; font-size: small;"> <span>zero signal</span> <span>single tone signal</span> <span>double tone signal</span> </div>			
Peak cathode driving voltage	$V_{kp}$	=	0	91	91	V
Anode current	$I_a$	=	72	400	270	mA
Grid current	$I_g$	=	-	140	80	mA
Driver output power	$W_{dr}$	=	-	35	35 (PEP)	W
Anode input power	$W_{i_a}$	=	180	1000	675	W
Anode dissipation	$W_a$	=	180	385	368	W
Output power	$W_o$	=	0	640 <sup>1)</sup>	640 (PEP) <sup>2)</sup>	W
Output power in load	$W_{load}$	=	0	580	580 (PEP)	W <sup>3)</sup>
Overall efficiency	$\eta$	=	-	58	43	%
Intermodulation distortion						
of the 3rd order	$d_3$	=	-	-	-29	dB <sup>4)</sup>
of the 5th order	$d_5$	=	-	-	-34	dB <sup>4)</sup>

- 1) Inclusive 25 W feedthrough power
- 2) Inclusive 25 W peak envelope feedthrough power
- 3) Measured in a circuit having an efficiency of 91 %
- 4) Maximum distortion level encountered at any driving level up to full drive, referred to the amplitude of either of the two tones in a double tone test signal at full drive.

## A.F. CLASS B AMPLIFIER AND MODULATOR


## LIMITING VALUES (Absolute limits)


Anode voltage	$V_a$	=	max. 3000	V
Anode input power	$W_{i_a}$	=	max. 1200	W
Anode dissipation	$W_a$	=	max. 400	W
Anode current	$I_a$	=	max. 400	mA
Grid dissipation	$W_g$	=	max. 20	W

## OPERATING CONDITIONS Class B, two tubes in push-pull

Anode voltage	$V_a$	=	3000	V
Load resistance	$R_{aa\sim}$	=	9500	$\Omega$
Peak grid driving voltage	$V_{ggp}$	=	0	176 V
Anode current	$I_a$	=	2x90	2x333 mA
Grid current	$I_g$	=	0	2x120 mA
Driving power	$W_{dr}$	=	0	26 W
Anode input power	$W_{i_a}$	=	2x270	2x1000 W
Anode dissipation	$W_a$	=	2x270	2x345 W
Output power	$W_o$	=	0	1310 W
Efficiency	$\eta$	=	-	65 %

7Z06416-25.4.aacj.

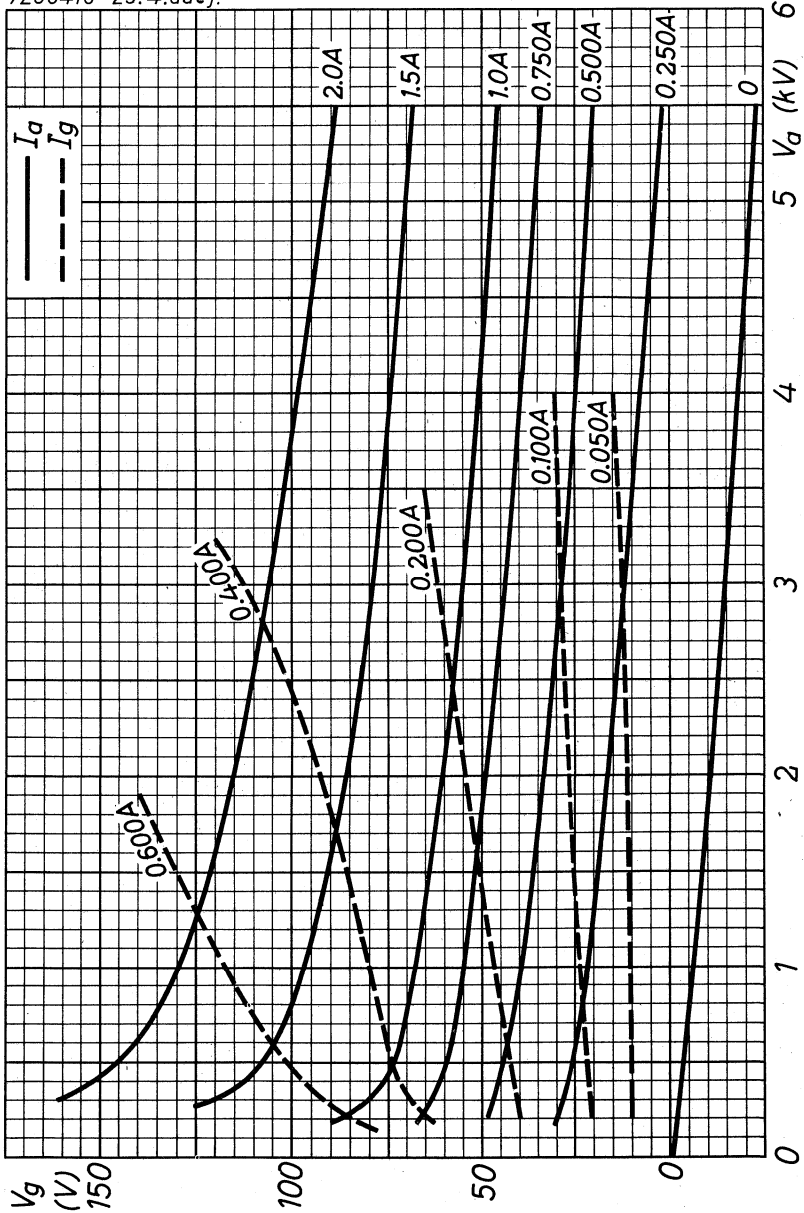

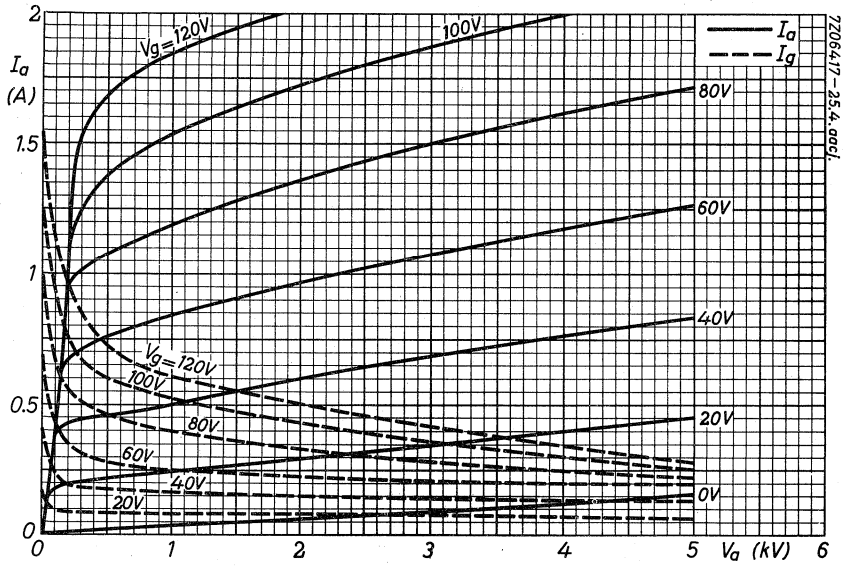

## WATER COOLED R.F. POWER TRIODE

QUICK REFERENCE DATA								
Freq. (MHz)	C telegr.		C an. mod.		C industr. osc.		B mod <sup>1)</sup>	
	V <sub>a</sub> (kV)	W <sub>o</sub> (kW)	V <sub>a</sub> (kV)	W <sub>o</sub> (kW)	V <sub>a</sub> (kV)	W <sub>o</sub> (kW)	V <sub>a</sub> (kV)	W <sub>o</sub> (kW)
30	12	108	10	83	12	124	10	106
	10	75	10	58	12	108	10	64
					10	75		

**HEATING:** direct; filament thoriated tungsten

Filament voltage	V <sub>f</sub>	=	17.5 V
Filament current	I <sub>f</sub>	=	196 A
Filament peak current	I <sub>fp</sub>	max.	420 A
Cold filament resistance	R <sub>fo</sub>	=	0.012 Ω

### CAPACITANCES

Anode to all other elements except grid	C <sub>a</sub>	=	2.2 pF
Grid to all other elements except anode	C <sub>g</sub>	=	122 pF
Anode to grid	C <sub>ag</sub>	=	75 pF

### TYPICAL CHARACTERISTICS

Anode voltage	V <sub>a</sub>	=	3 10 kV
Anode current	I <sub>a</sub>	=	50 5 A
Amplification factor	μ	=	25 25
Mutual conductance	S	=	140 60 mA/V

<sup>1)</sup> Two tubes

**TEMPERATURE LIMITS (Absolute limits)**

Water inlet temperature  $t_i$  = max. 50 °C  
 Temperature of seals = max. 180 °C

**WATER COOLING CHARACTERISTICS ; see also cooling curves**

$W_a$ (kW)	$t_i$ (°C)	$q_{min}$ (l/min)	$P_i$ (atm)
30	20	25	0.15
	50	45	0.45
50	20	32	0.25
	50	65	0.85
100	20	55	0.6
	50	120	3.0

At water inlet temperatures between 20 and 50 °C the required quantity of water can be found by linear interpolation.

At frequencies below 6 MHz forced air cooling of the seals will, as a rule, not be necessary. Above 6 MHz air cooling must be used to keep the anode and grid seal temperatures below 180 °C. The seals can be cooled by connecting a blower of suitable size to the air inlet of the anti-corona ring, attached to the tube.

At maximum frequency (30 MHz) and published operating conditions an air flow of 2.5 m<sup>3</sup>/minute with a pressure loss of about 500 mm H<sub>2</sub>O will in general be sufficient. The air flow must be started upon or before the application of filament voltage.

When using the special filament connectors type No. 40628, together with connecting leads of adequate cross-section, additional air cooling of the filament terminals is, as a rule, not necessary.

Care should be taken to ensure firm contact of the filament terminals in order to obtain equal distribution of current over these terminals.

**MECHANICAL DATA**

Dimensions in mm


Water-jacket : K714

Net weight of tube : 14 kg

Filament connectors: 40628

Net weight of water-jacket: 20.5 kg

O-ring : 2622 080 30916

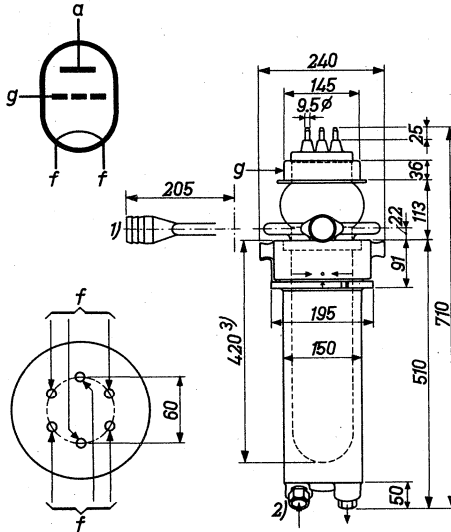

Mounting position: vertical with anode down

When connecting the filament the three pins of each group must be joined.

1) Use connecting hose with an inner diameter of  $1\frac{3}{4}$ ".

2) Coupling for metal tubing with an outer diameter of 28 mm.

3) For removing the tube from its water-jacket the free height above the tube must be at least 420 mm.

**R.F. CLASS C TELEGRAPHY**

**LIMITING VALUES (Absolute limits)**

Frequency	f	up to	4	15	30	MHz
Anode voltage	$V_a$	= max.	15	13.5	12.5	kV
Anode current	$I_a$	= max.	12.5	12.5	12.5	A
Anode input power	$W_{i_a}$	= max.	165	165	150	kW
Anode dissipation	$W_a$	= max.	100	100	100	kW
Negative grid voltage	$-V_g$	= max.	1200	1200	1200	V
Grid current	$I_g$	= max.	1.2	1.2	1.2	A

**OPERATING CONDITIONS**

Frequency	f	=	30	30	MHz
Anode voltage	$V_a$	=	12	10	kV
Grid voltage	$V_g$	=	-1000	-800	V
Grid driving voltage	$V_{g_p}$	=	1500	1200	V
Anode current	$I_a$	=	12	10	A
Grid current	$I_g$	=	0.75	0.75	A
Anode input power	$W_{i_a}$	=	144	100	kW
Anode dissipation	$W_a$	=	36	25	kW
Driving power	$W_{dr}$	=	1100	850	W
Output power	$W_o$	=	108	75	kW
Efficiency	$\eta$	=	75	75	%



## R.F. CLASS C ANODE MODULATION

## LIMITING VALUES (Absolute limits)

Frequency	f	up to	30	MHz
Anode voltage	$V_a$	= max.	10.5	kV
Anode current	$I_a$	= max.	10.5	A
Anode input power	$W_{i_a}$	= max.	110	kW
Anode dissipation	$W_a$	= max.	66	kW
Negative grid voltage	$-V_g$	= max.	1200	V
Grid current	$I_g$	= max.	1.3	A

## OPERATING CONDITIONS

Frequency	f	=	30	30	MHz
Anode voltage	$V_a$	=	10	10	kV
Grid voltage	$V_g$	=	-1050	-1050	V <sup>1)</sup>
Grid driving voltage	$V_{g_p}$	=	1550	1450	V
Anode current	$I_a$	=	10.5	7.4	A
Grid current	$I_g$	=	1.1	0.8	A
Anode input power	$W_{i_a}$	=	105	74	kW
Anode dissipation	$W_a$	=	22	16	kW
Driving power	$W_{dr}$	=	1650	1100	W
Output power	$W_o$	=	83	58	kW
Efficiency	$\eta$	=	79	79	%
Modulation depth	m	=	100	100	%
Modulation power	$W_{mod}$	=	53	37	kW

<sup>1)</sup> Grid bias partly obtained by a grid resistor

**R.F. CLASS C OSCILLATOR** for industrial use with anode voltage from three-phase rectifier without filter

**LIMITING VALUES** (Absolute limits)

Frequency	f	up to	30	MHz
Anode voltage	$V_a$	= max.	13	kV
Anode current	$I_a$	= max.	15	A
Anode input power	$W_{i_a}$	= max.	180	kW
Anode dissipation	$W_a$	= max.	100	kW
Negative grid voltage	$-V_g$	= max.	1600	V
Grid current, loaded	$I_g$	= max.	1.0	A
Grid current, unloaded	$I_g$	= max.	1.4	A
Grid circuit resistance	$R_g$	= max.	10	k $\Omega$

**OPERATING CONDITIONS**

Frequency	f	=	30	30	30	MHz
Anode voltage	$V_a$	=	12	12	10	kV
Anode current	$I_a$	=	14	12	10	A
Grid current	$I_g$	=	0.9	0.75	0.75	A
Grid circuit resistance	$R_g$	=	1100	1350	1100	$\Omega$
Feedback ratio	$V_{g\sim}/V_{a\sim}$	=	15	14	14	%
Anode input power	$W_{i_a}$	=	168	144	100	kW
Anode dissipation	$W_a$	=	44	36	25	kW
Output power	$W_o$	=	124	108	75	kW
Efficiency	$\eta$	=	74	75	75	%
Output power in the load	$W_l$	=	104	91	63	kW <sup>1)</sup>

<sup>1)</sup> Useful power in the load measured in a circuit having an efficiency of 85%.

**A.F. CLASS B AMPLIFIER AND MODULATOR**



**LIMITING VALUES (Absolute limits)**


Anode voltage	$V_a$	= max.	15	kV
Anode current	$I_a$	= max.	12	A
Anode input power	$W_{i_a}$	= max.	162	kW
Anode dissipation	$W_a$	= max.	100	kW
Negative grid voltage	$-V_g$	= max.	1200	V
Grid current	$I_g$	= max.	1.2	A




**OPERATING CONDITIONS, two tubes in push-pull**

Anode voltage	$V_a$	=	10	10	kV
Grid voltage	$V_g$	=	-540	-540	V <sup>1)</sup>
Load resistance	$R_{aa\sim}$	=	1360	1440	$\Omega$
Driving voltage	$V_{ggp}$	=	0 1550	0 1300	V
Anode current	$I_a$	=	2x0.3 2x8	2x0.3 2x5.8	A
Grid current	$I_g$	=	0 2x0.2	0 2x0.15	A
Anode input power	$W_{i_a}$	=	2x3 2x80	2x3 2x58	kW
Anode dissipation	$W_a$	=	2x3 2x27	2x3 2x26	kW
Driving power	$W_{dr}$	=	0 2x150	0 2x100	W
Output power	$W_o$	=	0 106	0 64	kW
Efficiency	$\eta$	=	- 67	- 56	%

<sup>1)</sup> To be adjusted for a zero signal anode current of 0.3 A

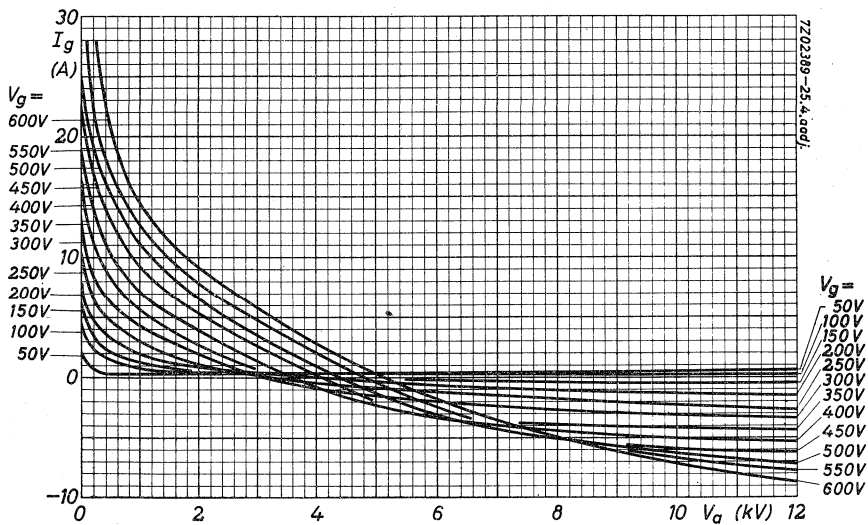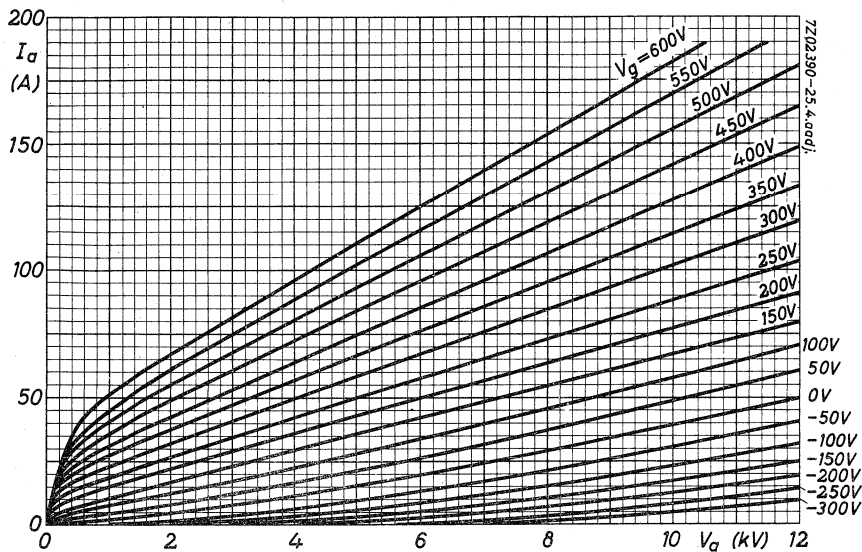

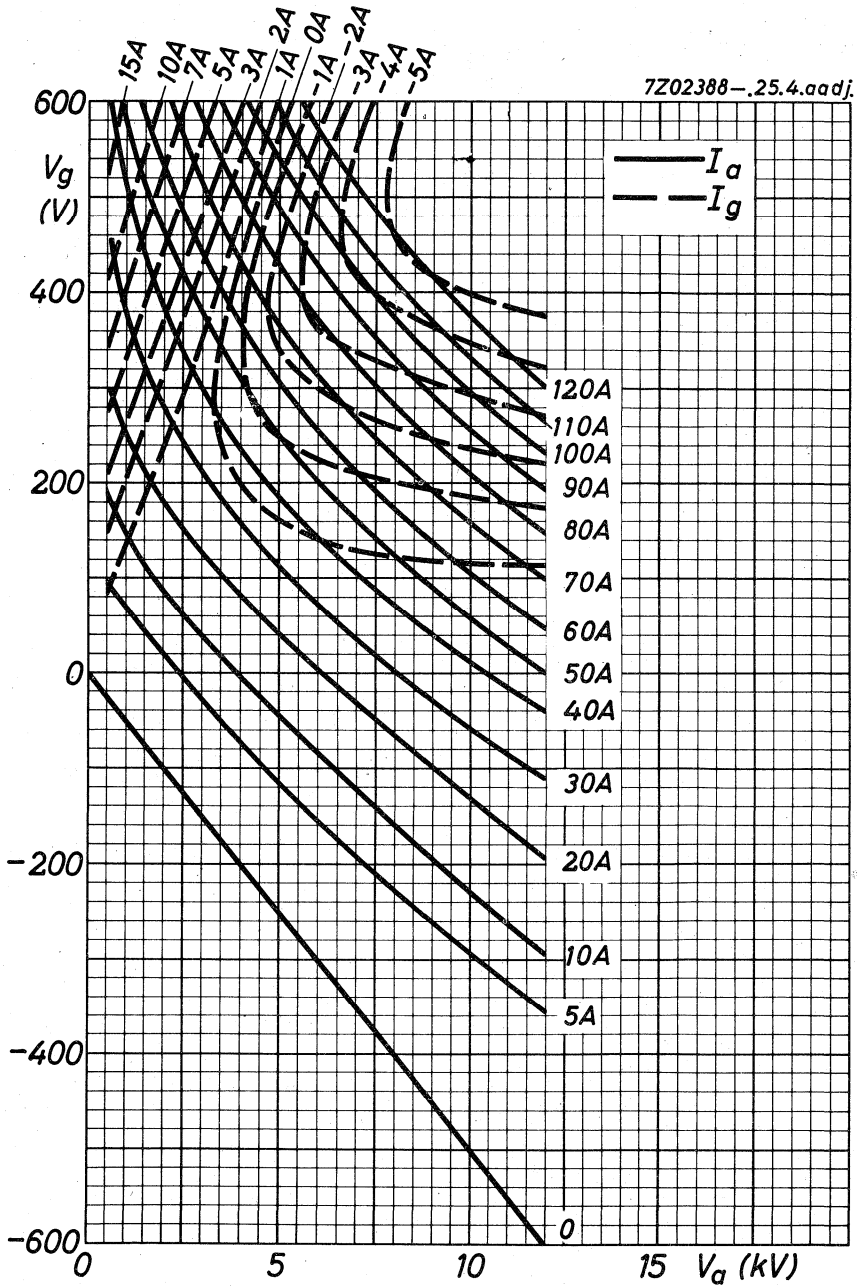

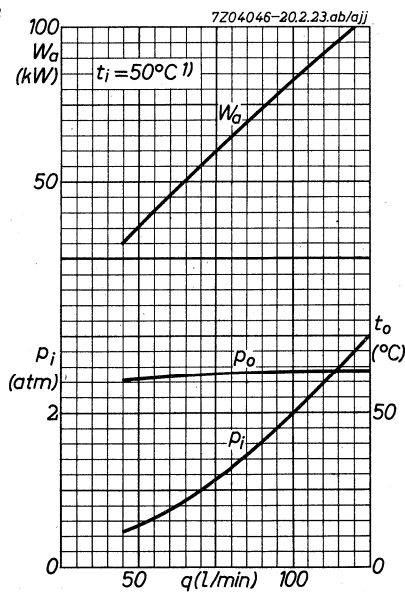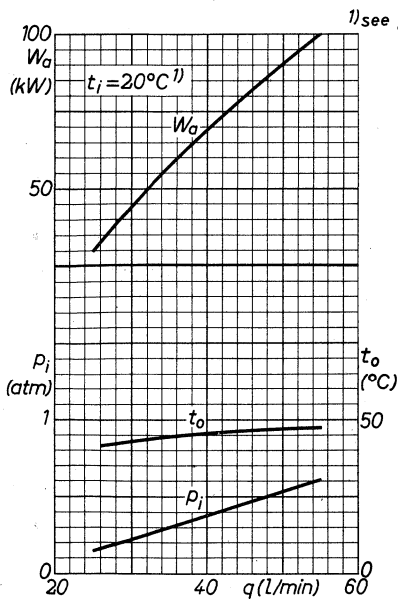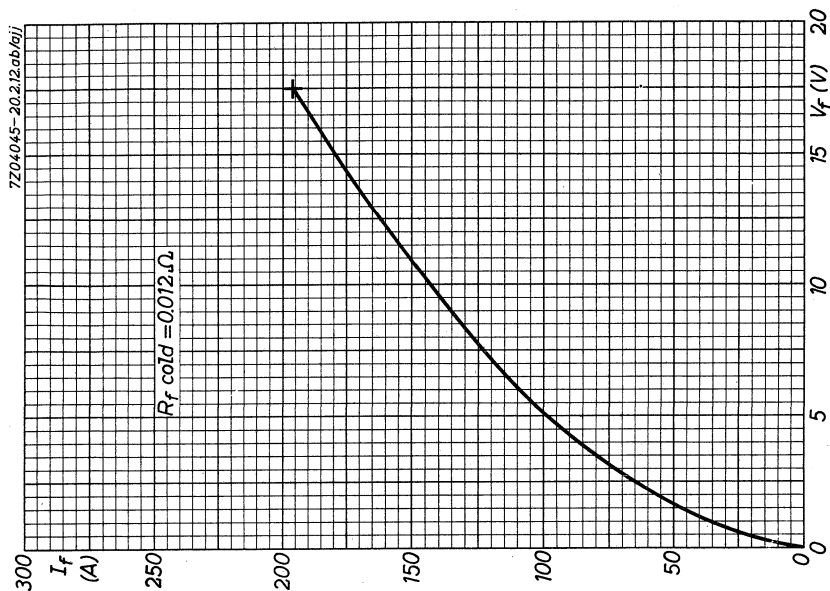

## AIR COOLED R.F. POWER TRIODE

QUICK REFERENCE DATA								
Freq. (MHz)	C teleg. .		C an. mod.		C industr. osc.		B mod <sup>1)</sup>	
	V <sub>a</sub> (kV)	W <sub>o</sub> (kW)	V <sub>a</sub> (kV)	W <sub>o</sub> (kW)	V <sub>a</sub> (kV)	W <sub>o</sub> (kW)	V <sub>a</sub> (kV)	W <sub>o</sub> (kW)
30	12	108	10	83	12	124	10	106
	10	75	10	58	12	108	10	64
					10	75		

**HEATING:** direct; filament thoriated tungsten

Filament voltage	V <sub>f</sub>	=	17.5	V
Filament current	I <sub>f</sub>	=	196	A
Filament peak current	I <sub>fp</sub>	max.	420	A
Cold filament resistance	R <sub>fo</sub>	=	0.012	Ω

### CAPACITANCES

Anode to all other elements except grid	C <sub>a</sub>	=	2.2	pF
Grid to all other elements except anode	C <sub>g</sub>	=	122	pF
Anode to grid	C <sub>ag</sub>	=	75	pF

### TYPICAL CHARACTERISTICS

Anode voltage	V <sub>a</sub>	=	3	10	kV
Anode current	I <sub>a</sub>	=	50	5	A
Amplification factor	μ	=	25	25	
Mutual conductance	S	=	140	60	mA/V

<sup>1)</sup> Two tubes

**TEMPERATURE LIMITS** (Absolute limits)

Temperature of all seals = max. 180 °C

**AIR COOLING CHARACTERISTICS** ; see also cooling curves

$W_a$ (kW)	$h$ (m)	$t_i$ (°C)	$q_{min}$ (m <sup>3</sup> /min)	$P_i$ (mm H <sub>2</sub> O)
30	0	35	35	114
	0	45	40	143
	1500	35	42	136
	3000	25	44	132
45	0	35	54	275
	0	45	62.5	335
	1500	35	64.5	322
	3000	25	68	319

When the tube is used at frequencies above 6 MHz special attention must be paid to the anode and grid seal temperatures. For frequencies below 20 MHz cooling of these seals can be effected by air flowing through the slots at the top of the cooler. In certain cases, e.g. at low dissipation and cooling with the minimum quantity of air (according to the cooling curves), the air flow to the seals will not be sufficient to maintain the seal temperatures below 180 °C. In these cases and also if it is preferred to close the slots, cooling of the seals should be effected by a separate air flow to the seals.

When using the filament connectors type 40628, together with connecting leads of adequate cross-section, additional air cooling of the filament terminals is, as a rule, not necessary.

Care should be taken to ensure firm contact of the filament terminals in order to obtain equal distribution of current over these terminals.



**MECHANICAL DATA**


Dimensions in mm

Filament connectors: 40628

Cooler housing : K506

Net weight of tube : 28.5 kg

Net weight of K506 : 72 kg

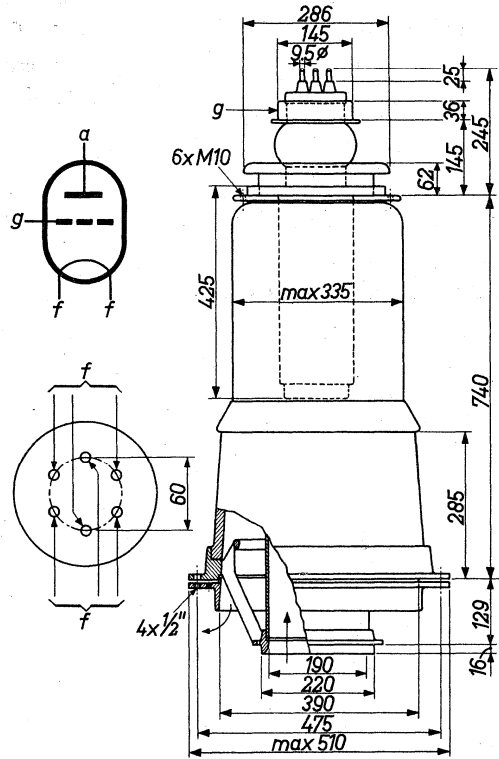

Tube mounted in cooler housing type K 506

Mounting position: vertical with anode down

When connecting the filament the three pins of each group must be joined.

## R.F. CLASS C TELEGRAPHY

## LIMITING VALUES (Absolute limits)

Frequency	f	up to	4	15	30	MHz
Anode voltage	$V_a$	= max.	15	13.5	12.5	kV
Anode current	$I_a$	= max.	12.5	12.5	12.5	A
Anode input power	$W_{i_a}$	= max.	165	165	150	kW
Anode dissipation	$W_a$	= max.	45	45	45	kW
Negative grid voltage	$-V_g$	= max.	1200	1200	1200	V
Grid current	$I_g$	= max.	1.2	1.2	1.2	A

## OPERATING CONDITIONS

Frequency	f	=	30	30	MHz
Anode voltage	$V_a$	=	12	10	kV
Grid voltage	$V_g$	=	-1000	-800	V
Grid driving voltage	$V_{g_p}$	=	1500	1200	V
Anode current	$I_a$	=	12	10	A
Grid current	$I_g$	=	0.75	0.75	A
Anode input power	$W_{i_a}$	=	144	100	kW
Anode dissipation	$W_a$	=	36	25	kW
Driving power	$W_{dr}$	=	1100	850	W
Output power	$W_o$	=	108	75	kW
Efficiency	$\eta$	=	75	75	%

**R.F. CLASS C ANODE MODULATION**

**LIMITING VALUES** (Absolute limits)

Frequency	f	up to	30	MHz
Anode voltage	$V_a$	= max.	10.5	kV
Anode current	$I_a$	= max.	10.5	A
Anode input power	$W_{i_a}$	= max.	110	kW
Anode dissipation	$W_a$	= max.	30	kW
Negative grid voltage	$-V_g$	= max.	1200	V
Grid current	$I_g$	= max.	1.3	A

**OPERATING CONDITIONS**

Frequency	f	=	30	30	MHz
Anode voltage	$V_a$	=	10	10	kV
Grid voltage	$V_g$	=	-1050	-1050	V <sup>1)</sup>
Grid driving voltage	$V_{g_p}$	=	1550	1450	V
Anode current	$I_a$	=	10.5	7.4	A
Grid current	$I_g$	=	1.1	0.8	A
Anode input power	$W_{i_a}$	=	105	74	kW
Anode dissipation	$W_a$	=	22	16	kW
Driving power	$W_{dr}$	=	1650	1100	W
Output power	$W_o$	=	83	58	kW
Efficiency	$\eta$	=	79	79	%
Modulation depth	m	=	100	100	%
Modulation power	$W_{mod}$	=	53	37	kW

<sup>1)</sup> Grid bias partly obtained by a grid resistor

**R.F. CLASS C OSCILLATOR** for industrial use with anode voltage from three-phase rectifier without filter

**LIMITING VALUES** (Absolute limits)

Frequency	f	up to	30	MHz
Anode voltage	$V_a$	= max.	13	kV
Anode current	$I_a$	= max.	15	A
Anode input power	$W_{i_a}$	= max.	180	kW
Anode dissipation	$W_a$	= max.	45	kW
Negative grid voltage	$-V_g$	= max.	1600	V
Grid current, loaded	$I_g$	= max.	1.0	A
Grid current, unloaded	$I_g$	= max.	1.4	A
Grid circuit resistance	$R_g$	= max.	10	k $\Omega$

**OPERATING CONDITIONS**

Frequency	f	=	30	30	30	MHz
Anode voltage	$V_a$	=	12	12	10	kV
Anode current	$I_a$	=	14	12	10	A
Grid current	$I_g$	=	0.9	0.75	0.75	A
Grid circuit resistance	$R_g$	=	1100	1350	1100	$\Omega$
Feedback ratio	$V_{g\sim}/V_{a\sim}$	=	15	14	14	%
Anode input power	$W_{i_a}$	=	168	144	100	kW
Anode dissipation	$W_a$	=	44	36	25	kW
Output power	$W_o$	=	124	108	75	kW
Efficiency	$\eta$	=	74	75	75	%
Output power in the load	$W_l$	=	104	91	63	kW <sup>1)</sup>

<sup>1)</sup> Useful power in the load measured in a circuit having an efficiency of 85%

**A.F. CLASS B AMPLIFIER AND MODULATOR**



**LIMITING VALUES** (Absolute limits)



Anode voltage	$V_a$	= max.	15	kV
Anode current	$I_a$	= max.	12	A
Anode input power	$W_{i_a}$	= max.	162	kW
Anode dissipation	$W_a$	= max.	45	kW
Negative grid voltage	$-V_g$	= max.	1200	V
Grid current	$I_g$	= max.	1.2	A





**OPERATING CONDITIONS**, two tubes in push-pull

Anode voltage	$V_a$	=	10	10	kV
Grid voltage	$V_g$	=	-540	-540	V <sup>1)</sup>
Load resistance	$R_{aa\sim}$	=	1360	1440	$\Omega$
Driving voltage	$V_{ggp}$	=	0 1550	0 1300	V
Anode current	$I_a$	=	2x0.3 2x8	2x0.3 2x5.8	A
Grid current	$I_g$	=	0 2x0.2	0 2x0.15	A
Anode input power	$W_{i_a}$	=	2x3 2x80	2x3 2x58	kW
Anode dissipation	$W_a$	=	2x3 2x27	2x3 2x26	kW
Driving power	$W_{dr}$	=	0 2x150	0 2x100	W
Output power	$W_o$	=	0 106	0 64	kW
Efficiency	$\eta$	=	- 67	- 56	%

<sup>1)</sup> To be adjusted for a zero signal anode current of 0.3 A

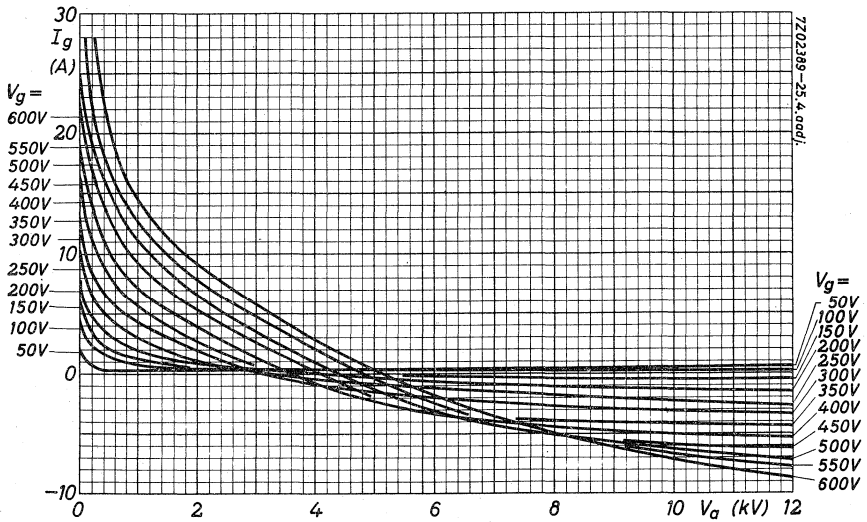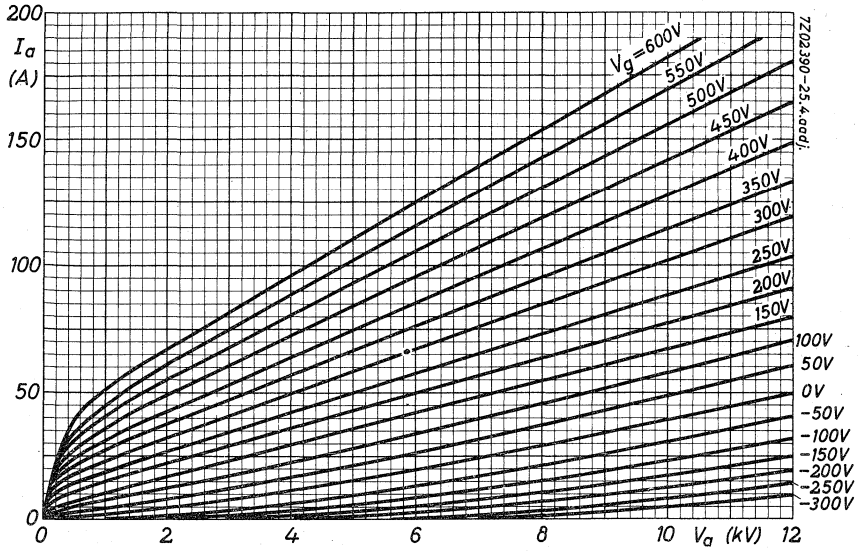

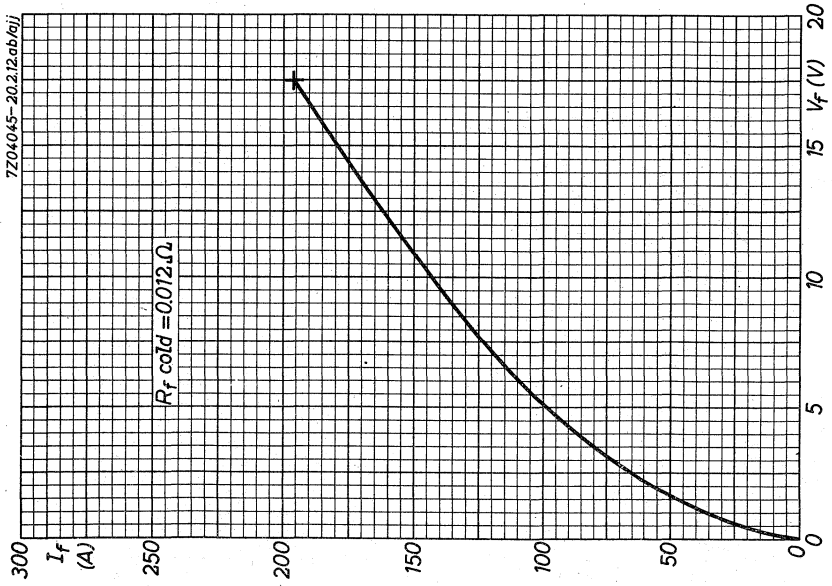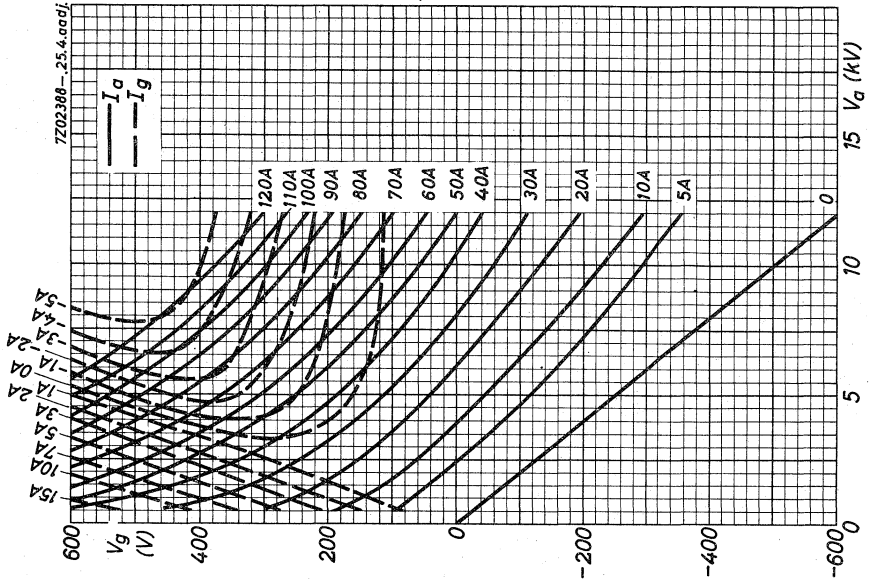

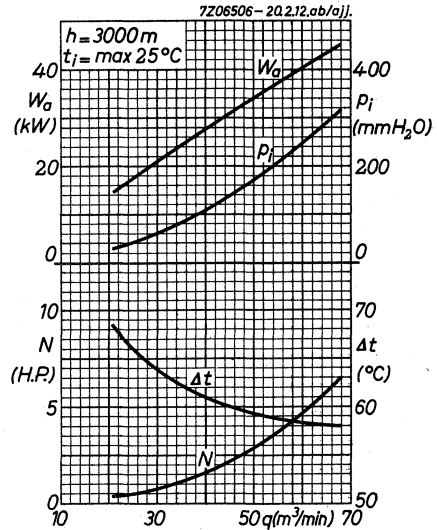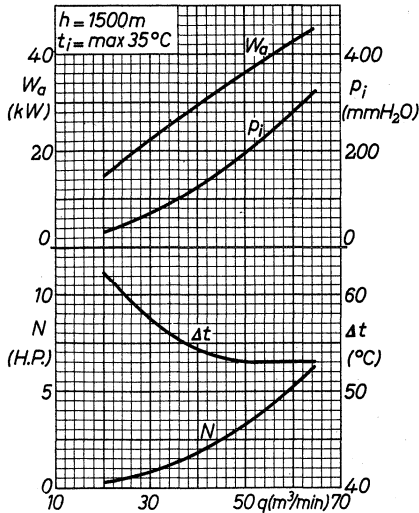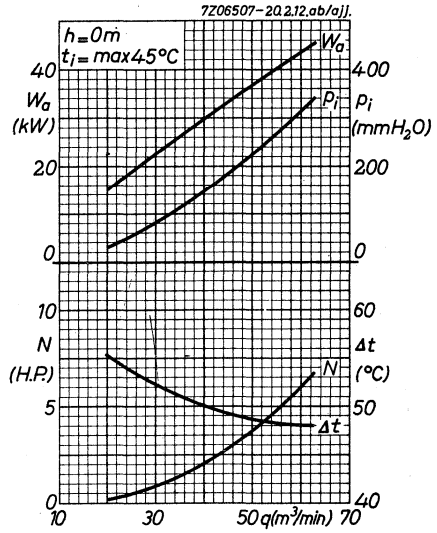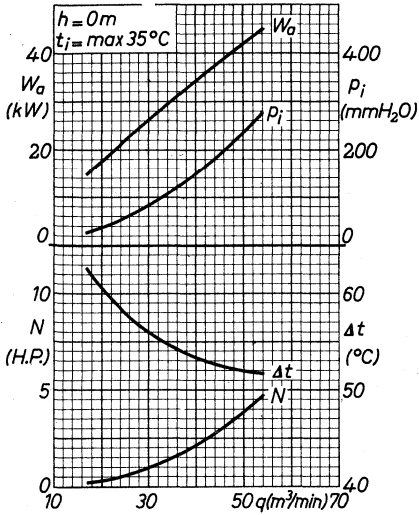



## AIR COOLED R.F. INDUSTRIAL TRIODE

Forced air cooled triode of metal-ceramic construction with integral cooler intended for use as an industrial oscillator.

### QUICK REFERENCE DATA

Oscillator output power ( $W_o - W_{\text{feedb}}$ ), typical	$W_{\text{osc}}$	4.75	kW
Frequency for full ratings	f	max. 85	MHz

To be read in conjunction with "General Recommendations Transmitting tubes, Tubes for R. F. heating".

### R.F. CLASS C OSCILLATOR FOR INDUSTRIAL USE

#### OPERATING CONDITIONS

Frequency	f	160	27.12	27.12	MHz
Filament voltage	$V_f$	6.0	6.3	6.3	V
Oscillator output power ( $W_o - W_{\text{feedb}}$ )	$W_{\text{osc}}$	3.75	4.75	3.85	kW
Anode voltage	$V_a$	5.0	6.0	5.0	kV
Anode current	$I_a$	1.0	1.0	1.0	A
Anode input power	$W_{ia}$	5.0	6.0	5.0	kW
Anode dissipation	$W_a$	1.03	1.0	0.93	kW
Anode output power	$W_o$	3.97	5.0	4.07	kW
Anode efficiency	$\eta_a$	79.4	83.3	81.4	%
Oscillator efficiency	$\eta_{\text{osc}}$	75.0	79.1	77.0	%
Feedback ratio	$V_{gp}/V_{ap}$	17	17	17	%
Grid resistor	$R_g$	2.0	2.5	2.0	k $\Omega$
Grid current, on load	$I_g$	260	250	260	mA
Grid voltage, negative	$-V_g$	520	625	520	V
Grid dissipation	$W_g$	80	90	80	W
Grid resistor dissipation	$W_{Rg}$	135	156	135	W

**LIMITING VALUES** (Absolute max. rating system)

Frequency	f	up to	85	160	MHz
Anode voltage	$V_a$	max.	7.2	6.0	kV
Anode current	$I_a$	max.	1.1	1.1	A
Anode input power	$W_{ia}$	max.	6.5	6.0	kW
Anode dissipation	$W_a$	max.	2.5	2.5	kW
Grid voltage	$-V_g$	max.	1.0	1.0	kV
Grid current, on load	$I_g$	max.	280	280	mA
		off load	$I_g$	max.	400 400 mA
Grid dissipation	$W_g$	max.	150	150	W
Grid circuit resistance	$R_g$	max.	20	20	k $\Omega$
Cathode current, mean	$I_k$	max.	1.4	1.4	A
		peak	$I_{kp}$	max.	7.5 7.5 A
Envelope temperature	$t_{env}$	max.	240		$^{\circ}C$

**HEATING:** direct; filament thoriated tungsten

Filament voltage (<120 MHz)	$V_f$	6.3	V
(>120 MHz)	$V_f$	6.0	V
Filament current at $V_f = 6.3$ V	$I_f$	33	A

The filament is designed to accept temporary fluctuations of +5% and -10%.

It is extremely important that the filament be properly decoupled. This should be so done that the resonance of the circuit formed by the filament and decoupling elements remains below the fundamental oscillator frequency. In grounded-grid circuits this resonance should be below the grid-cathode resonance. For further information please see Application Book "Tubes for R.F. heating" or contact the manufacturer.

**CAPACITANCES**

Anode to filament	$C_{af}$	0.4	pF
Grid to filament	$C_{gf}$	17	pF
Anode to grid	$C_{ag}$	14	pF

**CHARACTERISTICS** measured at  $V_a = 2.0$  kV,  $I_a = 0.5$  A

Transconductance	S	10	mA/V
Amplification factor	$\mu$	20	

**COOLING**

With insulating pedestal type 40630

Anode + grid dissipation $W_a + W_g$ (kW)	Altitude h (m)	Inlet temperature $t_i$ (°C)	Rate of flow $q_{min}$ (m <sup>3</sup> /min)	Pressure drop $p_i$ (mmH <sub>2</sub> O)	Outlet temperature $t_o$ (°C)
1	0	35	1.25	3.2	83
1	0	45	1.9	5.0	78
3	0	35	5.7	17	64
3	0	45	6.1	18.4	73

To obtain optimum life, the seal/envelope temperature under continuously loaded conditions should be kept at or below 200 °C.

**ACCESSORIES**



Filament connector		type 40688
Filament/cathode connector		type 40689
Grid connector	$f \leq 30$ MHz	type 40686
	$f > 30$ MHz	type 40687
Insulating pedestal		type 40630 net weight 2.1 kg


MECHANICAL DATA



Dimensions in mm

Mounting position: vertical with anode up or down

Net weight: approx. 3.0 kg

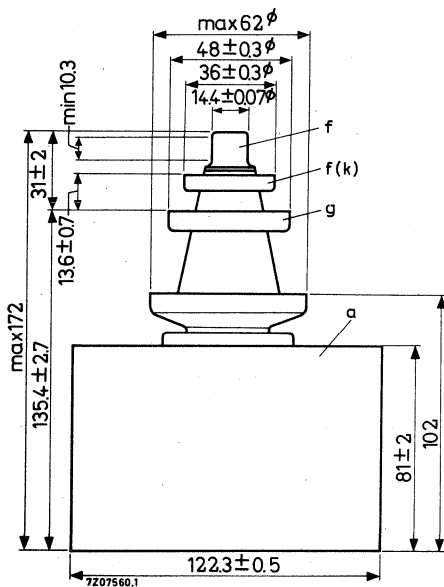

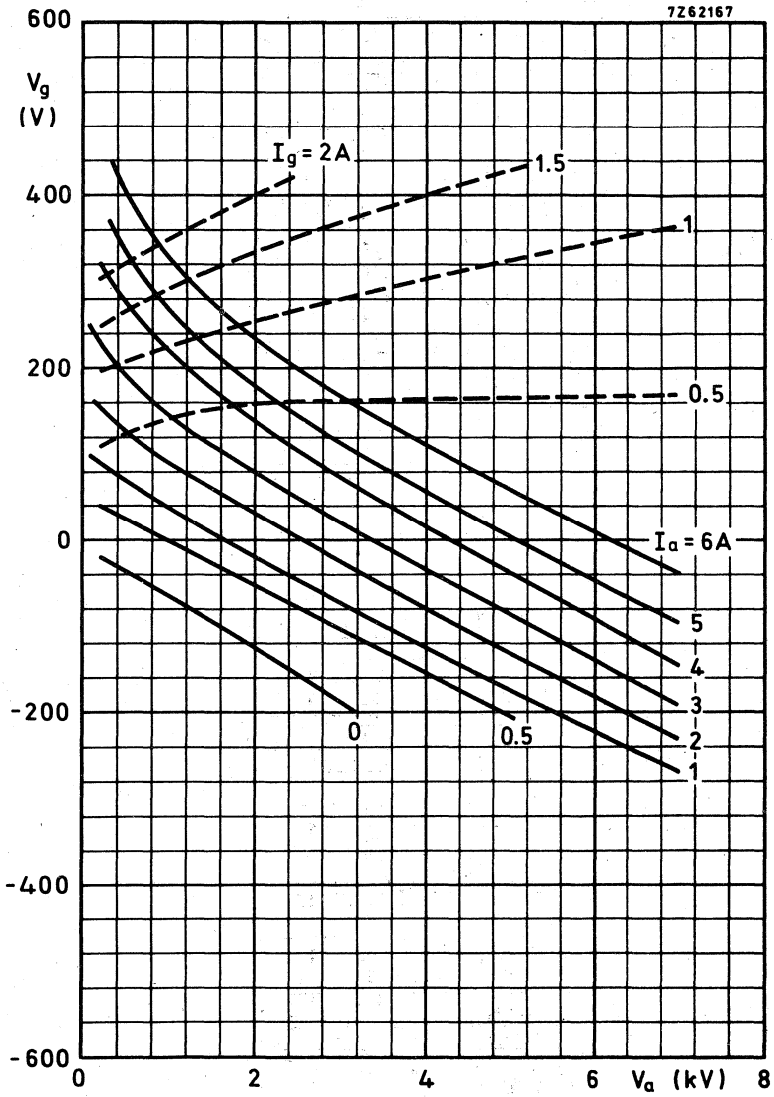

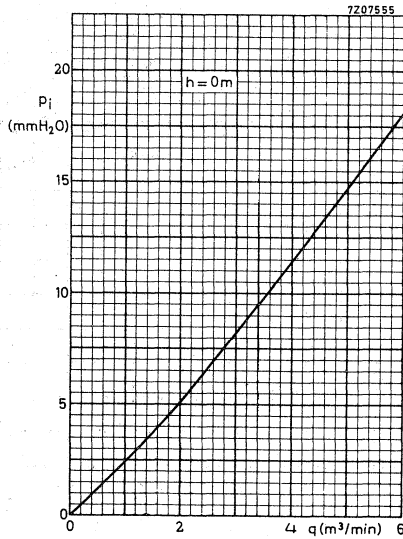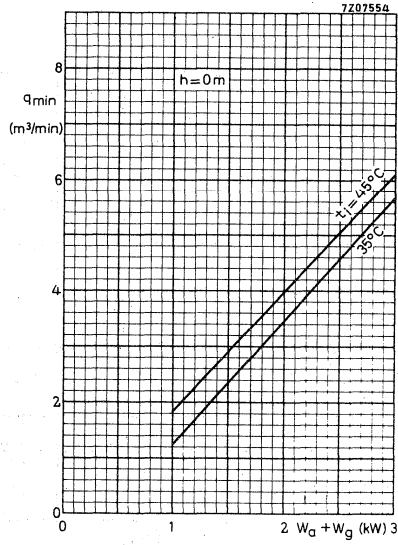

## WATER COOLED R.F. INDUSTRIAL TRIODE

Water-cooled triode of metal-ceramic construction intended for use as an industrial oscillator. The tube is cooled by means of a separate jacket.

### QUICK REFERENCE DATA

Oscillator output power ( $W_o - W_{feedb}$ ), typical	$W_{osc}$	4.75	kW
Frequency for full ratings	$f$	max.	85 MHz

To be read in conjunction with "General Recommendations Transmitting tubes, Tubes for R. F. heating."

### COOLING

See also cooling curves

With jacket K713

Anode + grid dissipation $W_a + W_g$ (kW)	Inlet temperature $t_i$ (°C)	Rate of flow $q$ min ( $\ell$ /min)	Pressure drop $P_i$ (atm)
1	20	2.5	0.11
	50	3.0	0.12
3	20	3.0	0.14
	50	6.8	0.38

Absolute max. water inlet temperature  $t_i$  max. 50 °C

A low velocity air flow may be required for cooling of the seals at frequencies above 4 MHz.

### ACCESSORIES

Filament connector	type	40688	
Filament/cathode connector	type	40689	
Grid connector	$f \leq 30$ MHz	type	40686
	$f > 30$ MHz	type	40687
Water jacket	type	K713	net weight 0.52 kg
Gasket	code	3322 026 82801	


For further data and curves please refer to YD1150

MECHANICAL DATA



Dimensions in mm

Mounting position: vertical anode down

Net weight: approx. 0.65 kg

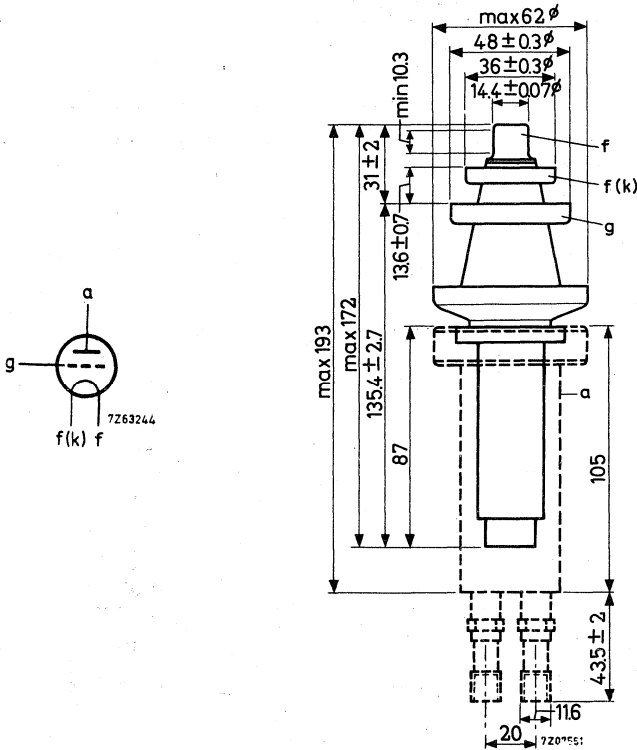



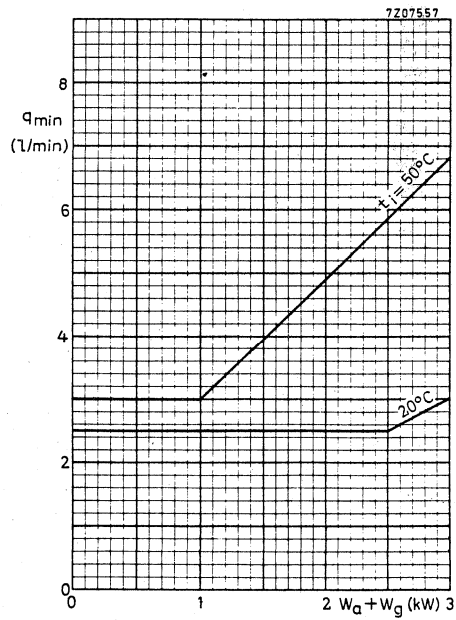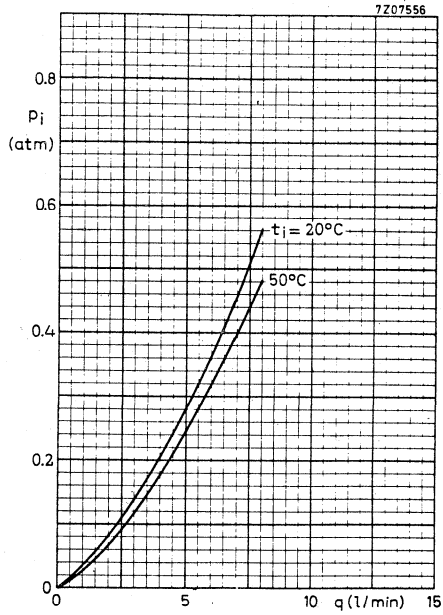



## WATER COOLED R.F. INDUSTRIAL TRIODE

Water-cooled triode of metal-ceramic construction with integral helical cooler intended for use as an industrial oscillator.

### QUICK REFERENCE DATA

Oscillator output power ( $W_o - W_{\text{feedb}}$ ), typical	$W_{\text{osc}}$	4.75	kW
Frequency for full ratings	f max.	85	MHz

To be read in conjunction with "General Recommendations Transmitting tubes, Tubes for R.F. heating"

### COOLING

See also cooling curves.

Anode + grid dissipation $W_a + W_g$ (kW)	Inlet temperature $t_i$ (°C)	Rate of flow $q$ min (ℓ/min)	Pressure drop $P_i$ (atm)
1	20	0.9	0.05
	50	1.4	0.06
3	20	2.2	0.14
	50	4.1	0.27

Absolute max. water inlet temperature  $t_i$  max. 50 °C

Absolute max. water pressure p max.  $6 \times 10^5$  Pa = 6 atm abs ←

A low velocity air flow may be required for cooling of the seals at frequencies above 4 MHz.

### ACCESSORIES

Filament connector	type	40688
Filament/cathode connector	type	40789
Grid connector	f ≤ 30 MHz type	40686
	f > 30 MHz type	40687




For further data and curves please refer to YD1150

MECHANICAL DATA



Dimensions in mm

Mounting position: vertical with anode down

Net weight: approx. 0.85 kg

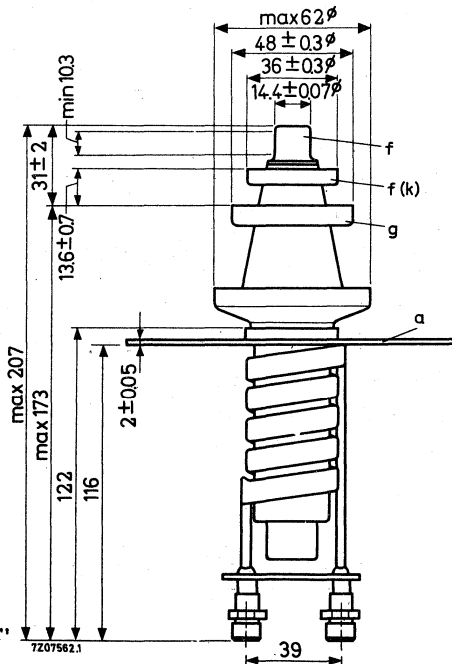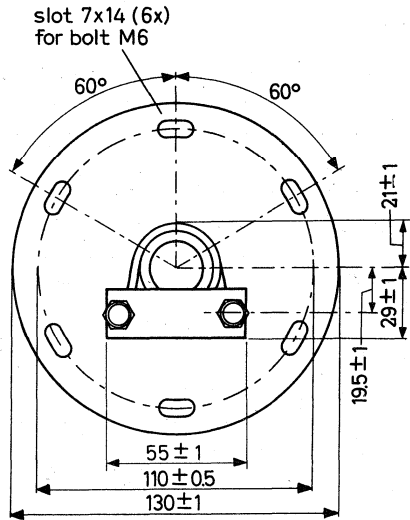

Thread of water connections BSP  $\frac{1}{4}$ "

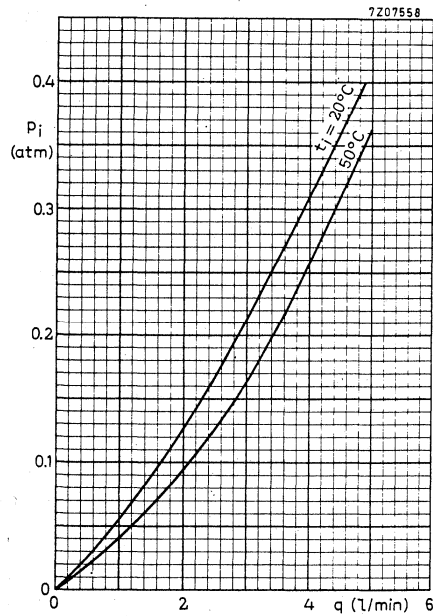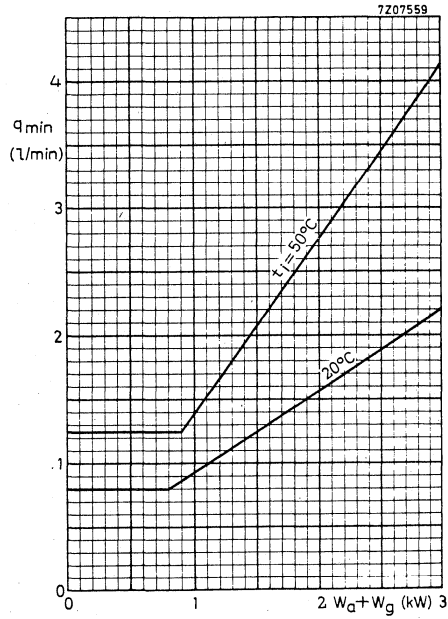



## AIR COOLED R.F. INDUSTRIAL TRIODE

Forced air cooled triode of metal-ceramic construction with integral cooler intended for use as an industrial oscillator.

QUICK REFERENCE DATA				
Oscillator output power ( $W_o - W_{\text{feedb}}$ ), typical	$W_{\text{osc}}$	8.8	kW	
Frequency for full ratings	f	max.	85	MHz

To be read in conjunction with "General Recommendations Transmitting tubes, Tubes for R.F. heating".

### R.F. CLASS C OSCILLATOR FOR INDUSTRIAL USE

#### OPERATING CONDITIONS

Frequency	f	150	27.12	27.12	MHz
Filament voltage	$V_f$	5.8	6.3	6.3	V
Oscillator output power ( $W_o - W_{\text{feedb}}$ )	$W_{\text{osc}}$	7.15	8.8	7.5	kW
Anode voltage	$V_a$	5.0	6.5	6.0	kV
Anode current	$I_a$	2.0	1.8	1.6	A
Anode input power	$W_{ia}$	10.0	11.7	9.6	kW
Anode dissipation	$W_a$	2.45	2.5	1.7	kW
Anode output power	$W_o$	7.55	9.2	7.9	kW
Anode efficiency	$\eta_a$	75.5	78.6	82.3	%
Oscillator efficiency	$\eta_{\text{osc}}$	71.5	75.2	78.1	%
Feedback ratio	$V_{gp}/V_{ap}$	15	16	15	%
Grid resistor	$R_g$	1.0	1.6	1.3	$k\Omega$
Grid current, on load	$I_g$	480	430	480	mA
Grid voltage, negative	$-V_g$	480	688	624	V
Grid dissipation	$W_g$	100	110	120	W
Grid resistor dissipation	$W_{Rg}$	230	296	300	W

**LIMITING VALUES** (Absolute max. rating system)

Frequency	f	up to	85	150	MHz
Anode voltage	$V_a$	max.	7.2	6.0	kV
Anode current	$I_a$	max.	2.2	2.2	A
Anode input power	$W_{ia}$	max.	12.5	11	kW
Anode dissipation	$W_a$	max.	5.0	5.0	kW
Grid voltage	$-V_g$	max.	1.0	1.0	kV
Grid current, on load off load	$I_g$	max.	550	550	mA
	$I_g$	max.	750	750	mA
Grid dissipation	$W_g$	max.	250	250	W
Grid circuit resistance	$R_g$	max.	20	20	k $\Omega$
Cathode current, mean peak	$I_k$	max.	2.8	2.8	A
	$I_{kp}$	max.	15	15	A
Envelope temperature	$t_{env}$	max.	240	240	$^{\circ}C$

**HEATING** : direct; filament thoriated tungsten

Filament voltage (f = 150 MHz)	$V_f$	5.8	V
(f < 150 MHz)	$V_f$	6.3	V
Filament current at $V_f = 6.3$ V	$I_f$	66	A

The filament is designed to accept temporary fluctuations of + 5% and - 10%.

It is extremely important that the filament be properly decoupled. This should be so done that the resonance of the circuit formed by the filament and decoupling elements remains below the fundamental oscillator frequency. In grounded-grid circuits this resonance should be below the grid-cathode resonance. For further information please see Application Book "Tubes for R.F. heating" or contact the manufacturer.

**CAPACITANCES**

Anode to filament	$C_{af}$	0.5	pF
Grid to filament	$C_{gf}$	16	pF
Anode to grid	$C_{ag}$	19	pF

**CHARACTERISTICS** measured at  $V_a = 2$  kV,  $I_a = 1$  A.

Transconductance	S	22	mA/V
Amplification factor	$\mu$	20	



**COOLING**

See also cooling curves

Anode + grid dissipation $W_a + W_g$ (kW)	Altitude $h$ (m)	Inlet temperature $t_i$ (°C)	Rate of flow $q_{min}$ (m <sup>3</sup> /min)	Pressure drop $p_i$ (mmH <sub>2</sub> O)	Outlet temperature $t_o$ (°C)
3	0	35	3.6	9	82
3	0	45	4.2	11	87

To obtain optimum life, the seal/envelope temperature under continuously loaded conditions should be kept at or below 200 °C.

**ACCESSORIES**



Filament connector	type	40688		
Filament/cathode connector	type	40689		
Grid connector $f \leq 30$ MHz	type	40686		
	$f > 30$ MHz	type	40687	
Insulating pedestal	type	40630	net weight	2.1 kg


MECHANICAL DATA



Dimensions in mm

Mounting position: vertical, with anode up or down

Net weight: approx. 3.9 kg

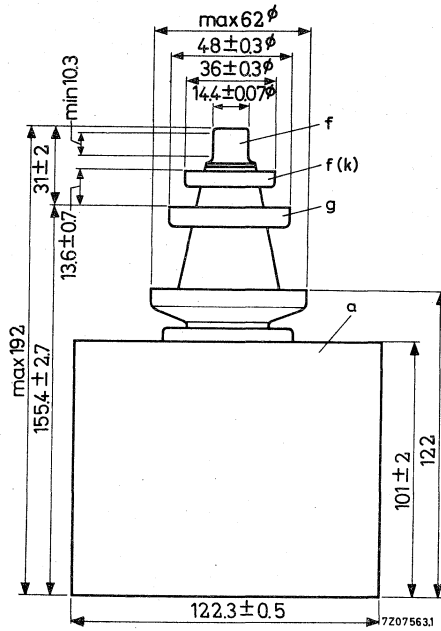

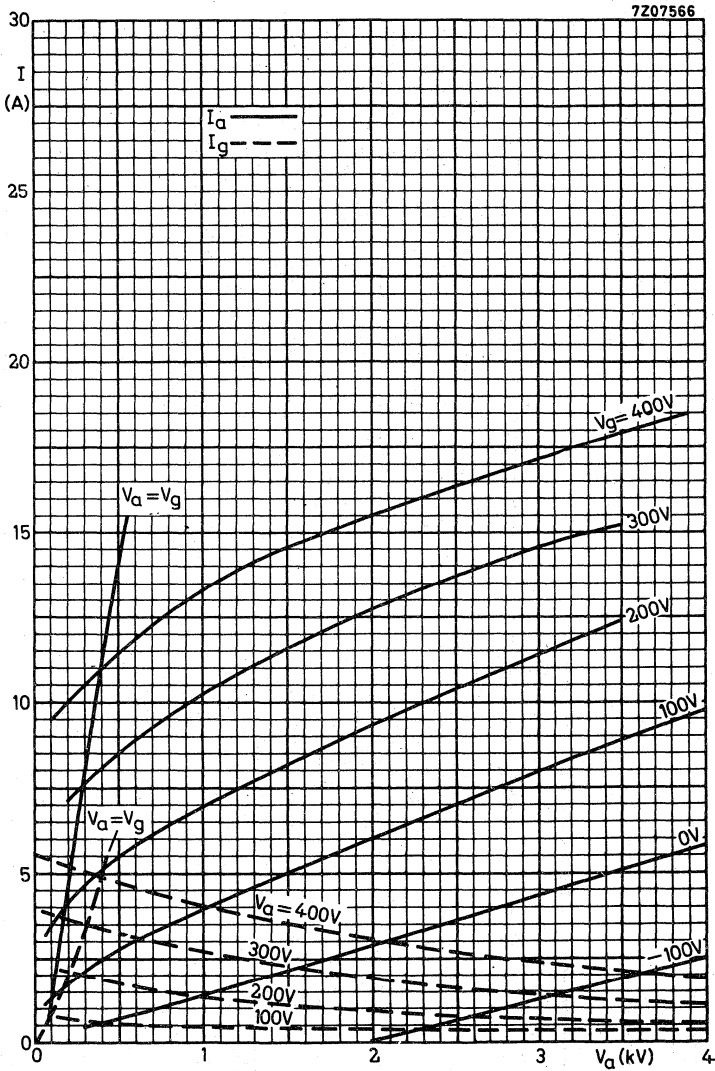

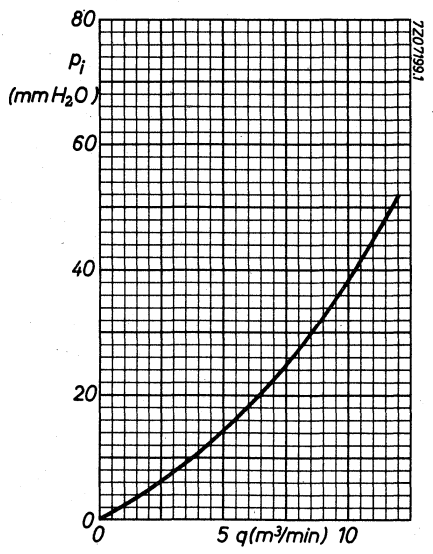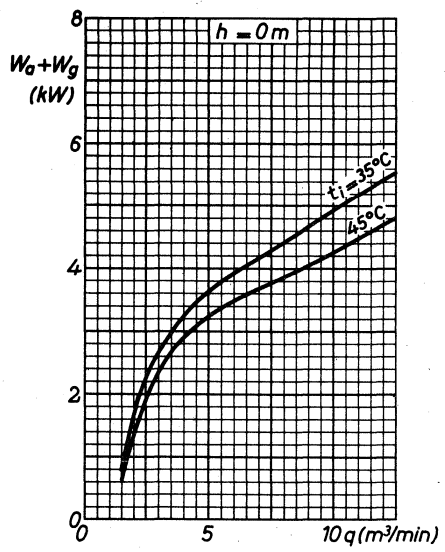

## WATER COOLED R.F. INDUSTRIAL TRIODE

Water-cooled triode of metal-ceramic construction intended for use as an industrial oscillator. The tube is cooled by means of a separate jacket.

QUICK REFERENCE DATA			
Oscillator output power ( $W_o - W_{\text{feedb}}$ ), typical	$W_{\text{osc}}$	8.8	kW
Frequency for full ratings	$f$	max. 85	MHz

To be read in conjunction with "General Recommendations Transmitting tubes, Tubes for R.F. heating."

### COOLING

See also cooling curves

With jacket K726

Anode + grid dissipation $W_a + W_g$ (kW)	Inlet temperature $t_i$ (°C)	Rate of flow $q_{\text{min}}$ (ℓ/min)	Pressure drop $P_i$ (atm)
3	20	3	0.16
	50	7	0.52
5	20	5	0.34
	50	11.5	1.4

Absolute max. water inlet temperature  $t_i$  max. 50 °C

A low velocity air flow may be required for cooling of the seals.

### ACCESSORIES

Filament connector	type	40688	
Filament/cathode connector ( $f \leq 30$ MHz)	type	40689	
Grid connector	$f \leq 30$ MHz	type	40686
	$f > 30$ MHz	type	40687
Water jacket	type	K726	net weight 0.73 kg
Gasket	code	3322 026 82801	



For further data and curves please refer to YD1160



MECHANICAL DATA

Dimensions in mm

Mounting position: vertical with anode down

Net weight: approx. 0.66 kg

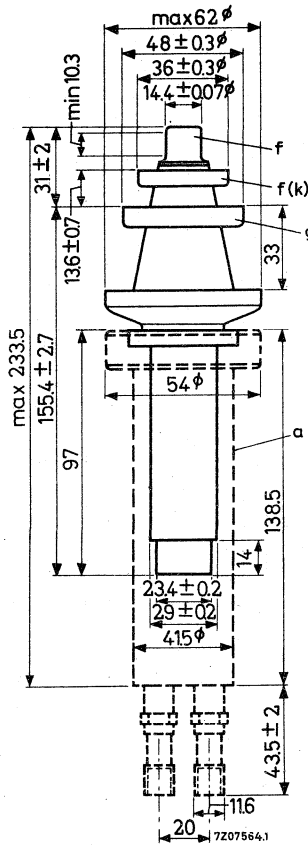

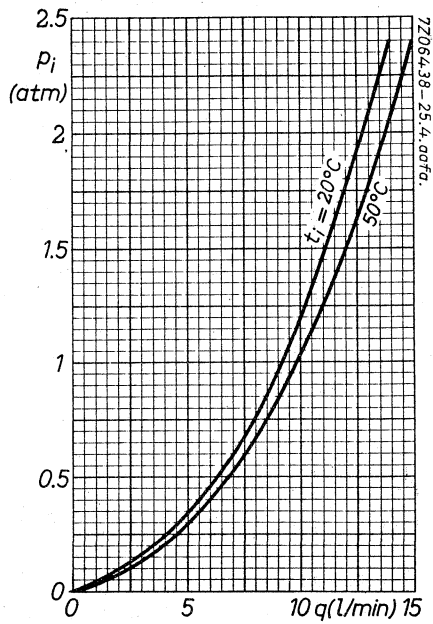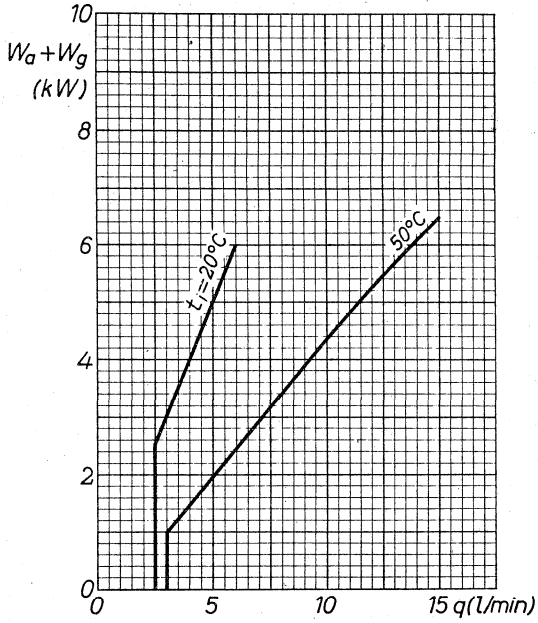





## WATER COOLED R.F INDUSTRIAL TRIODE

Water-cooled triode of metal-ceramic construction with integral helical cooler intended for use as an industrial oscillator.

QUICK REFERENCE DATA			
Oscillator output power ( $W_o - W_{\text{feedb}}$ )	$W_{\text{osc}}$	8.8	kW
Frequency for full ratings	$f$ max.	85	MHz

To be read in conjunction with "General Recommendations Transmitting tubes, Tubes for R.F. heating"

### COOLING

See also cooling curves

Anode + grid dissipation $W_a + W_g$ (kW)	Inlet temperature $t_i$ (°C)	Rate of flow $q$ min ( $\ell$ /min)	Pressure drop $P_i$ (atm)
3	20	2.2	0.18
	50	4.3	0.38
5	20	4.0	0.40
	50	8.0	1.4

Absolute max. water inlet temperature  $t_i$  max. 50 °C  
 Absolute max. water pressure  $p$  max.  $6 \times 10^5$  Pa = 6 atm abs ←  
 A low velocity air flow may be required for cooling of the seals.

### ACCESSORIES

Filament connector	type	40688
Filament/cathode connector $f \leq 30$ MHz	type	40689
Grid connector $f \leq 30$ MHz	type	40686
	$f > 30$ MHz	type




For further data and curves please refer to YD1160

MECHANICAL DATA



Mounting position: vertical with anode up or down  
 slot 7x14 (6x) for bolt M6

Net weight: approx. 1.03 kg

Dimensions in mm

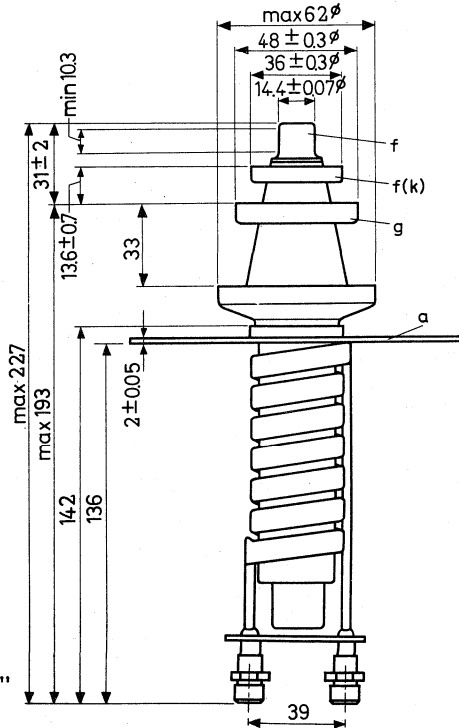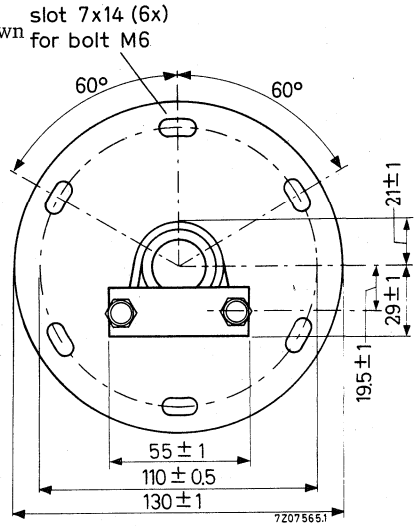

Thread of water connections BSP 3/8"

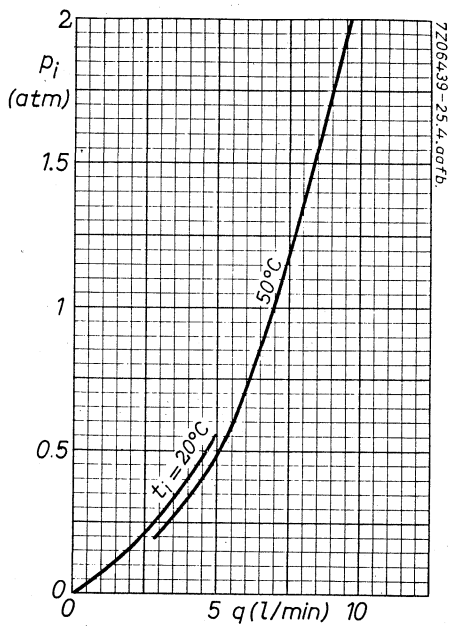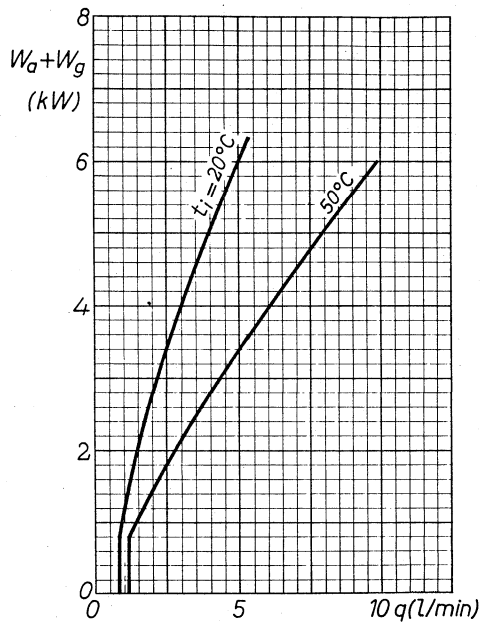



## AIR COOLED R.F. INDUSTRIAL TRIODE

Forced air-cooled triode of metal-ceramic construction intended for use as an industrial oscillator.

QUICK REFERENCE DATA			
Oscillator output power ( $W_o - W_{\text{feedb}}$ )	$W_{\text{osc}}$	15.4	kW
Frequency for full ratings	f max.	120	MHz

To be read in conjunction with "General Recommendations Transmitting tubes , Tubes for R.F. heating."

### R.F. CLASS C OSCILLATOR FOR INDUSTRIAL USE

#### OPERATING CONDITIONS

Frequency	f	120	MHz
Filament voltage	f	See under "HEATING "	
Oscillator output power ( $W_o - W_{\text{feedb}}$ )	$W_{\text{osc}}$	15.4	kW
Anode voltage	$V_a$	6.0	kV
Anode current	$I_a$	3.4	A
Anode input power	$W_{\text{ia}}$	20.4	kW
Anode dissipation	$W_a$	4.3	kW
Anode output power	$W_o$	16.1	kW
Anode efficiency	$\eta_a$	78.9	%
Oscillator efficiency	$\eta_{\text{osc}}$	75.5	%
Feedback ratio	$V_{\text{gp}}/V_{\text{ap}}$	15.5	%
Grid resistor	$R_g$	500	$\Omega$
Grid current, on load	$I_g$	920	mA
Grid voltage, negative	$-V_g$	460	V
Grid dissipation	$W_g$	280	W
Grid resistor dissipation	$W_{Rg}$	423	W

**LIMITING VALUES** (Absolute max. rating system)

Frequency for full ratings	f	up to	120	MHz
Anode voltage	V <sub>a</sub>	max.	7.2	kV
Anode current	I <sub>a</sub>	max.	4	A
Anode input power	W <sub>ia</sub>	max.	24	kW
Anode dissipation	W <sub>a</sub>	max.	10	kW
Grid voltage	-V <sub>g</sub>	max.	1.5	kV
Grid current, on load	I <sub>g</sub>	max.	1.0	A
off load	I <sub>g</sub>	max.	1.5	A
Grid dissipation	W <sub>g</sub>	max.	350	W
Grid circuit resistance	R <sub>g</sub>	max.	10	kΩ
Cathode current, mean	I <sub>k</sub>	max.	5.0	A
peak	I <sub>k</sub> <sup>p</sup>	max.	25	A
Envelope temperature	t <sub>env</sub>	max.	240	°C

**HEATING** : direct ; filament thoriated tungsten

Filament voltage	V <sub>f</sub>		5.8	V
Filament current	I <sub>f</sub>		130	A
Peak filament starting current	I <sub>f</sub> <sup>p</sup>	max.	800	A
Cold filament resistance	R <sub>f</sub> <sup>o</sup>		5.6	mΩ

The filament is designed to accept temporary fluctuations of +5% and -10%.

To ensure that the cathode temperature remains constant irrespective of the operating frequency, it may be necessary to reduce the filament voltage at higher frequencies. When doing so it must be borne in mind that the filament voltage-to-current ratio measured with only the filament voltage applied should remain constant under all operating conditions.

It is extremely important that the filament be properly decoupled. This should be so done that the resonance of the circuit formed by the filament and decoupling elements remains below the fundamental oscillator frequency. In grounded-grid circuits this resonance should be below the grid-cathode resonance. For further information please see Application Book "Tubes for R.F. heating" or contact the manufacturer.

**CAPACITANCES**

Anode to filament	C <sub>af</sub>	1	pF
Grid to filament	C <sub>gf</sub>	61	pF
Anode to grid	C <sub>ag</sub>	32	pF

→ **CHARACTERISTICS** measured at V<sub>a</sub> = 6 kV, I<sub>a</sub> = 2 A

Transconductance	S	40	mA/V
Amplification factor	μ	50	

## COOLING

See also cooling curves

Anode + grid dissipation $W_a + W_g$ (kW)	Altitude h (m)	Inlet temperature $t_i$ (°C)	Rate of flow $q$ min (m <sup>3</sup> /min)	Pressure drop $P_i$ (mmH <sub>2</sub> O)	Outlet temperature $t_o$ (°C)
10	0	35	9.5	55	94
8	0	35	6.5	28	105
6	0	35	4.5	15	113
4	0	35	3.0	8	117
10	0	45	11.0	69	98
8	0	45	7.6	35	108
6	0	45	5.2	19	115
4	0	45	3.5	10	119
10	1500	35	11.4	63	94
8	1500	35	7.8	32	105
6	1500	35	5.5	17	113
4	1500	35	3.6	9	117
10	3000	25	12.0	62	90
8	3000	25	8.2	32	102
6	3000	25	5.7	17	111
4	3000	25	3.8	9	116

Absolute max. air inlet temperature  $t_i$  max. 45 °C

At the lower values of anode dissipation and at the highest operating frequencies additional cooling of the seals is required.

To obtain optimum life, the seal/envelope temperature under continuously loaded conditions should be kept at or below 200 °C.

Direction of airflow: arbitrary.

## ACCESSORIES



Filament connector with cable	type	40692	net weight	450 g	
Filament/cathode connector with cable	type	40693	net weight	490 g	
Grid connector	$f \leq 4$ MHz	type	40690	net weight	55 g
	$f > 4$ MHz	type	40691	net weight	240 g
Insulating pedestal	type	40654	net weight	4.25 kg	

MECHANICAL DATA


Dimensions in mm



Mounting position: vertical with anode up or down



Net weight: approx 7.5 kg.

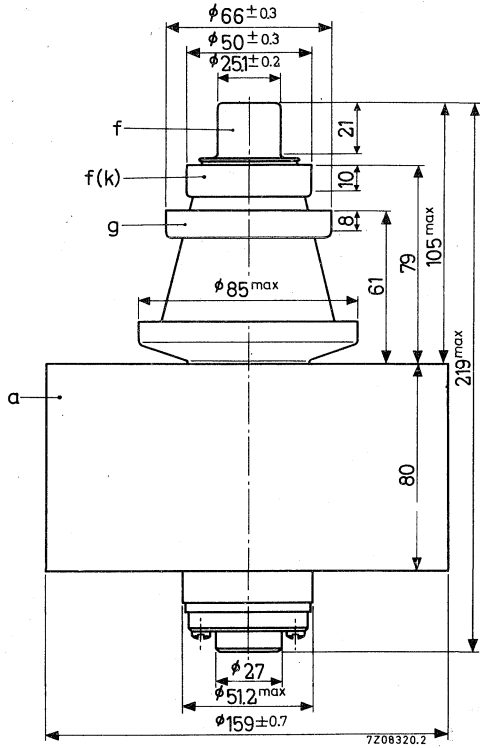



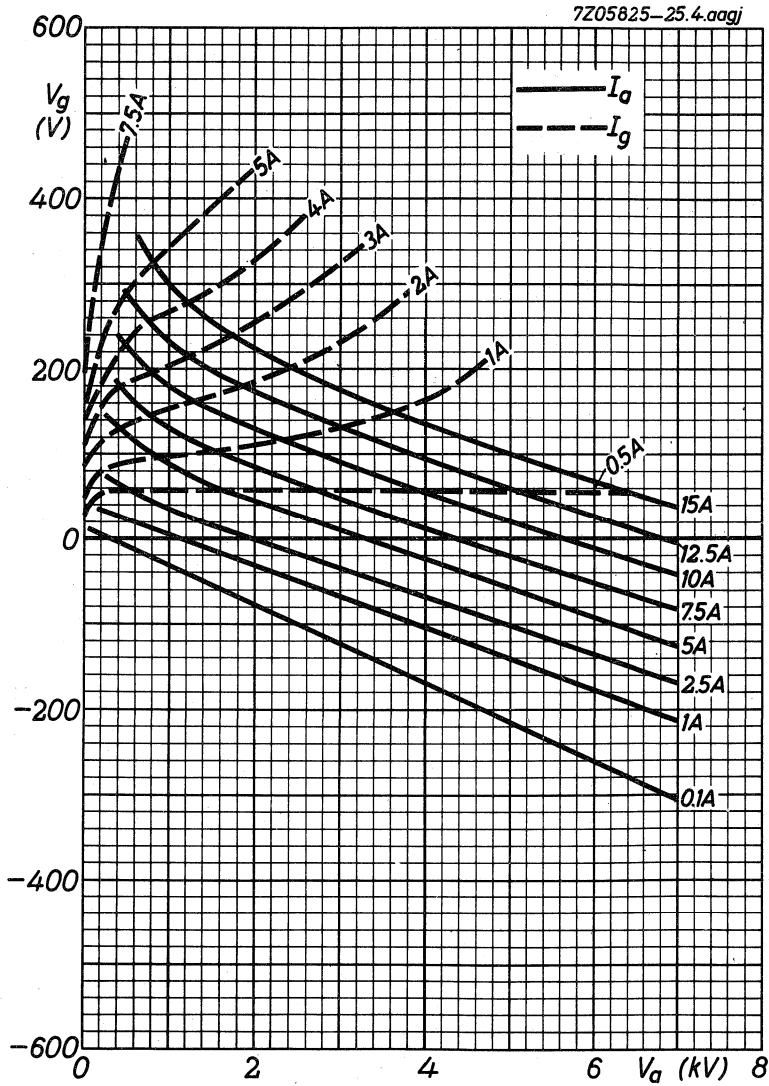

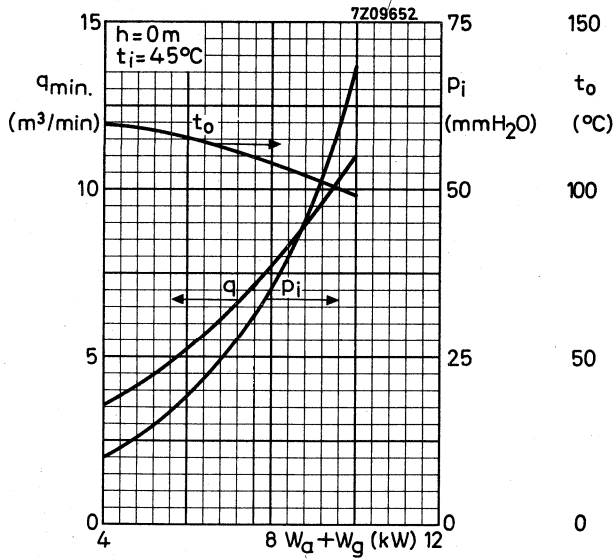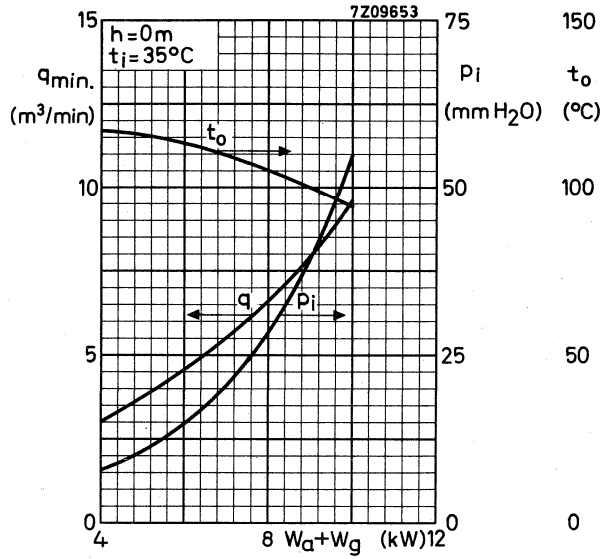

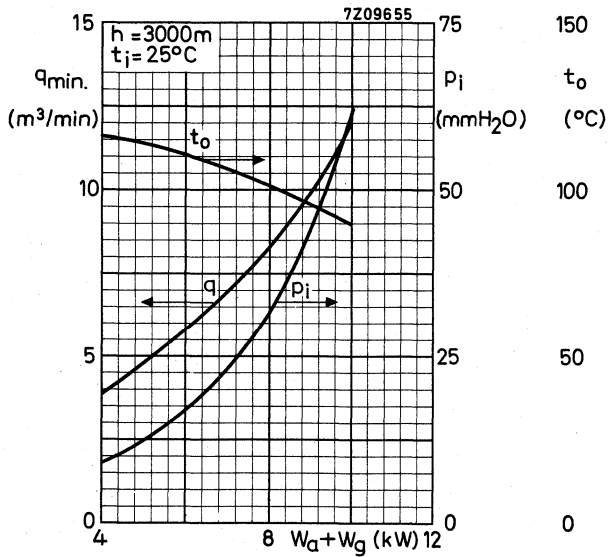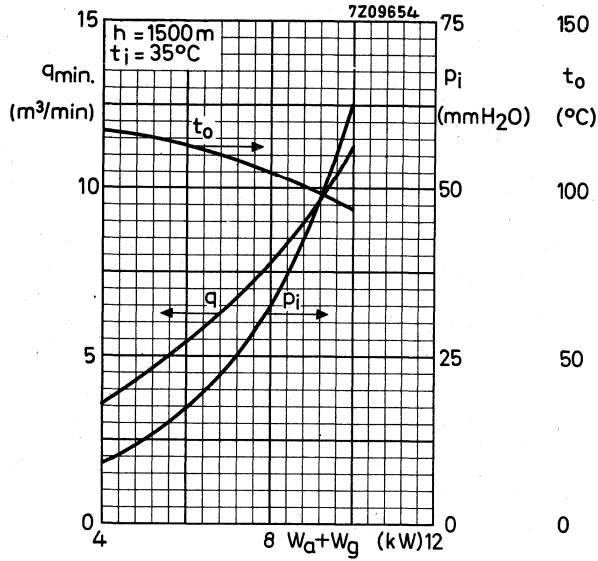



## WATER COOLED R.F. INDUSTRIAL TRIODE

Water-cooled triode of metal-ceramic construction intended for use as industrial oscillator. The tube is cooled by means of a separate jacket.

QUICK REFERENCE DATA			
Oscillator output power ( $W_o - W_{\text{feedb}}$ ), typical	$W_{\text{osc}}$	15.4	kW
Frequency for full ratings	f	max. 120	MHz

To be read in conjunction with "General Recommendations Transmitting tubes, Tubes for R.F. heating."

### COOLING

See also cooling curves

With jacket K727

Anode + grid dissipation $W_a + W_g$ (kW)	Inlet temperature $t_i$ (°C)	Rate of flow $q$ min (ℓ/min)	Pressure drop $P_i$ (atm)	Outlet temperature $t_o$ (°C)
10	20	10.0	0.60	36
	50	15.0	1.25	61
8	20	7.8	0.38	37
	50	11.3	0.75	62
6	20	5.7	0.22	38
	50	8.2	0.42	62

Absolute max. water inlet temperature  $t_i$  max. 50 °C

Air cooling of the seals is required at frequencies above 4 MHz

### ACCESSORIES

Filament connector with cable	type	40692	net weight	450 g
Filament/cathode connector with cable	type	40693	net weight	490 g
Grid connector	$f \leq 4$ MHz	type	40690	net weight 55 g
	$f > 4$ MHz	type	40691	net weight 240 g
Water jacket	type	K727	net weight	2 kg
Gasket ( O-ring)	code	2622 080 30889		


For further data and curves please refer to YD1170

**MECHANICAL DATA**



Dimensions in mm

Mounting position: vertical with anode down

Net weight: approx. 1.5 kg

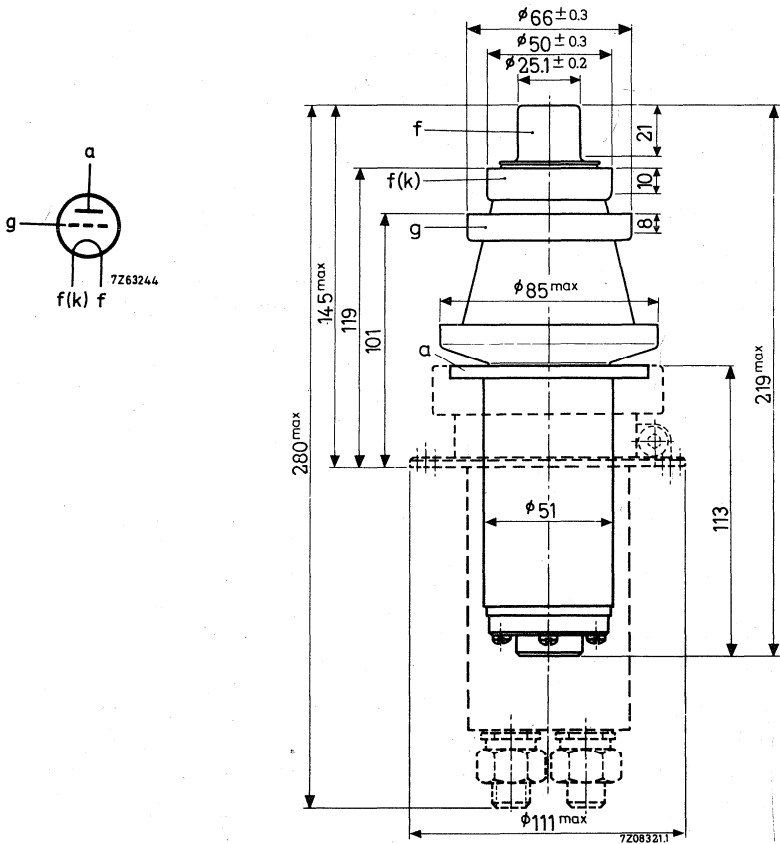

Thread of water connections BSP 1/2"

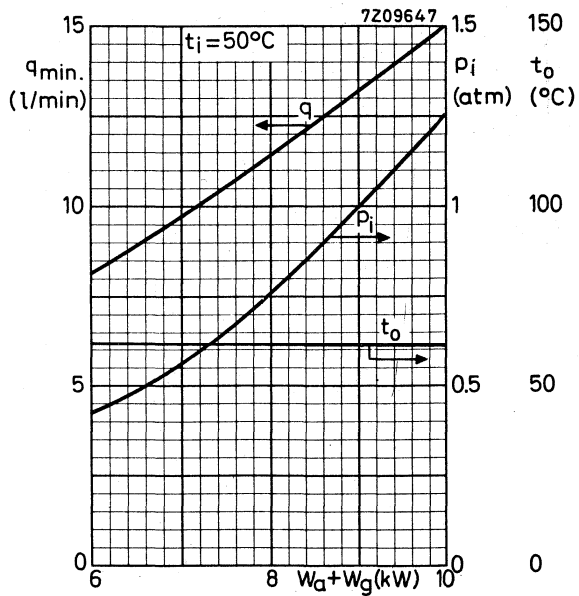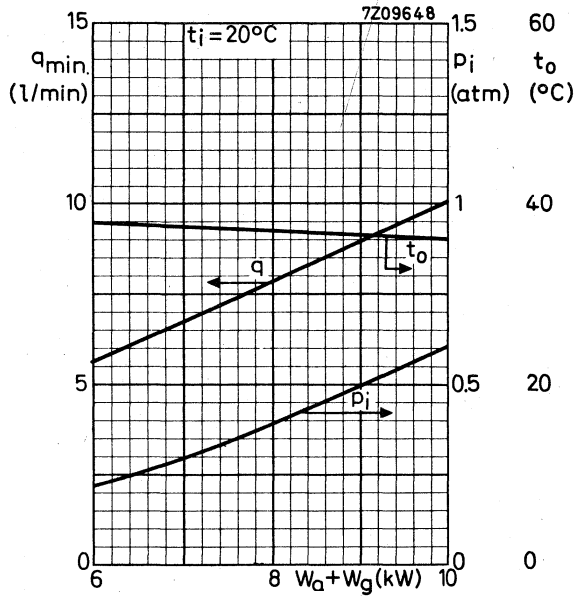





## WATER COOLED R.F. INDUSTRIAL TRIODE

Water-cooled triode of metal-ceramic construction with integral helical cooler intended for use as an industrial oscillator.

Oscillator output power ( $W_o - W_{\text{feedb}}$ ), typical	$W_{\text{osc}}$	15.4	kW
Frequency for full ratings	f	max. 120	MHz

To be read in conjunction with "General Recommendations Transmitting tubes, Tubes for R.F. heating".

### COOLING

See also cooling curves

Anode + grid dissipation $W_a + W_g$ (kW)	Inlet temperature $t_i$ (°C)	Rate of flow $q_{\text{min}}$ (ℓ/min)	Pressure drop $P_i$ (atm)	Outlet temperature $t_o$ (°C)
10	20	6.0	0.25	46
	50	9.0	0.52	67
8	20	4.5	0.15	49
	50	6.7	0.31	69
6	20	3.0	0.07	53
	50	4.5	0.15	72

Absolute max. water inlet temperature  $t_i$  max. 50 °C

Absolute max. water pressure p max.  $6 \times 10^5$  Pa = 6 atm abs ←

At frequencies above 4 MHz air cooling of the seals becomes mandatory.

### ACCESSORIES

Filament connector with cable	type 40692	net weight	450	g
Filament/cathode connector with cable	type 40693	net weight	490	g
Grid connector	f 4 MHz	type 40690	net weight	55
	f 4 MHz	type 40691	net weight	240




For further data please refer to YD1170

MECHANICAL DATA



Dimensions in mm

Mounting position: vertical with anode up or down

Net weight: approx. 2 kg

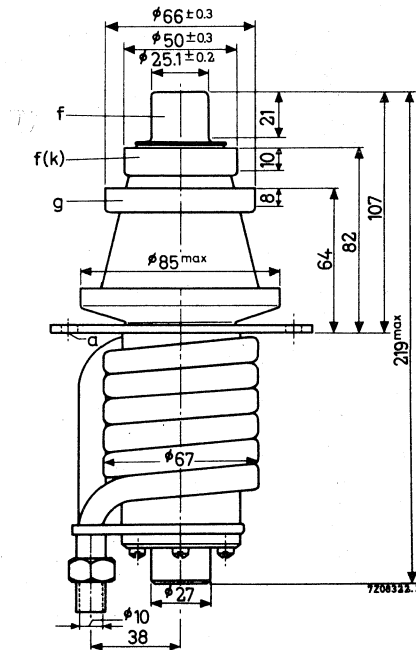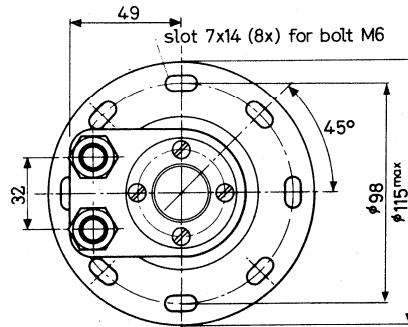

Thread of water connections BSP 3/8"

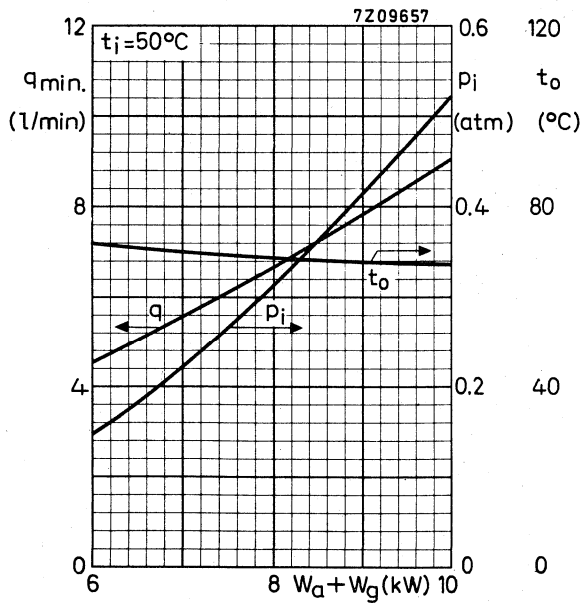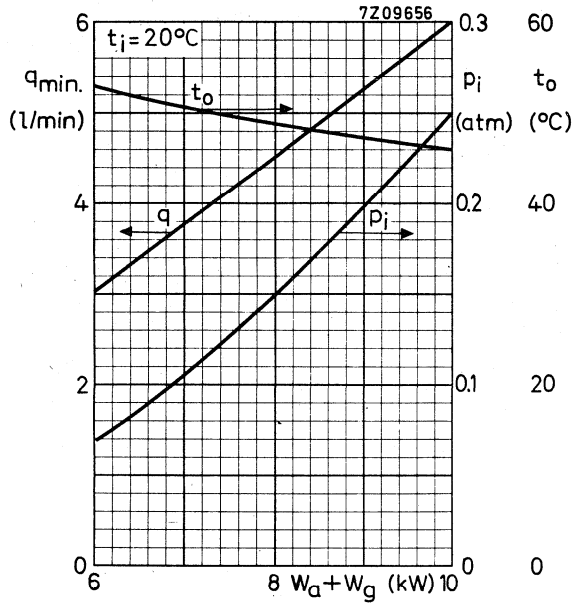



## AIR COOLED R.F. INDUSTRIAL TRIODE

Forced air cooled triode of metal-ceramic construction with integral cooler intended for use as an industrial oscillator.

QUICK REFERENCE DATA			
Oscillator output power ( $W_o - W_{feedb}$ ), typical	$W_{osc}$	13.22	kW
Frequency for full ratings	f max.	50	MHz

To be read in conjunction with "General Recommendations Transmitting tubes. Tubes for R. F. heating".

### R.F. CLASS C OSCILLATOR FOR INDUSTRIAL USE

#### OPERATING CONDITIONS

Frequency	f	50	MHz
Oscillator output power ( $W_o - W_{feedb}$ )	$W_{osc}$	13.22	kW
Anode voltage	$V_a$	10.0	kV
Anode current	$I_a$	1.75	A
Anode input power	$W_{ia}$	17.5	kW
Anode dissipation	$W_a$	3.8	kW
Anode output power	$W_o$	13.7	kW
Anode efficiency	$\eta_a$	78.3	%
Oscillator efficiency	$\eta_{osc}$	75.6	%
Feedback ratio	$V_{gp}/V_{ap}$	12.0	%
Grid resistor	$R_g$	1.5	k $\Omega$
Grid current, on load	$I_g$	450	mA
Grid voltage, negative	$-V_g$	675	V
Grid dissipation	$W_g$	180	W
Grid resistor dissipation	$W_{Rg}$	304	W

**LIMITING VALUES** (Absolute max. rating system)

Frequency for full ratings	f	up to	50	MHz
Anode voltage	$V_a$	max.	12	kV
Anode current	$I_a$	max.	2.0	A
Anode input power	$W_{ia}$	max.	20	kW
Anode dissipation	$W_a$	max.	10	kW
Grid voltage	$-V_g$	max.	1.5	kV
Grid current, on load	$I_g$	max.	0.6	A
	$I_g$	max.	0.8	A
Grid dissipation	$W_g$	max.	250	W
Grid circuit resistance	$R_g$	max.	10	$k\Omega$
Cathode current, mean	$I_k$	max.	2.5	A
	$I_{kp}$	max.	10	A
Envelope temperature	$t_{env}$	max.	240	$^{\circ}C$

**HEATING** : direct; filament thoriated tungsten

Filament voltage	$V_f$		5.4	V
Filament current	$I_f$		65	A
Peak filament starting current	$I_{fp}$	max.	400	A
Cold filament resistance	$R_{fo}$		10	$m\Omega$

The filament is designed to accept temporary fluctuations of +5% and -10%.

It is extremely important that the filament be properly decoupled. This should be so done that the resonance of the circuit formed by the filament and decoupling elements remains below the fundamental oscillator frequency. In grounded-grid circuits this resonance should be below the grid-cathode resonance. For further information please see Application Book "Tubes for R.F. heating" or contact the manufacturer.

**CAPACITANCES**

Anode to filament	$C_{af}$		0.4	pF
Grid to filament	$C_{gf}$		42	pF
Anode to grid	$C_{ag}$		17	pF

**CHARACTERISTICS** measured at  $V_a = 10$  kV,  $I_a = 0.8$  A

Transconductance	S		14	mA/V
Amplification factor	$\mu$		45	

## COOLING

See also cooling curves.

With insulating pedestal type 40654.

Anode + grid dissipation $W_a + W_g$ (kW)	Altitude h (m)	Inlet temperature $t_i$ (°C)	Rate of flow $q_{min}$ (m <sup>3</sup> /min)	Pressure drop $P_i$ (mmH <sub>2</sub> O)	Outlet temperature $t_o$ (°C)
10	0	35	9.5	55	94
8	0	35	6.5	28	105
6	0	35	4.5	15	113
4	0	35	3.0	8	117
10	0	45	11	69	98
8	0	45	7.6	35	108
6	0	45	5.2	19	115
4	0	45	3.5	10	119
10	1500	35	11.4	63	94
8	1500	35	7.8	32	105
6	1500	35	5.5	17	113
4	1500	35	3.6	9	117
10	3000	25	12	62	90
8	3000	25	8.2	32	102
6	3000	25	5.7	17	111
4	3000	25	3.8	9	116

To obtain optimum life, the seal/envelope temperature under continuous loaded conditions should be kept at or below 200 °C.

## ACCESSORIES



Filament connector with cable	type 40692	net weight	450 g
Filament/cathode connector with cable	type 40693	net weight	490 g
Grid connector	$f \leq 4$ MHz	type 40690	net weight 55 g
	$f > 4$ MHz	type 40691	net weight 240 g
Insulating pedestal	type 40654	net weight	4.25 kg

MECHANICAL DATA


Dimensions in mm



Mounting position: vertical with anode up or down



Net weight: approx. 7.5 kg

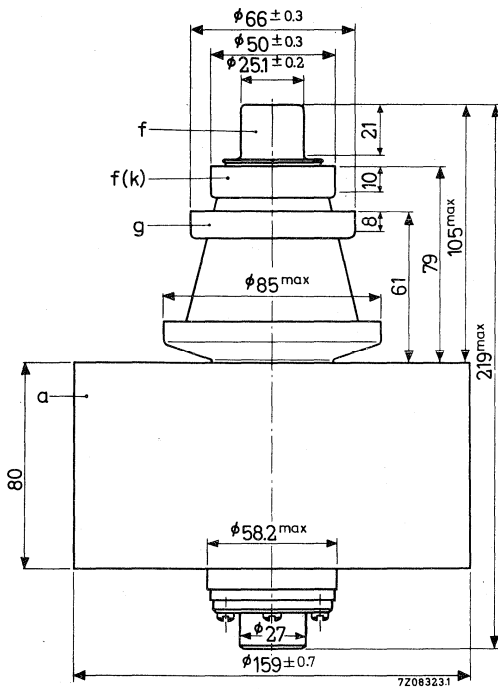



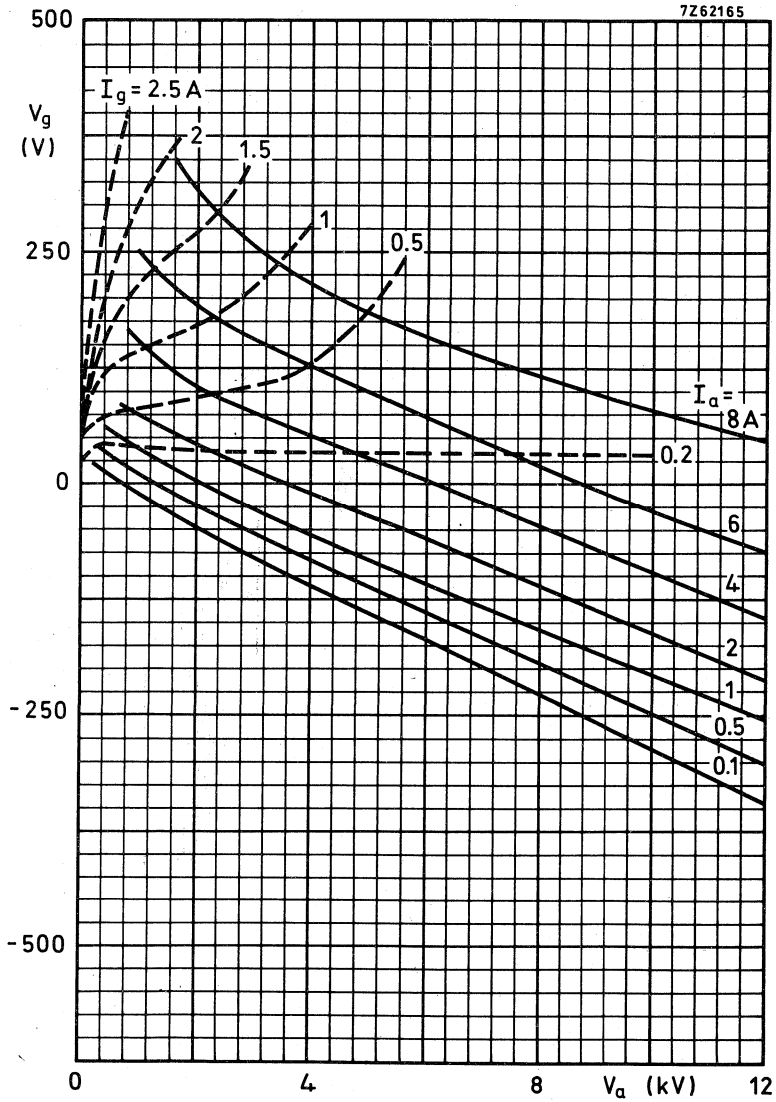

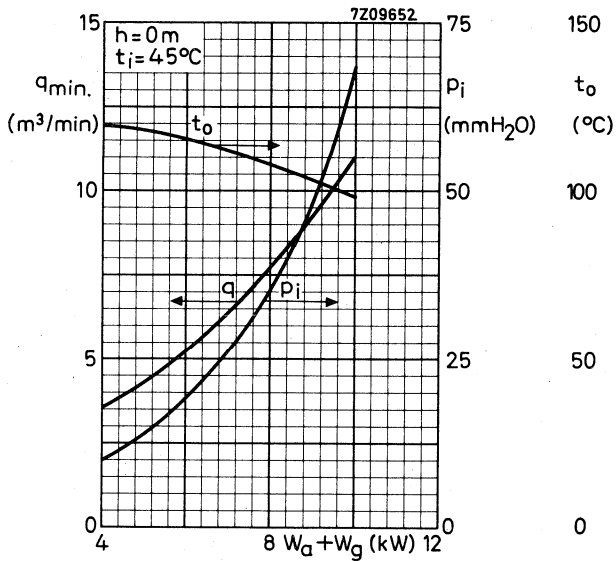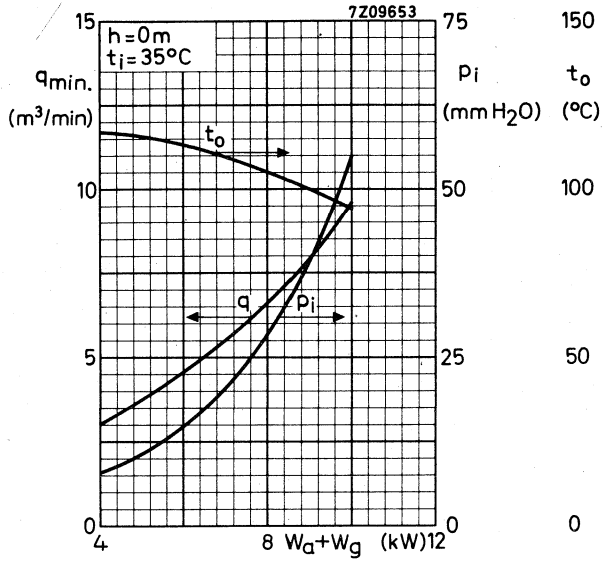

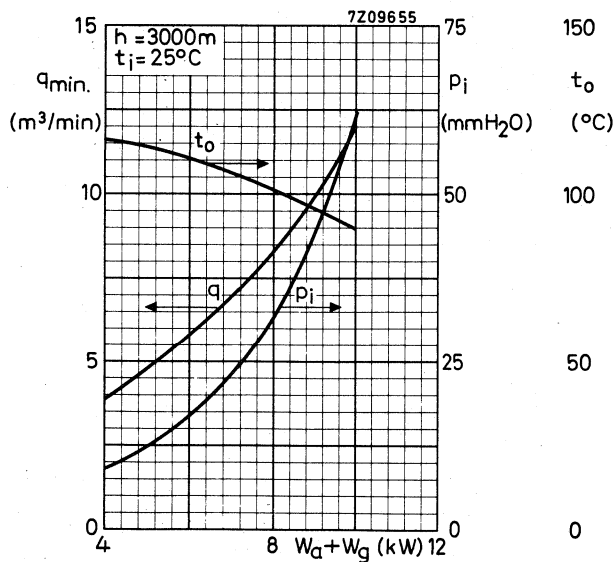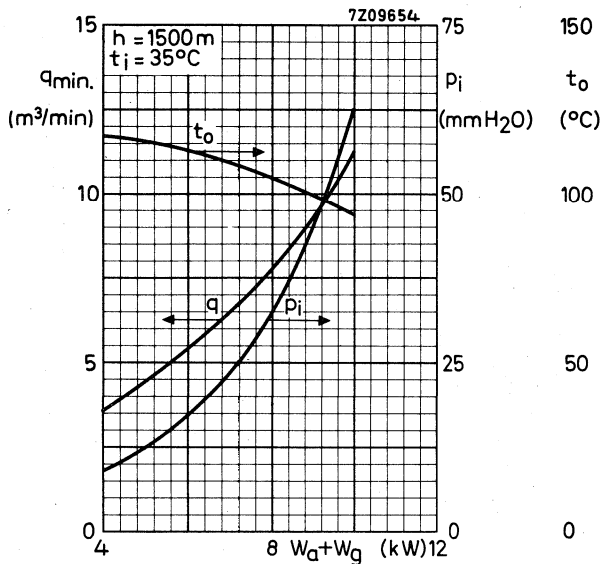



## AIR COOLED R.F. INDUSTRIAL TRIODE

Forced air cooled triode of metal-ceramic construction with integral cooler intended for use as an industrial oscillator.

### QUICK REFERENCE DATA

Oscillator output power ( $W_o - W_{\text{feedb}}$ ), typical	$W_{\text{osc}}$	26,5	kW
Frequency for full ratings	f max.	120	MHz

To be read in conjunction with "General Recommendations Transmitting tubes, Tubes for R.F. heating".

### R.F. CLASS C OSCILLATOR FOR INDUSTRIAL USE

#### OPERATING CONDITIONS

Frequency	f	120	120	120	MHz
Oscillator output power ( $W_o - W_{\text{feedb}}$ )	$W_{\text{osc}}$	15,6	22	26,5	kW
Anode voltage	$V_a$	6	8	10	kV
Anode current	$I_a$	3,6	3,6	3,4	A
Anode input power	$W_{ia}$	21,6	28,8	34	kW
Anode dissipation	$W_a$	5,4	6,1	6,8	kW
Anode output power	$W_o$	16,2	22,7	27,2	kW
Anode efficiency	$\eta_a$	75	78,8	80	%
Oscillator efficiency	$\eta_{\text{osc}}$	72,2	76,3	78	%
Feedback ratio	$V_{g_p}/V_{a_p}$	12	10	9	%
Grid resistor	$R_g$	300	400	560	$\Omega$
Grid current, on load	$I_g$	1	1	0,9	A
Grid voltage, negative	$-V_g$	300	400	500	V
Grid dissipation	$W_g$	290	290	240	W
Grid resistor dissipation	$W_{Rg}$	300	400	450	W

**LIMITING VALUES** (Absolute max. rating system)

Frequency for full ratings	f	up to	120 MHz
Anode voltage	V <sub>a</sub>	max.	12 kV
Anode current	I <sub>a</sub>	max.	4 A
Anode input power	W <sub>ia</sub>	max.	40 kW
Anode dissipation	W <sub>a</sub>	max.	10 kW
Grid voltage	-V <sub>g</sub>	max.	1,5 kV
Grid current, on load	I <sub>g</sub>	max.	1,1 A
off load	I <sub>g</sub>	max.	1,6 A
Grid dissipation	W <sub>g</sub>	max.	350 W
Grid circuit resistance	R <sub>g</sub>	max.	10 kΩ
Cathode current, mean	I <sub>k</sub>	max.	5 A
peak	I <sub>kp</sub>	max.	25 A
Envelope temperature	t <sub>env</sub>	max.	240 °C

**HEATING** : direct ; filament thoriated tungsten

Filament voltage	V <sub>f</sub>		5,8 V
Filament current	I <sub>f</sub>		130 A
Peak filament starting current	I <sub>f</sub> <sub>p</sub>	max.	800 A
Cold filament resistance	R <sub>f0</sub>		5,6 mΩ

The filament is designed to accept temporary fluctuations of +5% and -10%.

To ensure that the cathode temperature remains constant irrespective of the operating frequency, it may be necessary to reduce the filament voltage at higher frequencies. When doing so it must be borne in mind that the filament voltage-to-current ratio measured with only the filament voltage applied should remain constant under all operating conditions.

It is extremely important that the filament be properly decoupled. This should be so done that the resonance of the circuit formed by the filament and decoupling elements remains below the fundamental oscillator frequency. In grounded-grid circuits this resonance should be below the grid-cathode resonance. For further information please see Application Book "Tubes for R.F. heating" or contact the manufacturer.

**CAPACITANCES**

Anode to filament	C <sub>af</sub>	0,4 pF
Grid to filament	C <sub>gf</sub>	47 pF
Anode to grid	C <sub>ag</sub>	17 pF

**CHARACTERISTICS** measured at  $V_a = 12$  kV,  $I_a = 2$  A

Transconductance	S	33	mA/V
Amplification factor	$\mu$	44	

**COOLING**

See also cooling curves

Anode + grid dissipation $W_a + W_g$ (kW)	Altitude $h$ (m)	Inlet temperature $t_i$ (°C)	Rate of flow $q$ min. (m <sup>3</sup> /min)	Pressure drop $p_i$ (mm H <sub>2</sub> O)	Outlet temperature $t_o$ (°C)
10	0	35	9,5	55	94
8	0	35	6,5	28	105
6	0	35	4,5	15	113
4	0	35	3,0	8	117
10	0	45	11,0	69	98
8	0	45	7,6	35	108
6	0	45	5,2	19	115
4	0	45	3,5	10	119
10	1500	35	11,4	63	94
8	1500	35	7,8	32	105
6	1500	35	5,5	17	113
4	1500	35	3,6	9	117
10	3000	25	12,0	62	90
8	3000	25	8,2	32	102
6	3000	25	5,7	17	111
4	3000	25	3,8	9	116

Absolute max. air inlet temperature  $t_i$  max. 45 °C

At the lower values of anode dissipation and at the highest operating frequencies additional cooling of the seals is required.

To obtain optimum life, the seal/envelope temperature under continuously loaded conditions should be kept at or below 200 °C.

Direction of airflow: arbitrary.

**ACCESSORIES**



Filament connector with cable	type	40692	net weight	450	g
Filament/cathode connector with cable	type	40693	net weight	490	g
Grid connector $f \leq 4$ MHz	type	40690	net weight	55	g
	$f > 4$ MHz	type	40691	net weight	240
Insulating pedestal	type	40654	net weight	4,25	kg

MECHANICAL DATA

Dimensions in mm


Mounting position : vertical with anode up or down



Net weight : approx. 7,5 kg

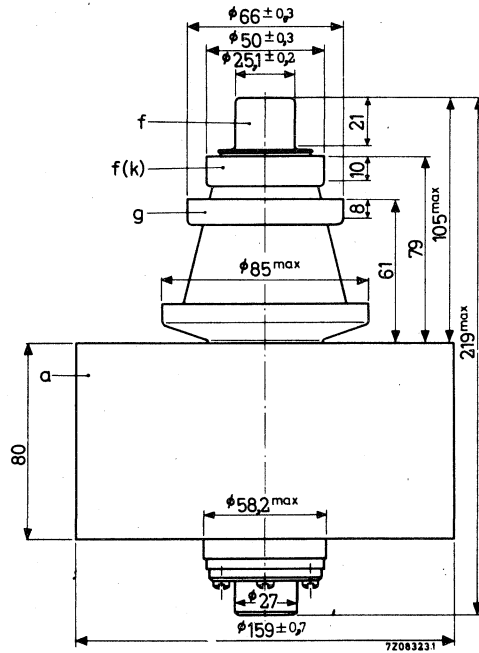





7Z65762

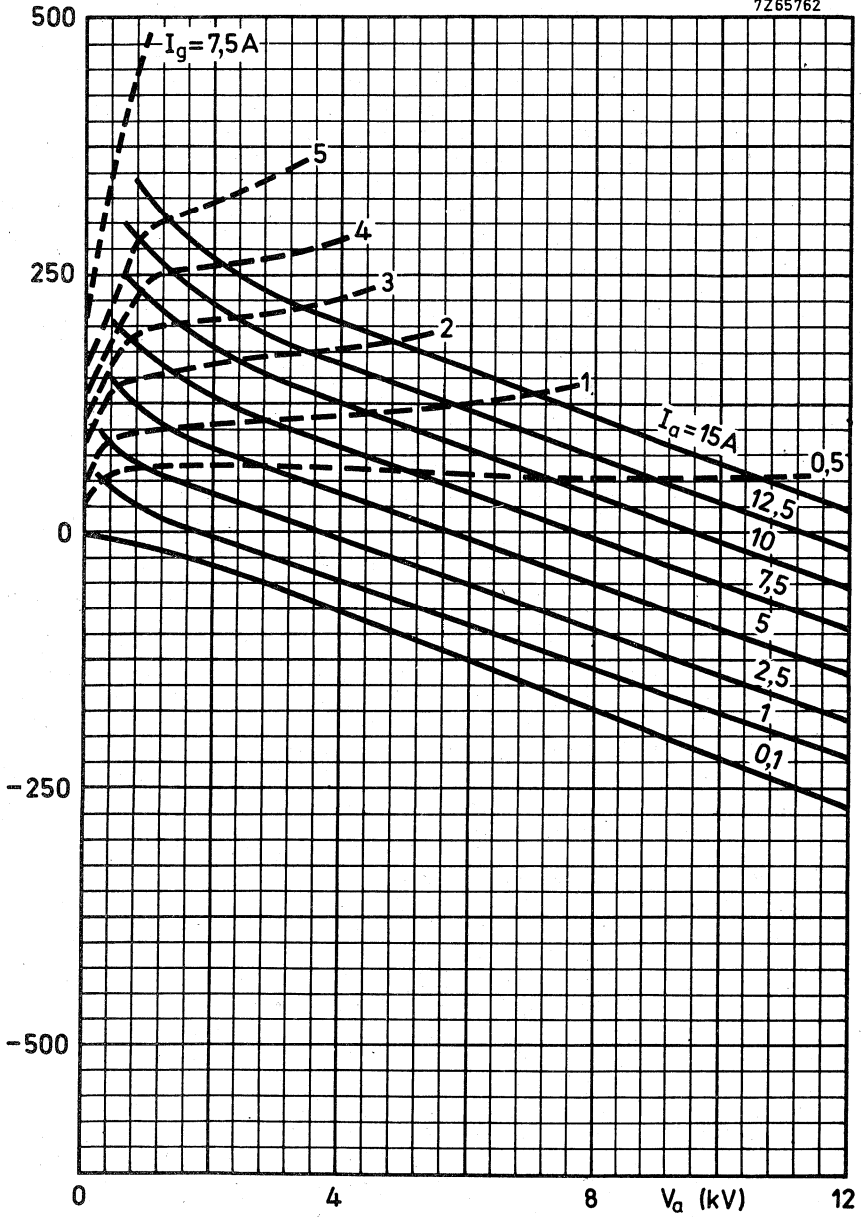

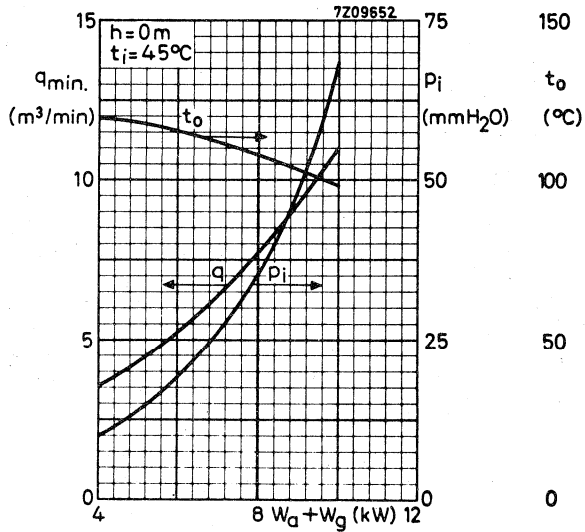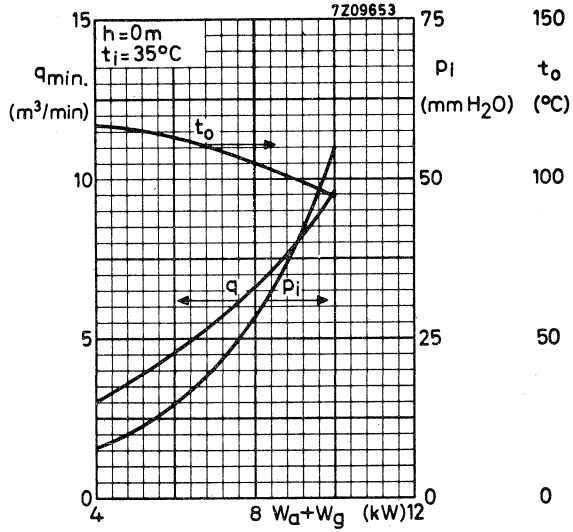

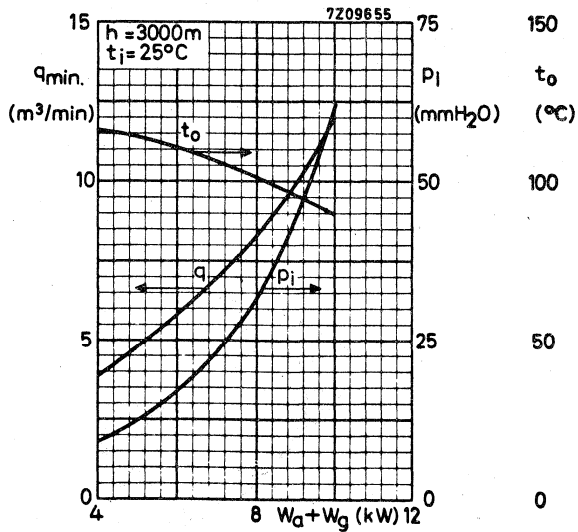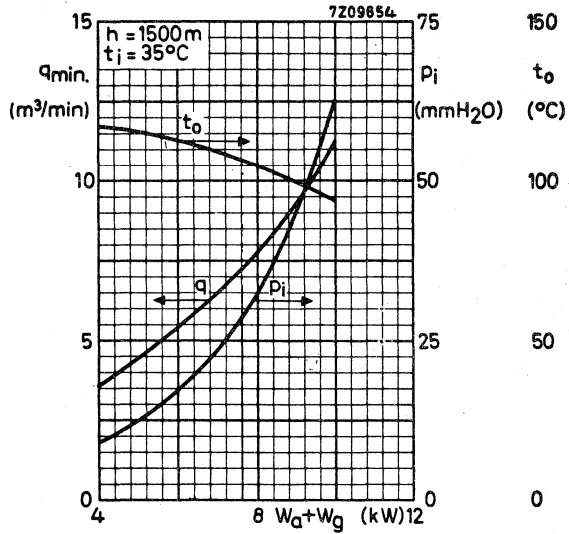



## WATER COOLED R.F. INDUSTRIAL TRIODE

Water-cooled triode of metal-ceramic construction with integral helical cooler intended for use as an industrial oscillator

### QUICK REFERENCE DATA

Oscillator output power ( $W_o - W_{\text{feedb}}$ ), typical	$W_{\text{osc}}$	26,5	kW
Frequency for full ratings	$f \text{ max}$	120	MHz

To be read in conjunction with "General Operational Recommendations Transmitting tubes, Tubes for R.F. heating"

### R.F. CLASS C OSCILLATOR FOR INDUSTRIAL USE

#### OPERATING CONDITIONS

		120	120	120	
Frequency	$f$	120	120	120	MHz
Oscillator output power ( $W_o - W_{\text{feedb}}$ )	$W_{\text{osc}}$	15,6	22,0	26,5	kW
Anode voltage	$V_a$	6	8	10	kV
Anode current	$I_a$	3,6	3,6	3,4	A
Anode input power	$W_{ia}$	21,6	28,8	34,0	kW
Anode dissipation	$W_a$	5,4	6,1	6,8	kW
Anode output power	$W_o$	16,2	22,7	27,2	kW
Anode efficiency	$\eta_a$	75	78,8	80	%
Oscillator efficiency	$\eta_{\text{osc}}$	72,2	76,3	78,0	%
Feedback ratio	$V_{gp}/V_{ap}$	12	10	9	%
Grid resistor	$R_g$	300	400	560	$\Omega$
Grid current, on load	$I_g$	1,0	1,0	0,9	A
Grid voltage, negative	$-V_g$	300	400	500	V
Grid dissipation	$W_g$	290	290	240	W
Grid resistor dissipation	$W_{Rg}$	300	400	450	W

**LIMITING VALUES** (Absolute max. rating system)

Frequency for full ratings	f	up to	120	MHz <sup>1)</sup>
Anode voltage	V <sub>a</sub>	max.	12	kV
Anode current	I <sub>a</sub>	max.	4	A
Anode input power	W <sub>ia</sub>	max.	40	kW
Anode dissipation	W <sub>a</sub>	max.	15	kW
Grid voltage	-V <sub>g</sub>	max.	1,5	kV
Grid current, on load off load	I <sub>g</sub>	max.	1,1	A
	I <sub>g</sub>	max.	1,6	A
Grid dissipation	W <sub>g</sub>	max.	350	W
Grid circuit resistance	R <sub>g</sub>	max.	10	kΩ
Cathode current, mean peak	I <sub>k</sub>	max.	5	A
	I <sub>kp</sub>	max.	25	A
Envelope temperature	t <sub>env</sub>	max.	240	°C

**HEATING** : direct; filament thoriated tungsten.

Filament voltage	V <sub>f</sub>		5,8	V
Filament current	I <sub>f</sub>		130	A
Peak filament starting current	I <sub>fp</sub>	max.	800	A
Cold filament resistance	R <sub>f0</sub>		5,6	mΩ

The filament is designed to accept temporary fluctuations of + 5 % and - 10 %

To ensure that the cathode temperature remains constant irrespective of the operating frequency it may be necessary to reduce the filament voltage at higher frequencies. When doing so it must be borne in mind that the filament voltage-to-current ratio, as measured with only the filament voltage applied, should remain constant under all operating conditions

It is extremely important that the filament be properly decoupled. This should be so done that the resonance of the circuit formed by the filament and decoupling elements remains below the fundamental oscillator frequency. In grounded-grid circuits this resonance should be below the grid-cathode resonance. For further information please see Application Book "Tubes for R.F. heating" or contact the manufacturer.

<sup>1)</sup> When the tubes are to be used at frequencies above 30 MHz the manufacturer should be consulted for more detailed information.

**CAPACITANCES**

Anode to filament	$C_{af}$	0,4	pF
Grid to filament	$C_{gf}$	47	pF
Anode to grid	$C_{ag}$	17	pF

**CHARACTERISTICS** at  $V_a = 12$  kV,  $I_a = 2$  A

Transconductance	S	33	mA/V
Amplification factor	$\mu$	44	

**COOLING**

Anode + grid dissipation $W_a + W_g$ (kW)	Inlet temperature $t_i$ (°C)	Rate of flow $q_{min}$ (l/min)	Pressure drop $P_i$ (kPa)	Outlet temperature $t_o$ (°C)
15	20	7,5	50	50
	50	11,0	100	71
10	20	5,0	24	51
	50	7,2	47	72
5	20	2,5	7	53
	50	3,7	17	73

Absolute max. water inlet temperature  $t_i$  max 50 °C

At frequencies > 4 MHz, air-cooling of the seals becomes mandatory.

To obtain optimum life, the seal/envelope temperature under continuously loaded conditions should be kept at or below 200 °C

**ACCESSORIES**




Filament connector with cable	type	40692	net weight	450 g
Filament/cathode connector with cable	type	40693	net weight	480 g
Grid connector	$f \leq 4$ MHz	type	40690	net weight 55 g
	$f > 4$ MHz	type	40691	net weight 240 g

MECHANICAL DATA

Dimensions in mm

Mounting position: Vertical with anode up or down


Net weight: approx. 6,5 kg

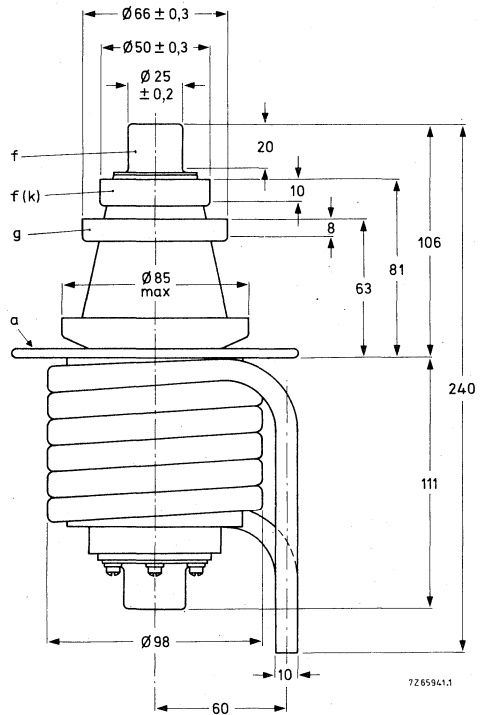
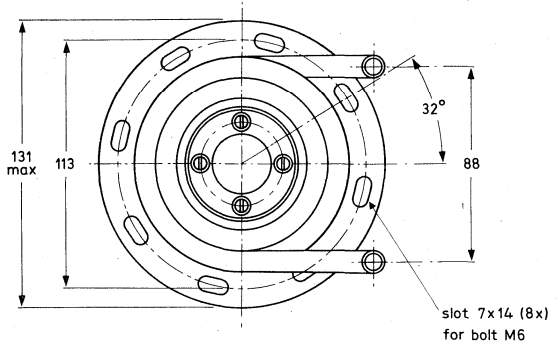


With the anode up the water connections should be interchanged.



7Z65762

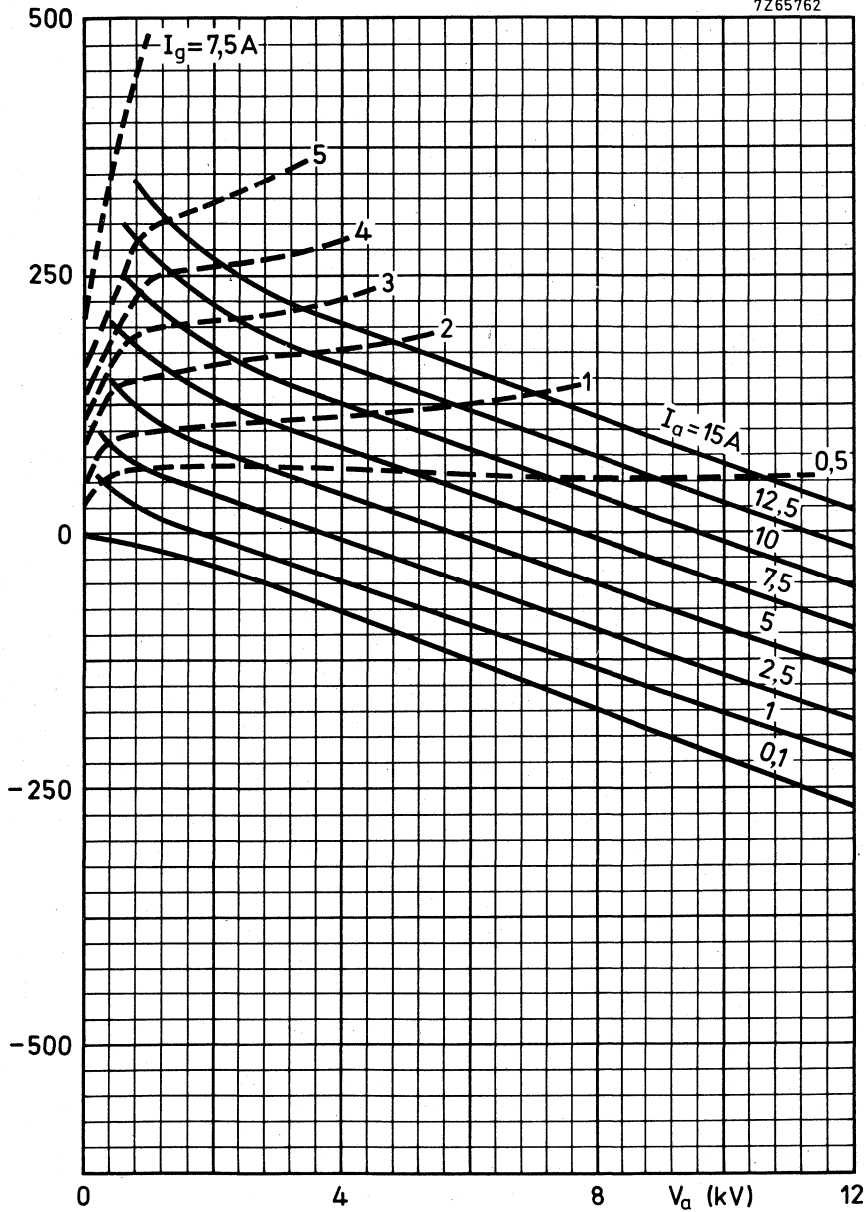

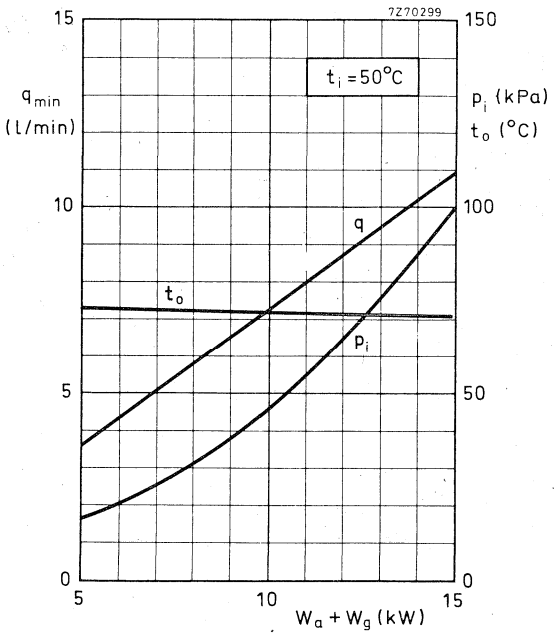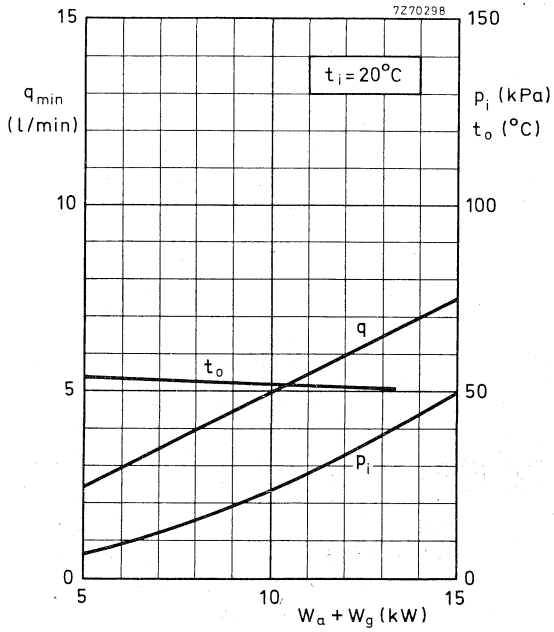

## AIR COOLED R.F. INDUSTRIAL TRIODE

Forced air cooled triode of metal-ceramic construction with integral cooler intended for use as an industrial oscillator.

### QUICK REFERENCE DATA

Oscillator output power ( $W_o - W_{\text{feedb}}$ ), typical	$W_{\text{osc}}$	31.6	kW
Frequency for full ratings	f	max. 100	MHz

To be read in conjunction with "General Recommendations Transmitting tubes, Tubes for R. F. heating"

### R.F. CLASS C OSCILLATOR FOR INDUSTRIAL USE

#### OPERATING CONDITIONS

Frequency	f	90	MHz
Oscillator output power ( $W_o - W_{\text{feedb}}$ )	$W_{\text{osc}}$	31.6	kW
Anode voltage	$V_a$	7.5	kV
Anode current	$I_a$	5.4	A
Anode input power	$W_{ia}$	40.5	kW
Anode dissipation	$W_a$	7.5	kW
Anode output power	$W_o$	33.0	kW
Anode efficiency	$\eta_a$	81.5	%
Oscillator efficiency	$\eta_{\text{osc}}$	78.0	%
Feedback ratio	$V_{gp}/V_{ap}$	14.8	%
Grid resistor	$R_g$	450	$\Omega$
Grid current, on load	$I_g$	1.45	A
Grid voltage, negative	$-V_g$	652	V
Grid dissipation	$W_g$	450	W
Grid resistor dissipation	$WR_g$	946	W

**LIMITING VALUES** (Absolute max. rating system)

Frequency	f	up to	100	MHz
Anode voltage	$V_a$	max.	9	kV
Anode current	$I_a$	max.	6	A
Anode input power	$W_{i_a}$	max.	45	kW
Anode dissipation, continuous service	$W_a$	max.	15	kW
Grid voltage	$-V_g$	max.	1.25	kV
Grid current, on load	$I_g$	max.	1.6	A
off load	$I_g$	max.	2.4	A
Grid dissipation	$W_g$	max.	500	W
Grid circuit resistance	$R_g$	max.	10	k $\Omega$
Cathode current, mean	$I_k$	max.	7.5	A
peak	$I_{k_p}$	max.	40	A
Envelope temperature	$t_{env}$	max.	240	$^{\circ}C$

**HEATING** : direct ; filament thoriated tungsten, mesh construction

Filament voltage	$V_f$		7	V
Filament current	$I_f$		175	A
Peak filament starting current	$I_{f_p}$	max.	1000	A
Cold filament resistance	$R_{f_0}$		4.2	m $\Omega$

The filament is designed to accept temporary fluctuations of +5% and -10%.

To ensure that the cathode temperature remains constant irrespective of the operating frequency, it may be necessary to reduce the filament voltage at higher frequencies. When doing so it must be borne in mind that the filament voltage-to-current ratio measured with only the filament voltage applied should remain constant under all operating conditions.

It is extremely important that the filament be properly decoupled. This should be so done that the resonance of the circuit formed by the filament and decoupling elements remains below the fundamental oscillator frequency. In grounded-grid circuits this resonance should be below the grid-cathode resonance. For further information please see Application Book "Tubes for R.F. heating" or contact the manufacturer.

**CAPACITANCES**

Anode to filament	$C_{af}$		1	pF
Grid to filament	$C_{gf}$		61	pF
Anode to grid	$C_{ag}$		32	pF

**CHARACTERISTICS** measured at  $V_a = 12$  kV,  $I_a = 2$  A

Transconductance	S		40	mA/V
Amplification factor	$\mu$		50	

## COOLING

See also cooling curves

With insulating pedestal type 40648

Anode+grid dissipation $W_a + W_g$ (kW)	Altitude  h (m)	Inlet temperature $t_i$ (°C)	Rate of flow $q_{min}$ (m <sup>3</sup> /min)	Pressure drop $P_i$ (mmH <sub>2</sub> O)	Outlet temperature $t_o$ (°C)
15	0	35	15	85	92
10	0	35	9.3	32	99
8	0	35	7	20	104
15	0	45	17.3	106	98
10	0	45	10.7	40	104
8	0	45	8.1	25	108
15	1500	35	18	97	93
10	1500	35	11.2	46	100
8	1500	35	8.4	23	104
15	3000	25	19	95	90
10	3000	25	11.8	45	95
8	3000	25	8.9	23	99

No additional cooling of the seals is required at frequencies < 4 MHz.

Preferred direction of air flow, especially at the higher operating frequencies : see outline drawing.

To obtain optimum life, the seal/envelope temperature under continuous loaded conditions should be kept at or below 200 °C.

## ACCESSORIES


Filament connector with cable	type 40708	net weight	600 g
Filament/cathode connector with cable	type 40709	net weight	640 g
Grid connector	$f \leq 4$ MHz	type 40710	net weight 60 g
	$f > 4$ MHz	type 40711	net weight 310 g
Insulating pedestal	type 40648	net weight	7.15 kg


MECHANICAL DATA





Dimensions in mm

Mounting position: vertical with anode up or down

Net weight: approx. 12.1 kg


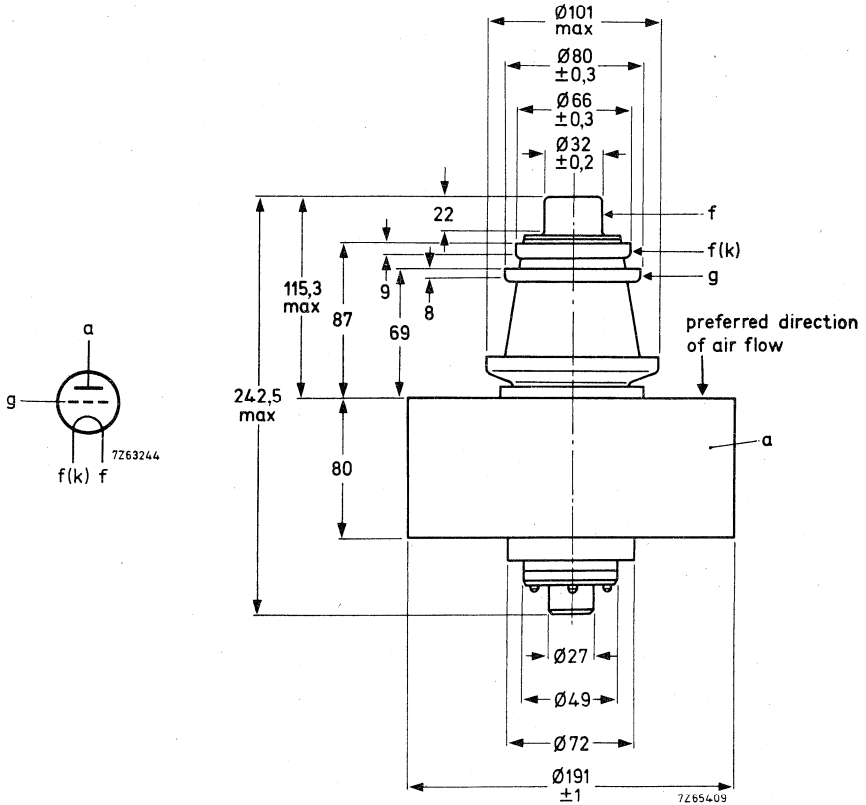


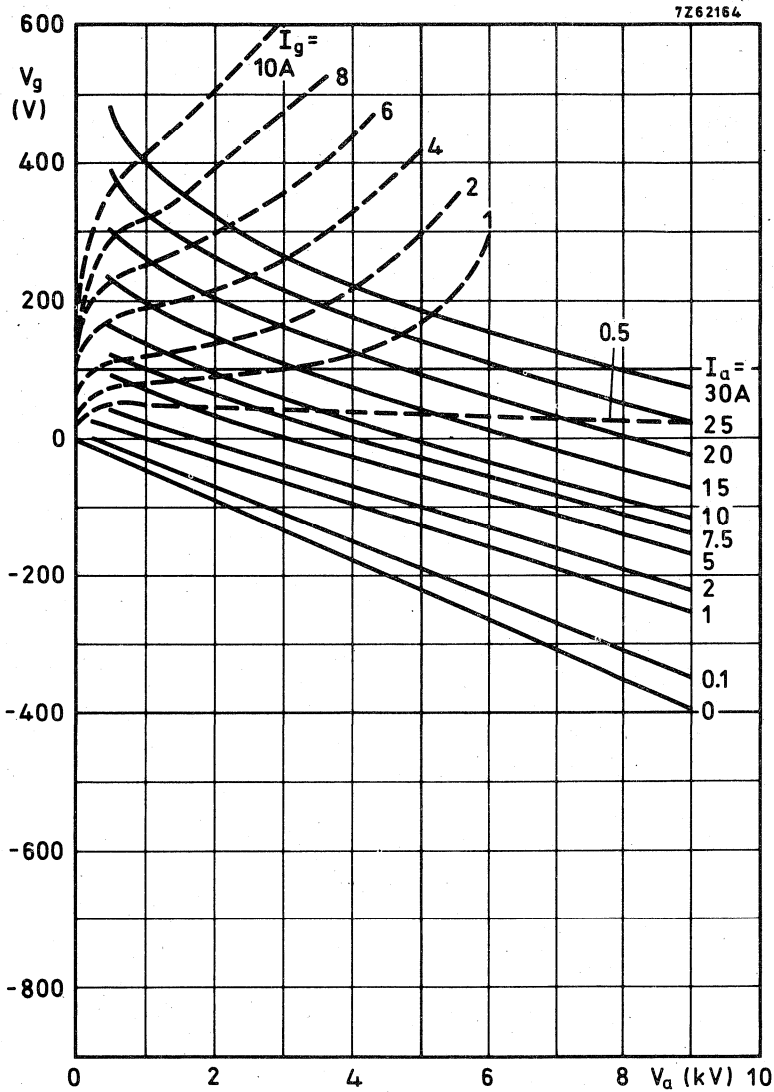

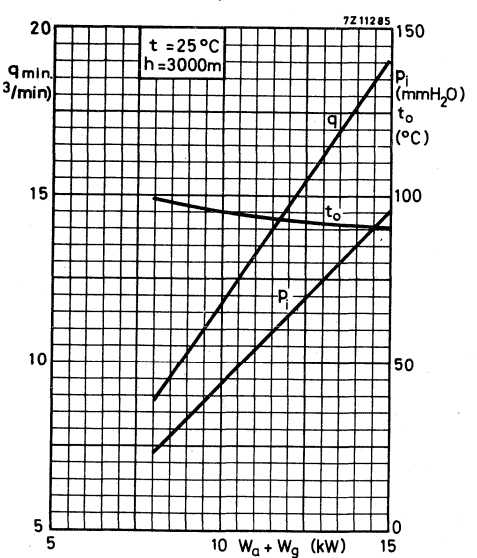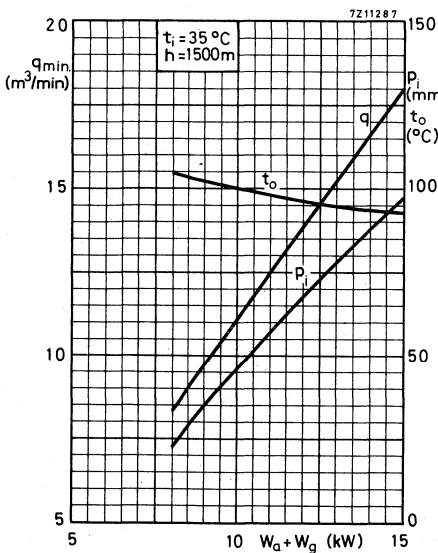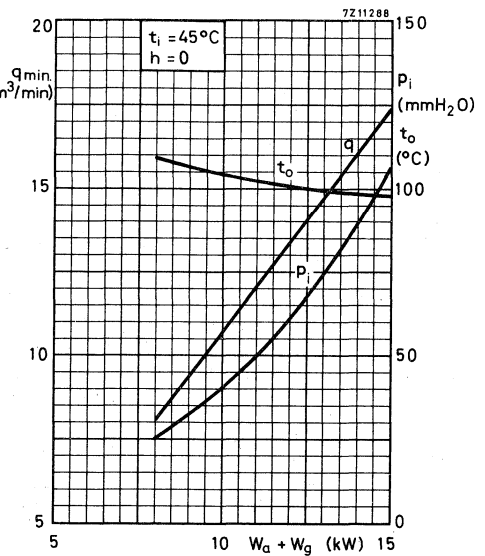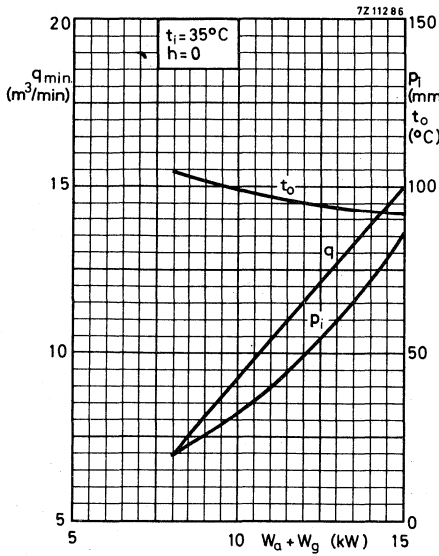



72624631

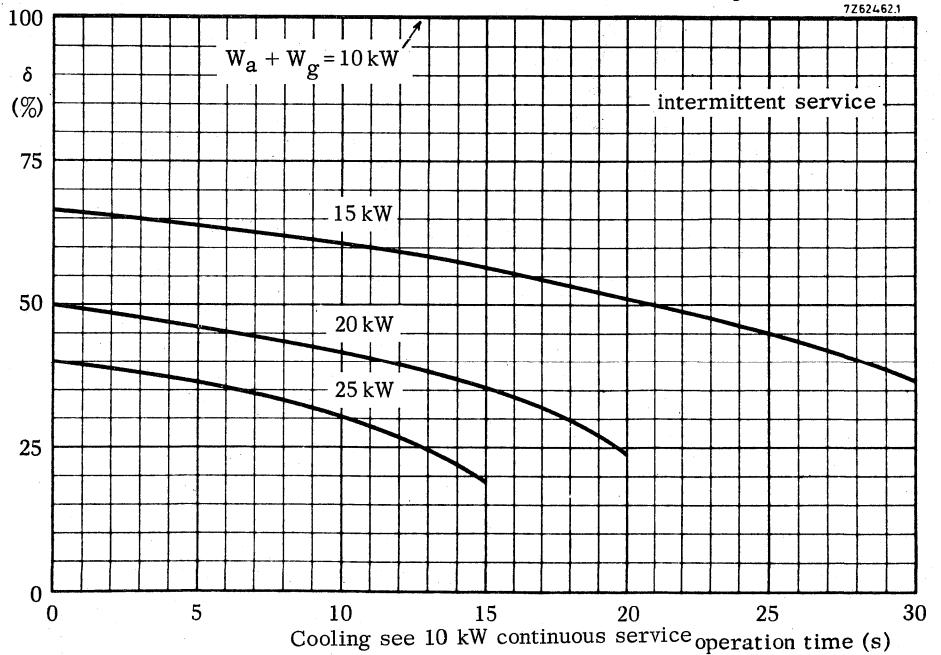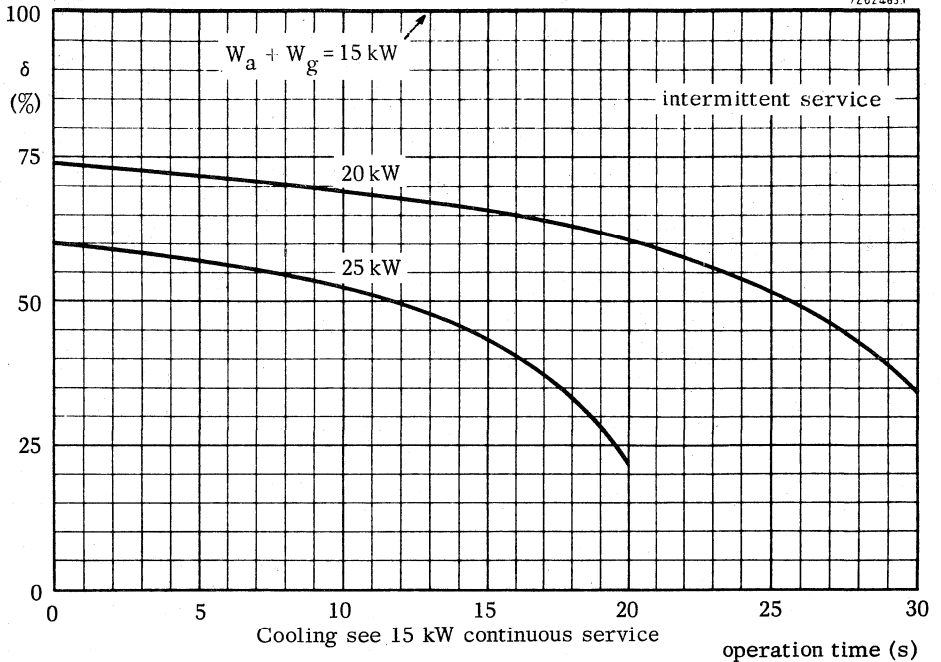



## WATER COOLED R.F. INDUSTRIAL TRIODE

Water cooled triode of metal-ceramic construction with integral cooler intended for use as an industrial oscillator.

### QUICK REFERENCE DATA

Oscillator output power ( $W_o - W_{\text{feedb}}$ ), typical	$W_{\text{osc}}$	31.6 kW
Frequency for full ratings	f	max. 100 MHz

To be read in conjunction with "General Recommendations Transmitting tubes, Tubes for R. F. heating.

### R.F. CLASS C OSCILLATOR FOR INDUSTRIAL USE

#### OPERATING CONDITIONS

Frequency	f	90 MHz
Oscillator output power ( $W_o - W_{\text{feedb}}$ )	$W_{\text{osc}}$	31.6 kW
Anode voltage	$V_a$	7.5 kV
Anode current	$I_a$	5.4 A
Anode input power	$W_{\text{ia}}$	40.5 kW
Anode dissipation	$W_a$	7.5 kW
Anode output power	$W_o$	33.0 kW
Anode efficiency	$\eta_a$	81.5 %
Oscillator efficiency	$\eta_{\text{osc}}$	78 %
Feedback ratio	$V_{\text{gp}}/V_{\text{ap}}$	14.8 %
Grid resistor	$R_g$	450 $\Omega$
Grid current, on load	$I_g$	1.45 A
Grid voltage, negative	$-V_g$	652 V
Grid dissipation	$W_g$	450 W
Grid resistor dissipation	$W_{Rg}$	946 W

**LIMITING VALUES** (Absolute max. rating system)

Frequency	f	up to	100	MHz
Anode voltage	$V_a$	max.	9	kV
Anode current	$I_a$	max.	6	A
Anode input power	$W_{I_a}$	max.	45	kW
Anode dissipation	$W_a$	max.	20	kW
Grid voltage	$-V_g$	max.	1.25	kV
Grid current, on load	$I_g$	max.	1.6	A
off load	$I_g$	max.	2.4	A
Grid dissipation	$W_g$	max.	500	W
Grid circuit resistance	$R_g$	max.	10	k $\Omega$
Cathode current, mean	$I_k$	max.	7.5	A
peak	$I_{kp}$	max.	40	A
Envelope temperature	$t_{env}$	max.	240	$^{\circ}C$

**HEATING** : direct; filament thoriated tungsten, mesh construction

Filament voltage	$V_f$		7	V
Filament current	$I_f$		175	A
Peak filament starting current	$I_{fp}$	max.	1000	A
Cold filament resistance	$R_{f0}$		4.2	m $\Omega$

The filament is designed to accept temporary fluctuations of +5% and -10%.

To ensure that the cathode temperature remains constant irrespective of the operating frequency, it may be necessary to reduce the filament voltage at higher frequencies. When doing so it must be borne in mind that the filament voltage-to-current ratio measured with only the filament voltage applied should remain constant under all operating conditions.

It is extremely important that the filament be properly decoupled. This should be so done that the resonance of the circuit formed by the filament and decoupling elements remains below the fundamental oscillator frequency. In grounded-grid circuits this resonance should be below the grid-cathode resonance. For further information please see Application Book "Tubes for R. F. heating" or contact the manufacturer.

**CAPACITANCES**

Anode to filament	$C_{af}$		1	pF
Grid to filament	$C_{gf}$		61	pF
Anode to grid	$C_{ag}$		32	pF

**CHARACTERISTICS** measured at  $V_a = 12$  kV,  $I_a = 2$  A

Transconductance	S		40	mA/V
Amplification factor	$\mu$		50	

**COOLING**

See also cooling curves

Anode + grid dissipation $W_a + W_g$ (kW)	Inlet temperature $t_i$ (°C)	Rate of flow $Q_{min}$ (ℓ/min)	Pressure drop $P_i$ (atm)	Outlet temperature $t_o$ (°C)
20	20	10	0.40	51
	50	15	0.80	71
15	20	7.5	0.22	54
	50	10.5	0.43	73
10	20	4.5	0.10	58
	50	6.7	0.20	75

Absolute max. water inlet temperature  $t_i$  max. 50 °C

Absolute max. water pressure  $p$  max.  $6 \times 10^5$  Pa = 6 atm abs ←

To obtain optimum life, the seal/envelope temperature under continuously loaded conditions should be kept at or below 200 °C.

No additional cooling of the seals is required at frequencies below 4 MHz. At frequencies above 4 MHz air cooling of the seals becomes mandatory.

**ACCESSORIES**




Filament connector		type	40708	net weight	600	g
Filament/cathode connector		type	40709	net weight	640	g
Grid connector	$f \leq 4$ MHz	type	40710	net weight	60	g
	$f > 4$ MHz	type	40711	net weight	310	g

MECHANICAL DATA


Dimensions in mm



Mounting position: vertical with anode up or down.

When the tube is used with anode up the water connections should be interchanged.

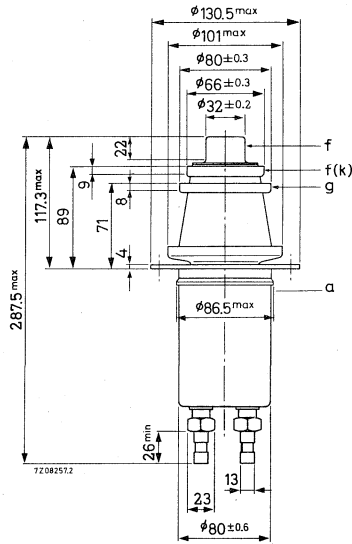

Water inlet and outlet connections use British Standard Pipe  $\frac{1}{2}$  in thread.

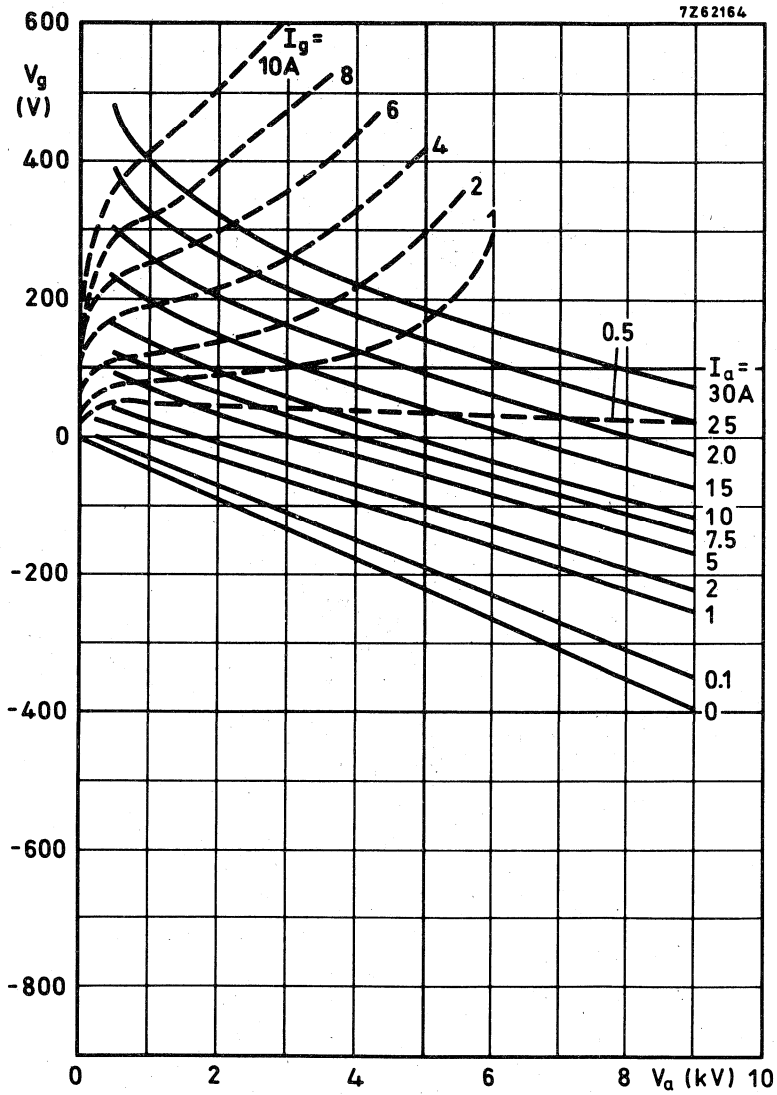

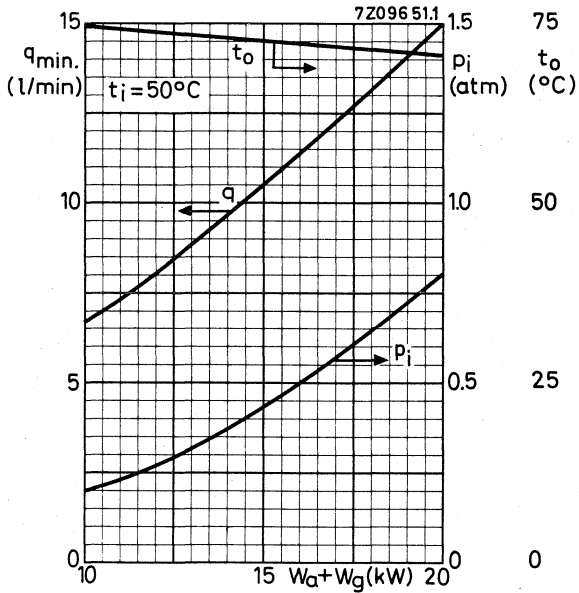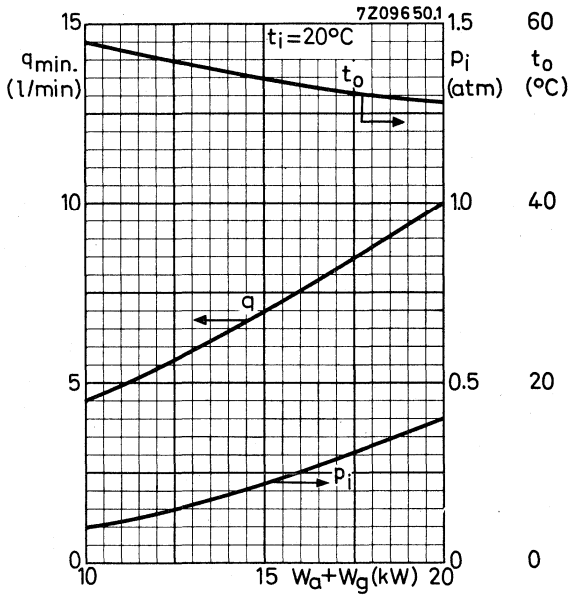



## AIR COOLED R.F. INDUSTRIAL TRIODE

Forced-air cooled triode of metal-ceramic construction with integral brazed radiator intended for use as an industrial oscillator.

QUICK REFERENCE DATA			
Oscillator output power ( $W_o - W_{\text{feedb}}$ ), typical	$W_{\text{osc}}$	50	kW
Frequency for full ratings	f	max. 100	MHz

To be read in conjunction with "General Recommendations Transmitting tubes, Tubes for R.F. heating".

### R.F. CLASS C OSCILLATOR FOR INDUSTRIAL USE

#### OPERATING CONDITIONS

Frequency	f	90	90	90	MHz
Oscillator output power ( $W_o - W_{\text{feedb}}$ )	$W_{\text{osc}}$	33.4	40	50	kW
Anode voltage	$V_a$	8.5	10	12	kV
Anode current	$I_a$	5.4	5.33	5.33	A
Anode input power	$W_{ia}$	45.9	53.3	64	kW
Anode dissipation	$W_a$	11.4	12.1	12.8	kW
Anode output power	$W_o$	34.5	41.2	51.2	kW
Anode efficiency	$\eta_a$	75.1	77.3	80.0	%
Oscillator efficiency	$\eta_{\text{osc}}$	72.7	75.0	78.1	%
Feedback ratio	$V_{gp}/V_{ap}$	11	10.2	9	%
Grid resistor	$R_g$	330	400	430	$\Omega$
Grid current, on load	$I_g$	1.5	1.45	1.4	A
Grid voltage, negative	$-V_g$	495	580	600	V
Grid dissipation	$W_g$	400	380	360	W
Grid resistor dissipation	$W_{R_g}$	740	840	840	W

**LIMITING VALUES** (Absolute max. rating system)

Frequency for full ratings	f	up to	100	MHz
Anode voltage	$V_a$	max.	14.4	kV
Anode current	$I_a$	max.	6	A
Anode input power	$W_{i_a}$	max.	72	kW
Anode dissipation, continuous service	$W_a$	max.	15	kW
Grid voltage	$-V_g$	max.	1.5	kV
Grid current, on load	$I_g$	max.	1.6	A
off load	$I_g$	max.	2.4	A
Grid dissipation	$W_g$	max.	500	W
Grid circuit resistance	$R_g$	max.	10	$k\Omega$
Cathode current, mean	$I_k$	max.	7.5	A
peak	$I_{k_p}$	max.	40	A
Envelope temperature	$t_{env}$	max.	240	$^{\circ}C$

**HEATING:** direct; filament thoriated tungsten, mesh construction

Filament voltage	$V_f$		7	V
Filament current	$I_f$		175	A
Peak filament starting current	$I_{f_p}$	max.	1000	A
Cold filament resistance	$R_{f_0}$		4.2	$m\Omega$

The filament is designed to accept temporary fluctuations of +5% and -10%.

To ensure that the cathode temperature remains constant irrespective of the operating frequency, it may be necessary to reduce the filament voltage at higher frequencies. When doing so it must be borne in mind that the filament voltage-to-current ratio measured with only the filament voltage applied should remain constant under all operating conditions

It is extremely important that the filament be properly decoupled. This should be so done that the resonance of the circuit formed by the filament and decoupling elements remains below the fundamental oscillator frequency. In grounded-grid circuits this resonance should be below the grid-cathode resonance. For further information please see Application Book "Tubes for R.F. heating" or consult the manufacturer.

**CAPACITANCES**

Anode to filament	$C_{af}$		1	pF
Grid to filament	$C_{gf}$		61	pF
Anode to grid	$C_{ag}$		22	pF

**CHARACTERISTICS** measured at  $V_a = 12$  kV,  $I_a = 2$  A

Transconductance	S		40	mA/V
Amplification factor	$\mu$		50	

**COOLING**

With insulating pedestal type 40648

Anode + grid dissipation $W_a + W_g$ (kW)	Altitude  h (m)	Inlet temperature  $t_i$ (°C)	Rate of flow  $q_{min}$ (m <sup>3</sup> /min)	Pressure drop  $P_i$ (mm H <sub>2</sub> O)	Outlet temperature  $t_o$ (°C)
15	0	35	15	85	92
10	0	35	9.3	35	99
8	0	35	7	22	104
15	0	45	17.3	106	98
10	0	45	10.7	44	104
8	0	45	8.1	27	108
15	1500	35	18	97	93
10	1500	35	11.2	40	100
8	1500	35	8.4	25	104
15	3000	25	19	95	90
10	3000	25	11.8	39	95
8	3000	25	8.9	25	99

No additional cooling of the seals is required at frequencies below 4 MHz.

The above cooling conditions apply to the airflow direction as indicated in the outline drawing. In case of reversed flow direction a larger air volume will be required to keep the anode temperature below the limiting value.

To obtain optimum life, the seal/envelope temperature under continuous loaded conditions should be kept at or below 200 °C.

**ACCESSORIES**


Filament connector with cable	type 40708	net weight	600 g
Filament/cathode connector with cable	type 40709	net weight	640 g
Grid connector	type 40711	net weight	310 g
Insulating pedestal	type 40648	net weight	7.15 kg

MECHANICAL DATA


Dimensions in mm

Mounting position : vertical with anode up or down



Net weight : approx. 12 kg

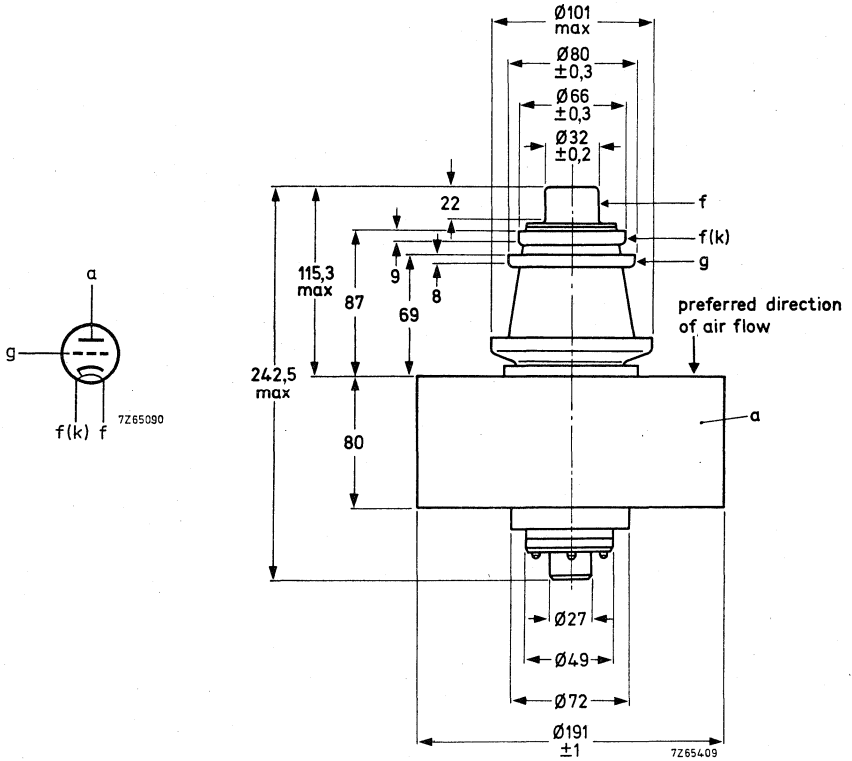

72 624 60

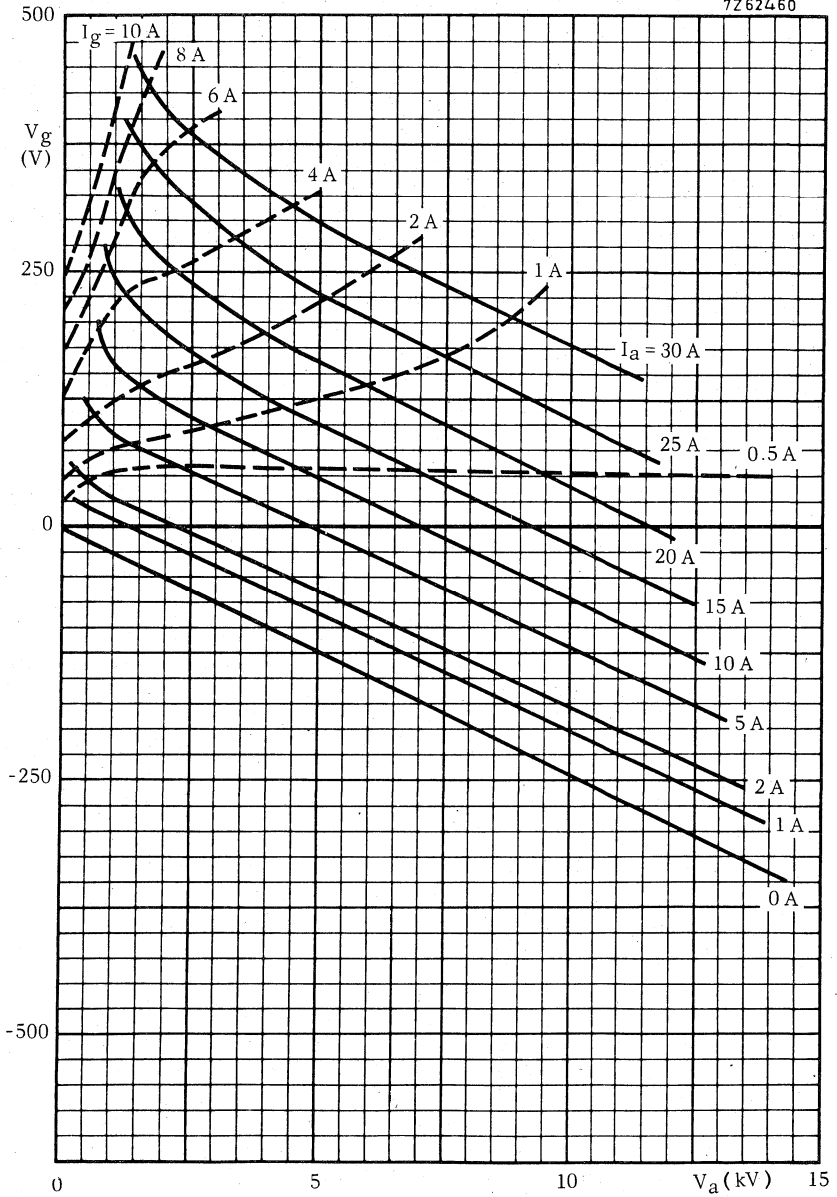

Intermittent service

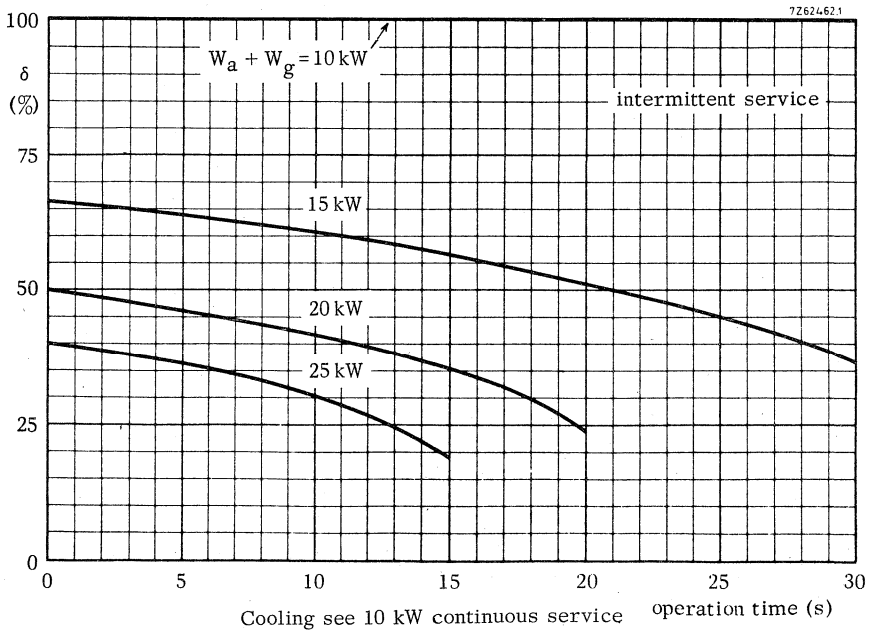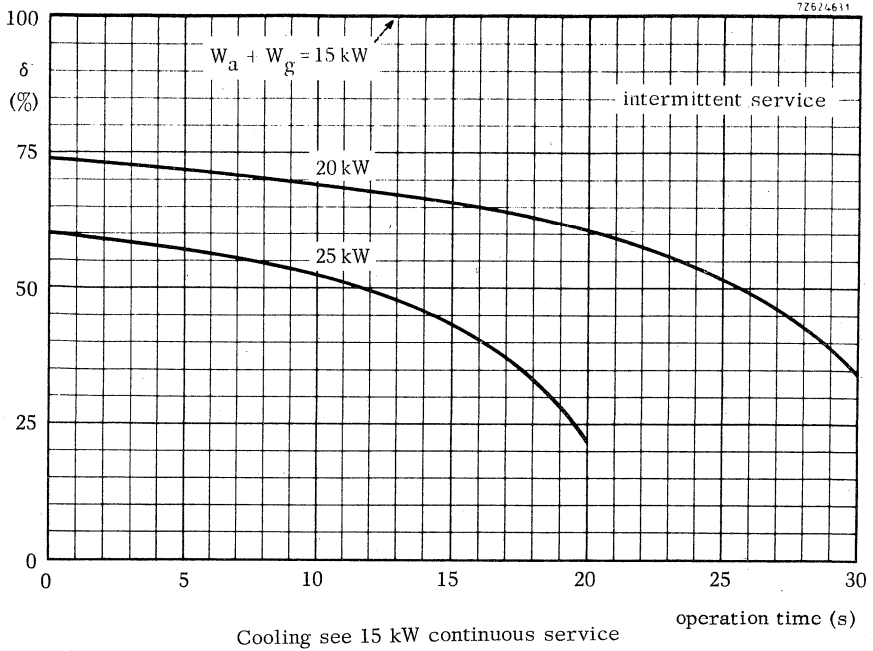

## WATER COOLED R.F. INDUSTRIAL TRIODE

Water-cooled triode of metal-ceramic construction with integral cooler intended for use as an industrial oscillator.

### QUICK REFERENCE DATA

Oscillator output power ( $W_o - W_{\text{feedb}}$ ), typical	$W_{\text{osc}}$	50	kW	
Frequency for full ratings	f	max. 100	MHz	

To be read in conjunction with "General Recommendations Transmitting tubes, Tubes for R. F. heating.

### R.F. CLASS C OSCILLATOR FOR INDUSTRIAL USE

#### OPERATING CONDITIONS

Frequency	f	90	90	90	MHz
Oscillator output power ( $W_o - W_{\text{feedb}}$ )	$W_{\text{osc}}$	33.4	40	50	kW
Anode voltage	$V_a$	8.5	10	12	kV
Anode current	$I_a$	5.4	5.33	5.33	A
Anode input power	$W_{ia}$	45.9	53.3	64	kW
Anode dissipation	$W_a$	11.4	12.1	12.8	kW
Anode output power	$W_o$	34.5	41.2	51.2	kW
Anode efficiency	$\eta_a$	75.1	77.3	80.0	%
Oscillator efficiency	$\eta_{\text{osc}}$	72.7	75.0	78.1	%
Feedback ratio	$V_{gp}/V_{ap}$	11	10.2	9	%
Grid resistor	$R_g$	330	400	430	$\Omega$
Grid current, on load	$I_g$	1.5	1.45	1.4	A
Grid voltage, negative	$-V_g$	495	580	600	V
Grid dissipation	$W_g$	400	380	360	W
Grid resistor dissipation	$W_{Rg}$	740	840	840	W

**LIMITING VALUES** (Absolute max. rating system)

Frequency for full ratings	f	up to	100	MHz
Anode voltage	$V_a$	max.	14.4	kV
Anode current	$I_a$	max.	6	A
Anode input power	$W_{ia}$	max.	72	kW
Anode dissipation	$W_a$	max.	20	kW
Grid voltage	$-V_g$	max.	1.5	kV
Grid current, on load	$I_g$	max.	1.6	A
off load	$I_g$	max.	2.4	A
Grid dissipation	$W_g$	max.	500	W
Grid circuit resistance	$R_g$	max.	10	$k\Omega$
Cathode current, mean	$I_k$	max.	7.5	A
peak	$I_{kp}$	max.	40	A
Envelope temperature	$t_{env}$	max.	240	$^{\circ}C$

**HEATING:** direct; filament thoriated tungsten, mesh construction

Filament voltage	$V_f$		7	V
Filament current	$I_f$		175	A
Peak filament starting current	$I_{fp}$	max.	1000	A
Cold filament resistance	$R_{f0}$		4.2	$m\Omega$

The filament is designed to accept temporary fluctuations of +5% and -10%.

To ensure that the cathode temperature remains constant irrespective of the operating frequency, it may be necessary to reduce the filament voltage at higher frequencies. When doing so it must be borne in mind that the filament voltage-to-current ratio measured with only the filament voltage applied should remain constant under all operating conditions.

It is extremely important that the filament be properly decoupled. This should so be done that the resonance of the circuit formed by the filament and decoupling elements remains below the fundamental oscillator frequency. In grounded-grid circuits this resonance should be below the grid-cathode resonance. For further information please see Application Book "Tubes for R.F. heating" or contact the manufacturer.

**CAPACITANCES**

Anode to filament	$C_{af}$		1	pF
Grid to filament	$C_{gf}$		61	pF
Anode to grid	$C_{ag}$		22	pF

**CHARACTERISTICS** measured at  $V_a = 12$  kV,  $I_a = 2$  A

Transconductance	S		40	mA/V
Amplification factor	$\mu$		50	



## COOLING

Anode + grid dissipation $W_a + W_g$ (kW)	Inlet temperature $t_i$ (°C)	Rate of flow $q_{min}$ (l/min)	Pressure drop $P_i$ (atm)	Outlet temperature $t_o$ (°C)
20	20	10	0.40	51
	50	15	0.80	71
15	20	7	0.22	54
	50	10.5	0.43	73
10	20	4.5	0.10	58
	50	6.7	0.20	75

Absolute max. water inlet temperature  $t_i$  max. 50 °C

Absolute max. water pressure  $p$  max.  $6 \times 10^5$  Pa = 6 atm abs ←

To obtain optimum life, the seal/envelope temperature under continuously loaded conditions should be kept at or below 200°C.

No additional cooling of the seals is required at frequencies below 4 MHz. At frequencies higher than 4 MHz air cooling of the seals becomes mandatory.

## ACCESSORIES




Filament connector with cable	type	40708	net weight	600	g
Filament/cathode connector with cable	type	40709	net weight	640	g
Grid connector	type	40711	net weight	310	g

MECHANICAL DATA

Dimensions in mm


Mounting position : Vertical, with anode up or down

Net weight : approx. 3 kg

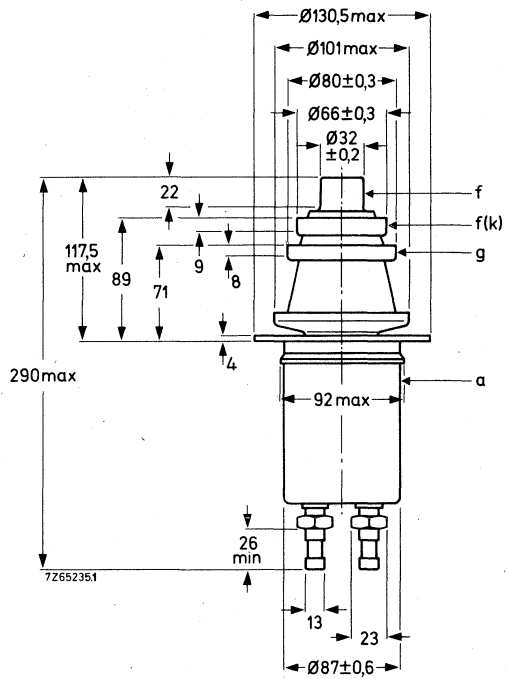

When the tube is used with the anode up the water connections should be interchanged.

7262460

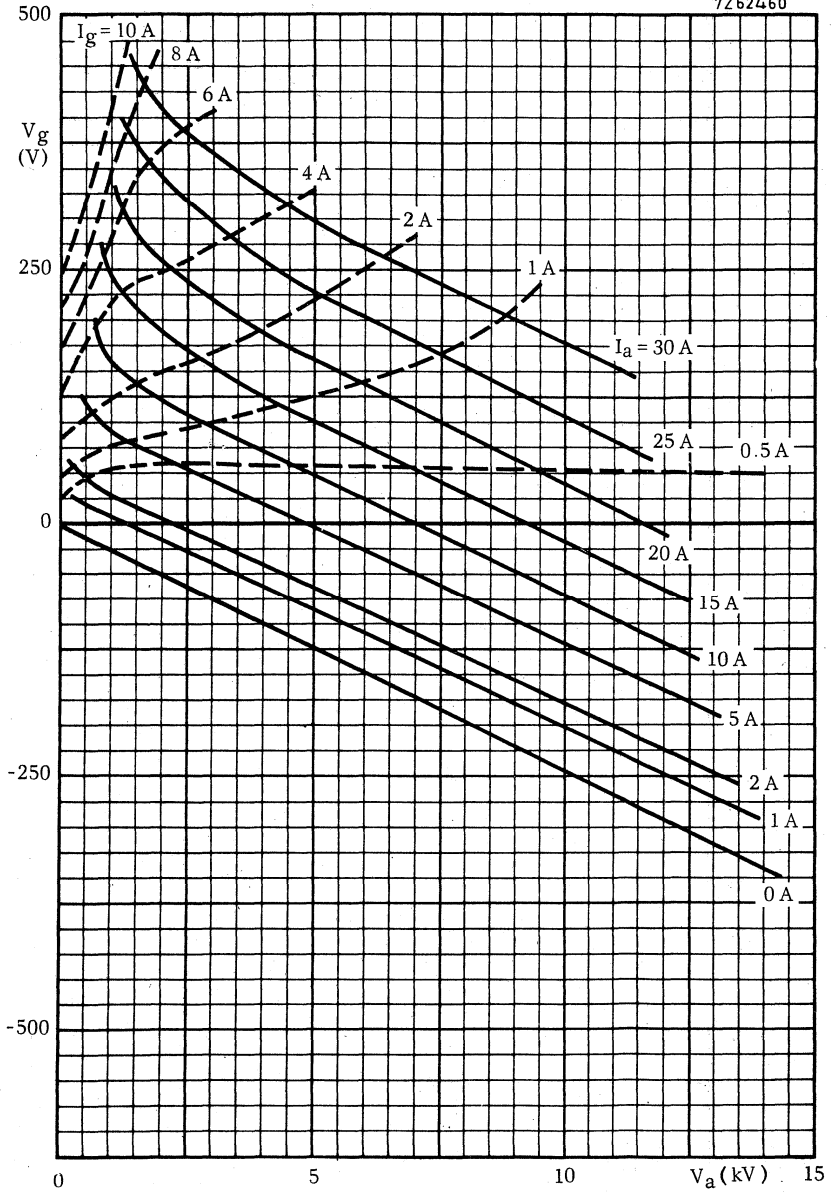



## WATER COOLED R.F. INDUSTRIAL TRIODE

Water-cooled triode of metal-ceramic construction with integral cooler intended for use as an industrial oscillator.

### QUICK REFERENCE DATA

Oscillator output power ( $W_o - W_{feedb}$ ), typical	$W_{osc}$	62.7 kW
Frequency for full ratings	f	max. 100 MHz

To be read in conjunction with "General Recommendations Transmitting tubes , Tubes for R.F. heating."

### R.F. CLASS C OSCILLATOR FOR INDUSTRIAL USE OPERATING CONDITIONS

Frequency	f	30	MHz
Oscillator output power ( $W_o - W_{feedb}$ )	$W_{osc}$	62.7	kW
Anode voltage	$V_a$	8.0	kV
Anode current	$I_a$	10	A
Anode input power	$W_{ia}$	80.0	kW
Anode dissipation	$W_a$	15.0	kW
Anode output power	$W_o$	65.0	kW
Anode efficiency	$\eta_a$	81.2	%
Oscillator efficiency	$\eta_{osc}$	78.4	%
Feedback ratio	$V_{gp}/V_{ap}$	14.6	%
Grid resistor	$R_g$	300	$\Omega$
Grid current, on load	$I_g$	2.25	A
Grid voltage, negative	$-V_g$	675	V
Grid dissipation	$W_g$	750	W
Grid resistor dissipation	$W_{Rg}$	1.52	kW



**CAPACITANCES**

Anode to filament	$C_{af}$	1.3	pF
Grid to filament	$C_{gf}$	100	pF
Anode to grid	$C_{ag}$	45	pF

**CHARACTERISTICS** measured at  $V_a = 8$  kV,  $I_a = 6$  A

Transconductance	S	90	mA/V
Amplification factor	$\mu$	35	

**COOLING**

See also cooling curves

Anode + grid dissipation $W_a + W_g$ (kW)	Inlet temperature $t_i$ (°C)	rate of flow $q$ min ( $\frac{l}{min}$ )	Pressure drop $P_i$ (atm)	Outlet temperature $t_o$ (°C)
40	20	20	0.40	51
	50	30	0.80	71
30	20	14	0.21	53
	50	21	0.43	72
20	20	9	0.10	56
	50	13.5	0.20	74

Absolute max. water inlet temperature  $t_i$  max. 50 °C

Absolute max. water pressure  $p$  max.  $6 \times 10^5$  Pa = 6 atm abs ←

To obtain optimum life, the seal/envelope temperature under continuously loaded conditions should be kept at or below 200 °C.

At frequencies above 4 MHz air cooling of the seals becomes mandatory.

**ACCESSORIES**




Filament connector with cable	type	40705	net weight	700	g	
Filament/cathode connector with cable	type	40706	net weight	830	g	
Grid connector	$f \leq 4$ MHz	type	40707	net weight	75	g
	$f > 4$ MHz	type	40736	net weight	450	g

→ MECHANICAL DATA

Dimensions in mm


Mounting position: vertical with anode up or down



Net weight: approx 6 kg

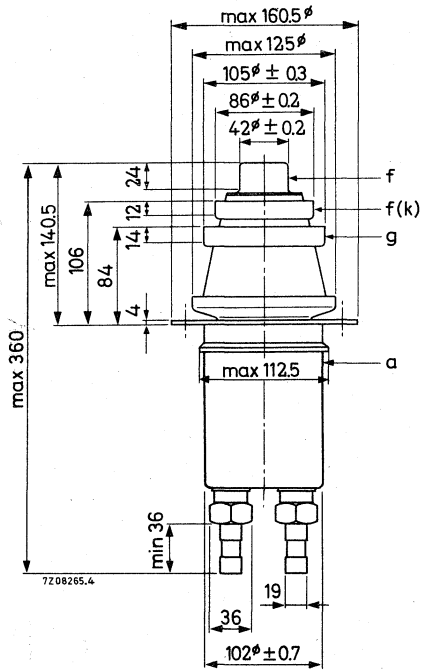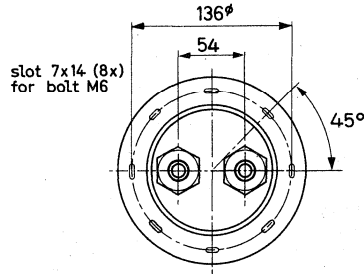

With the anode up the water connections should be interchanged.



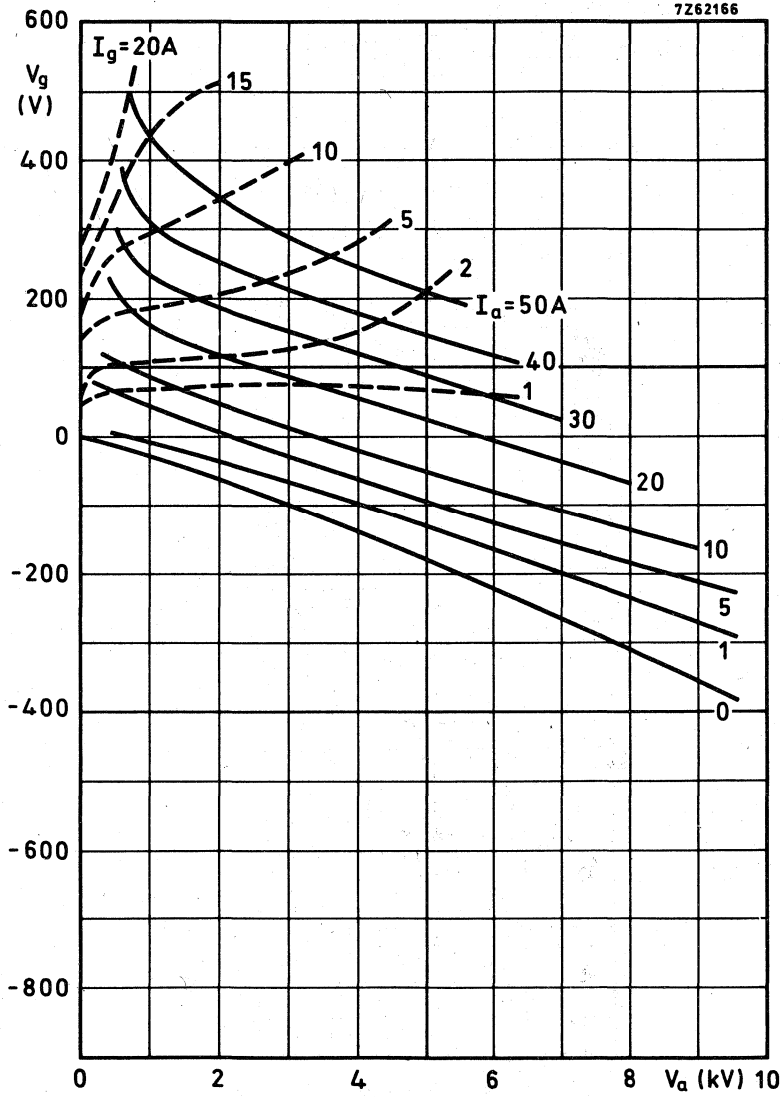

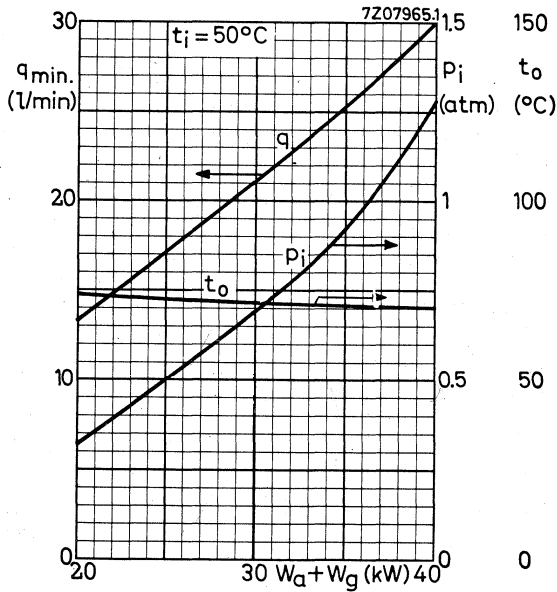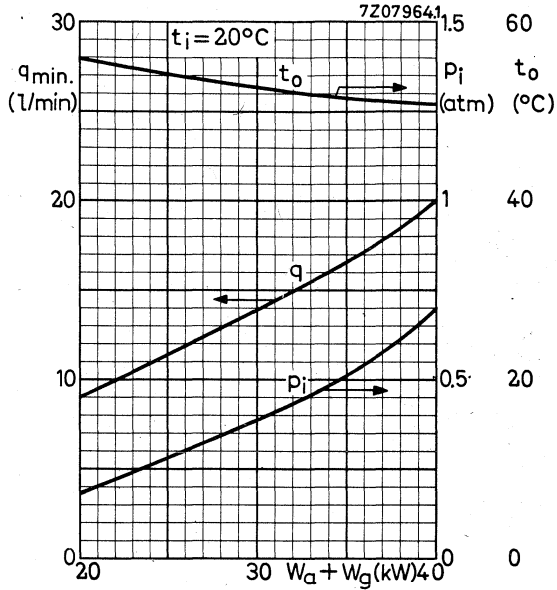

## VAPOUR COOLED R.F. INDUSTRIAL TRIODE

Vapourcooled triode of metal-ceramic construction intended for use as an industrial oscillator.

QUICK REFERENCE DATA			
Oscillator output power ( $W_o - W_{\text{feedb}}$ ), typical	$W_{\text{osc}}$	62.7	kW
Frequency for full ratings	f max.	100	MHz

To be read in conjunction with "General Recommendations Transmitting tubes, Tubes for R.F. heating".

### R.F. CLASS C OSCILLATOR FOR INDUSTRIAL USE

#### OPERATING CONDITIONS

Frequency	f	30	MHz
Oscillator output power ( $W_o - W_{\text{feedb}}$ )	$W_{\text{osc}}$	62.7	kW
Anode voltage	$V_a$	8.0	kV
Anode current	$I_a$	10	A
Anode input power	$W_{ia}$	80	kW
Anode dissipation	$W_a$	15	kW
Anode output power	$W_o$	65	kW
Anode efficiency	$\eta_a$	81.2	%
Oscillator efficiency	$\eta_{\text{osc}}$	78.4	%
Feedback ratio	$V_{\text{gp}}/V_{\text{ap}}$	14.6	%
Grid resistor	$R_g$	300	$\Omega$
Grid current, on load	$I_g$	2.25	A
Grid voltage, negative	$-V_g$	675	V
Grid dissipation	$W_g$	750	W
Grid resistor dissipation	$W_{Rg}$	1.52	kW

**LIMITING VALUES** (Absolute max. rating system)

Frequency for full ratings	f	up to	100	MHz <sup>1)</sup>
Anode voltage	V <sub>a</sub>	max.	9.6	kV
Anode current	I <sub>a</sub>	max.	12	A
Anode input power	W <sub>ia</sub>	max.	96	kW
Anode dissipation	W <sub>a</sub>	max.	40	kW
Grid voltage	-V <sub>g</sub>	max.	1.5	kV
Grid current, on load	I <sub>g</sub>	max.	2.5	A
off load	I <sub>g</sub>	max.	3.5	A
Grid dissipation	W <sub>g</sub>	max.	1	kW
Grid circuit resistance	R <sub>g</sub>	max.	10	kΩ
Cathode current, mean	I <sub>k</sub>	max.	14	A
peak	I <sub>k</sub> <sub>p</sub>	max.	70	A
Envelope temperature	t <sub>env</sub>	max.	240	°C

**HEATING** : direct; filament thoriated tungsten

Filament voltage	V <sub>f</sub>		8.4	V
Filament current	I <sub>f</sub>		235	A
Peak filament starting current	I <sub>f</sub> <sub>p</sub>	max.	1500	A
Cold filament resistance	R <sub>f0</sub>		3.9	mΩ

The filament is designed to accept temporary fluctuations of +5% and -10%.

To ensure that the cathode temperature remains constant irrespective of the operating frequency, it may be necessary to reduce the filament voltage at higher frequencies. When doing so it must be borne in mind that the filament voltage-to-current ratio measured with only the filament voltage applied should remain constant under all operating conditions.

It is extremely important that the filament be properly decoupled. This should be so done that the resonance of the circuit formed by the filament and decoupling elements remains below the fundamental oscillator frequency. In grounded-grid-circuits this resonance should be below the grid-cathode resonance. For further information please see Application Book "Tubes for R.F. heating" or contact the manufacturer.

**CAPACITANCES**

Anode to filament	C <sub>af</sub>		pF
Grid to filament	C <sub>gf</sub>		pF
Anode to grid	C <sub>ag</sub>		pF

**CHARACTERISTICS**      measured at V<sub>a</sub> = 8 kV., I<sub>a</sub> = 6 A

Transconductance	S	90	mA/V
Amplification factor	μ	35	

<sup>1)</sup> When the tube has to be used at frequencies above 30 MHz the manufacturer should be consulted for more detailed information.

**COOLING**

See also cooling curves

With integrated boiler-condenser type K735.

Anode + grid dissipation $W_a + W_g$ (kW)	Inlet temperature $t_i$ (°C)	Rate of flow $q$ min (ℓ/min)	Pressure drop $P_i$ (atm)	Outlet temperature $t_o$ (°C)
40	20	11	0.05	74
	35	15	0.07	74
	50	25	0.16	74
30	20	8	0.03	76
	35	11	0.05	76
	50	17	0.09	76
20	20	5	0.02	80
	35	6.7	0.03	80
	50	10	0.04	80

Air-cooling of seals is required.

To obtain optimum life, the seal/envelope temperature under continuously loaded conditions should be kept at or lower than 200 °C.

**ACCESSORIES**



Filament connector with cable	type 40705	net weight	700 g
Filament/cathode connector with cable	type 40706	net weight	830 g
Grid connector	type 40736	net weight	450 g
Boiler condenser	type K735	net weight	70 kg

MECHANICAL DATA


Dimensions in mm




Mounting position: vertical with anode down

Net weight: approx 15.7 kg

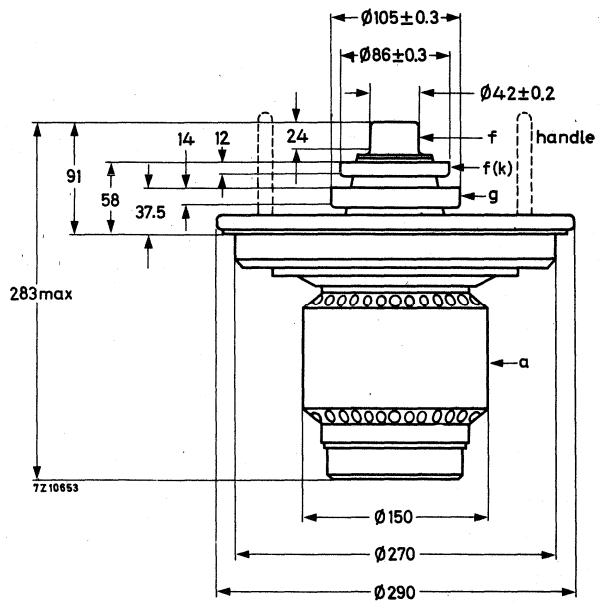

Note: The handles should be removed before switching on the tube.

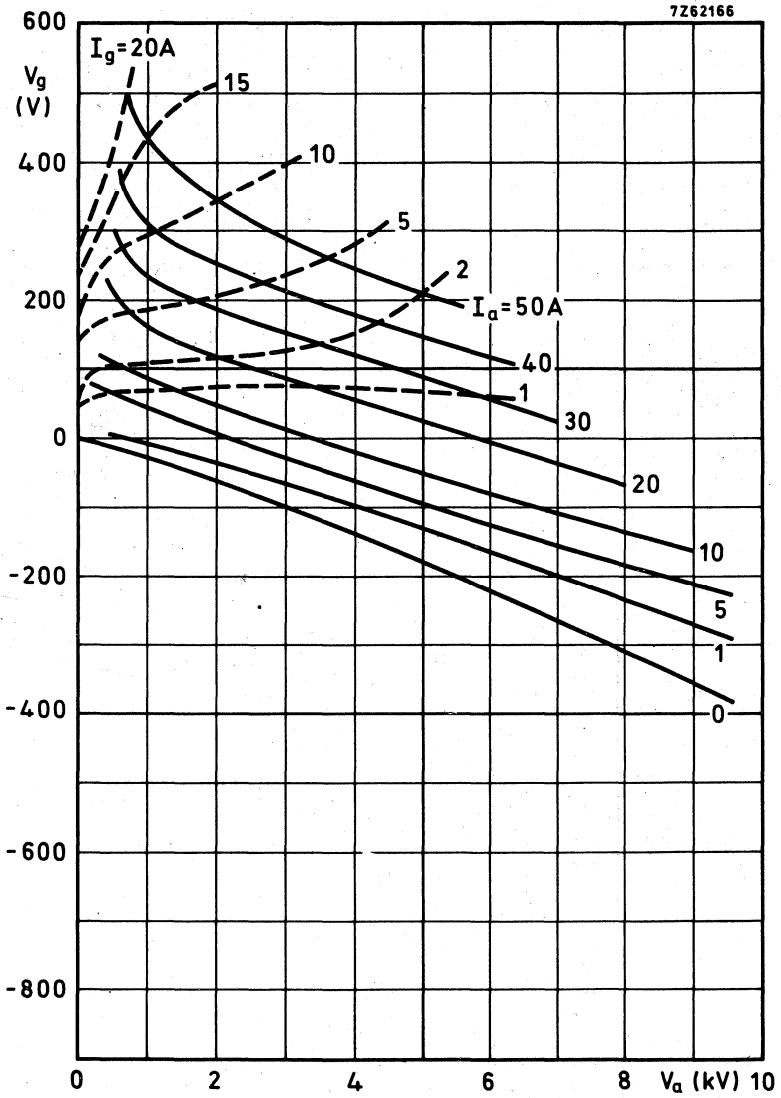

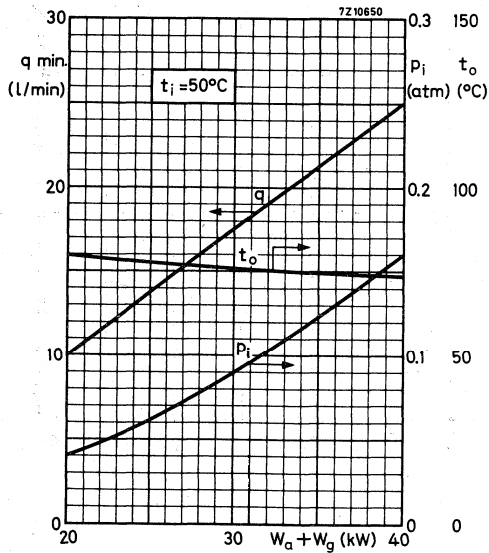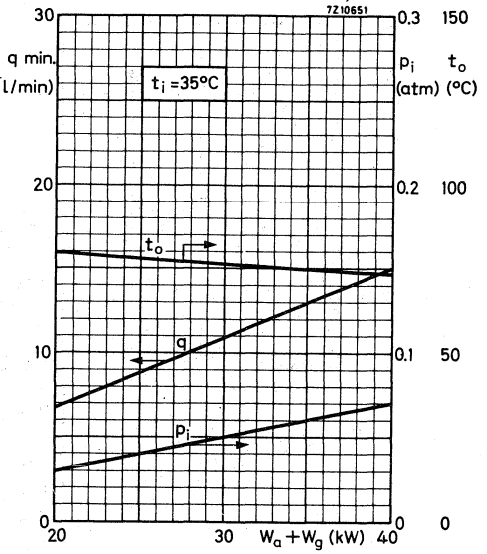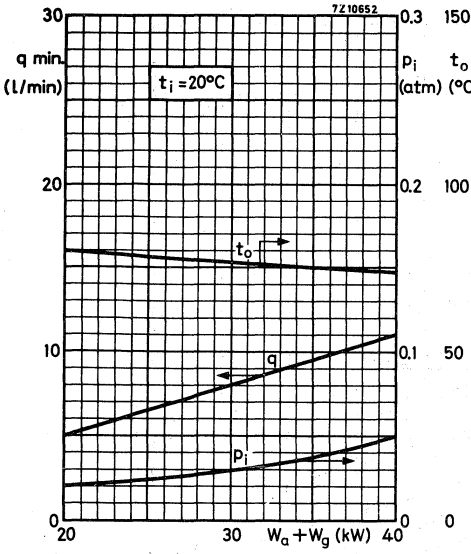



## AIR COOLED R.F. INDUSTRIAL TRIODE

Air-cooled triode of metal-ceramic construction with integral cooler intended for use as an industrial oscillator.

QUICK REFERENCE DATA					
Oscillator output power ( $W_o - W_{\text{feedb}}$ ), typical	$W_{\text{osc}}$		90	kW	
Frequency for full ratings	f	max.	30	MHz	

To be read in conjunction with "General Recommendations Transmitting tubes, Tubes for R.F. heating".

### R.F. CLASS C OSCILLATOR FOR INDUSTRIAL USE

#### OPERATING CONDITIONS

Frequency	f	30	30	30	MHz
Oscillator output power ( $W_o - W_{\text{feedb}}$ )	$W_{\text{osc}}$	60.6	74	90	kW
Anode voltage	$V_a$	8.5	10	12	kV
Anode current	$I_a$	10	10	9.75	A
Anode input power	$W_{i_a}$	85	100	117	kW
Anode dissipation	$W_a$	22.4	24	24.9	kW
Anode output power	$W_o$	62.6	76	92.1	kW
Anode efficiency	$\eta_a$	73.6	76	78.8	%
Oscillator efficiency	$\eta_{\text{osc}}$	71.2	74	77	%
Feedback ratio	$V_{g_p}/V_{a_p}$	12.5	10.9	9.4	%
Grid resistor	$R_g$	210	240	260	$\Omega$
Grid current, on load	$I_g$	2.4	2.3	2.3	A
Grid voltage, negative	$V_g$	500	550	600	V
Grid dissipation	$W_g$	760	730	720	W
Grid resistor dissipation	$W_{R_g}$	1.2	1.27	1.38	kW



Anode+grid dissipation $W_a + W_g$ (kW)	Altitude $h$ (m)	Inlet temperature $t_i$ (°C)	Rate of flow $q_{min}$ (m <sup>3</sup> /min)	Pressure drop $P_i$ (mmH <sub>2</sub> O)	Outlet temperature $t_o$ (°C)
30	0	35	34	120	84
25	0	35	27.2	78	87
20	0	35	21.4	48	89
30	0	45	38	150	91
25	0	45	30.4	98	93
20	0	45	23.9	60	95
30	1500	35	41	138	84
25	1500	35	32.7	90	87
20	1500	35	25.7	55	89
30	3000	25	43	135	79
25	3000	25	34.4	88	83
20	3000	25	27	54	85

For frequencies higher than 4 MHz air cooling of the seals is mandatory.

The above cooling conditions apply to the air flow direction as indicated in the outline drawing. In case of reversed flow direction a larger air volume will be required to keep the anode temperature below the limiting value.

#### ACCESSORIES



Filament connector with cable	type 40705	net weight	700 g
Filament/cathode connector with cable	type 40706	net weight	830 g
Grid connector	type 40736	net weight	450 g
Insulating pedestal	type 40729	net weight	8.2 kg

MECHANICAL DATA


Dimensions in mm

Mounting position : vertical with anode up or down


Net weight : approx. 20 kg

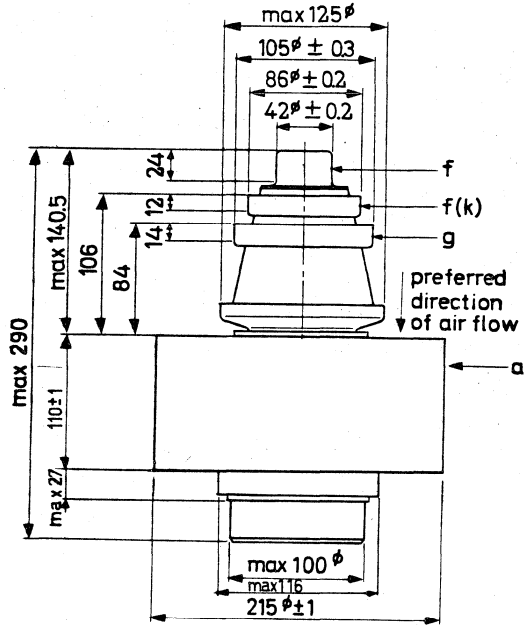


7266128

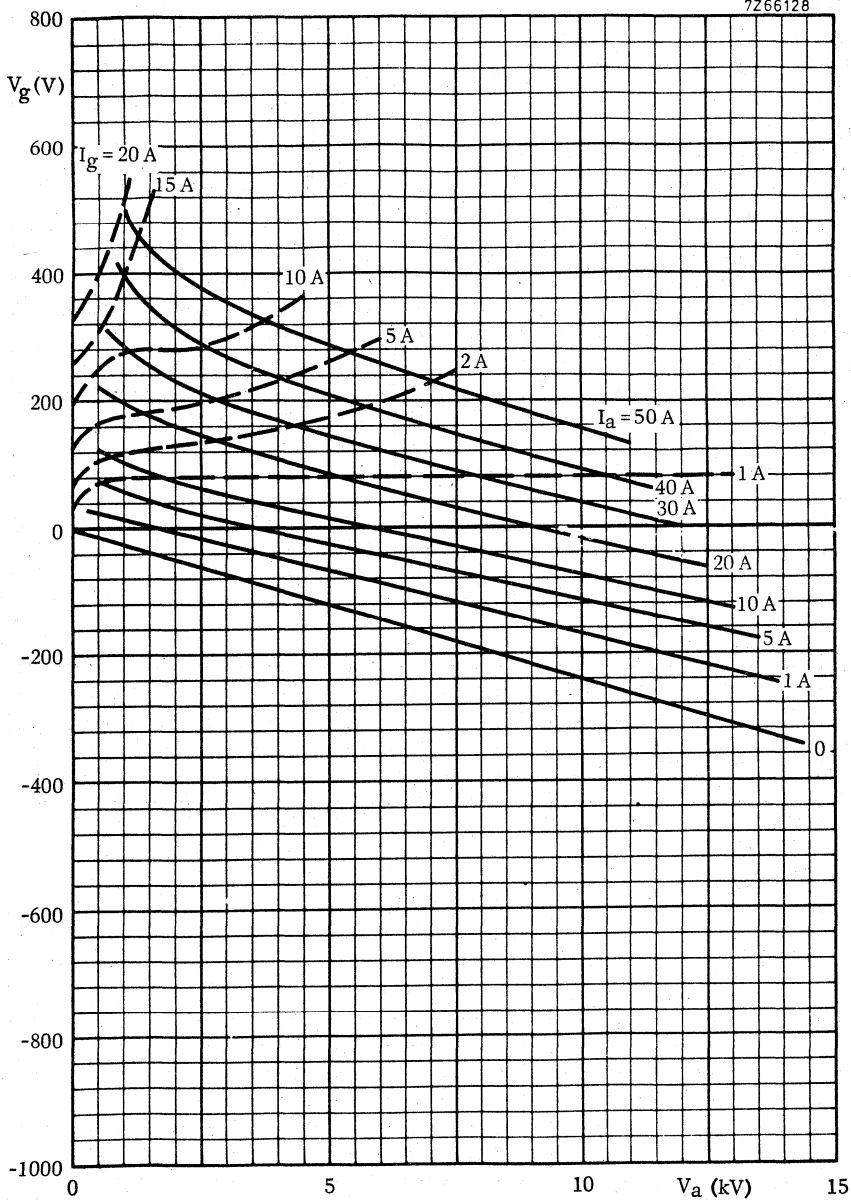


7265308

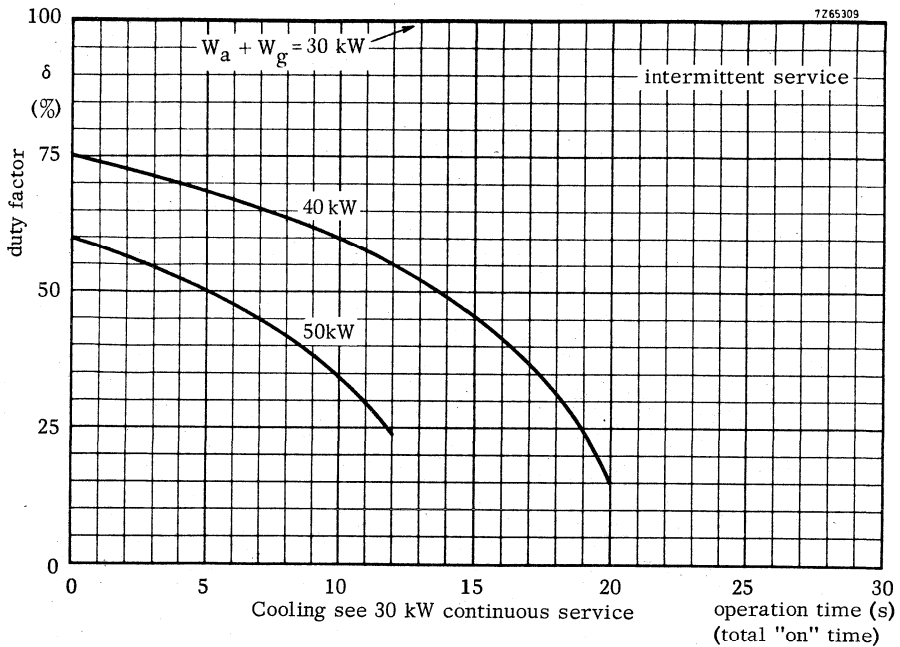

7265308

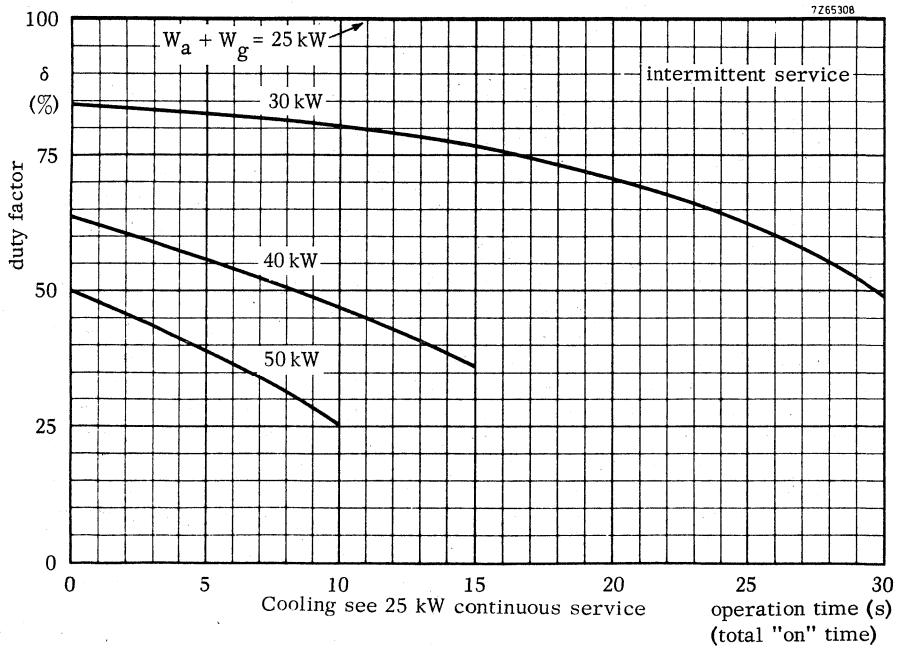

7265307

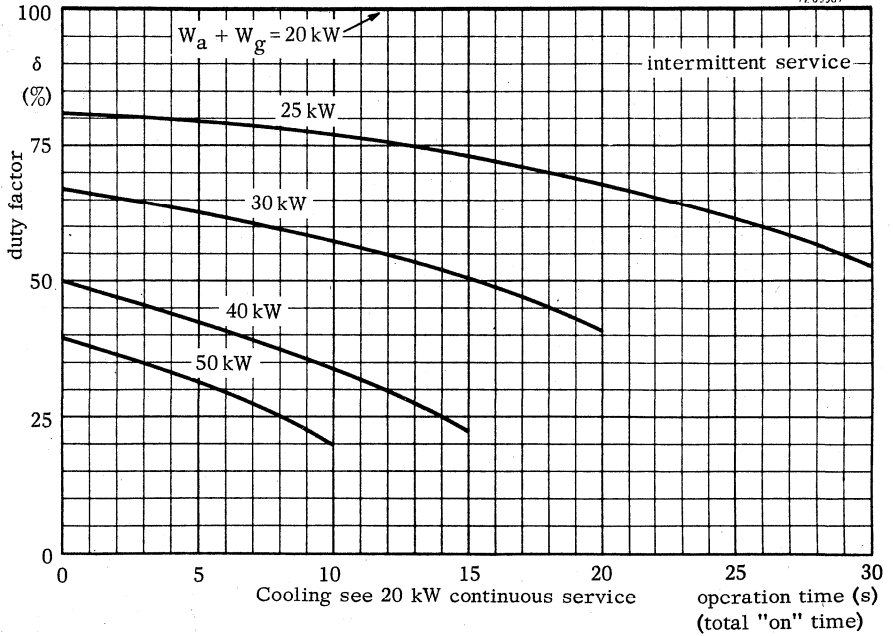





## WATER COOLED R.F. INDUSTRIAL TRIODE

Water-cooled triode of metal ceramic construction with integral cooler intended for use as an industrial oscillator.

### QUICK REFERENCE DATA

Oscillator output power ( $W_o - W_{\text{feedb}}$ )	$W_{\text{osc}}$		107,6	kW
Frequency for full ratings	f	max.	30	MHz

### R.F. CLASS C OSCILLATOR FOR INDUSTRIAL USE

#### OPERATING CONDITIONS

Frequency	f	30	30	30	MHz
Oscillator output power ( $W_o - W_{\text{feedb}}$ )	$W_{\text{osc}}$	60,6	74	107,6	kW
Anode voltage	$V_a$	8,5	10	12	kV
Anode current	$I_a$	10	10	12	A
Anode input power	$W_{\text{ia}}$	85	100	144	kW
Anode dissipation	$W_a$	22,4	24	34	kW
Anode output power	$W_o$	62,6	76	110	kW
Anode efficiency	$\eta_a$	73,6	76	76,4	%
Oscillator efficiency	$\eta_{\text{osc}}$	71,2	74	74,7	%
Feedback ratio	$V_{\text{gp}}/V_{\text{ap}}$	12,5	10,9	11	%
Grid resistor	$R_g$	210	240	230	$\Omega$
Grid current, on load	$I_g$	2,4	2,3	2,6	A
Grid voltage, negative	$-V_g$	500	550	600	V
Grid dissipation	$W_g$	760	730	840	W
Grid resistor dissipation	$W_{\text{Rg}}$	1,2	1,27	1,56	kW

**LIMITING VALUES** (Absolute max. rating system)

Frequency	f	up to	100	MHz <sup>1)</sup>
Anode voltage	V <sub>a</sub>	max.	15	kV
Anode current	I <sub>a</sub>	max.	15	A
Anode input power	W <sub>ia</sub>	max.	150	kW
Anode dissipation	W <sub>a</sub>	max.	50	kW
Grid voltage	-V <sub>g</sub>	max.	1,5	kV
Grid current, on load off load	I <sub>g</sub>	max.	2,8	A
	I <sub>g</sub>	max.	3,8	A
Grid dissipation	W <sub>g</sub>	max.	1,1	kW
Grid circuit resistance	R <sub>g</sub>	max.	10	kΩ
Cathode current, mean peak	I <sub>k</sub>	max.	17,5	A
	I <sub>kp</sub>	max.	70	A
Envelope temperature	t <sub>env</sub>	max.	220	°C

**HEATING** : direct; filament thoriated tungsten, mesh construction

Filament voltage	V <sub>f</sub>		8,4	V
Filament current	I <sub>f</sub>		235	A
Peak filament starting current	I <sub>fp</sub>	max.	1500	A
Cold filament resistance	R <sub>f0</sub>		3,9	mΩ

The filament is designed to accept temporary fluctuations of  $\pm 5\%$

To ensure that the cathode temperature remains constant irrespective of the operating frequency it may be necessary to reduce the filament voltage at higher frequencies. When doing so it must be borne in mind that the filament voltage-to-current ratio measured with only the filament voltage applied should remain constant under all operating conditions

It is extremely important that the filament be properly decoupled. This should be so done that the resonance of the circuit formed by the filament and decoupling elements remains below the fundamental oscillator frequency. In grounded-grid circuits this resonance should be below the grid-cathode resonance. For further information please see Application Book "Tubes for R.F. heating" or contact the manufacturer.

<sup>1)</sup> When the tubes are to be used at frequencies above 30 MHz the manufacturer should be consulted for more detailed information.

**CAPACITANCES**

Anode to filament	$C_{af}$	1,2	pF
Grid to filament	$C_{gf}$	100	pF
Anode to grid	$C_{ag}$	33	pF

**CHARACTERISTICS** at  $V_a = 12$  kV,  $I_a = 3$  A

Transconductance	S	80	mA/V
Amplification factor	$\mu$	50	

**COOLING**

See also cooling curves

Anode + grid dissipation $W_a + W_g$ (kW)	Inlet temperature $t_i$ (°C)	Rate of flow $q_{min}$ (l/min)	Pressure drop $P_i$ (atm)	Outlet temperature $t_o$ (°C)
50	20	26	0,60	49
	50	39	1,23	69
40	20	20	0,40	51
	50	30	0,80	71
30	20	14	0,24	53
	50	21	0,43	72
20	20	9	0,10	56
	50	13,5	0,20	74

Absolute max. water inlet temperature  $t_i$  max. 50 °C

Absolute max. water pressure  $p$  max.  $6 \times 10^5$  Pa = 6 atm abs ←

At frequencies above 4 MHz air cooling of the seals becomes mandatory.

To obtain optimum life, the seal/envelope temperature under continuous loaded conditions should be kept at or below 200 °C.

**ACCESSORIES**




Filament connector with cable	type 40705	net weight	700 g
Filament/cathode connector with cable	type 40706	net weight	830 g
Grid connector	type 40736	net weight	450 g

MECHANICAL DATA


Dimensions in mm



Mounting position : Vertical with anode up or down

Net weight : approx. 6,5 kg

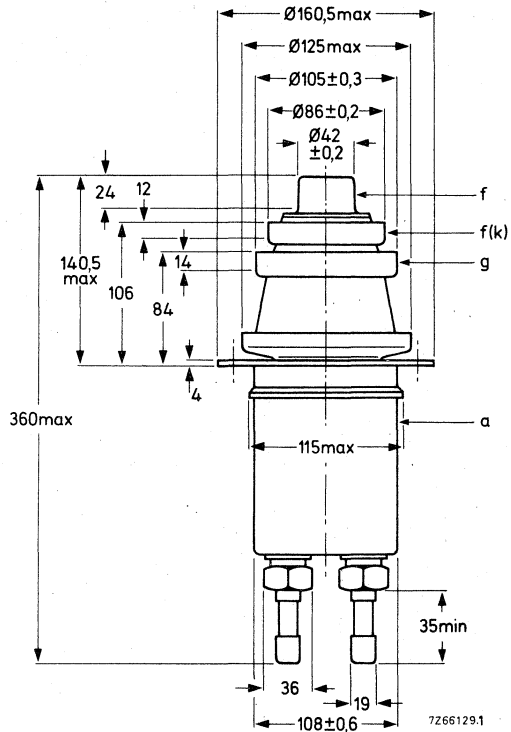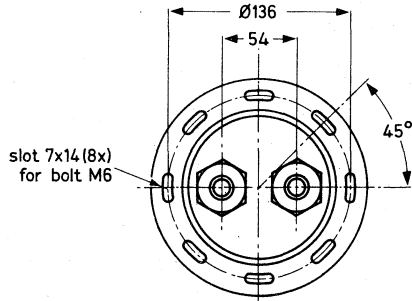

With the anode up the water connections should be interchanged.

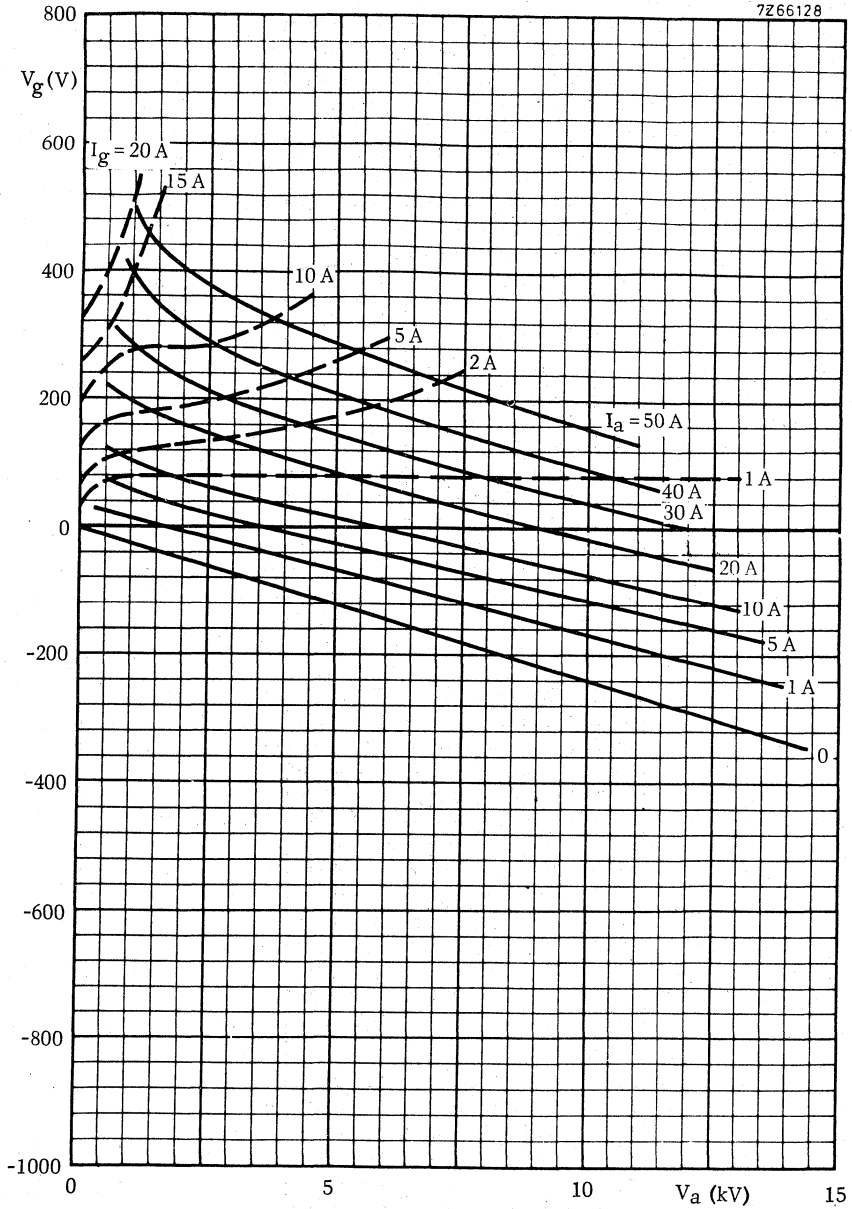

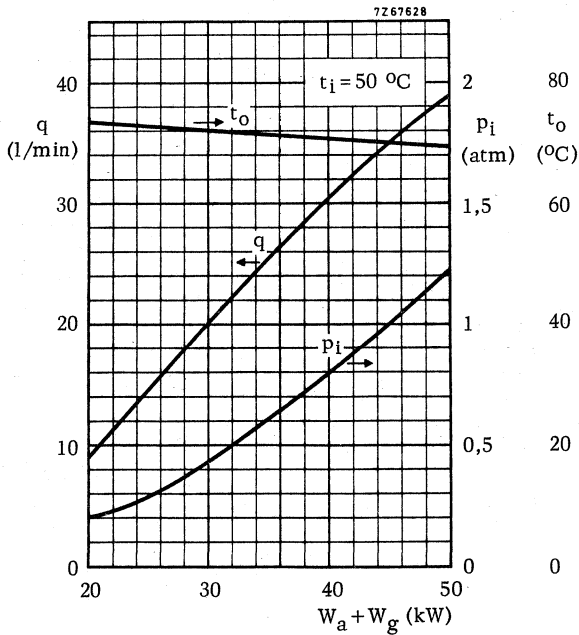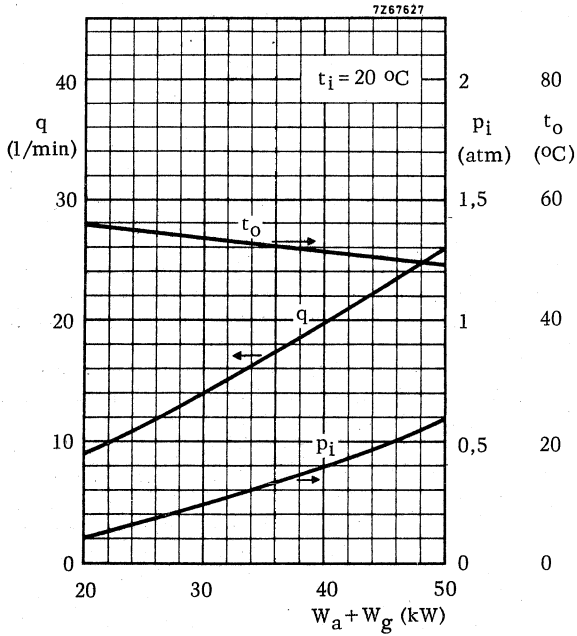

## WATER COOLED R.F. INDUSTRIAL TRIODE

Water-cooled triode of metal-ceramic construction with integral cooler intended for use as an industrial oscillator.

### QUICK REFERENCE DATA

Oscillator output power ( $W_o - W_{\text{feedb}}$ ), typical	$W_{\text{osc}}$	163	kW
Frequency for full ratings	f max.	100	MHz

To be read in conjunction with "General Recommendations Transmitting tubes, Tubes for R.F. heating".

### R.F. CLASS C OSCILLATOR FOR INDUSTRIAL USE

#### OPERATING CONDITIONS

Frequency	f	30	30	MHz
Oscillator output power ( $W_o - W_{\text{feedb}}$ )	$W_{\text{osc}}$	120	163	kW
Anode voltage	$V_a$	10	12	kV
Anode current	$I_a$	16	18	A
Anode input power	$W_{ia}$	160	216	kW
Anode dissipation	$W_a$	36	47	kW
Anode output power	$W_o$	124	169	kW
Anode efficiency	$\eta_a$	77,5	78	%
Oscillator efficiency	$\eta_{\text{osc}}$	75	75,4	%
Feedback ratio	$V_{gp}/V_{ap}$	12,8	14	%
Grid resistor	$R_g$	200	225	$\Omega$
Grid current, on load	$I_g$	3,5	4	A
Grid voltage, negative	$-V_g$	700	900	V
Grid dissipation	$W_g$	1,5	2	kW
Grid resistor dissipation	$W_{Rg}$	2,45	3,6	kW

**LIMITING VALUES** (Absolute max. rating system)

Frequency for full ratings	$f$	up to	100	MHz <sup>1)</sup>
Anode voltage	$V_a$	max.	15	kV
Anode current	$I_a$	max.	19	A
Anode input power	$W_{ia}$	max.	220	kW
Anode dissipation	$W_a$	max.	100	kW
Grid voltage	$-V_g$	max.	2	kV
Grid current, on load	$I_g$	max.	5	A
off load	$I_g$	max.	7	A
Grid dissipation	$W_g$	max.	2,5	kW
Grid circuit resistance	$R_g$	max.	10	k $\Omega$
Cathode current, mean	$I_k$	max.	24	A
peak	$I_{kp}$	max.	100	A
Envelope temperature	$t_{env}$	max.	220	$^{\circ}C$

**HEATING :** direct; filament thoriated tungsten

Filament voltage	$V_f$		12,2	V
Filament current	$I_f$		250	A
Peak filament starting current	$I_{fp}$	max.	1500	A
Cold filament resistance	$R_{f_0}$		5,3	m $\Omega$

The filament is designed to accept temporary fluctuations of  $\pm 5\%$ .

To ensure that the cathode temperature remains constant irrespective of the operating frequency, it may be necessary to reduce the filament voltage at higher frequencies. When doing so it must be borne in mind that the filament voltage-to-current ratio measured with only the filament voltage applied should remain constant under all operating conditions.

It is extremely important that the filament be properly decoupled. This should be so done that the resonance of the circuit formed by the filament and decoupling elements remains below the fundamental oscillator frequency. In grounded-grid circuits this resonance should be below the grid-cathode resonance. For further information please see Application Book "Tubes for R.F. heating" or contact the manufacturer.

<sup>1)</sup> When the tubes are to be used at frequencies above 30 MHz the manufacturer should be consulted for more detailed information.



**CAPACITANCES**

Anode to filament	$C_{af}$	2,7	pF
Grid to filament	$C_{gf}$	170	pF
Anode to grid	$C_{ag}$	55	pF

**CHARACTERISTICS** measured at  $V_a = 10$  kV,  $I_a = 8$  A

Transconductance	S	150	mA/V
Amplification factor	$\mu$	30	

**COOLING**

See also cooling curves.

Anode + grid dissipation $W_a + W_g$ (kW)	Inlet temperature $t_i$ (°C)	Rate of flow $q_{min}$ (l/min)	Pressure drop $P_i$ (atm)	Outlet temperature $t_o$ (°C)
100	20	52	0,55	49
	50	78	1,05	69
80	20	39	0,32	51
	50	60	0,65	70
60	20	29	0,19	52
	50	42	0,32	72
40	20	18	0,08	54
	50	27	0,15	73

Absolute max. water inlet temperature  $t_i$  max. 50 °C

Absolute max. water pressure  $p$  max.  $6 \times 10^5$  Pa = 6 atm abs ←


To obtain optimum life the seal/envelope temperature under continuous loaded conditions should be kept at or below 200 °C.



At low frequencies the seals are sufficiently cooled if the filament connectors are water-cooled by a flow of abt 0,5 l/min. At frequencies higher than abt.  $\Omega$  MHz, however, an additional air flow of abt. 4 m<sup>3</sup>/min. must be led along the seals from a 50 mm diameter nozzle positioned at a distance of 250 mm from the tube header.

**ACCESSORIES**

Filament connector with cable	type	40695	net weight	1,4 kg	
Filament/cathode connector with cable	type	40696	net weight	1,6 kg	
Grid connector $f \leq 4$ MHz	type	40694	net weight	270 g	
		$f > 4$ MHz	type	40737	net weight



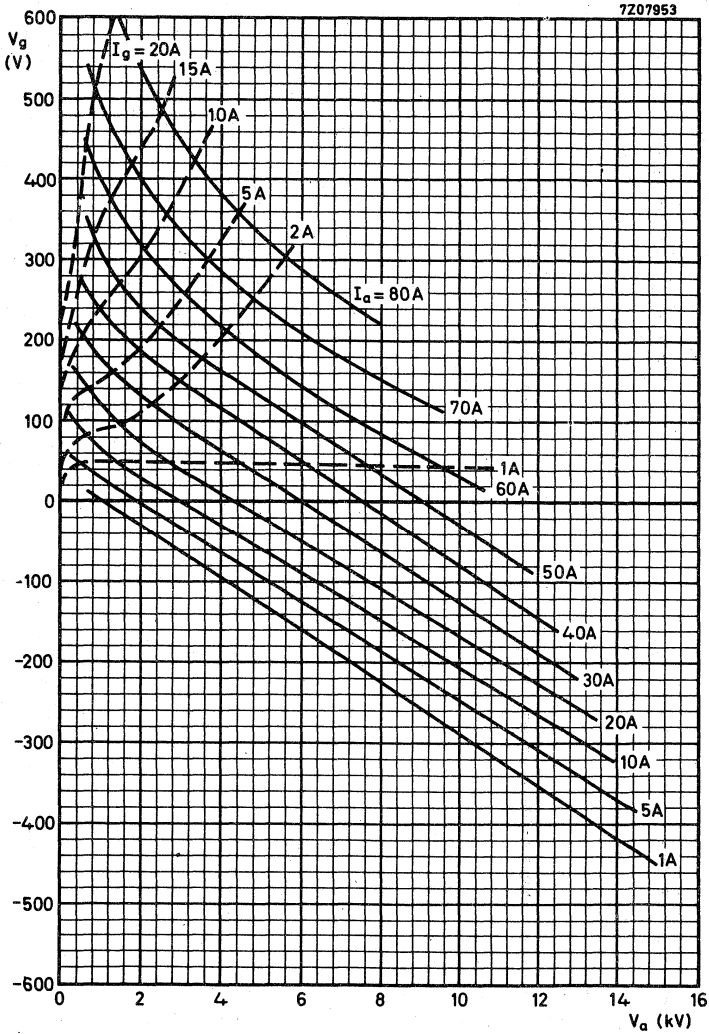

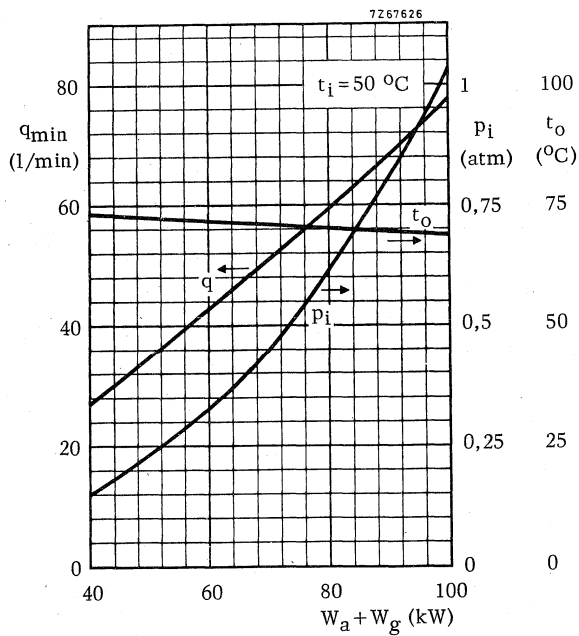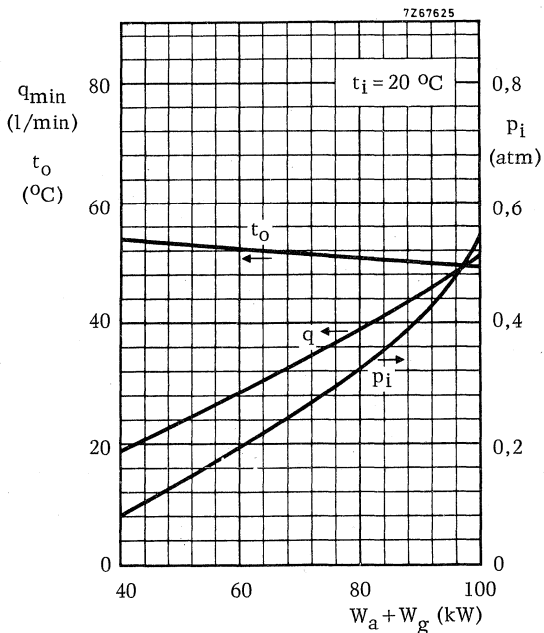

## VAPOUR COOLED R.F. INDUSTRIAL TRIODE

Vapour cooled triode of metal-ceramic construction intended for use as an industrial oscillator.

QUICK REFERENCE DATA			
Oscillator output power ( $W_o - W_{\text{feedb}}$ ), typical	$W_{\text{osc}}$	120	kW
Frequency for full ratings	f. max.	100	MHz

To be read in conjunction with "General Recommendations Transmitting tubes, Tubes for heating."

### R.F. CLASS C OSCILLATOR FOR INDUSTRIAL USE

#### OPERATING CONDITIONS

Frequency	f	30	30	MHz
Oscillator output power ( $W_o - W_{\text{feedb}}$ )	$W_{\text{osc}}$	120	120	kW
Anode voltage	$V_a$	10	12	kV
Anode current	$I_a$	16.0	13.0	A
Anode input power	$W_{ia}$	160	156	kW
Anode dissipation	$W_a$	36.0	32.5	kW
Anode output power	$W_o$	124	123.5	kW
Anode efficiency	$\eta_a$	77.5	79.2	%
Oscillator efficiency	$\eta_{\text{osc}}$	75	77	%
Feedback ratio	$V_{\text{gp}}/V_{\text{ap}}$	12.8	11.6	%
Grid resistor	$R_g$	200	330	$\Omega$
Grid current, on load	$I_g$	3.5	2.7	A
Grid voltage, negative	$-V_g$	700	891	V
Grid dissipation	$W_g$	1.5	1.1	kW
Grid resistor dissipation	$W_{Rg}$	2.45	2.4	kW

**LIMITING VALUES** (Absolute max. rating system)

Frequency for full ratings	f	up to	100	MHz <sup>1)</sup>
Anode voltage	V <sub>a</sub>	max.	14.4	kV
Anode current	I <sub>a</sub>	max.	18	A
Anode input power	W <sub>ia</sub>	max.	220	kW
Anode dissipation	W <sub>a</sub>	max.	80	kW
Grid voltage	-V <sub>g</sub>	max.	2.0	kV
Grid current, on load	I <sub>g</sub>	max.	4	A
off load	I <sub>g</sub>	max.	5.5	A
Grid dissipation	W <sub>g</sub>	max.	2.0	kW
Grid circuit resistance	R <sub>g</sub>	max.	10	kΩ
Cathode current, mean	I <sub>k</sub>	max.	22	A
peak	I <sub>kp</sub>	max.	100	A
Envelope temperature	t <sub>env</sub>	max.	240	°C

**HEATING** : direct ; filament thoriated tungsten

Filament voltage	V <sub>f</sub>		12.2	V
Filament current	I <sub>f</sub>		255	A
Peak filament starting current	I <sub>f</sub> <sup>p</sup>	max.	1500	A
Cold filament resistance	R <sub>fo</sub>		5.3	mΩ

The filament is designed to accept temporary fluctuations of +5% and -10%.

To ensure that the cathode temperature remains constant irrespective of the operating frequency, it may be necessary to reduce the filament voltage at higher frequencies. When doing so it must be borne in mind that the filament voltage-to-current ratio measured with only the filament voltage applied should remain constant under all operating conditions.

It is extremely important that the filament be properly decoupled. This should be so done that the resonance of the circuit formed by the filament and decoupling elements remains below the fundamental oscillator frequency. In grounded-grid circuits this resonance should be below the grid-cathode resonance. For further information please see Application book "Tubes for R.F. heating" or contact the manufacturer.

**CAPACITANCES**

Anode to filament	C <sub>af</sub>	2.7	pF
Grid to filament	C <sub>gf</sub>	170	pF
Anode to grid	C <sub>ag</sub>	55	pF

**CHARACTERISTICS** measured at V<sub>a</sub> = 10 kV, I<sub>a</sub> = 8 A

Transconductance	S	150	mA/V
Amplification factor	μ	30	

<sup>1)</sup> When the tubes are to be used at frequencies above 30 MHz the manufacturer should be consulted for more detailed information.

**COOLING**

See also cooling curves

With integrated boiler condenser type K735

Anode + grid dissipation $W_a + W_g$ (kW)	Inlet temperature $t_i$ (°C)	Rate of flow $q_{min}$ (ℓ/min)	Pressure drop $P_i$ (atm)	Outlet temperature $t_o$ (°C)
80	20	29	0.20	60
	35	48	0.51	59
60	20	16	0.08	75
	35	24	0.14	72
	50	45	0.45	70
40	20	10	0.04	80
	35	13.5	0.06	80
	50	20	0.10	80

Absolute max. water inlet temperature  $t_i$  max. 50 °C

At low frequencies the seals are sufficiently cooled if the filament connectors are water-cooled by a flow of abt. 0.5 ℓ/min. At high frequencies, however, an additional airflow of abt 4 m<sup>3</sup>/min must be led along the seals from a 50 mm diameter nozzle positioned at a distance of 250 mm from the tube header.

To obtain optimum life, the seal/anode temperature under continuous loaded conditions should be kept at or below 200 °C.

**ACCESSORIES**


Filament connector with cable	type 40695	net weight	1,4 kg
Filament/cathode connector with cable	type 40696	net weight	1,6 kg
Grid connector	type 40737	net weight	525 g
Boiler condenser	type K735	net weight	70 kg

MECHANICAL DATA

Dimensions in mm

Mounting position: vertical with anode down


Net weight: approx. 16.7 kg



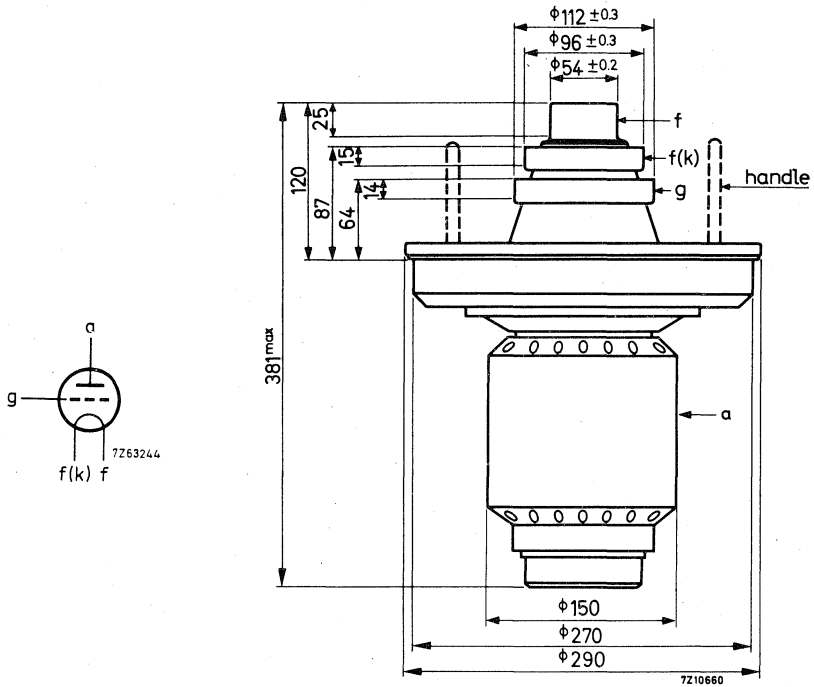


Note: The handles should be removed before switching on the tube.



7Z07953

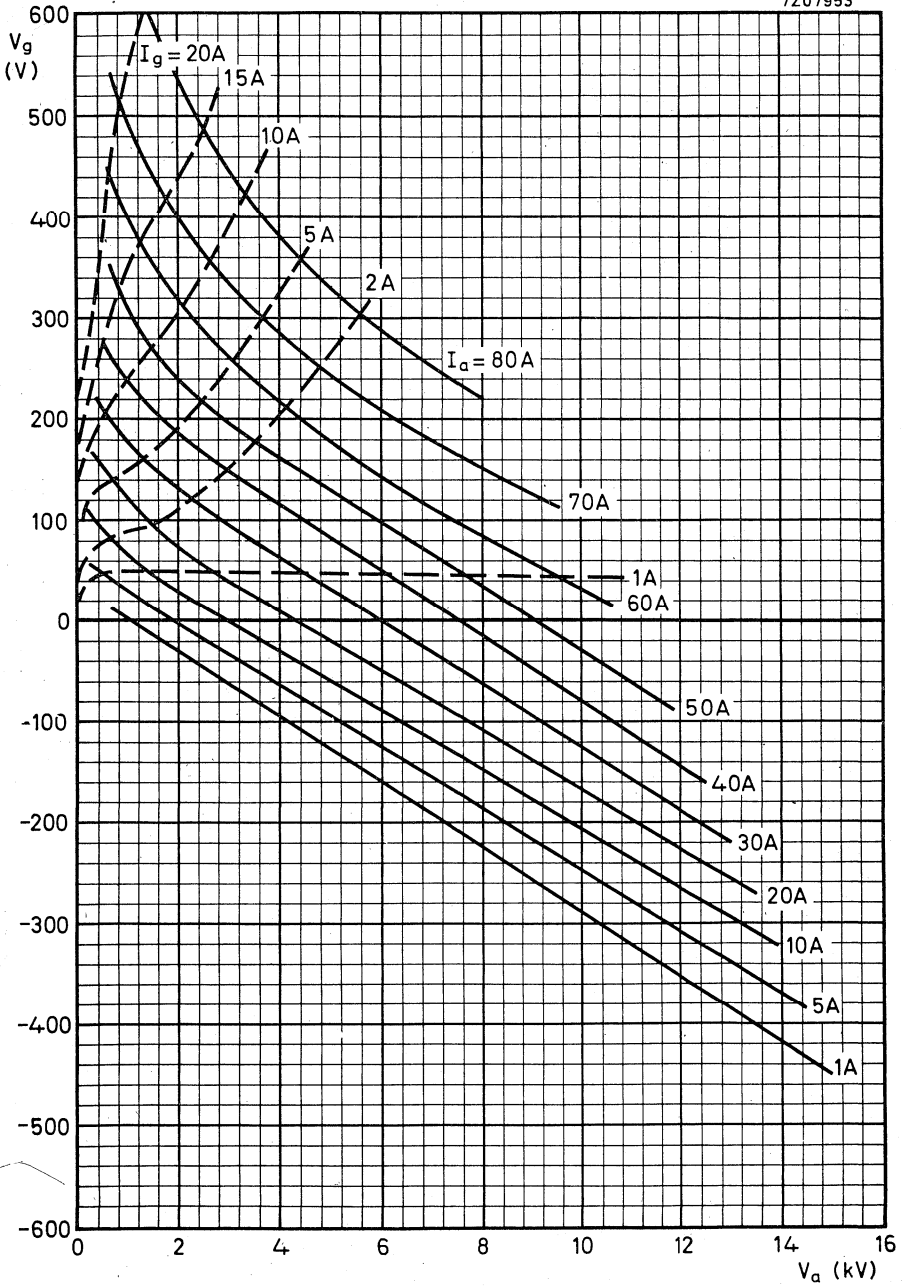

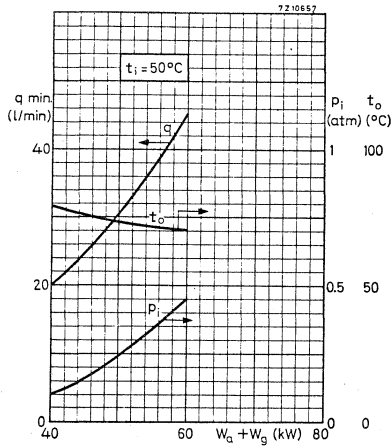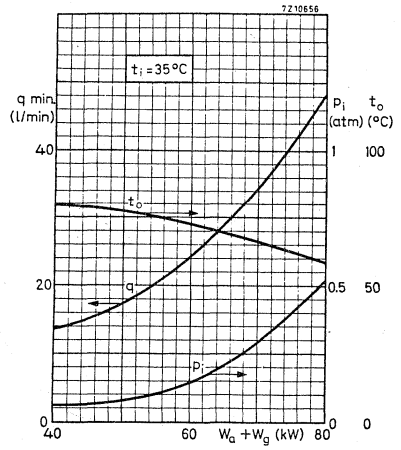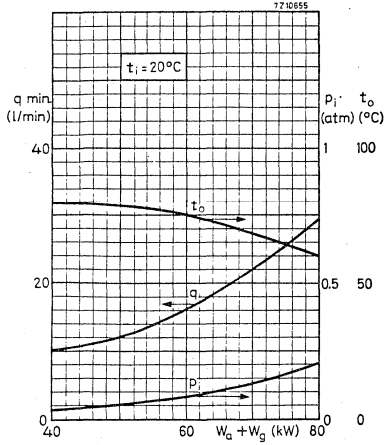

## VAPOUR COOLED R.F. INDUSTRIAL TRIODE

Vapour-cooled triode of metal-ceramic construction with integral cooler intended for use as an industrial oscillator.

### QUICK REFERENCE DATA

Oscillator output power ( $W_o - W_{feedb}$ ), typical	$W_{osc}$	120	kW
Frequency for full ratings	f max.	100	MHz

To be read in conjunction with "General Recommendations Transmitting tubes, Tubes for R.F. heating"

### R.F. CLASS C OSCILLATOR FOR INDUSTRIAL USE

#### OPERATING CONDITIONS

Frequency	f	30	30	MHz
Oscillator output power ( $W_o - W_{feedb}$ )	$W_{osc}$	120	120	kW
Anode voltage	$V_a$	10	12	kV
Anode current	$I_a$	16	13	A
Anode input power	$W_{ia}$	160	156	kW
Anode dissipation	$W_a$	36	32.5	kW
Anode output power	$W_o$	124	123.5	kW
Anode efficiency	$\eta_a$	77.5	79.2	%
Oscillator efficiency	$\eta_{osc}$	75	77	%
Feedback ratio	$V_{gp}/V_{ap}$	12.8	11.6	%
Grid resistor	$R_g$	200	330	$\Omega$
Grid current, on load	$I_g$	3.5	2.7	A
Grid voltage, negative	$-V_g$	700	891	V
Grid dissipation	$W_g$	1.5	1.1	kW
Grid resistor dissipation	$W_{Rg}$	2.45	2.4	kW

Data based on pre-production tubes.

**LIMITING VALUES** (Absolute max. rating system)

Frequency for full ratings	$f$	up to	100 MHz <sup>1)</sup>
Anode voltage	$V_a$	max.	14.4 kV
Anode current	$I_a$	max.	18 A
Anode input power	$W_{i_a}$	max.	220 kW
Anode dissipation	$W_a$	max.	80 kW
Grid voltage	$-V_g$	max.	2 kV
Grid current, on load	$I_g$	max.	4 A
off load	$I_g$	max.	5.5 A
Grid dissipation	$W_g$	max.	2 kW
Grid circuit resistance	$R_g$	max.	10 k $\Omega$
Cathode current, mean	$I_k$	max.	22 A
peak	$I_{k_p}$	max.	100 A
Envelope temperature	$t_{env}$	max.	240 °C

**HEATING** : direct ; filament thoriated tungsten, mesh construction.

Filament voltage	$V_f$		12.2 V
Filament current	$I_f$		255 A
Peak filament starting current	$I_{f_p}$	max.	1500 A
Cold filament resistance	$R_{f_0}$		5.3 m $\Omega$

The filament is designed to accept temporary fluctuations of + 5 % and - 10 %.

It is extremely important that the filament be properly decoupled. This should be so done that the resonance of the circuit formed by the filament and decoupling elements remains below the fundamental oscillator frequency. In grounded-grid circuits this resonance should be below the grid-cathode resonance. For further information please see Application Book "Tubes for R. F. heating" or consult the manufacturer.

**CAPACITANCES**

Anode to filament	$C_{af}$	2.7 pF
Grid to filament	$C_{gf}$	170 pF
Anode to grid	$C_{ag}$	55 pF

**CHARACTERISTICS** measured at  $V_a = 10$  kV,  $I_a = 8$  A

Transconductance	$S$	150 mA/V
Amplification factor	$\mu$	30

<sup>1)</sup> When the tube is to be used at frequencies above 30 MHz the manufacturer should be consulted for more detailed information.

**COOLING**

Type of condenser arbitrary.


Required capacity of condenser for $W_a+W_g$	80 $72 \times 10^3$	60 $55 \times 10^3$	40 $37 \times 10^3$	kW kcal/h
Volume of produced vapour				
at backflow temperature of 20 °C	3.3	2.5	1.7	$m^3/min$
at backflow temperature of 90 °C	3.7	2.8	1.9	$m^3/min$
Amount of backflowing water				
at backflow temperature of 20 °C	2.0	1.5	1.0	$l/min$
at backflow temperature of 90 °C	2.1	1.6	1.1	$l/min$

Cooling of the seals can be accomplished by a low velocity airflow, or by watercooling of the filament connectors. A waterflow of approximately 0.5  $l/min$  will be sufficient. The cooling circuits of these accessories may be connected in series.

To obtain optimum life, the seal/envelope temperature under continuously loaded conditions should be kept at or below 200 °C.


**ACCESSORIES**

Filament connector with cable	type 40695	net weight	1.4 kg
Filament/cathode connector with cable	type 40696	net weight	1.6 kg
Grid connector	type 40737	net weight	525 g
Water level control	type 40735	net weight	8.5 kg

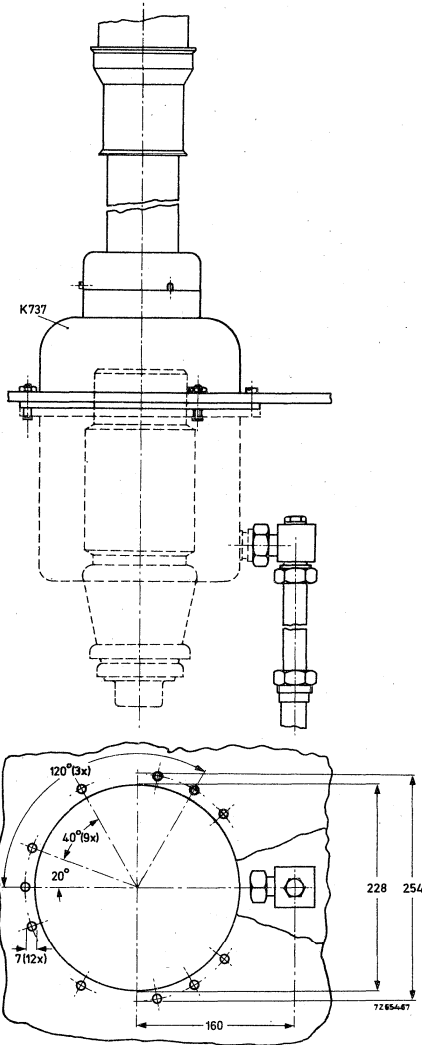


PARTS OF BOILER

Dimensions in mm.

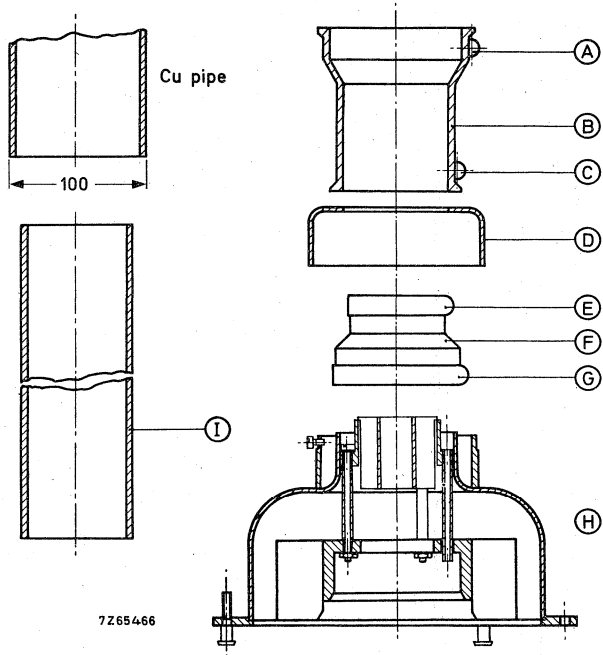

	description	catalogue number
A	Compression ring	9390 098 40002
B	Collar	9390 098 60002
C	Compression ring	9390 098 70002
D	Collar	9390 228 20002
E	Compression ring	9390 228 30002
F	Collar	9390 130 40002
G	Compression ring	9390 228 40002
H	Boiler hood	8222 033 73530
I	Quartz pipe	9390 098 10002

Dimensions in mm

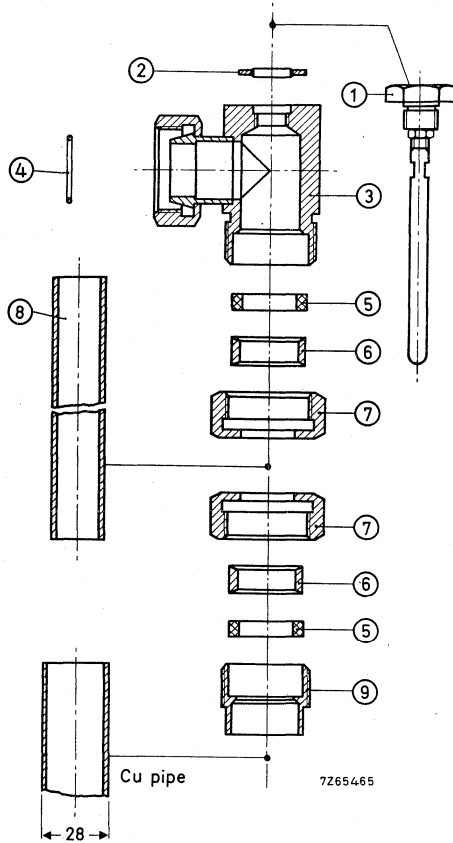


	description	catalogue number
1	Anti-corrosion pin	9390 245 10002
2	Gasket	2622 080 02801
3	90° joint	8222 033 73630
4	Gasket	2622 080 30721
5	Gasket	9390 098 80002
6	Gasket	9390 098 50002
7	Compression nut	9390 098 90002
8	Quartz pipe	9390 088 30002
9	Reduction collar	9390 099 00002





7287953

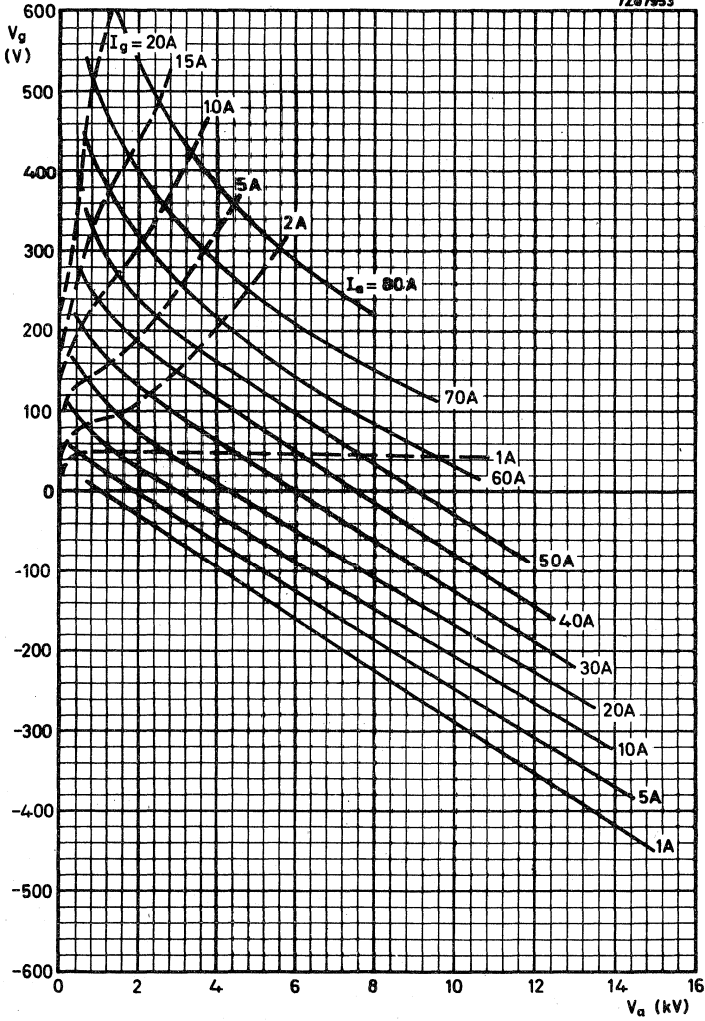

## WATER COOLED R.F. INDUSTRIAL TRIODE

Water-cooled triode of metal-ceramic construction with integral cooler intended for use as an industrial oscillator.

QUICK REFERENCE DATA		
Oscillator output power ( $W_o - W_{\text{feedb}}$ ), typical	$W_{\text{osc}}$	240 kW
Frequency for full ratings	f max.	100 MHz

To be read in conjunction with "General Recommendations Transmitting tubes, Tubes for R.F. heating."

### R.F. CLASS C OSCILLATOR FOR INDUSTRIAL USE

#### OPERATING CONDITIONS

Frequency	f	30 MHz
Oscillator output power ( $W_o - W_{\text{feedb}}$ )	$W_{\text{osc}}$	240 kW
Anode voltage	$V_a$	14 kV
Anode current	$I_a$	23.5 A
Anode input power	$W_{ia}$	329 kW
Anode dissipation	$W_a$	81.5 kW
Anode output power	$W_o$	247.5 kW
Anode efficiency	$\eta_a$	75.2 %
Oscillator efficiency	$\eta_{\text{osc}}$	73.0 %
Feedback ratio	$V_{gp}/V_{ap}$	10.4 %
Grid resistor	$R_g$	135 $\Omega$
Grid current, on load	$I_g$	6 A
Grid voltage, negative	$-V_g$	810 V
Grid dissipation	$W_g$	2.6 kW
Grid resistor dissipation	$W_{Rg}$	4.86 kW

**LIMITING VALUES** (Absolute max. rating system)

Frequency for full ratings	f	up to	100	MHz <sup>1)</sup>
Anode voltage	V <sub>a</sub>	max.	16.8	kV
Anode current	I <sub>a</sub>	max.	25	A
Anode input power	W <sub>ia</sub>	max.	375	kW
Anode dissipation	W <sub>a</sub>	max.	120	kW
Grid voltage	-V <sub>g</sub>	max.	2	kV
Grid current, on load	I <sub>g</sub>	max.	7	A
off load	I <sub>g</sub>	max.	8.5	A
Grid dissipation	W <sub>g</sub>	max.	3	kW
Grid circuit resistance	R <sub>g</sub>	max.	10	kΩ
Cathode current, mean	I <sub>k</sub>	max.	31	A
peak	I <sub>kp</sub>	max.	175	A
Envelope temperature	t <sub>env</sub>	max.	240	°C

**HEATING** : direct; filament thoriated tungsten

Filament voltage	V <sub>f</sub>		12.6	V
Filament current	I <sub>f</sub>		380	A
Peak filament starting current	I <sub>f</sub> <sup>p</sup>	max.	2000	A
Cold filament resistance	R <sub>f0</sub>		3.6	mΩ

The filament is designed to accept temporary fluctuations of +5% and -10%.

To ensure that the cathode temperature remains constant irrespective of the operating frequency, it may be necessary to reduce the filament voltage at higher frequencies. When doing so it must be borne in mind that the filament voltage-to-current ratio measured with only the filament voltage applied should remain constant under all operating conditions.

It is extremely important that the filament be properly decoupled. This should be so done that the resonance of the circuit formed by the filament and decoupling elements remains below the fundamental oscillator frequency. In grounded-grid circuits this resonance should be below the grid-cathode resonance. For further information please see Application Book "Tubes for R. F. heating" or contact the manufacturer.

**CAPACITANCES**

Anode to filament	C <sub>af</sub>	3	pF
Grid to filament	C <sub>gf</sub>	185	pF
Anode to grid	C <sub>ag</sub>	60	pF

**CHARACTERISTICS** measured at V<sub>a</sub> = 14 kV, I<sub>a</sub> = 10 A

Transconductance	S	190	mA/V
Amplification factor	μ	41	

<sup>1)</sup> When the tubes are to be used at frequencies above 30 MHz the manufacturer should be consulted for more detailed information.

**COOLING**

See also cooling curves

Anode + grid dissipation $W_a + W_g$ (kW)	Inlet temperature $t_i$ (°C)	Rate of flow $q$ min (ℓ/min)	Pressure drop $P_i$ (atm)	Outlet temperature $t_o$ (°C)
120	20	60	0.7	50
	50	90	1.3	77
80	20	34	0.3	54
	50	54	0.55	72
40	20	15	0.07	60
	50	24	0.13	70

Absolute max. water inlet temperature

$t_i$  max. 50 °C

Absolute max. water pressure

$p$  max.  $6 \times 10^5$  Pa = 6 atmabs ←

To obtain optimum life, the seal/envelope temperature under continuously loaded conditions should be kept at or below 200 °C.

At low frequencies the seals are sufficiently cooled if the filament connectors are water-cooled by a flow of abt 0.5 ℓ/min. At higher frequencies, however, an additional airflow of abt 4 m<sup>3</sup>/min must be led along the seals from a 50 mm diameter nozzle positioned at a distance of 250 mm from the tube header.

**ACCESSORIES**




Filament connector with cable	type	40695	net weight	1.4	kg
Filament/cathode connector with cable	type	40696	net weight	1.6	kg
Grid connector	$f \leq 4$ MHz	type	40694	net weight	270 g
	$f > 4$ MHz	type	40737	net weight	525 g

MECHANICAL DATA

Dimensions in mm

Mounting position : vertical with anode up or down


Net weight : approx. 15.6 kg

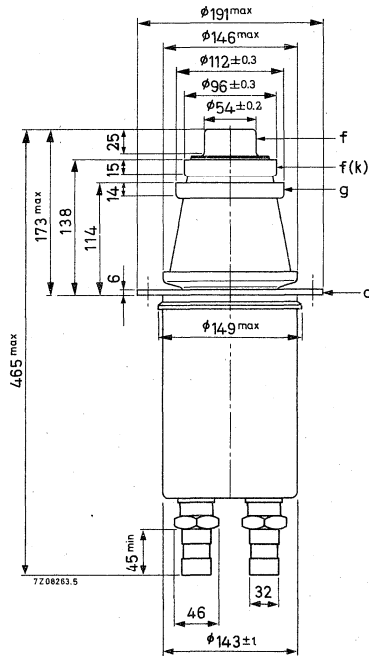



Thread of water connections BSP  $1\frac{1}{4}$  in.

With anode up the water inlet and outlet connections should be interchanged.

7Z08262

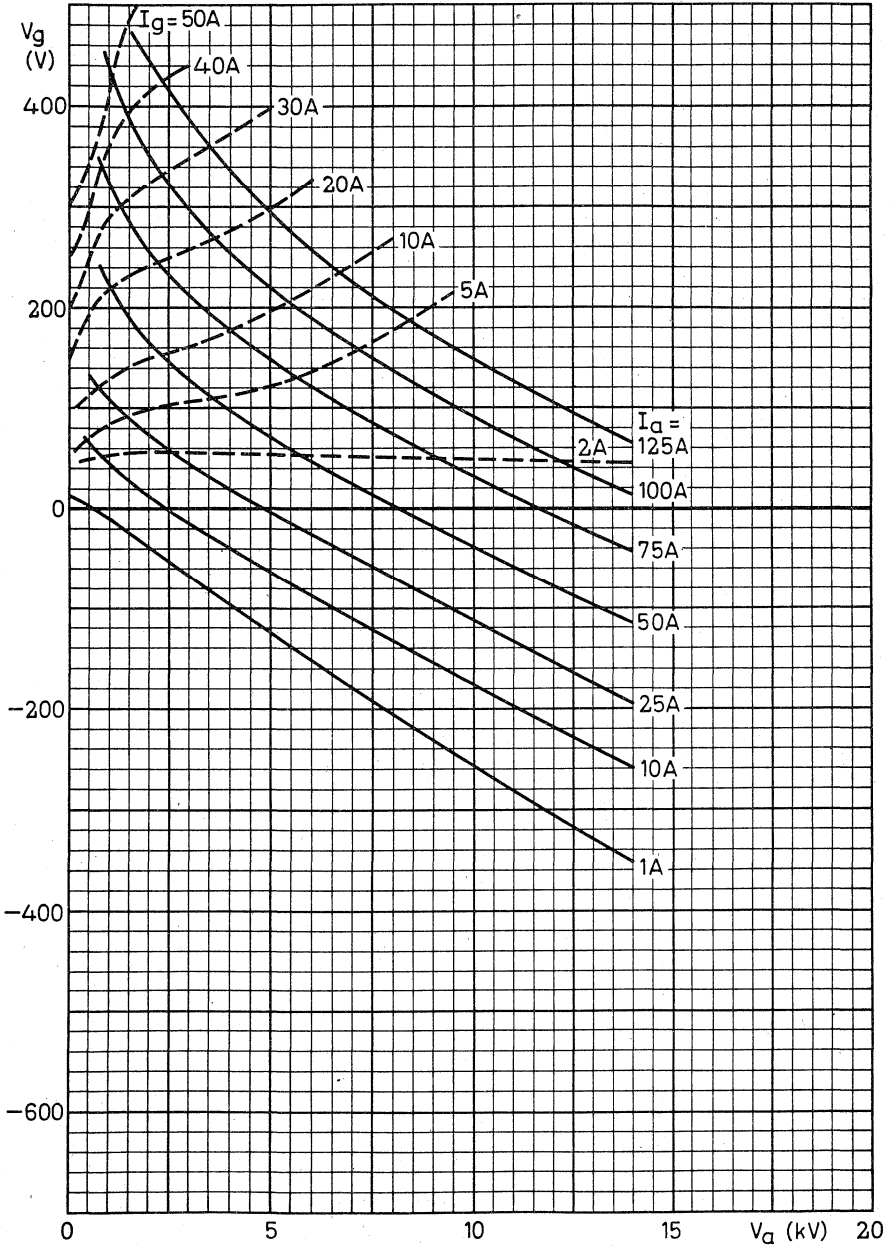

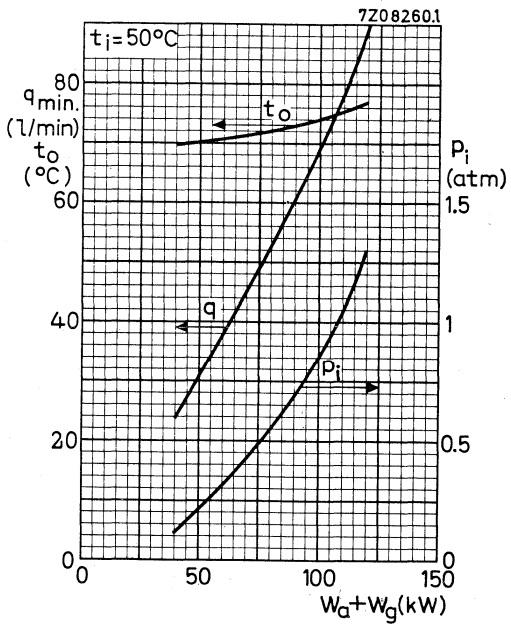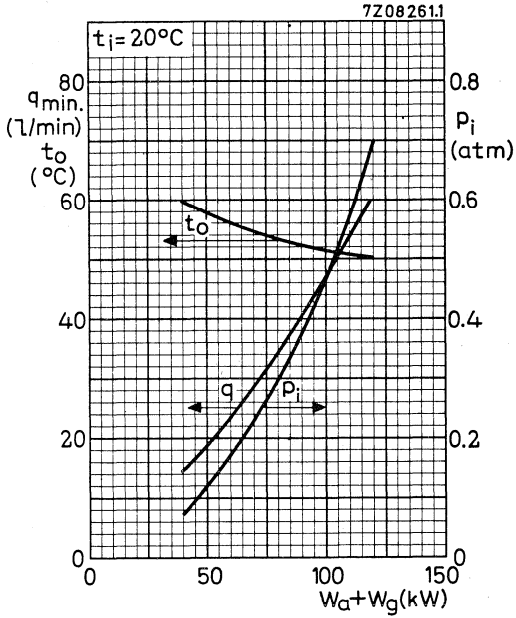



## VAPOUR COOLED R.F. INDUSTRIAL TRIODE

Vapour cooled triode of metal-ceramic construction intended for use as an industrial oscillator.

QUICK REFERENCE DATA			
Oscillator output power ( $W_o - W_{\text{feedb}}$ ), typical	$W_{\text{osc}}$	240	kW
Frequency for full ratings	$f$ max.	100	MHz

To be read in conjunction with "General Recommendations Transmitting tubes, Tubes for R.F. heating."

### R.F. CLASS C OSCILLATOR FOR INDUSTRIAL USE

#### OPERATING CONDITIONS

Frequency	$f$	30	MHz
Oscillator output power ( $W_o - W_{\text{feedb}}$ )	$W_{\text{osc}}$	240	kW
Anode voltage	$V_a$	14	kV
Anode current	$I_a$	23.5	A
Anode input power	$W_{ia}$	329	kW
Anode dissipation	$W_a$	81.5	kW
Anode output power	$W_o$	247.5	kW
Anode efficiency	$\eta_a$	75.2	%
Oscillator efficiency	$\eta_{\text{osc}}$	73	%
Feedback ratio	$V_{gp}/V_{ap}$	10.4	%
Grid resistor	$R_g$	135	$\Omega$
Grid current, on load	$I_g$	6	A
Grid voltage, negative	$-V_g$	810	V
Grid dissipation	$W_g$	2.6	kW
Grid resistor dissipation	$W_{Rg}$	4.86	kW

**LIMITING VALUES** (Absolute max. rating system)

Frequency for full ratings	f	up to	100	MHz <sup>1)</sup>
Anode voltage	V <sub>a</sub>	max.	16.8	kV
Anode current	I <sub>a</sub>	max.	25	A
Anode input power	W <sub>ia</sub>	max.	375	kW
Anode dissipation	W <sub>a</sub>	max.	120	kW
Grid voltage	-V <sub>g</sub>	max.	2	kV
Grid current, on load	I <sub>g</sub>	max.	7	A
off load	I <sub>g</sub>	max.	8.5	A
Grid dissipation	W <sub>g</sub>	max.	3	kW
Grid circuit resistance	R <sub>g</sub>	max.	10	kΩ
Cathode current, mean	I <sub>k</sub>	max.	31	A
peak	I <sub>kp</sub>	max.	175	A
Envelope temperature	t <sub>env</sub>	max.	240	°C

**HEATING** : direct ; filament thoriated tungsten

Filament voltage	V <sub>f</sub>		12.6	V
Filament current	I <sub>f</sub>		380	A
Peak filament starting current	I <sub>fp</sub>	max.	2000	A
Cold filament resistance	R <sub>fo</sub>		3.6	mΩ

The filament is designed to accept temporary fluctuations of +5% and -10%.

To ensure that the cathode temperature remains constant irrespective of the operating frequency, it may be necessary to reduce the filament voltage at higher frequencies. When doing so it must be borne in mind that the filament voltage-to-current ratio measured with only the filament voltage applied should remain constant under all operating conditions.

It is extremely important that the filament be properly decoupled. This should be so done that the resonance of the circuit formed by the filament and decoupling elements remains below the fundamental oscillator frequency. In grounded-grid circuits this resonance should be below the grid-cathode resonance. For further information please see Application Book "Tubes for R.F. heating" or contact the manufacturer.

**CAPACITANCES**

Anode to filament	C <sub>af</sub>		3	pF
Grid to filament	C <sub>gf</sub>		185	pF
Anode to grid	C <sub>ag</sub>		60	pF

**CHARACTERISTICS** measured at V<sub>a</sub> = 14 kV, I<sub>a</sub> = 10 A

Transconductance	S		190	mA/V
Amplification factor	μ		41	

<sup>1)</sup> When the tubes are to be used at frequencies above 30 MHz the manufacturer should be consulted for more detailed information.

**COOLING**

See also cooling curves

With integrated boiler condenser type K733

Anode + grid dissipation $W_a + W_g$ (kW)	Inlet temperature $t_i$ (°C)	Rate of flow $q$ min ( $\ell$ /min)	Pressure drop $P_i$ (atm)	Outlet temperature $t_o$ (°C)
120	20	59	0.84	50
80	20	29	0.20	61
	35	48	0.51	61
40	20	10	0.04	81
	35	13.5	0.06	81
	50	20	0.10	81

To obtain optimum life, the seal/envelope temperature under continuous loaded conditions should be kept at or below 200 °C.

At low frequencies the seals are sufficiently cooled if the filament connectors are water-cooled by a flow of abt. 0.5  $\ell$ /min. At high frequencies, however, an additional airflow of abt. 4 m<sup>3</sup>/min must be led along the seals from a 50 mm diameter nozzle positioned at a distance of 250 mm from the tube header.

**ACCESSORIES**


Filament connector with cable	type 40695	net weight	1.4 kg
Filament/cathode connector with cable	type 40696	net weight	1.6 kg
Grid connector	type 40694	net weight	270 g
Boiler condenser	type K733	net weight	70 kg

MECHANICAL DATA

Dimensions in mm


Mounting position: vertical with anode down

Net weight: approx. 27 kg

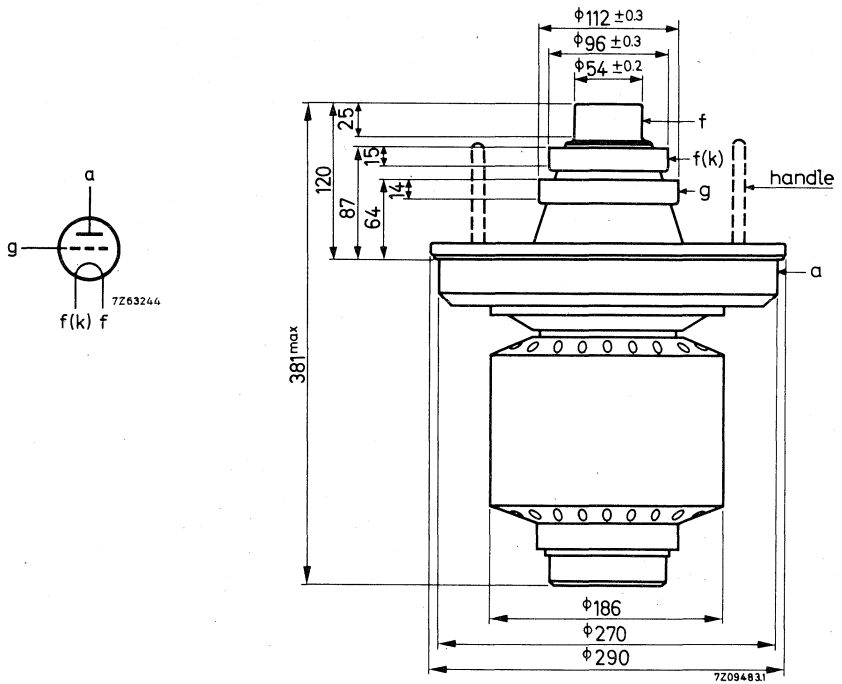


The handles should be removed before switching on the tube.


7Z08262

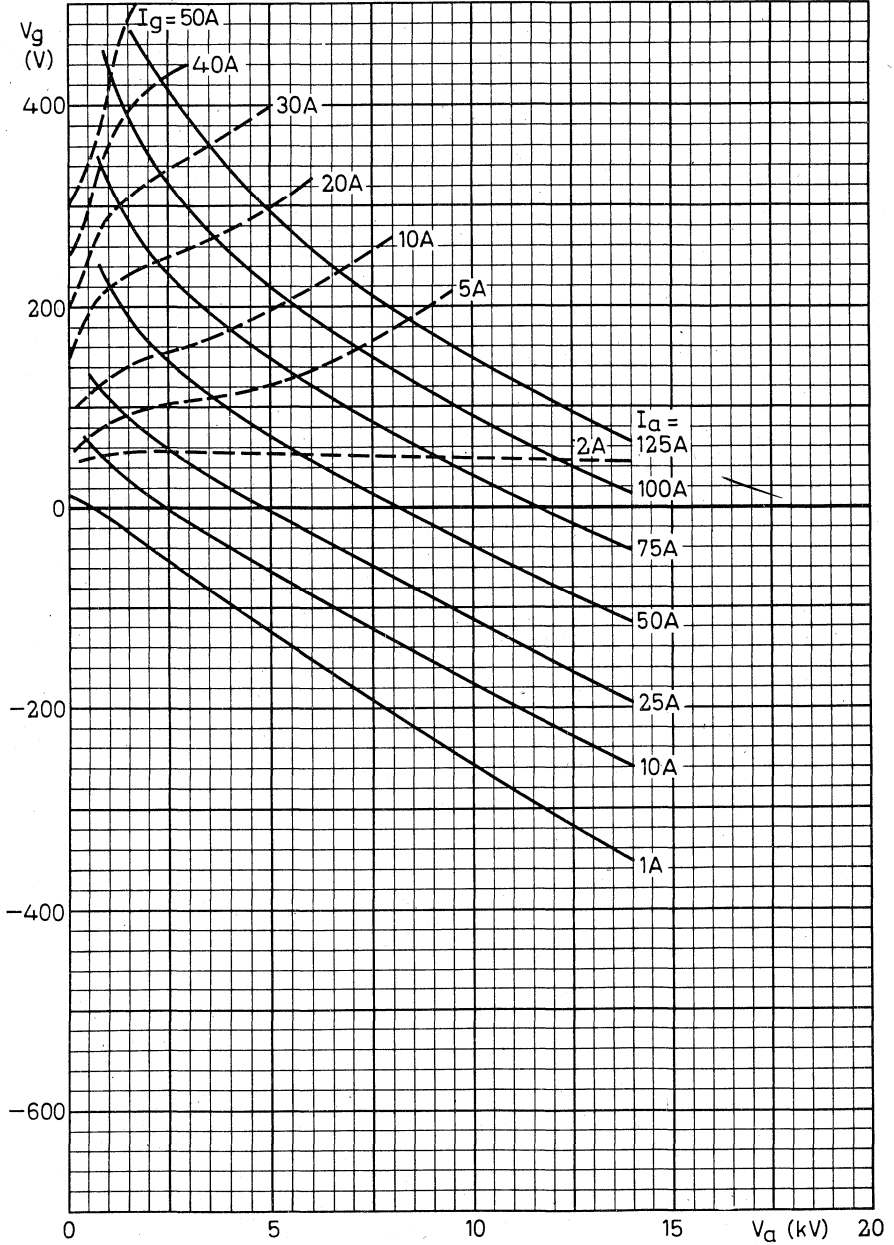

7210658

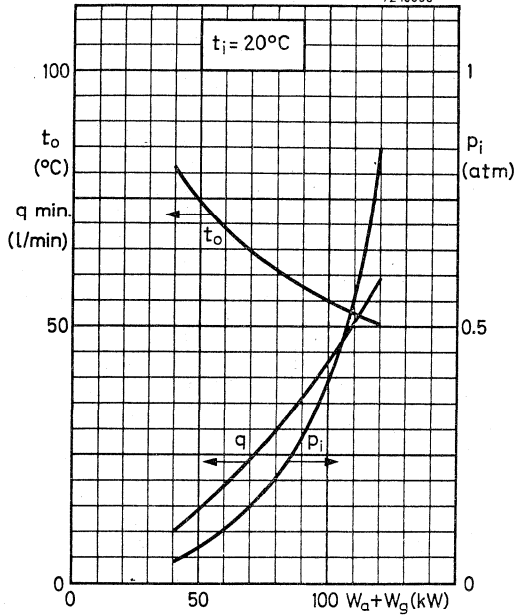

7210659

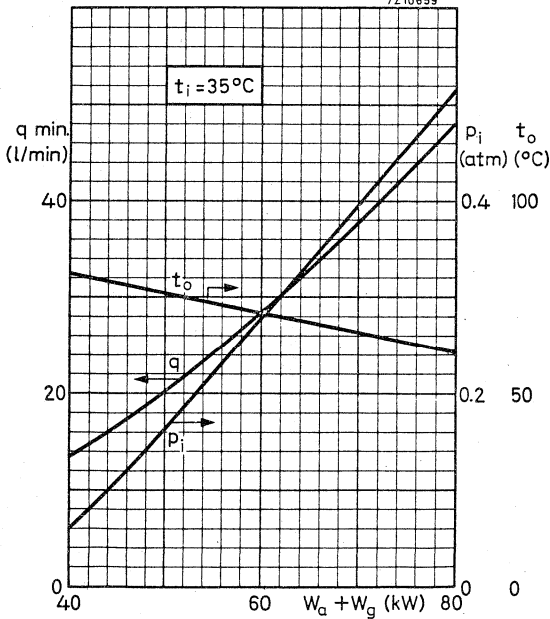

## AIR COOLED R.F. INDUSTRIAL TRIODE

Air-cooled triode of metal-ceramic construction with integral cooler intended for use as an industrial oscillator.

QUICK REFERENCE DATA				
Oscillator output power ( $W_o - W_{\text{feedb}}$ ), typical	$W_{\text{osc}}$	2.67	kW	
Frequency for full ratings	f	max.	250	MHz

To be read in conjunction with "General Recommendations Transmitting tubes, Tubes for R.F. heating".

### R.F. CLASS C OSCILLATOR FOR INDUSTRIAL USE

#### OPERATING CONDITIONS

Frequency	f	160	27.12	MHz
Filament voltage	$V_f$	6.0	6.3	V
Oscillator output power ( $W_o - W_{\text{feedb}}$ )	$W_{\text{osc}}$	2.22	2.67	kW
Anode voltage	$V_a$	4.5	5.0	kV
Anode current	$I_a$	700	750	mA
Anode input power	$W_{ia}$	3.15	3.75	kW
Anode dissipation	$W_a$	0.75	0.83	kW
Anode output power	$W_o$	2.4	2.9	kW
Anode efficiency	$\eta_a$	76	78	%
Oscillator efficiency	$\eta_{\text{osc}}$	71	71	%
Feedback ratio	$V_{gp}/V_{ap}$	17	17	%
Grid resistor	$R_g$	2.2	2.2	k $\Omega$
Grid current, on load	$I_g$	225	235	mA
Grid voltage, negative	$-V_g$	495	517	V
Grid dissipation	$W_g$	70	80	W
Grid resistor dissipation	$W_{Rg}$	111	121	W





**COOLING**

See cooling curves.

A low velocity air flow directed to the seals may be required,

To obtain optimum life, the seal/envelope temperature under continuously loaded conditions should be kept at or below 200 °C.

**ACCESSORIES**



Filament connector		type	40688
Filament/cathode connector		type	40689
Grid connector	$f \leq 30$ MHz	type	40686
	$f > 30$ MHz	type	40687


MECHANICAL DATA

Dimensions in mm


Mounting position: vertical with anode up or down.

Net weight: approx. 1.13 kg

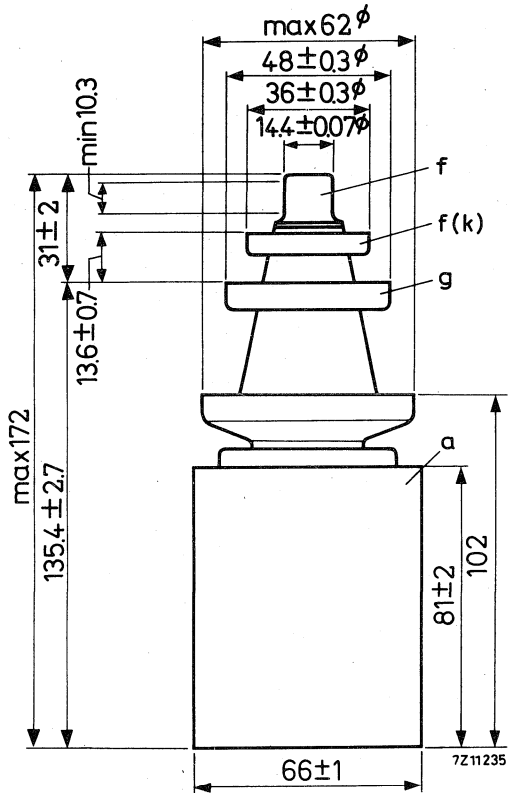


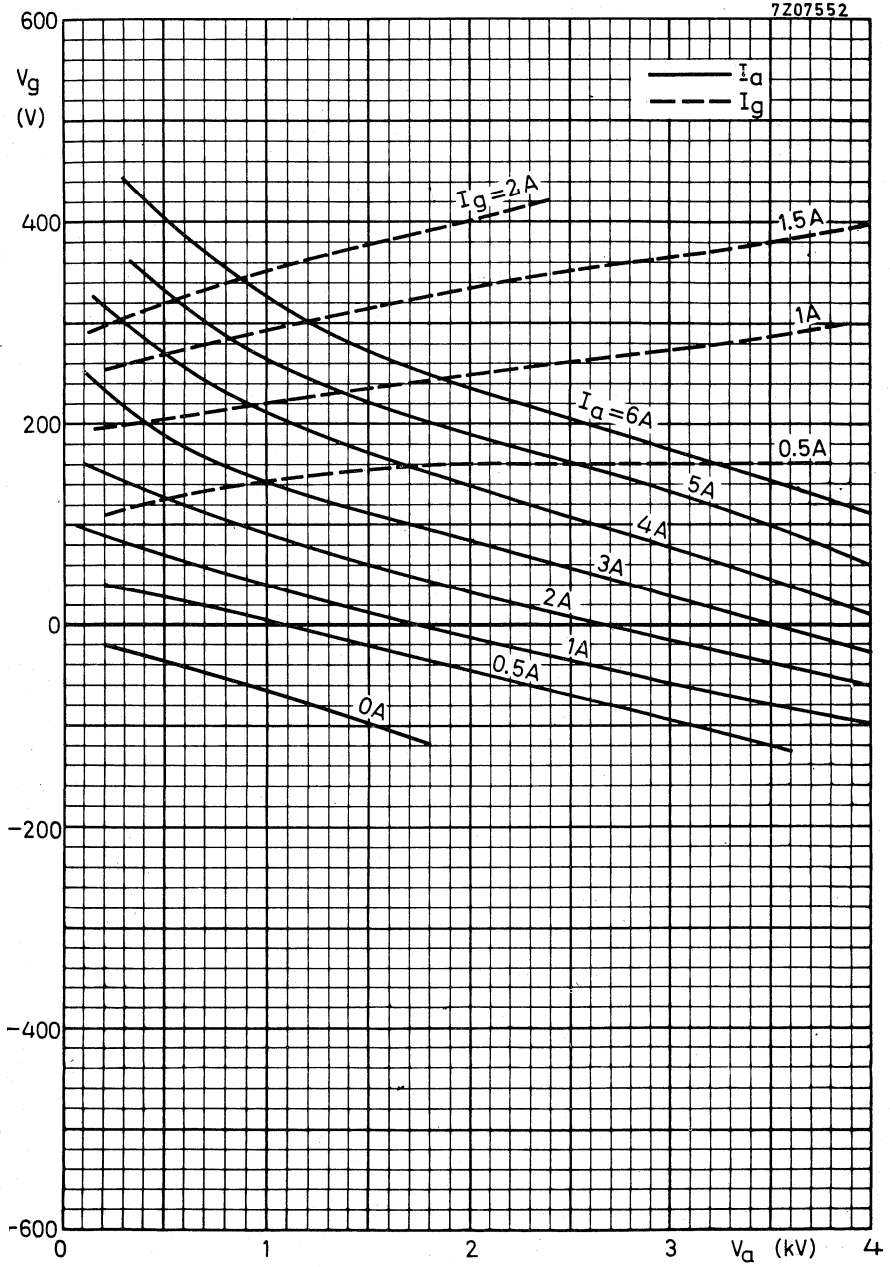

airflow to header

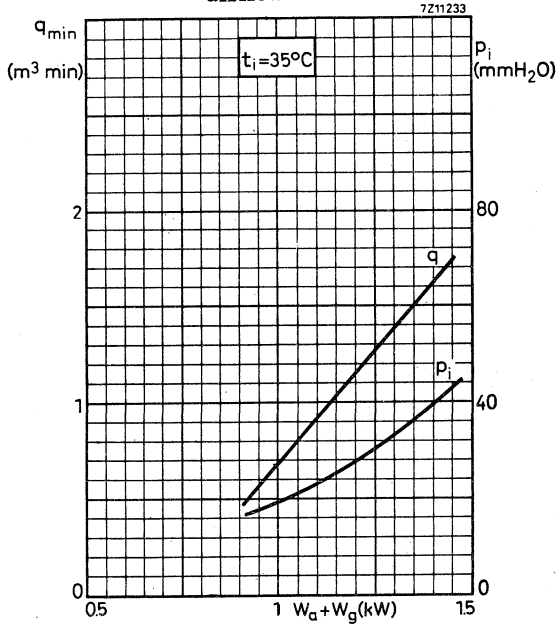

airflow from header

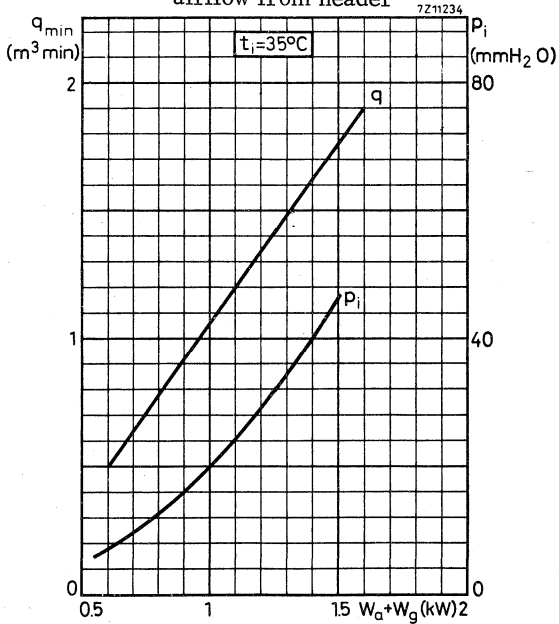

## AIR COOLED R.F. POWER TRIODE

Forced-air cooled coaxial power triode in metal-ceramic construction primarily intended for use as a R.F. class AB linear broad-band amplifier in TV transposer service at frequencies up to 1000 MHz.

### QUICK REFERENCE DATA

QUICK REFERENCE DATA				
<u>Transposer service</u> ( combined sound and vision )				
Frequency	f	470	to	860 MHz
Anode voltage	V <sub>a</sub>			1700 V
Output power in load	W <sub>ℓ</sub>			35 W
Power gain	G			20 dB
<u>Vision amplifier</u>				
Frequency	f	470	to	860 MHz
Anode voltage	V <sub>a</sub>			1700 V
Output power in load	W <sub>ℓ</sub>			35 W
Power gain	G			20 dB

**HEATING** : indirect by a. c. or d. c. ; oxide coated cathode.

Heater voltage	V <sub>f</sub>	5	V±5% <sup>1)</sup>
Heater current	I <sub>f</sub>	2, 1	A
Cathode heating time	T <sub>h</sub> min.	120	s

### CAPACITANCES

Anode to grid	C <sub>ag</sub>	3, 5	pF
Grid to cathode and heater	C <sub>g/kf</sub>	17	pF
Anode to cathode and heater	C <sub>a/kf</sub>	0, 05	pF

### TYPICAL CHARACTERISTICS

Anode voltage	V <sub>a</sub>	1700	V
Anode current	I <sub>a</sub>	170	mA
Transconductance	S	55	mA/V
Amplification factor	μ	200	

<sup>1)</sup> For optimum transposer performance (linearity) ±2%.

## TEMPERATURE LIMITS

Absolute max. anode and seal temperature  $t_{max}$  150 °C

## COOLING

Forced air

$W_a$ (W)	$t_i$ (°C)	$q_{min}$ (l/min)	$P_i$ (mm H <sub>2</sub> O)
300	up to	550	85
250	45	400	52

Recommended air duct see page 4.


## MECHANICAL DATA

Dimensions in mm

Net weight: approx. 180 g.

reference point for anode temperature measurements

	min.	max.
A	52,2	55,2
B	32,2	34,2
C	0,9	2,3
D	25,0	26,4
E	19,9	21,9
F	14	15
G	13,5	14,5
H	20	21
J	44,6	45,4
K	1,9	2,1
L <sup>1)</sup>	8	
M	11,3	11,7
N	15,8	16,4
P	22,6	23,0
Q	35,8	36,2
R	38	39
S	44,6	45,4
T <sup>1)</sup>	7,5	

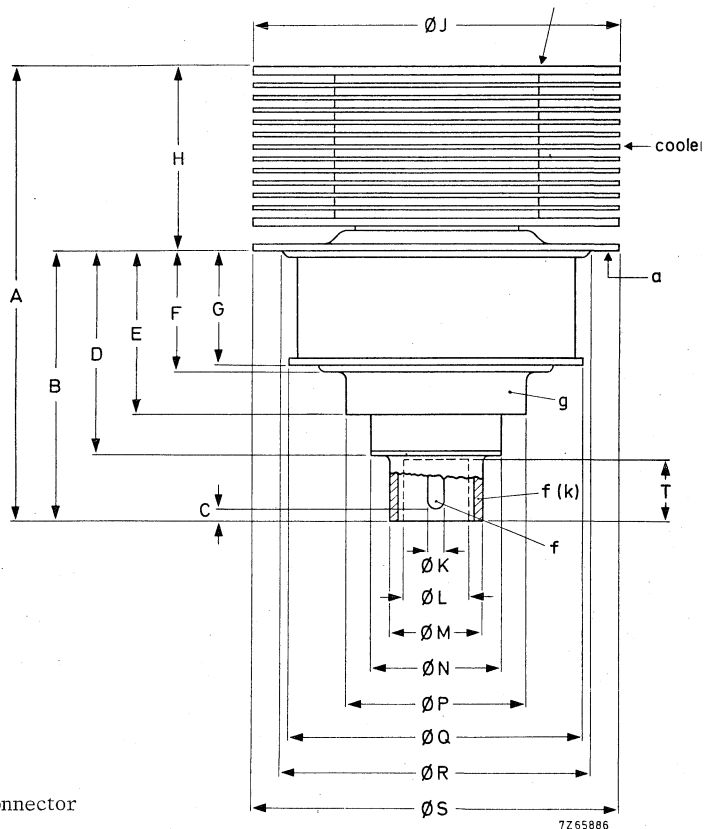

<sup>1)</sup> Available for heater connector

R.F. CLASS AB AMPLIFIER FOR TV TRANSPOSER SERVICE, grounded grid

**LIMITING VALUES** (Absolute max. rating system)

Frequency	f	up to	1000	MHz
Anode voltage	$V_a$	max.	2000	V
Grid voltage	$-V_g$	max.	50	V
Anode dissipation	$W_a$	max.	300	W
Grid current	$I_g$	max.	5	mA
Cathode current	$I_k$	max.	200	mA

**OPERATING CONDITIONS, grounded grid**

		CCIR standard L 1)	CCIR standard G 2)	
Frequency	f	470 to 860	470 to 860	MHz
Bandwidth (-1 dB)	B	9	9	MHz
Anode voltage	$V_a$	1700	1700	V
Grid voltage 3)	$V_g$	-5, 8	-5, 8	V
Grid current	$I_g$	≈ 0	≈ 0	mA
Anode current, no signal	$I_a$	120	120	mA
Anode current at c. w. output power = 35 W	$I_a$	170	170	mA
Driving power (peak white) (sync)	$W_{dr}$	0, 35	0, 35	W
Output power in load (peak white) (sync)	$W_l$	35	35	W
Power gain	G	20	20	dB
Intermodulation products 4)	d	-	≤ -52	dB
Differential phase		≤ 2	5) ≤ 2	°
Differential gain		≥ 96	5) ≥ 96	%

1) Positive modulation, negative synchronization, sound and vision separate.

2) Negative modulation, positive synchronization, combined sound and vision.

3) To be adjusted for the stated no-signal anode current.

4) Three-tone test method (vision carrier -8 dB, sound carrier -7 dB, sideband signal -16 dB with respect to the sum signal amplitude of the composite signal).



Stated figure applies to a vision-to-sound power ratio of 5: 1.

For a vision-to sound power ratio of 10: 1: IM products ≤ -55 dB.


5) Measured with a saw-tooth amplitude running from 17 % to 75 % of the peak sync value, with superimposed a 4, 43 MHz sinewave with a 10% peak-to-peak value.

Recommended air duct

Dimensions in mm

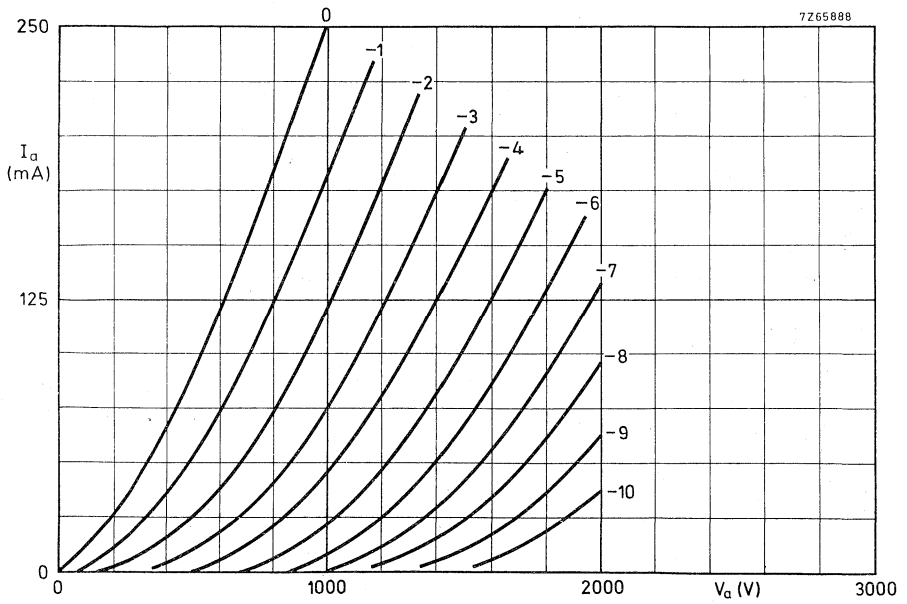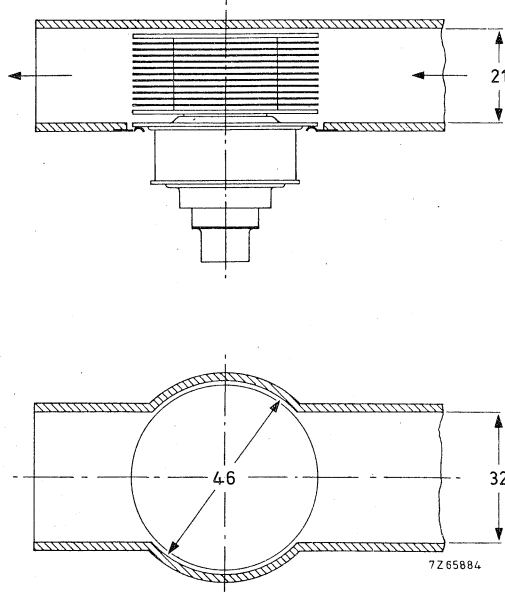



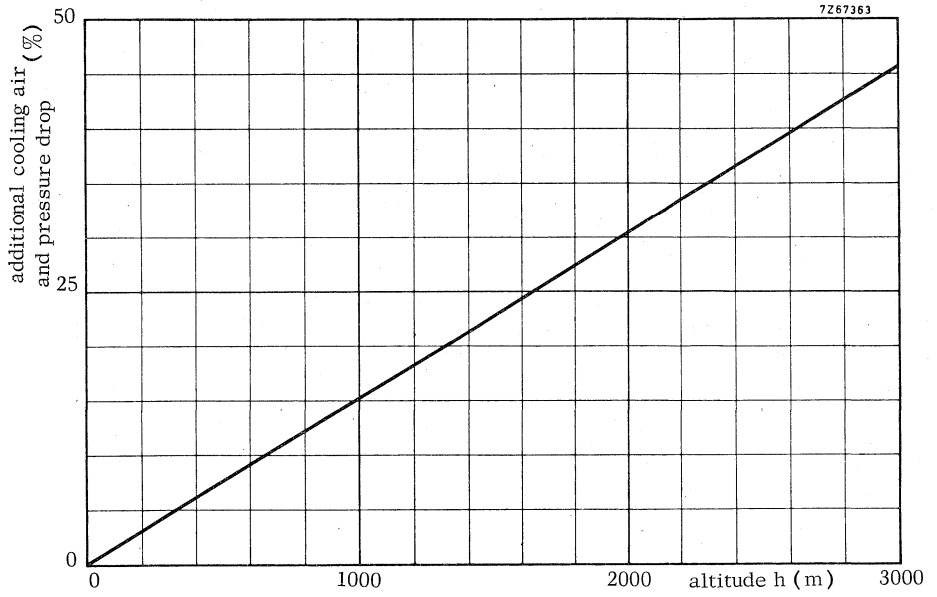



## AIR COOLED R.F. POWER TRIODE

Forced-air cooled coaxial power triode in metal-ceramic construction primarily intended for use as a R.F. class AB linear broadband amplifier in TV transposer service at frequencies up to 1000 MHz.

QUICK REFERENCE DATA			
Transposer service (combined sound and vision)			
Frequency	$f$	470 to 860	MHz
Anode voltage	$V_a$	1900	V
Output power in load (sync)	$W_l$	55	W
Power gain	$G$	19	dB

**HEATING** : indirect by a.c. or d.c.; oxide coated cathode.

Heater voltage	$V_f$	5	$V \pm 5\%$ <sup>1)</sup>
Heater current	$I_f$	2,1	A
Cathode heating time	$T_h$ min.	120	s

### CAPACITANCES

Anode to grid	$C_{ag}$	3,5	pF
Grid to cathode and heater	$C_{g/kf}$	17	pF
Anode to cathode and heater	$C_{a/kf}$	0,05	pF

### TYPICAL CHARACTERISTICS

Anode voltage	$V_a$	1900	V
Anode current	$I_a$	180	mA
Transconductance	$S$	60	mA/V
Amplification factor	$\mu$	200	

### TEMPERATURE LIMITS

Absolute max. seal temperature	$t_s$ max.	150	$^{\circ}C$
Absolute max, anode temperature at reference point	$t_a$ max.	100	$^{\circ}C$

<sup>1)</sup> For optimum transposer performance (linearity)  $\pm 2\%$ .

COOLING

Forced air

$W_a$ (W)	$t_i$ (°C)	$q_{min}$ (l/min)	$P_i$ (mm H <sub>2</sub> O)
325	up to	550	56
275	45	400	33

Recommended airduct see page 4.


MECHANICAL DATA

Dimensions in mm

Net weight : approx. 290 g

reference point for anode temperature measurements

	min.	max.
A	61,2	64,2
B	32,2	34,2
C	0,9	2,3
D	25,0	26,4
E	19,9	21,9
F	14	15
G	13,5	14,5
H	29	30
J	53,9	54,1
K	1,9	2,1
L <sup>1)</sup>	8	
M	11,3	11,7
N	15,8	16,4
P	22,6	23,0
Q	35,8	36,2
R	38	39
S	44,6	45,4
T <sup>1)</sup>	7,5	

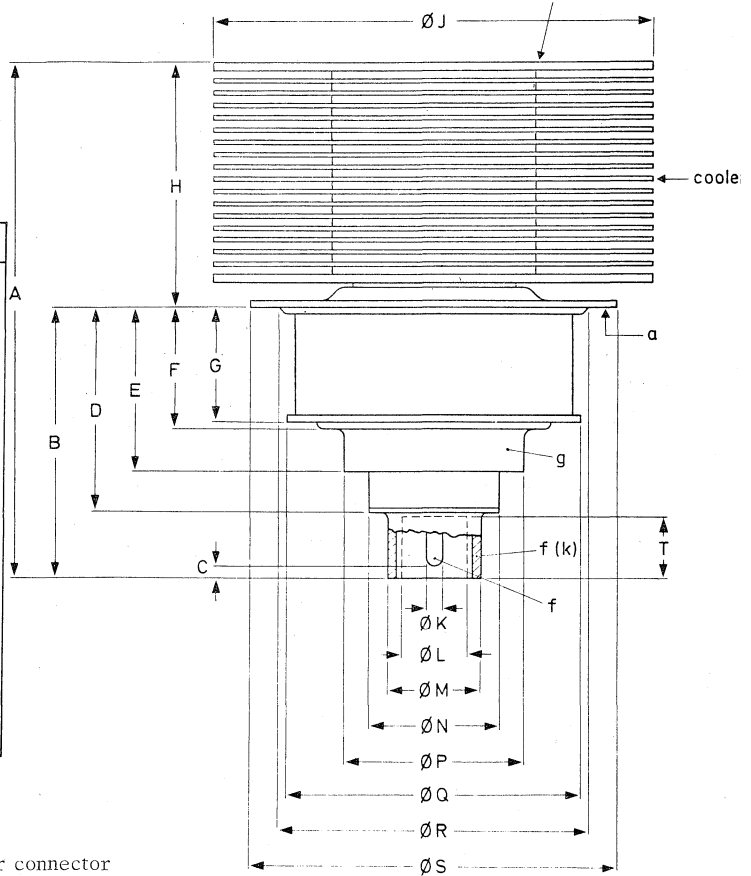

7Z65987

<sup>1)</sup> Available for heater connector

## R.F. CLASS AB AMPLIFIER FOR TV TRANSPOSER SERVICE, grounded grid

## LIMITING VALUES (Absolute max. rating system)

Frequency	f	up to	1000	MHz
Anode voltage	$V_a$	max.	2000	V
Grid voltage	$-V_g$	max.	50	V
Anode dissipation	$W_a$	max.	325	W
Grid current	$I_g$	max.	5	mA
Cathode current	$I_k$	max.	250	mA

## OPERATING CONDITIONS, grounded grid

				CCIR standard G <sup>1)</sup>
Frequency	f	470 to	860	MHz
Bandwidth (-1 dB)	B		9	MHz
Anode voltage	$V_a$		1900	V
Grid voltage <sup>2)</sup>	$V_g$		-6,6	V
Grid current	$I_g$		≈ 0	mA
Anode current, no signal	$I_a$		130	mA
Anode current at zero dB level (vision carrier)	$I_a$		180	mA
Driving power (sync)	$W_{dr}$		0,7	W
Output power in load	$W_l$		55	W
Power gain	G		19	dB
Intermodulation products <sup>3)</sup>	d		-54	dB
Differential phase <sup>4)</sup>			2	°
Differential gain <sup>4)</sup>			96	%

1) Negative modulation, positive synchronization, combined sound and vision.




2) To be adjusted for the stated no-signal anode current.


3) Three-tone test method (vision carrier -8 dB, sound carrier -7 dB, sideband signal -16 dB with respect to the sum signal amplitude of the composite signal).  
Stated figure applies to a vision to sound power ratio of 5 : 1.  
For a vision to sound power ratio of 10 : 1 : IM products ≤ -56 dB.

4) Measured with a saw-tooth amplitude running from 17 % to 75 % of the peak sync value, with superimposed a 4,43 MHz sinewave with a 10 % peak-to-peak value.

Recommended airduct

Dimensions in mm

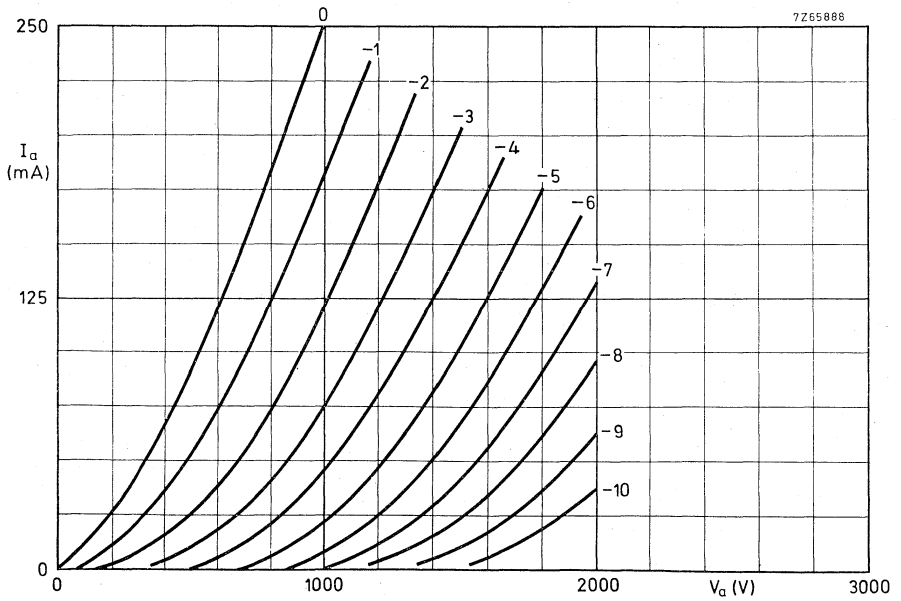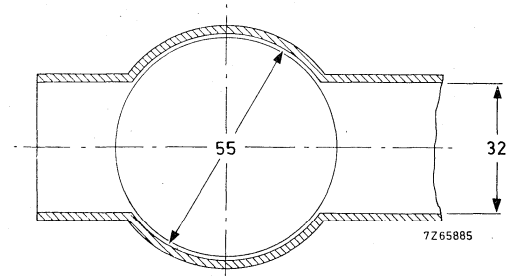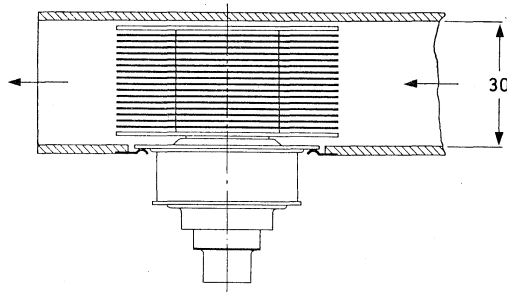

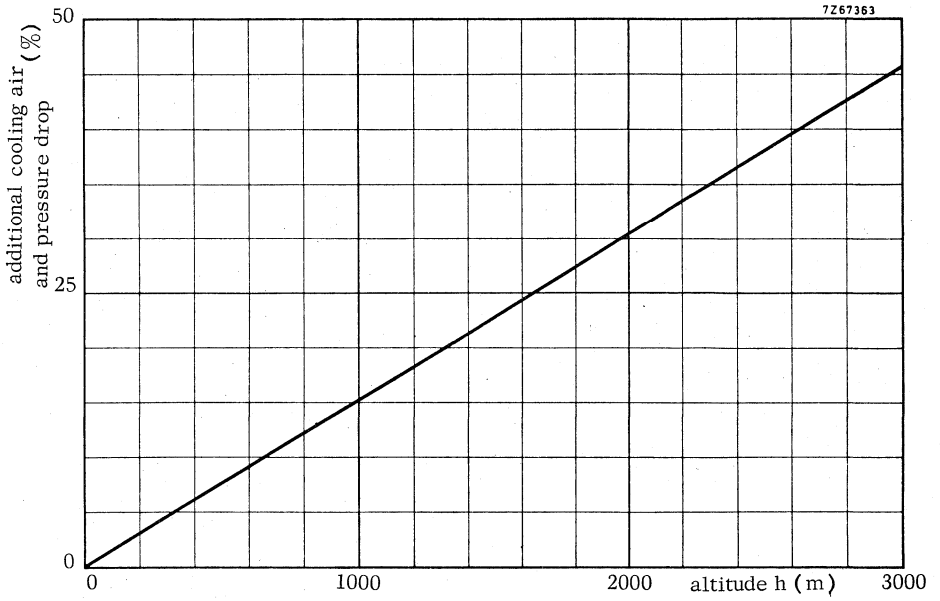





## AIR COOLED R.F. POWER TRIODE

Forced-air cooled coaxial power triode in metal-ceramic construction primarily intended for use as R.F. class AB linear broadband amplifier in TV transposer service at frequencies up to 1000 MHz.

QUICK REFERENCE DATA			
Frequency	$f$	370 to 860	MHz
Anode voltage	$V_a$	3000	V
Output power in load	$W_l$	220	W
Power gain	$G$	16,5	dB

**HEATING** : indirect, by a.c. (50 Hz to 400 Hz) or d.c.; oxide coated cathode.

Heater voltage	$V_f$	6,0 to 6,3	$V \pm 5\%$ 1)
Heater current	$I_f$	4,8 to 5,8	A
Cathode heating time	$T_h$	min. 180	s

### CAPACITANCES

Anode to grid	$C_{ag}$	6,8 to 8,0	pF
Grid to cathode and heater	$C_{g/kf}$	20 to 30	pF
Anode to cathode and heater	$C_{a/kf}$	90 to 180	fF

### TYPICAL CHARACTERISTICS

Anode voltage	$V_a$	3	kV
Anode current	$I_a$	400	mA
Transconductance	$S$	70	mA/V
Amplification factor	$\mu$	90	

### TEMPERATURE LIMITS

Absolute max. temperature measured at reference points	$t$	max. 250	$^{\circ}C$
--	-----	----------	-------------

To obtain optimum life, this temperature should not exceed 200  $^{\circ}C$ .

1) The heater voltage must be adjusted between 6,0 and 6,3 V.

For optimum performance (linearity) the voltage set must be maintained within  $\pm 2\%$  for transposer service, or  $\pm 5\%$  for other applications.

**COOLING**

Anode: forced air

$W_a$ (W)	$t_i$ (°C)	$q_{min}$ (m <sup>3</sup> /min)	$P_i$ (mm H <sub>2</sub> O)
1800	25	2	180



Other terminals: low velocity air flow.

When only the heater voltage is applied, the heater and heater/cathode terminals should also be cooled.

Cooling air and voltages may be switched off simultaneously.

**MECHANICAL DATA**

Dimensions in mm

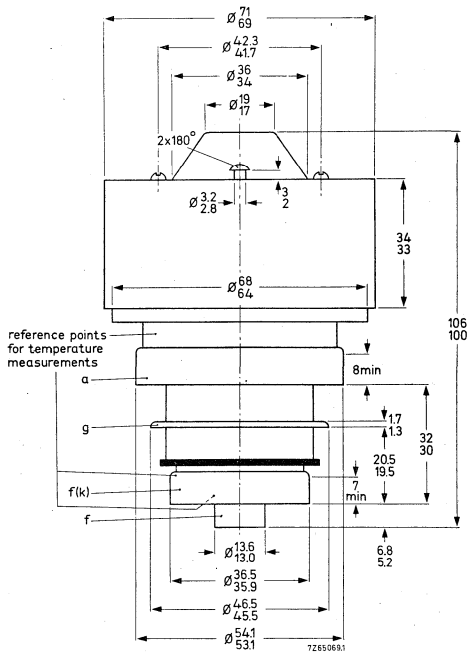

The radiator and the terminals are situated within concentric cylinders of the following dimensions:

Radiator	72,0 dia
Anode terminal	55,1 dia
grid terminal	47,0 dia
Heater/cathode terminal	37,0 dia
Heater terminal	14,5 dia

## R.F. CLASS AB AMPLIFIER FOR TV TRANSPOSER SERVICE

## LIMITING VALUES (Absolute max. rating system)

Frequency	f	up to	1000	MHz
Anode voltage	$V_a$	max.	3500	V
Grid voltage	$-V_g$	max.	200	V
Anode dissipation	$W_a$	max.	1800	W
Grid current	$I_g$	max.	5	mA
Cathode current	$I_k$	max.	550	mA <sup>1)</sup>

## OPERATING CONDITIONS , grounded grid

Standard		CCIR -G	<sup>2) 3)</sup>
Frequency	f	470 to 860	MHz
Anode voltage	$V_a$	3000	V
Grid voltage <sup>4)</sup>	$V_g$	-30	V
Anode current, no signal	$I_a$	420	mA
Anode current at zero dB level (vision carrier)	$I_a$	650	mA
Grid current	$I_g$	≈ 0	mA
Driver output power (sync)	$W_{dr}$	7	W
Output power in load (sync)	$W_l$	220	W
Power gain	G	16,5	dB
Intermodulation products <sup>5)</sup>	d	-55	dB
		< -53	dB
Intermodulation products <sup>6)</sup>	d	-57	dB
		< -55	dB

<sup>1)</sup> During a short period, for adjustment of the transmitter,  $I_k$  max. = 700 mA.

<sup>2)</sup> Negative modulation, positive synchronization, combined sound and vision.


<sup>3)</sup> R.F. driving power should be applied after the heater and electrode voltages.

<sup>4)</sup> To be adjusted for the stated no-signal anode current. Range values for equipment design -15 to -45 V.


<sup>5)</sup> Three-tone test method (vision carrier -8 dB, sound carrier -7 dB, sideband signal -17 dB with respect to peak sync level = 0 dB).



<sup>6)</sup> Three-tone test method (vision carrier -8 dB, sound carrier -10 dB, sideband signal -16 dB with respect to peak sync level = 0 dB).



7264829

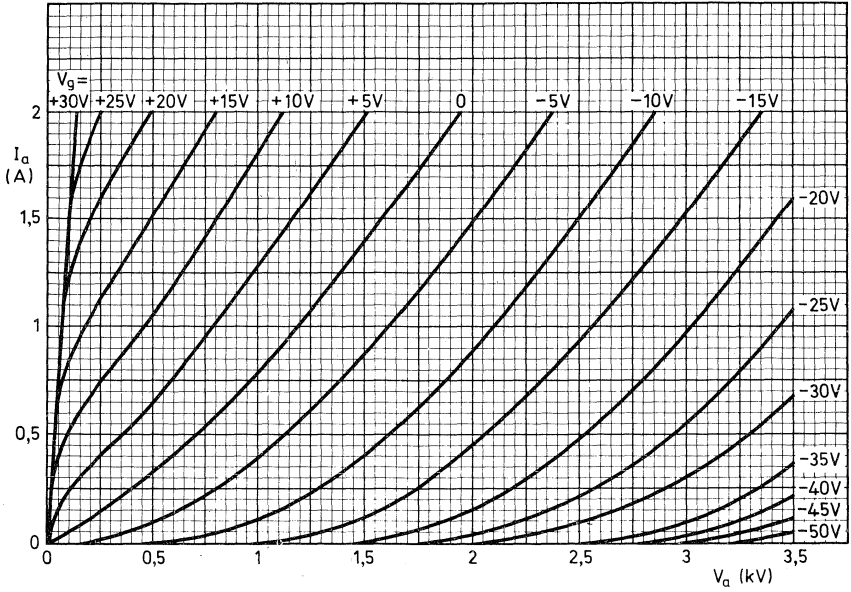

7270218

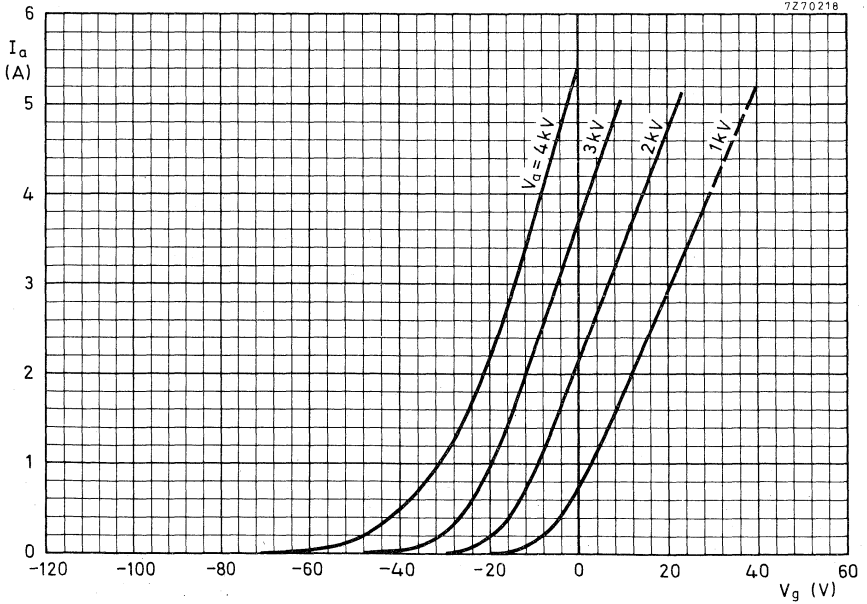

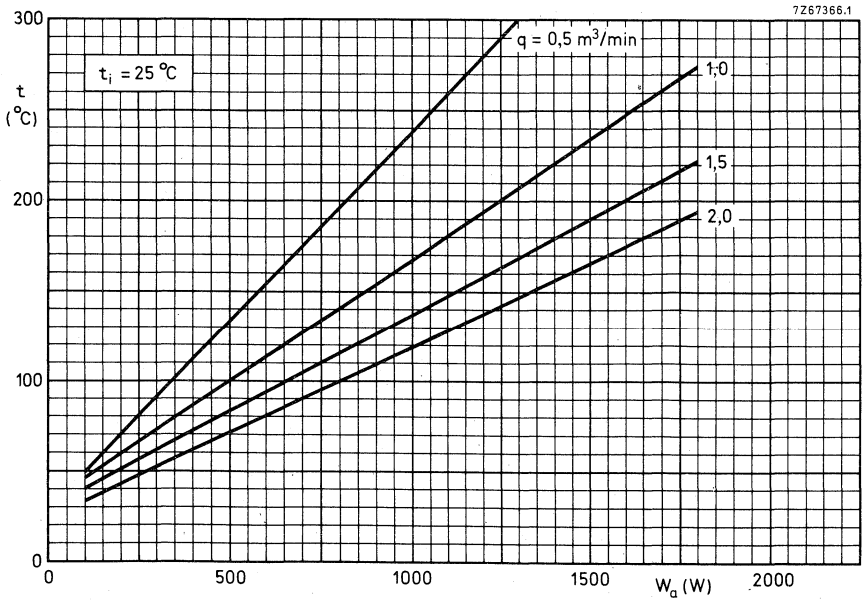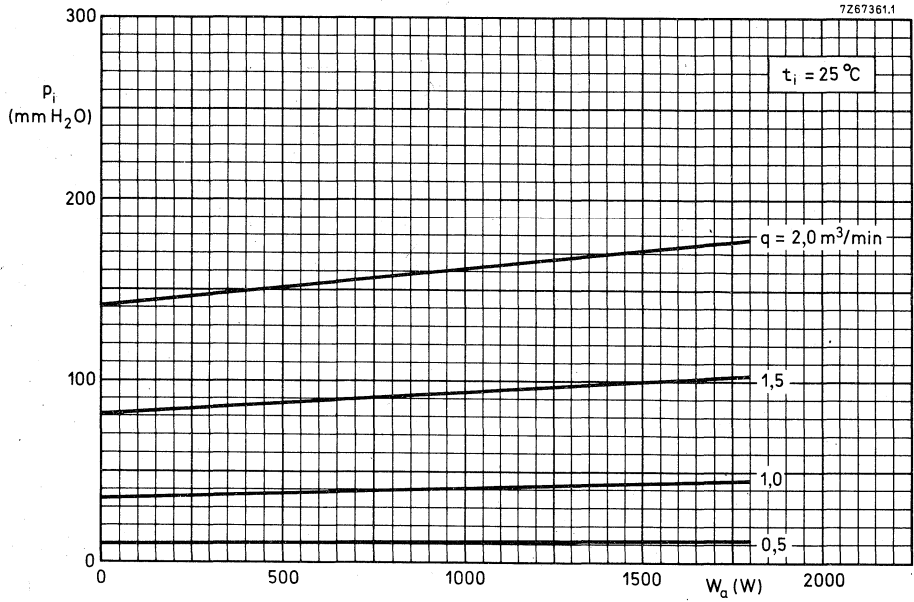

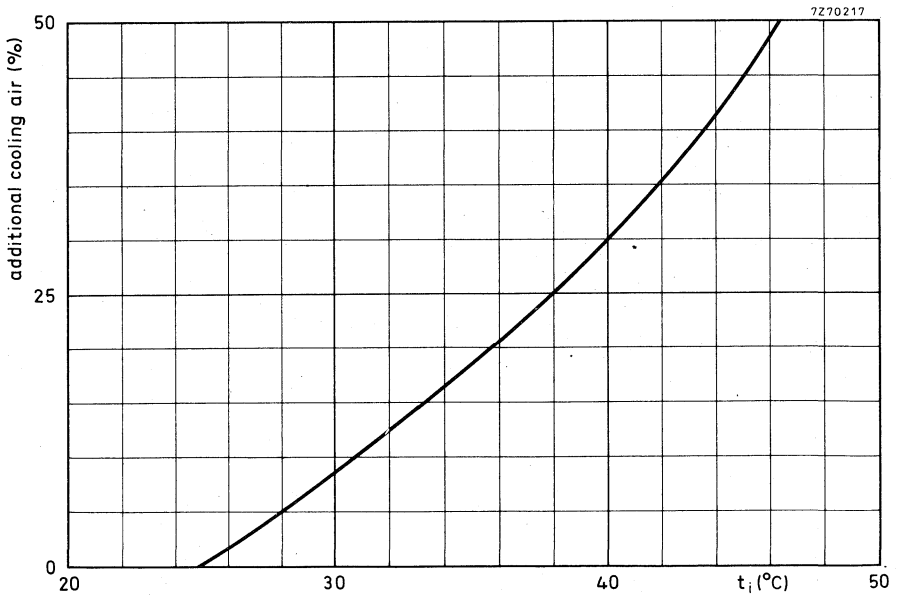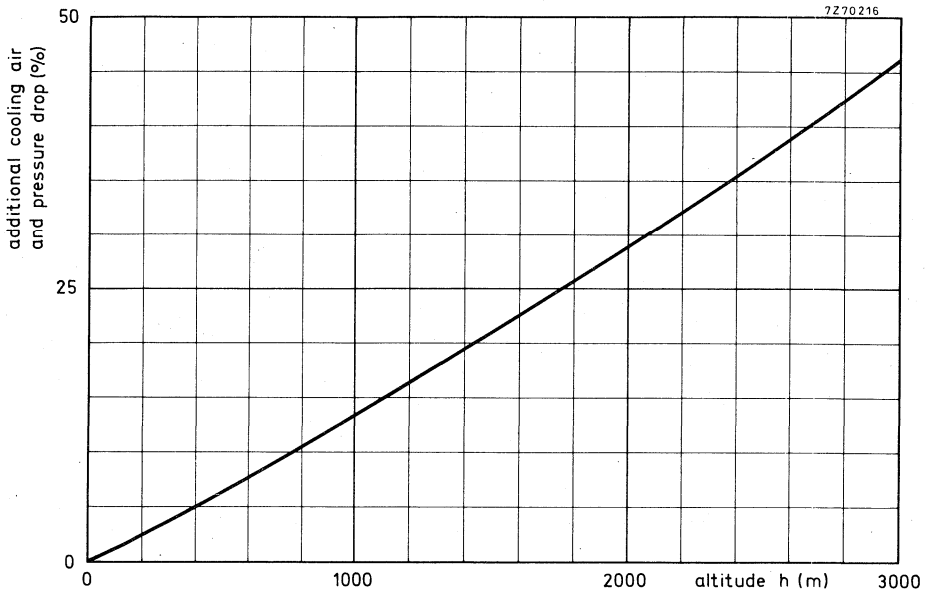

## AIR COOLED R.F. POWER TRIODE

Obsolete type. Replacement type YD1333.



# AIR COOLED R.F. POWER TRIODE

Obsolete type Replacement type YD1336.





## AIR COOLED R.F. POWER TRIODE

Forced-air cooled coaxial power triode in metal-ceramic construction primarily intended for use as R. F. class AB linear broadband amplifier in TV transposer service at frequencies up to 1000 MHz.

### QUICK REFERENCE DATA

Transposer service (combined sound and vision)			
Frequency	f	470 to 860	MHz
Anode voltage	$V_a$	2500	V
Output power in load (sync)	$W_\ell$	110	W
Power gain	G	16	dB

**HEATING** : indirect by a. c. (50 Hz to 400 Hz) or d. c. ; oxide coated cathode.

Heater voltage	$V_f$	6.0 to 6.3	V $\pm 5\%$ 1)
Heater current	$I_f$	4.8 to 5.8	A
Cathode heating time	$T_h$	min. 180	s

### CAPACITANCES

Anode to grid	$C_{ag}$	6.8 to 8.0	pF
Grid to cathode and heater	$C_{g/kf}$	20 to 30	pF
Anode to cathode and heater	$C_{a/kf}$	90 to 180	fF

### TYPICAL CHARACTERISTICS

Anode voltage	$V_a$	2	kV
Anode current	$I_a$	250	mA
Transconductance	S	60	mA/V
Amplification factor	$\mu$	90	

### TEMPERATURE LIMITS

Absolute max. temperature measured at reference points	t	max. 250	$^{\circ}\text{C}$
--	---	----------	--------------------

To obtain optimum life, this temperature should not exceed 200  $^{\circ}\text{C}$ .

1) The heater voltage must be adjusted between 6.0 and 6.3 V.

For optimum performance (linearity) the voltage set must be maintained within  $\pm 2\%$  for transposer service, or  $\pm 5\%$  for other applications.

**COOLING**

Anode: forced air


$W_a$ (W)	$t_i$ (°C)	$q_{min}$ (m <sup>3</sup> /min)	$P_i$ (mm H <sub>2</sub> O)
900	25	1,5	31

Other terminals: low velocity airflow.

When only the heater voltage is applied the heater and heater/cathode terminals should also be cooled.

Cooling air and voltages may be switched off simultaneously.

**MECHANICAL DATA**

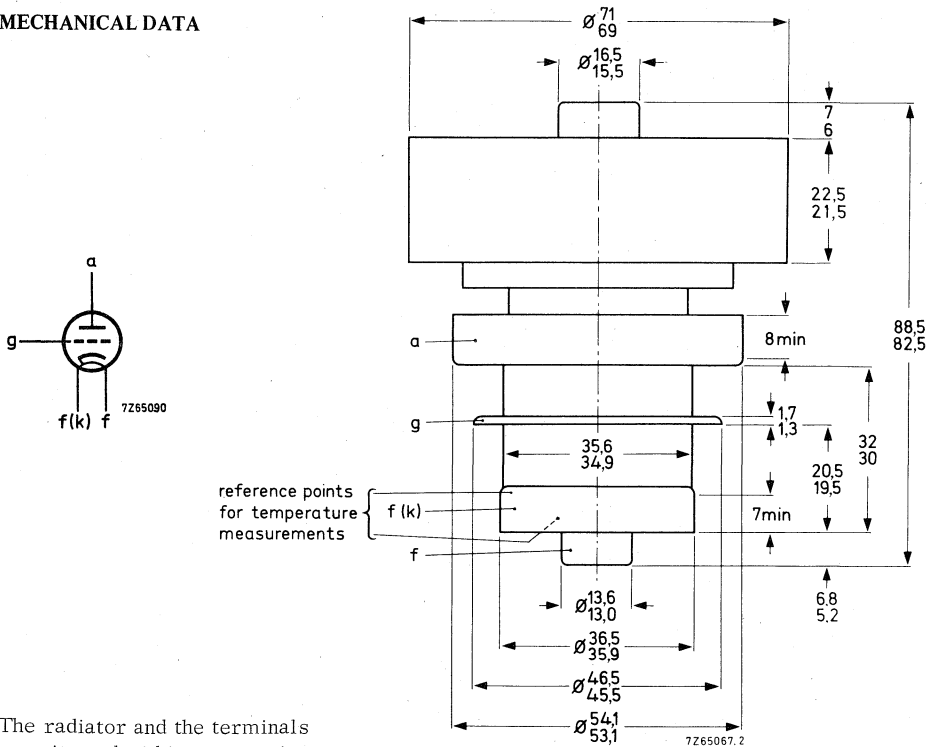

The radiator and the terminals are situated within concentric cylinders of the following dimensions:

Radiator	72,0 dia
Anode terminal	55,1 dia
Grid terminal	47,0 dia
Heater/cathode terminal	37,0 dia
Heater terminal	14,5 dia

## R.F. CLASS AB AMPLIFIER FOR TV TRANSPOSER SERVICE

grounded grid

## LIMITING VALUES (Absolute max. rating system)

Frequency	f	up to	1000	MHz
Anode voltage	$V_a$	max.	3500	V
Grid voltage	$-V_g$	max.	200	V
Anode dissipation	$W_a$	max.	900	W
Grid current	$I_g$	max.	5	mA
Cathode current	$I_k$	max.	550	mA

## OPERATING CONDITIONS , grounded grid

Standard		CCIR-G		1) 2)
		470 to 860	470 to 860	
Frequency	f	470 to 860	470 to 860	MHz
Anode voltage	$V_a$	2500	1800	V
Grid voltage <sup>3)</sup>	$V_g$	-24	-14	V
Anode current, no signal	$I_a$	250	330	mA
Anode current at zero dB level (vision carrier)	$I_a$	420	450	mA
Grid current	$I_g$	≈ 0	≈ 0	mA
Driver output power (sync)	$W_{dr}$	3,5	3,5	W
Output power in load (sync)	$W_l$	110	110	W
Power gain	G	16	16	dB
Intermodulation products <sup>4)</sup>	d	-58 < -56	-56 < -54	dB dB

1) Negative modulation, positive synchronization, combined sound and vision.

2) R.F. driving power should be applied after the heater and electrode voltages.

3) To be adjusted for the stated no-signal anode current. Range values for equipment design : -10 to -40 V, -5 to -35 V respectively.

4) Three-tone test method (vision carrier -8 dB, sound carrier -10 dB, sideband signal -16 dB with respect to peak sync level = 0 dB).

## R.F. CLASS AB AMPLIFIER FOR TV SOUND SERVICE

## LIMITING VALUES (Absolute max. rating system)



Frequency	f	up to	1000	MHz
Anode voltage	$V_a$	max.	3500	V
Grid voltage	$-V_g$	max.	200	V
Anode dissipation	$W_a$	max.	900	W
Grid current	$I_g$	max.	5	mA
Cathode current	$I_k$	max.	550	mA

## OPERATING CONDITIONS 1)


Frequency	f	174 to	860	MHz
Anode voltage	$V_a$		2700	V
Grid voltage 2)	$V_g$		-28	V
Anode current, no signal	$I_a$		200	mA
Anode current	$I_a$		350	mA
Grid current	$I_g$		0	mA
Driver output power	$W_{dr}$		8	W
Output power in load	$W_l$		300	W
Power gain	G		16	dB

1) R.F. driving power should be applied after the heater and electrode voltages.


2) To be adjusted for the stated no-signal anode current. Range values for equipment design -15 to -40 V. For "automatic bias" the cathode resistor range is 80 to 180  $\Omega$ .

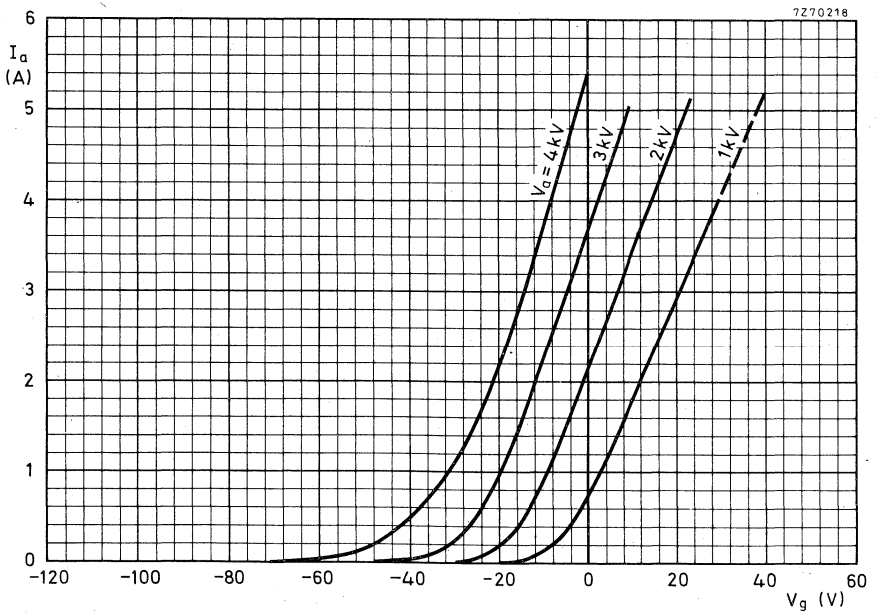
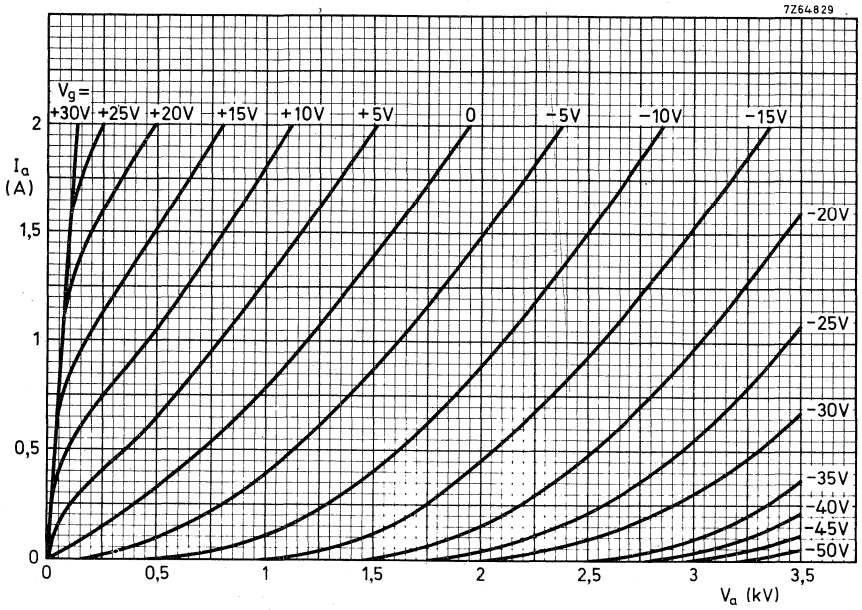


7266124.1

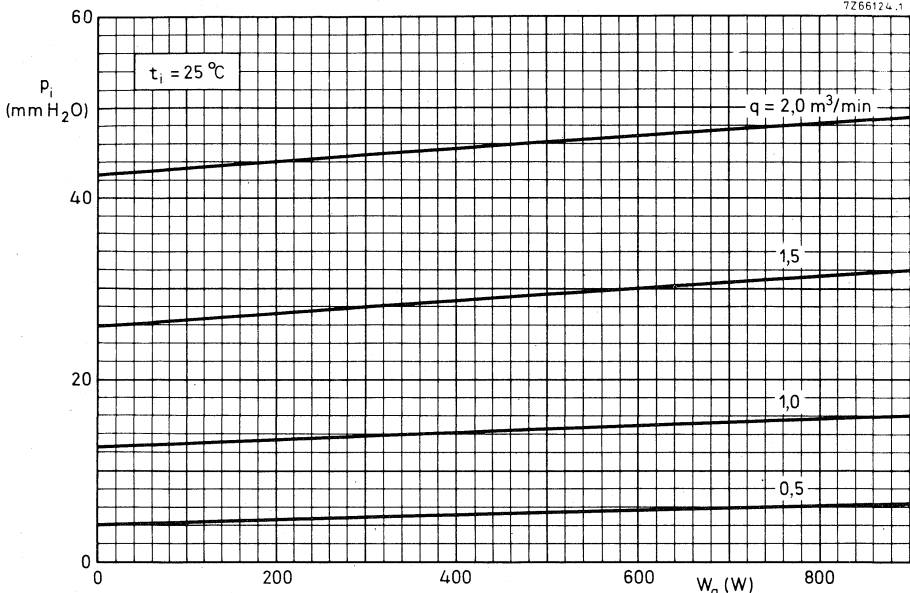

7266123.1

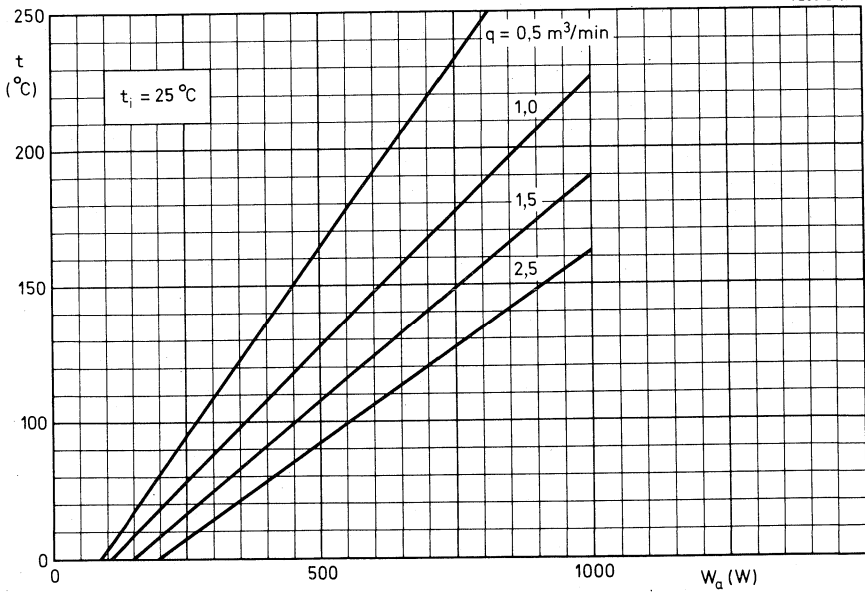

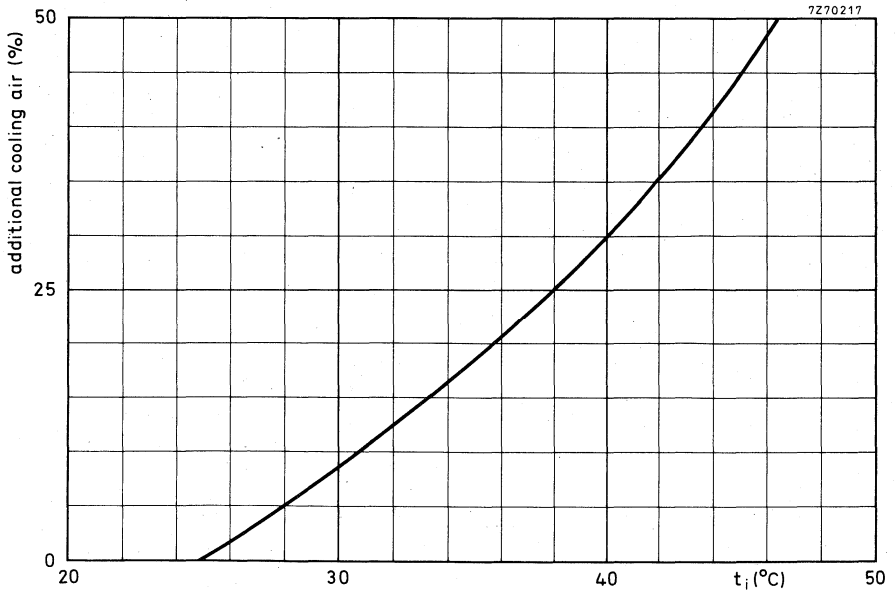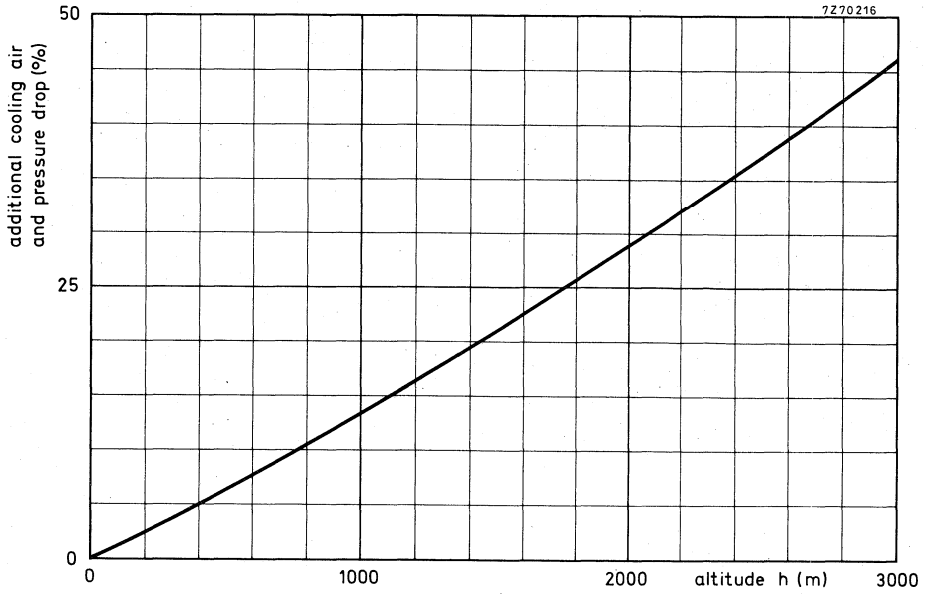





## AIR COOLED R.F. POWERTRIODE

Forced-air cooled coaxial power triode in metal-ceramic construction primarily intended for use as R.F. class AB linear broadband amplifier in TV transposer service at frequencies up to 1000 MHz.

### QUICK REFERENCE DATA

Transposer service (combined sound and vision)

Frequency	f	470 to 860	MHz
Anode voltage	$V_a$	2500	V
Output power in the load (sync)	$W_l$	110	W
Power gain	G	16,5	dB

**HEATING** : indirect, by a.c. (50 Hz to 400 Hz) or d.c.; oxide coated cathode.

Heater voltage	$V_f$	6,0 to 6,3	$V \pm 5\% \text{ } ^1$
Heater current	$I_f$	4,8 to 5,8	A
Cathode heating time	$T_h$	min. 180	s

### CAPACITANCES

Anode to grid	$C_{ag}$	6,8 to 8	pF
Grid to cathode and heater	$C_{g/kf}$	20 to 30	pF
Anode to cathode and heater	$C_{a/kf}$	90 to 180	fF

### TYPICAL CHARACTERISTICS

Anode voltage	$V_a$	2	kV
Anode current	$I_a$	400	mA
Transconductance	S	70	mA/V
Amplification factor	$\mu$	90	

### TEMPERATURE LIMITS

Absolute max. temperature measured at reference points	t	max. 250	$^{\circ}\text{C}$
--	---	----------	--------------------

To obtain optimum life, this temperature should not exceed 200  $^{\circ}\text{C}$ .

1) The heater voltage must be adjusted between 6,0 and 6,3 V.

For optimum performance (linearity) the voltage set must be maintained within  $\pm 2\%$  for transposer service, or  $\pm 5\%$  for other applications.

**COOLING**

Anode: forced air

$W_a$ (W)	$t_i$ (°C)	$q_{min}$ (m <sup>3</sup> /min)	$P_i$ (mm H <sub>2</sub> O)
1000	25	0,7	2

Other terminals: low velocity air flow.

When only the heater voltage is applied, the heater and heater/cathode terminals should also be cooled.



Cooling air and voltages may be switched off simultaneously.

**MECHANICAL DATA**

Dimensions in mm

Net weight : approx. 1000 g

Mounting position: any

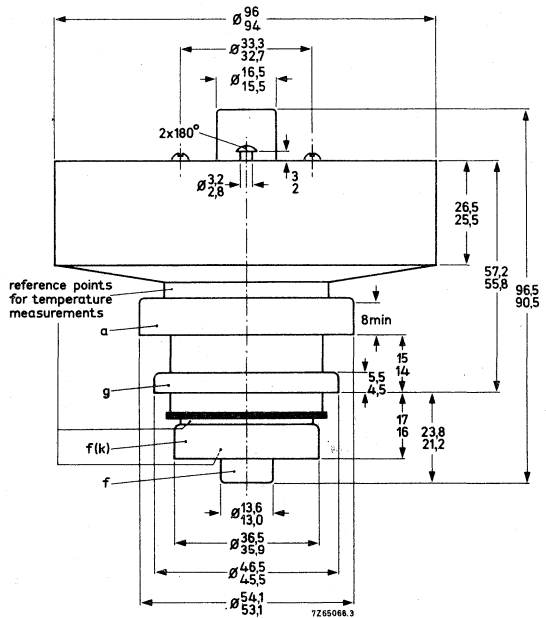

The radiator and the terminals are situated within concentric cylinders of the following dimensions :

Radiator	97,0 dia
Anode terminal	55,1 dia
Grid terminal	47,0 dia
Heater/cathode terminal	37,0 dia
Heater terminal	14,5 dia

## R.F. CLASS AB AMPLIFIER FOR TV TRANSPOSER SERVICE

grounded grid

**LIMITING VALUES** (Absolute max. rating system)

Frequency	f	up to	1000	MHz
Anode voltage	$V_a$	max.	3500	V
Grid voltage	$-V_g$	max.	200	V
Anode dissipation	$W_a$	max.	1800	W
Grid current	$I_g$	max.	$\pm 5$	mA
Cathode current	$I_k$	max.	550	mA <sup>1)</sup>

**OPERATING CONDITIONS**, grounded grid <sup>2)3)</sup>

Standard		<u>CCIR-G</u>	
Frequency	f	470 to 860	MHz
Anode voltage	$V_a$	2500	V
Grid voltage <sup>4)</sup>	$V_g$	-25	V
Anode current, no signal <sup>4)</sup>	$I_a$	200 to 300	mA
Anode current at zero dB level (vision carrier)	$I_a$	420 (<500)	mA
Grid current	$I_g$	$\approx 0$	mA
Driver output power (sync)	$W_{dr}$	4	W
Output power in load (sync)	$W_l$	110	W
Power gain	G	16,5	dB
Intermodulation products	d	-60 < -58	dB dB

<sup>1)</sup> During a short period, for adjustment of the transmitter,  $I_k$  max. = 700 mA.

<sup>2)</sup> Negative modulation, positive synchronization, combined sound and vision.

<sup>3)</sup> R.F. driving power should be applied after the heater and electrode voltages.


<sup>4)</sup> To be adjusted for the zero-signal anode current stated on the measuring report supplied with each tube.

Range values for equipment design -10 to -40 V.


The stated no-signal anode current results in optimum linearity.



<sup>5)</sup> Three-tone method (vision carrier -8 dB, sound carrier -10 dB, sideband signal -16 dB with respect to peak sync level = 0 dB).



7264829

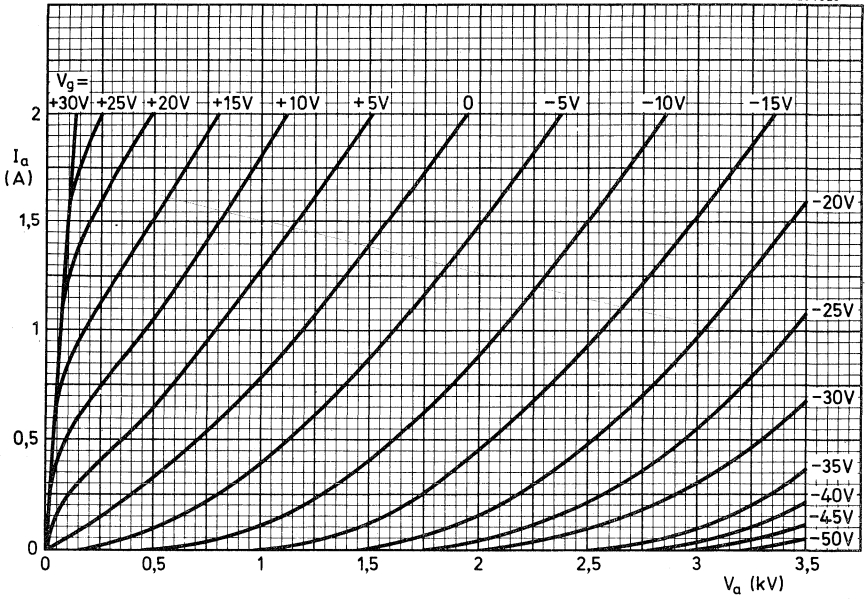

7270218

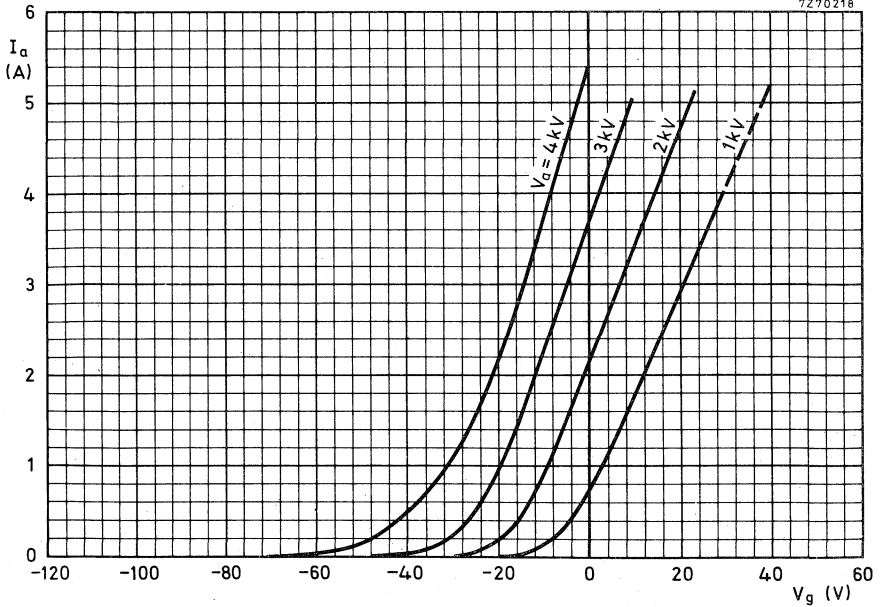

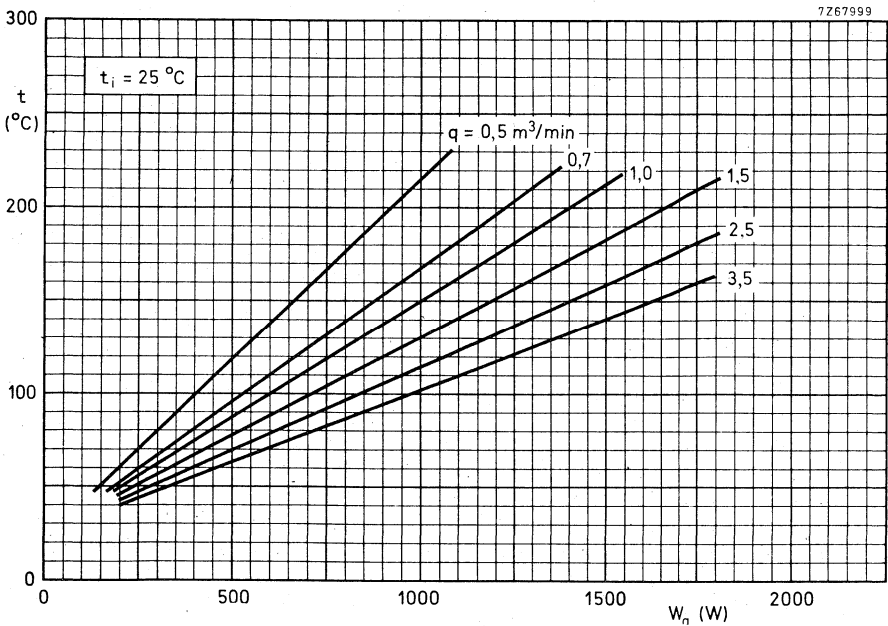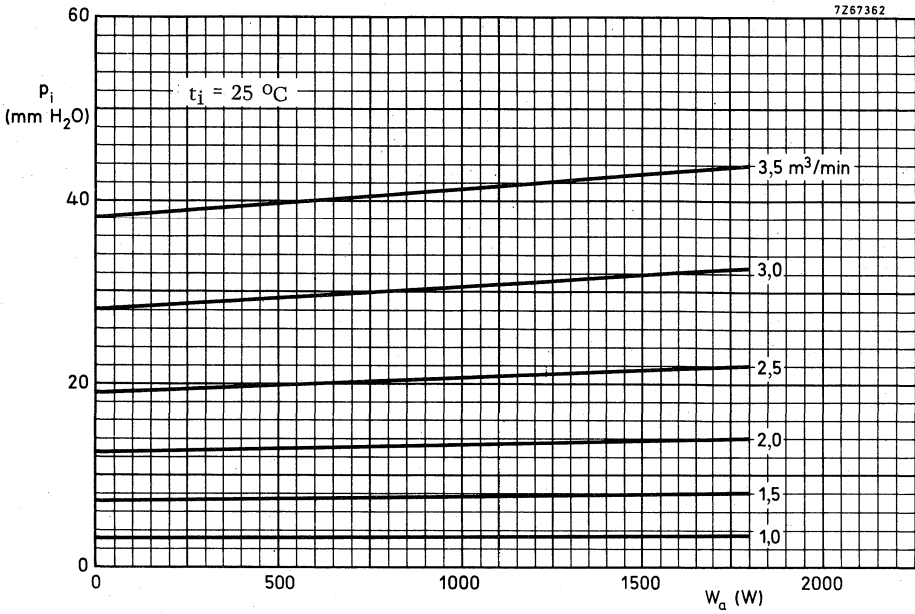

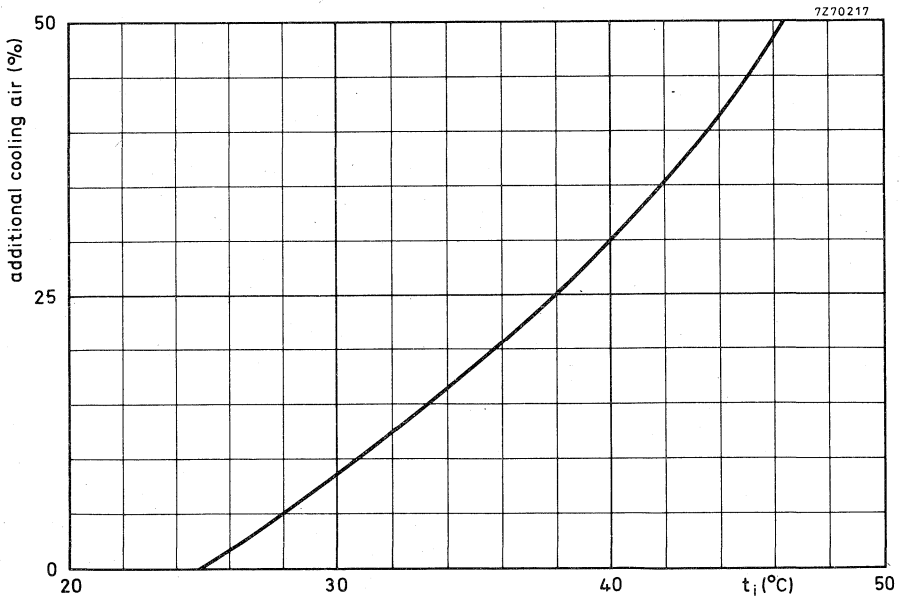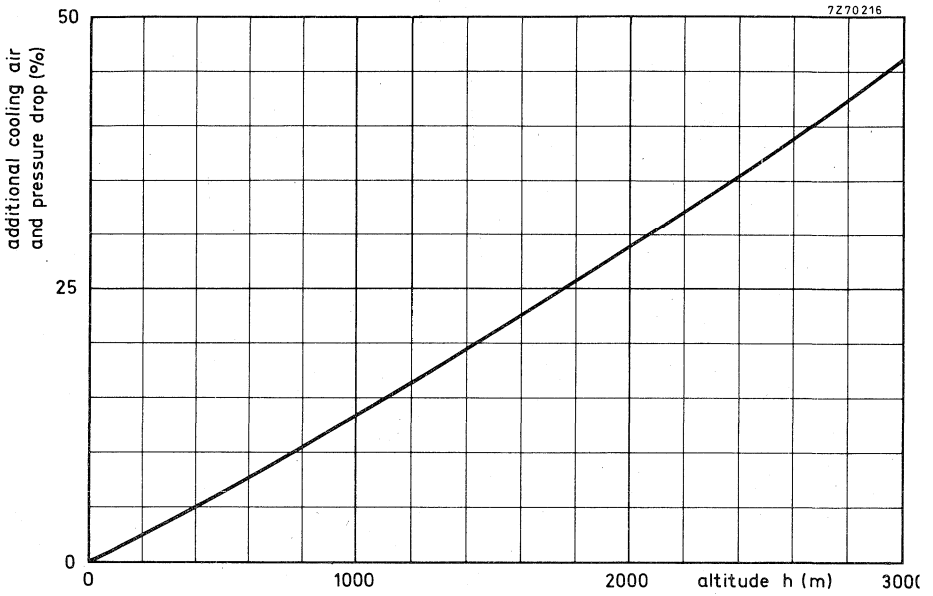

## AIR COOLED R.F. POWER TRIODE

Forced-air cooled coaxial power triode in metal-ceramic construction primarily intended for use as R.F. class AB linear broadband amplifier in TV sound and vision service at frequencies up to 1000 MHz.

QUICK REFERENCE DATA			
Frequency	f	470 to 860	MHz
Anode voltage	$V_a$	3500	V
Output power in the load (sync - CCIR-G) (peak white - CCIR-L)	$W_l$	550	W
	$W_l$	550	W
Power gain	G	15	dB

**HEATING** : indirect by a.c. (50 Hz to 400 Hz) or d.c. ; oxide coated cathode.

Heater voltage	$V_f$	6,0 to 6,3	$V \pm 5\% ^1$
Heater current	$I_f$	4,8 to 5,8	A
Cathode heating time	$T_h$	min. 180	s

### CAPACITANCES

Anode to grid	$C_{ag}$	6,8 to 8	pF
Grid to cathode and heater	$C_{g/kf}$	20 to 30	pF
Anode to cathode and heater	$C_{a/kf}$	90 to 180	fF

### TYPICAL CHARACTERISTICS

Anode voltage	$V_a$	3	kV
Anode current	$I_a$	400	mA
Transconductance	S	70	mA/V
Amplification factor	$\mu$	90	

### TEMPERATURE LIMITS

Absolute max. temperature measured at reference points	t	max. 250	°C
---	---	----------	----

To obtain optimum life this temperature should not exceed 200 °C.

<sup>1</sup>) For optimum performance as TV broadband amplifier (linearity) the voltage set must be maintained within  $\pm 2\%$ .

Data based on pre-production tubes.

## COOLING

Anode: forced air

$W_a$ (W)	$t_i$ (°C)	$q_{min}$ (m <sup>3</sup> /min)	$P_i$ (mm H <sub>2</sub> O)
1800	25	2,5	22

Other terminals: low velocity air flow.

When only the heater voltage is applied, the heater and heater/cathode terminals should also be cooled.



Cooling air and voltages may be switched off simultaneously.

## MECHANICAL DATA

Dimensions in mm

Net weight: approx. 1000 g

Mounting position: any

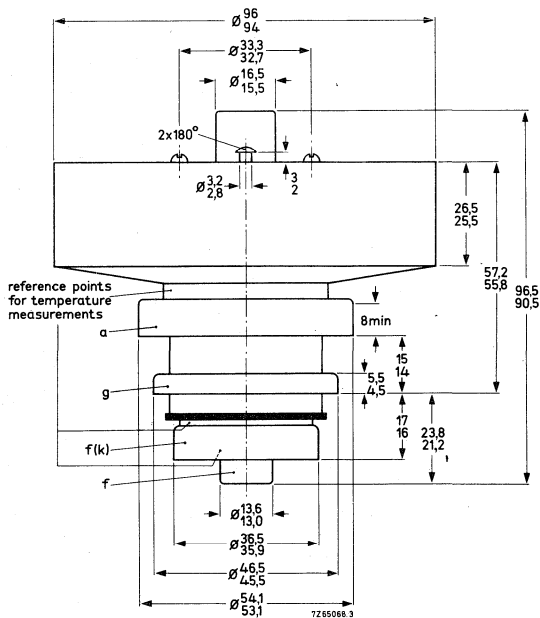

The radiator and the terminals are situated within concentric cylinders of the following dimensions:

Radiator	97,0 dia
Anode terminal	55,1 dia
Grid terminal	47,0 dia
Heater/cathode terminal	37,0 dia
Heater terminal	14,5 dia



## R.F. CLASS AB AMPLIFIER FOR TELEVISION SERVICE , grounded grid

## LIMITING VALUES (Absolute max. rating system)

Frequency	f	up to	1000	MHz
Anode voltage	$V_a$	max.	3800	V
Grid voltage	$-V_g$	max.	200	V
Anode dissipation	$W_a$	max.	1900	W <sup>1)</sup>
Grid current	$I_g$	max.	$\pm 5$	mA
Cathode current	$I_k$	max.	700	mA <sup>1)</sup>

OPERATING CONDITIONS grounded grid <sup>2)</sup>

Standard		CCIR-G	CCIR-L	
Frequency	f	470 to 860	470 to 860	MHz
Anode voltage	$V_a$	3500	3500	V
Grid voltage <sup>3)</sup>	$V_g$	-38	-38	V
Anode current, no signal	$I_a$	250	250	mA
Anode current at average grey level	$I_a$	$\approx 500$	$\approx 500$	mA
Grid current	$I_g$	$\approx 0$	$\approx 0$	mA
Driver output power, sync	$W_{dr}$	21		W
peak white	$W_{dr}$		21	W
Output power in load, sync	$W_\ell$	550		W
peak white	$W_\ell$		550	W
Power gain	G	15	15	dB
Differential gain		95	95	% <sup>4)</sup>

<sup>1)</sup> During a short period, for adjustment of the transmitter,  $W_a = \text{max. } 2200 \text{ W}$ , and  $I_k = \text{max. } 800 \text{ mA}$ .


<sup>2)</sup> R.F. driving power should be applied after the heater and electrode voltages.

<sup>3)</sup> To be adjusted for the stated no-signal anode current. Range values for equipment design -20 to -50 V.


<sup>4)</sup> Standard CCIR-G: Measured with a saw-tooth drive of 15% to 80% of peak sync amplitude with a superimposed 4,43 MHz signal with a peak-to-peak value of 10% of the peak sync amplitude adjusted at picture white level.



Standard CCIR-L: Measured on white level with a sawtooth drive of 30% to 100% of peak white amplitude with a superimposed 3 MHz signal with a peak-to-peak value of 30% of the picture white amplitude.



7264829

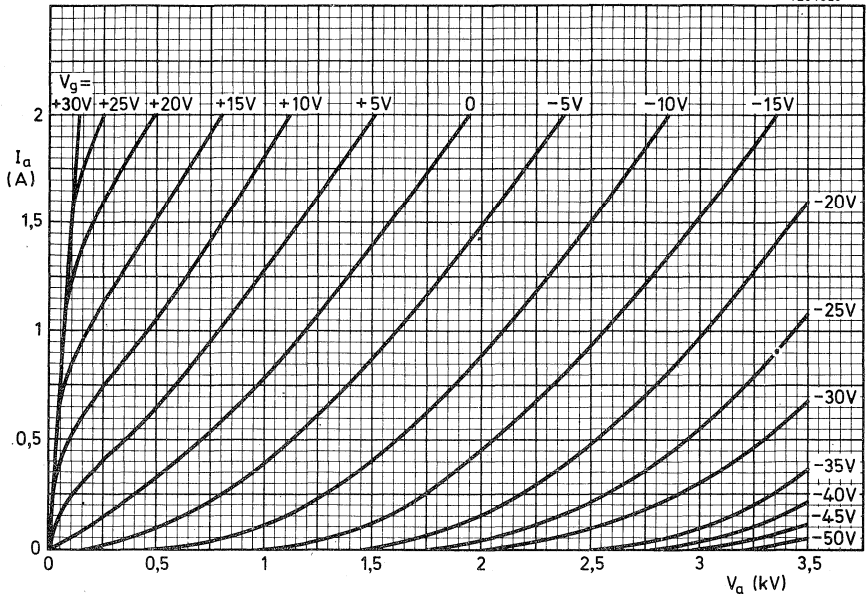

7270218

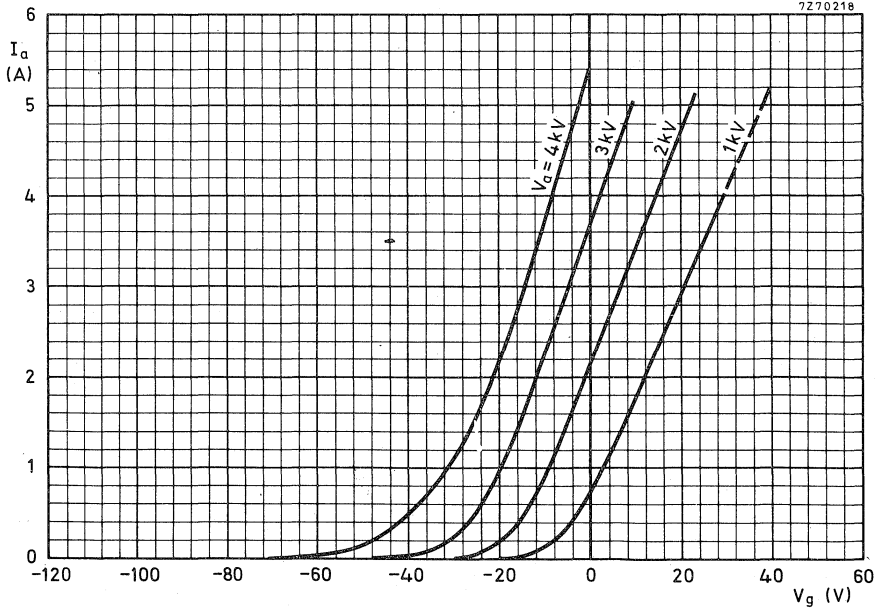

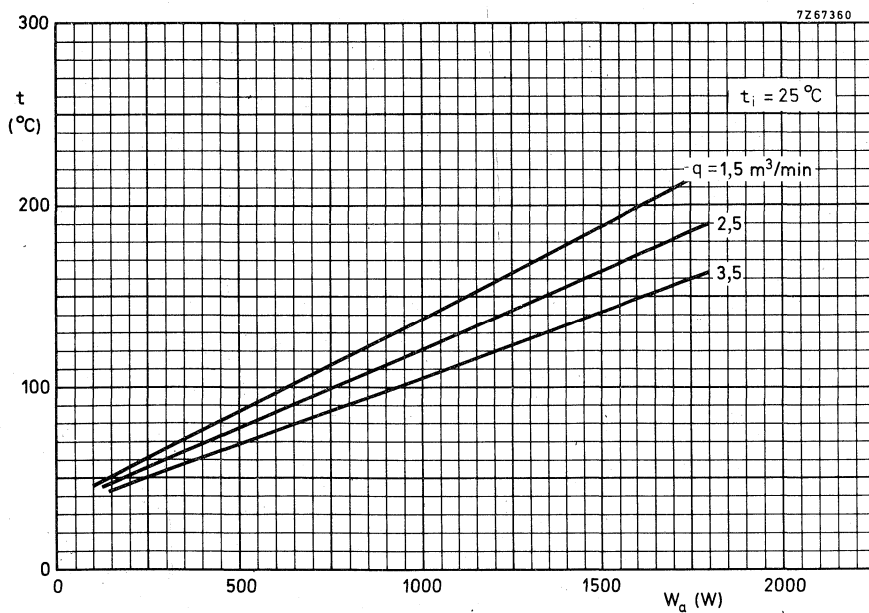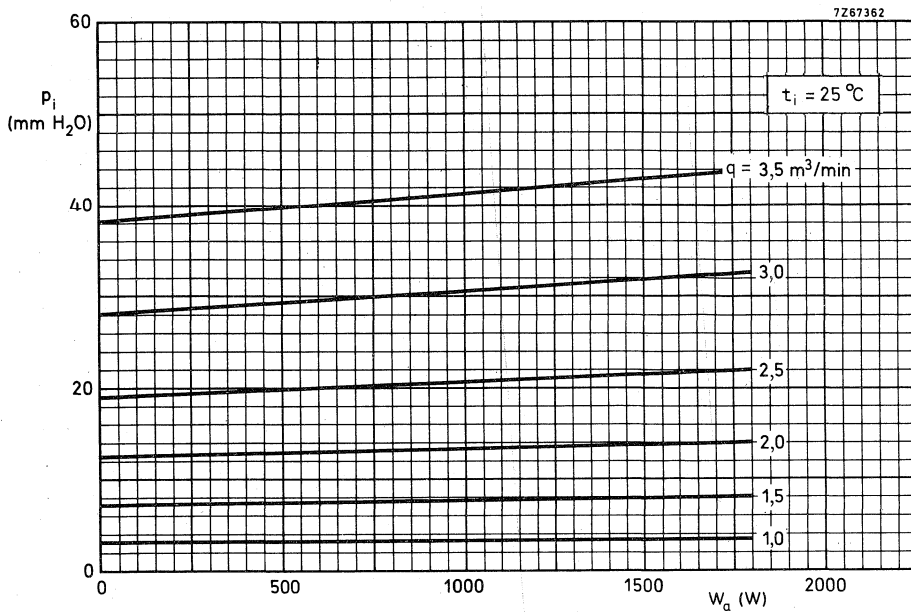

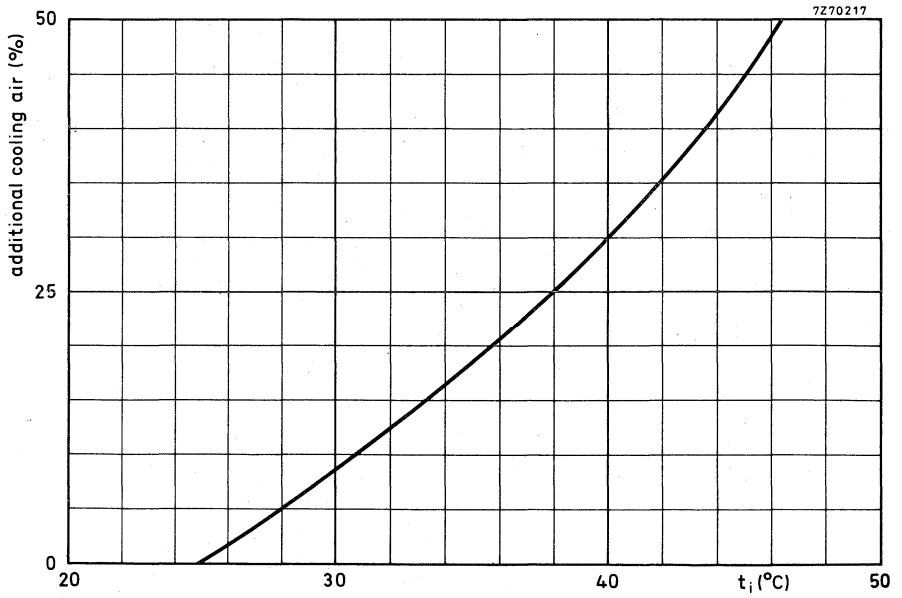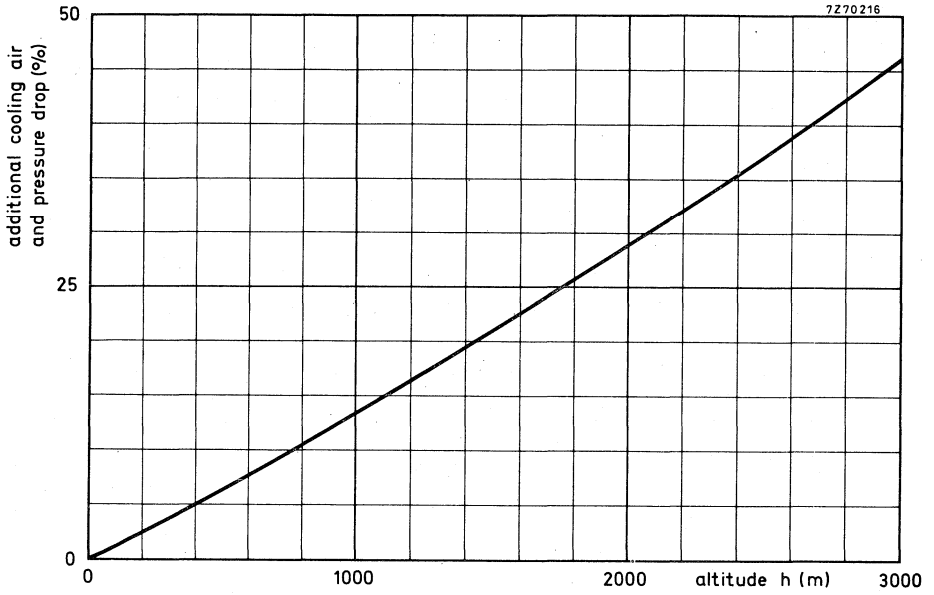

## AIR COOLED R.F. POWER TRIODE

Forced-air cooled coaxial power triode in metal-ceramic construction primarily intended for use as R. F. class AB linear broadband amplifier in TV transposer service at frequencies up to 1000 MHz.

QUICK REFERENCE DATA			
Transposer service (combined sound and vision)			
Frequency	$f$	470 to 860	MHz
Anode voltage	$V_a$	3000	V
Output power in the load (sync)	$W_\ell$	220	W
Power gain	$G$	16,5	dB

**HEATING** : indirect, by a. c. (50 Hz to 400 Hz) or d. c. ; oxide coated cathode.

Heater voltage	$V_f$	6,0 to 6,3	$V \pm 5\% I_1$
Heater current	$I_f$	4,8 to 5,8	A
Cathode heating time	$T_h$ min.	180	s

### CAPACITANCES

Anode to grid	$C_{ag}$	6,8 to 8	pF
Grid to cathode and heater	$C_{g/kf}$	20 to 30	pF
Anode to cathode and heater	$C_{a/kf}$	90 to 180	fF

### TYPICAL CHARACTERISTICS

Anode voltage	$V_a$	3	kV
Anode current	$I_a$	400	mA
Transconductance	$S$	70	mA/V
Amplification factor	$\mu$	90	

### TEMPERATURE LIMITS

Absolute max. temperature measured at reference points	$t$ max.	250	$^{\circ}C$
--	----------	-----	-------------

To obtain optimum life, this temperature should not exceed 200  $^{\circ}C$ .

<sup>1</sup>) The heater voltage must be adjusted between 6,0 and 6,3 V.

For optimum performance (linearity) the voltage set must be maintained within  $\pm 2\%$  for transposer service, or  $\pm 5\%$  for other applications.

COOLING

Anode : forced air

$W_a$ (W)	$t_i$ (°C)	$Q_{min}$ (m <sup>3</sup> /min)	$P_1$ (mm H <sub>2</sub> O)
1800	25	2,5	22

Other terminals: low velocity air flow.

When only the heater voltage is applied, the heater and heater/cathode terminals should also be cooled.



Cooling air and voltages may be switched off simultaneously.

MECHANICAL DATA

Dimensions in mm

Net weight : approx. 1000 g

Mounting position: any

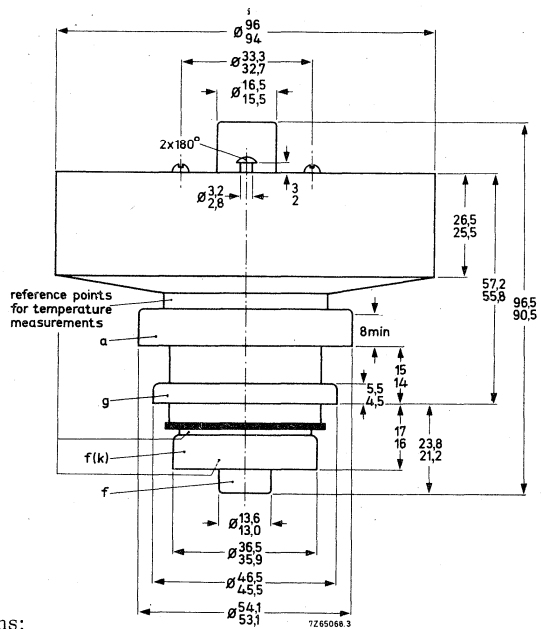

The radiator and the terminals are situated within concentric cylinders of the following dimensions:

Radiator	97,0 dia
Anode terminal	55,1 dia
Grid terminal	47,0 dia
Heater/cathode terminal	37,0 dia
Heater terminal	14,5 dia

R.F. CLASS AB AMPLIFIER FOR TV TRANSPOSER SERVICE

grounded grid

LIMITING VALUES (Absolute max. rating system)

Frequency	f	up to	1000	MHz
Anode voltage	$V_a$	max.	3500	V
Grid voltage	$-V_g$	max.	200	V
Anode dissipation	$W_a$	max.	1800	W
Grid current	$I_g$	max.	$\pm 5$	mA
Cathode current	$I_k$	max.	550	mA <sup>1)</sup>

OPERATING CONDITIONS , grounded grid <sup>2)3)</sup>

Standard		C. C. I. R-G	C. C. I. R-G	C. C. I. R-I	
Frequency	f	470 to 860	470 to 860	470 to 860	MHz
Anode voltage	$V_a$	3000	3000	3000	V
Grid voltage <sup>4)</sup>	$V_g$	-30	-30	-30	V
Anode current, no signal	$I_a$	420	350	420	mA
Anode current at zero dB level (vision carrier)	$I_a$	650	550	650	mA
Grid current	$I_g$	$\approx 0$	$\approx 0$	$\approx 0$	mA
Driver output power (sync)	$W_{dr}$	7	8	7	W
Output power in load (sync)	$W_l$	220	220	220	W
Output power at $I_g = 0$	$W_o$	$\geq 390$	$\geq 390$	$\geq 390$	W
Power gain	G	16,5	16,0	16,5	dB
Intermodulation products	d	-57 <sup>5)</sup> < -55	-56 <sup>5)</sup> < -54	-55 <sup>6)</sup> < -53	dB

<sup>1)</sup> During a short period, for adjustment of the transmitter,  $I_k$  max. = 700 mA

<sup>2)</sup> Negative modulation, positive synchronization, combined sound and vision.


<sup>3)</sup> R. F. driving power should be applied after the heater and electrode voltages.

<sup>4)</sup> To be adjusted for the stated no. signal anode current. Range values for equipment design -15 to -45 V.


<sup>5)</sup> Three-tone test method (vision carrier -8 dB, sound carrier -10 dB, sideband signal -16 dB with respect to peak sync level = 0 dB. ).

<sup>6)</sup> Three-tone test method (vision carrier - 8 dB, sound carrier -7 dB, sideband signal -17 dB with respect to peak sync level = 0 dB ).



7264829


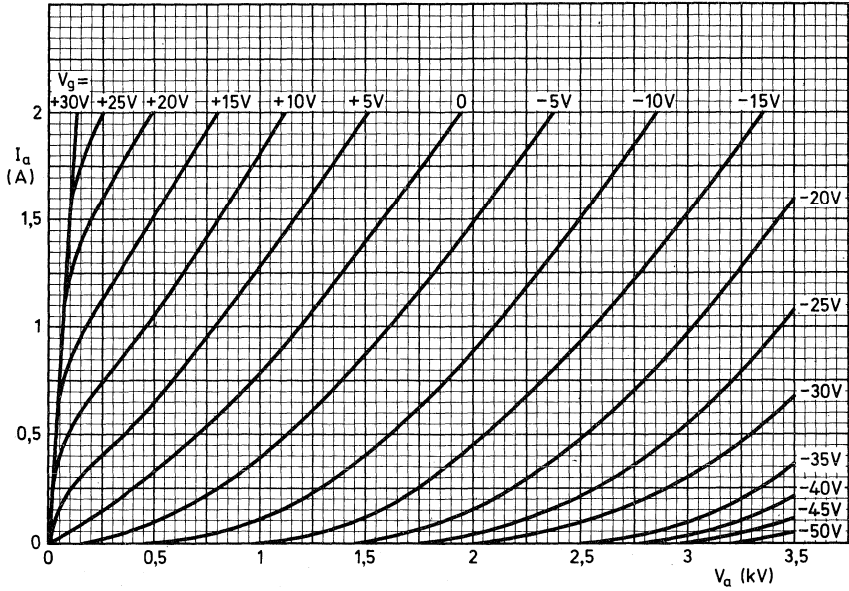


7270218

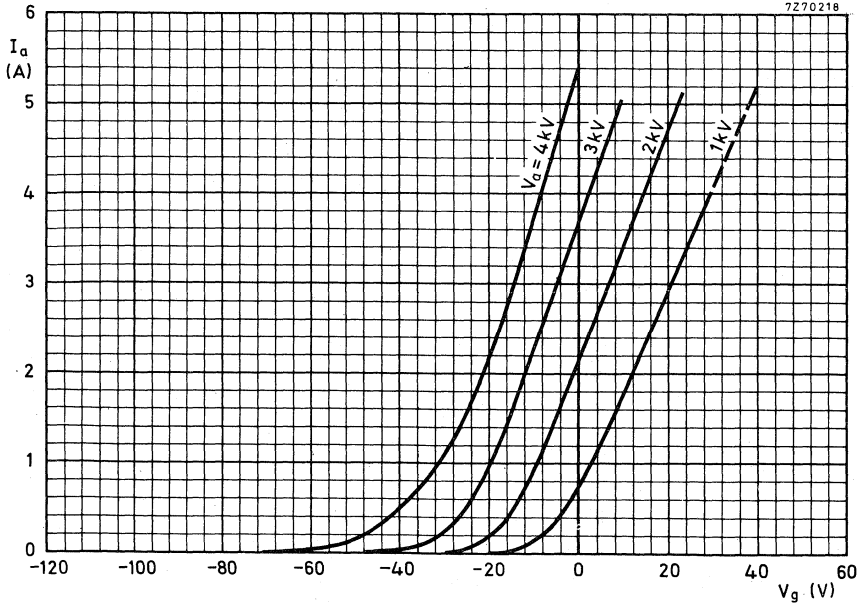



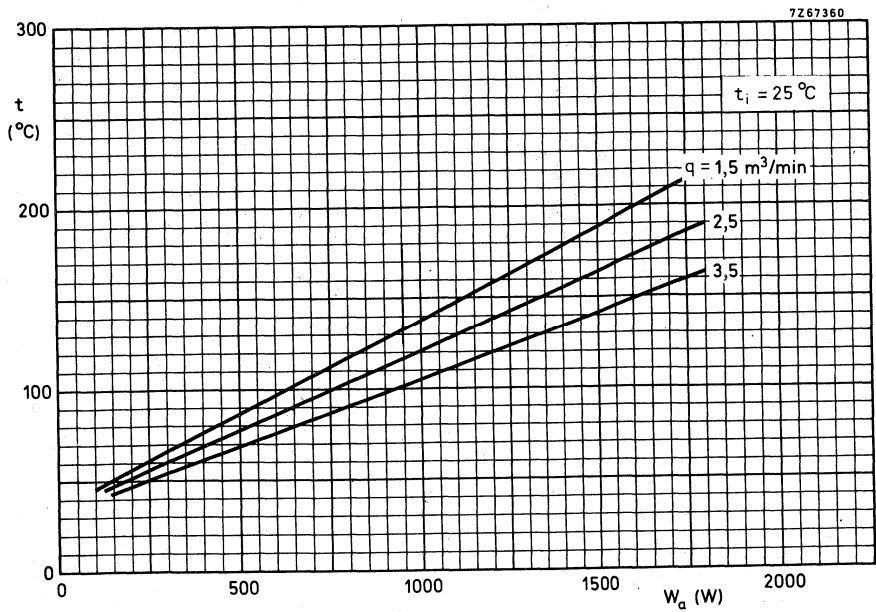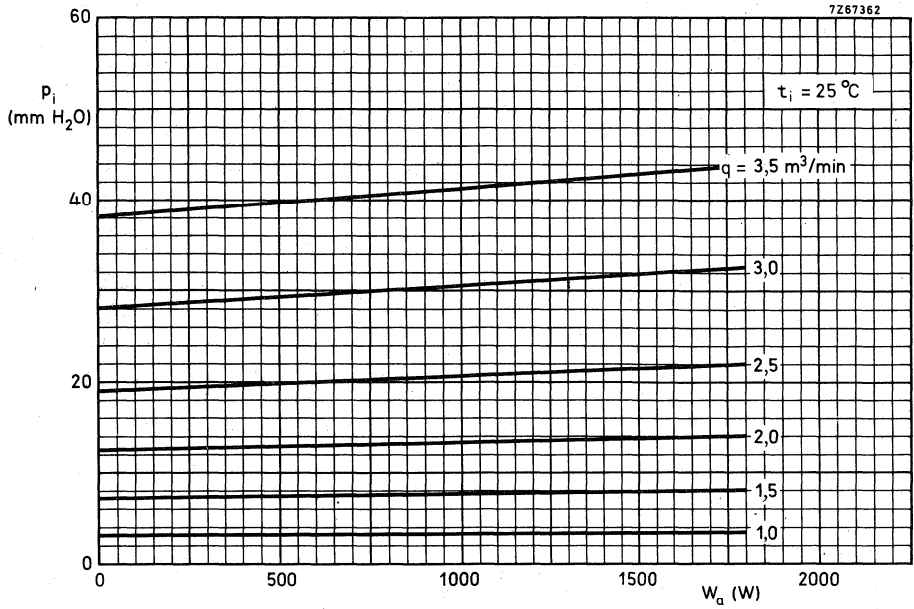

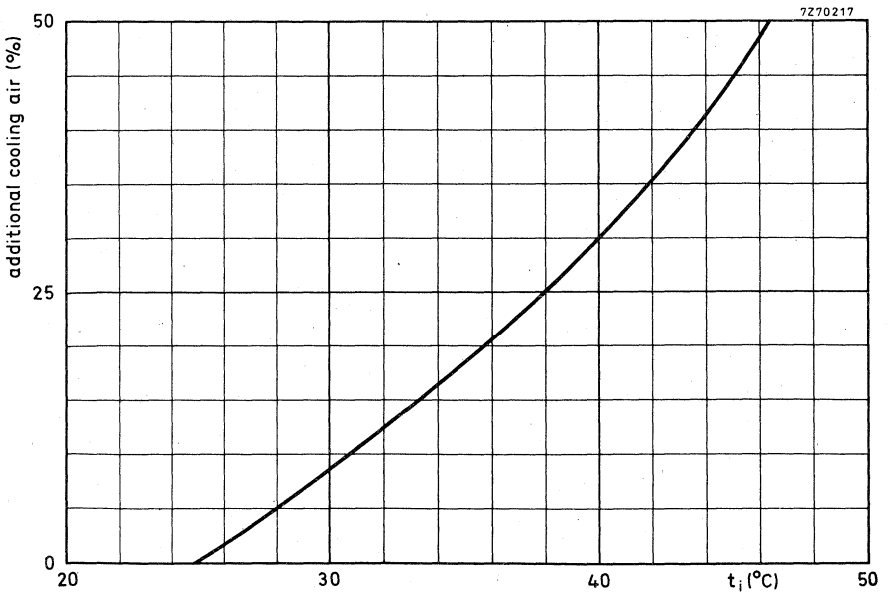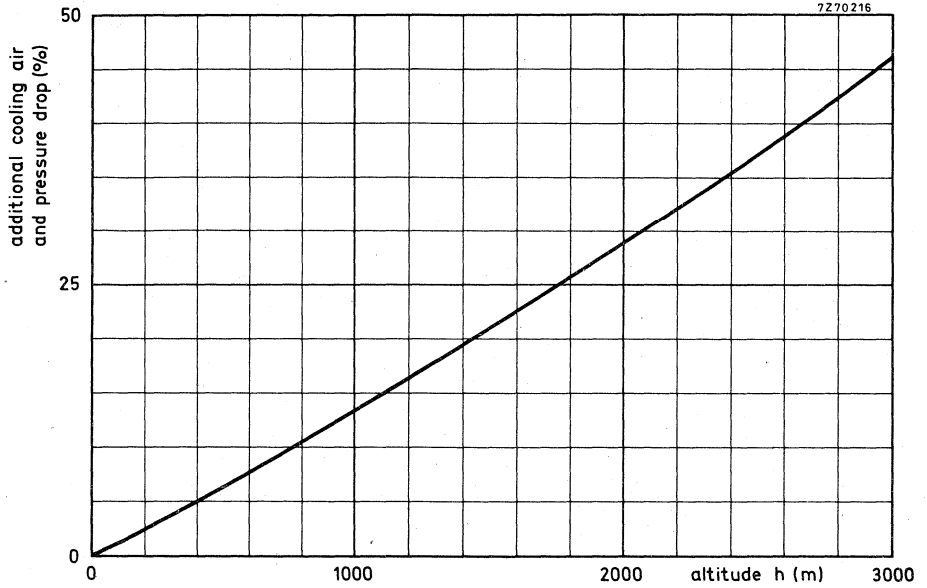

## WATER COOLED R.F. INDUSTRIAL TRIODE

Water-cooled triode of metal-ceramic construction with integral cooler intended for use as an industrial oscillator.

### QUICK REFERENCE DATA

Oscillator output power ( $W_o - W_{\text{feedb}}$ ), typical	$W_{\text{osc}}$	480	kW
Frequency for full ratings	f max.	30	MHz

To be read in conjunction with "General Recommendations Transmitting tubes, Tubes for R.F. heating."

### R.F. CLASS C OSCILLATOR FOR INDUSTRIAL USE

#### OPERATING CONDITIONS

Frequency	f	30	MHz
Oscillator output power ( $W_o - W_{\text{feedb}}$ )	$W_{\text{osc}}$	480	kW
Anode voltage	$V_a$	16	kV
Anode current	$I_a$	42	A
Anode input power	$W_{ia}$	672	kW
Anode dissipation	$W_a$	183	kW
Anode output power	$W_o$	489	kW
Anode efficiency	$\eta_a$	73	%
Oscillator efficiency	$\eta_{\text{osc}}$	71.5	%
Feedback ratio	$V_{gp}/V_{ap}$	9.3	%
Grid resistor	$R_g$	100	$\Omega$
Grid current, on load	$I_g$	7.5	A
Grid voltage, negative	$-V_g$	750	V
Grid dissipation	$W_g$	3.4	kW
Grid resistor dissipation	$W_{Rg}$	5.6	kW



## COOLING

Anode + grid dissipation $W_a + W_g$ (kW)	Inlet temperature $t_i$ (°C)	Rate of flow $q_{min}$ (l/min)	Pressure drop $P_i$ (atm)	Outlet temperature $t_o$ (°C)
240	20	120	1	50
	50	180	1.8	70
200	20	95	0.65	52
	50	144	1.2	71
160	20	72	0.42	54
	50	110	0.75	72

Absolute max. water inlet temperature  $t_i$  max. 50 °C

Absolute max. water pressure  $p$  max.  $6 \times 10^5$  Pa = 6 atmabs ←

To obtain optimum life, the seal/envelope temperature under continuously loaded conditions should be kept at or below 200 °C.

At low frequencies the seals are sufficiently cooled if the filament connectors are water-cooled by a flow of abt. 1 l/min. At high frequencies, however, an additional airflow of abt. 6 m<sup>3</sup>/min must be led along the seals from a 60 mm diameter nozzle positioned at a distance of 300 mm from the tube header.

## ACCESSORIES


Filament connector with cable	type	40695	net weight	1.4	kg
Filament/cathode connector with cable	type	40696	net weight	1.6	kg
Grid connector	$f \leq 4$ MHz	type	40694	net weight	270 g
	$f > 4$ MHz	type	40737	net weight	525 g

MECHANICAL DATA

Dimensions in mm


Mounting position: vertical with anode up or down

Net weight: approx. 30 kg

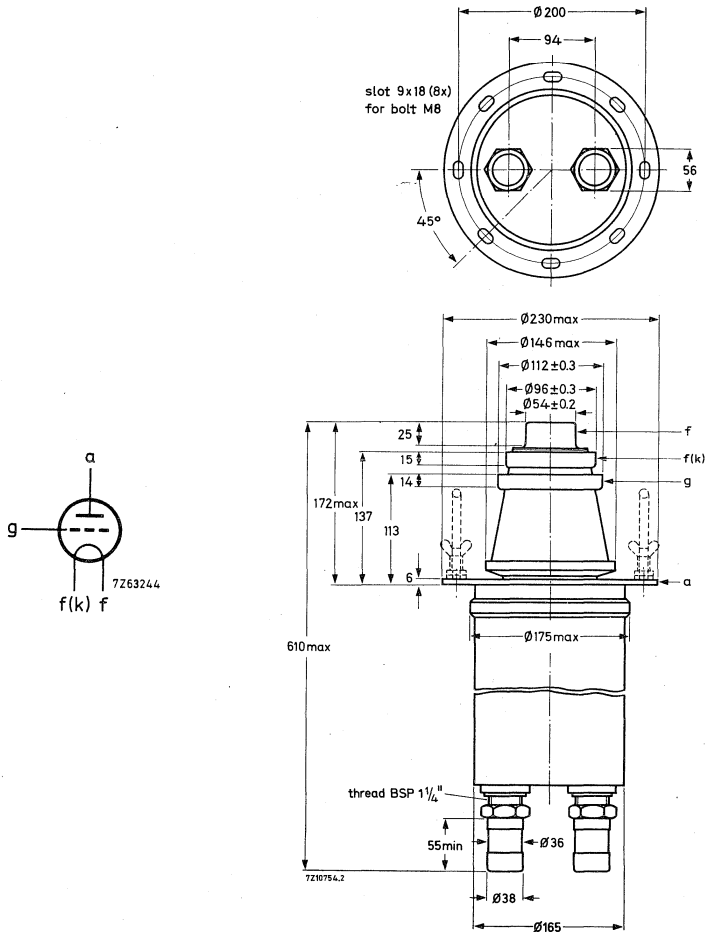

The handles should be removed before switching on the tube.

When using the tube in the anode up position the input and output water connections should be reversed.

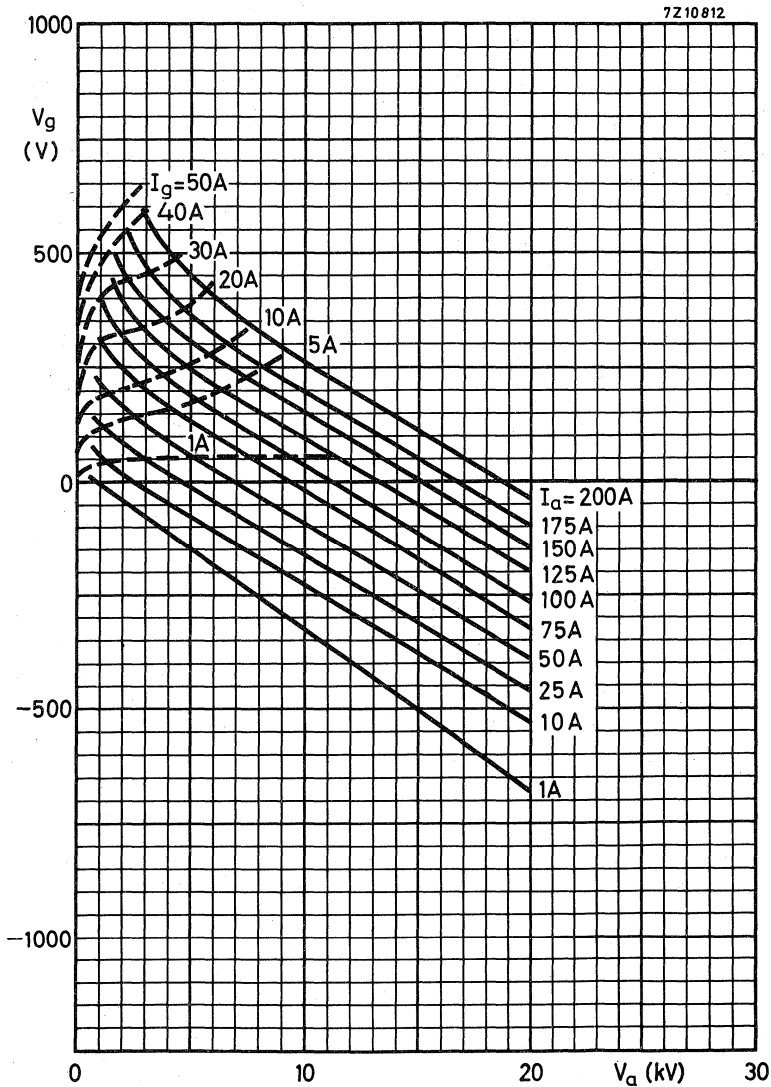





## VAPOUR COOLED R.F. INDUSTRIAL TRIODE

Vapour cooled triode of metal-ceramic construction intended for use as industrial oscillator.

QUICK REFERENCE DATA			
Oscillator output power ( $W_o - W_{\text{feedb.}}$ )	$W_{\text{osc}}$	480	kW
Frequency for full ratings	f	max. 30	MHz

To be read in conjunction with "General Recommendations Transmitting tubes for R. F. heating".

### R.F. CLASS C OSCILLATOR FOR INDUSTRIAL USE

#### OPERATING CONDITIONS

Frequency	f	30	MHz
Oscillator output power ( $W_o - W_{\text{feedb.}}$ )	$W_{\text{osc}}$	480	kW
Anode voltage	$V_a$	16	kV
Anode current	$I_a$	42	A
Anode input power	$W_{\text{ia}}$	672	kW
Anode dissipation	$W_a$	183	kW
Anode output power	$W_o$	489	kW
Anode efficiency	$\eta_a$	73	%
Oscillator efficiency	$\eta_{\text{osc}}$	71.5	%
Feedback ratio	$V_{\text{gp}}/V_{\text{ap}}$	9.3	%
Grid resistor	$R_g$	100	$\Omega$
Grid current, on load	$I_g$	7.5	A
Grid voltage, negative	$-V_g$	750	V
Grid dissipation	$W_g$	3.4	kW
Grid resistor dissipation	$W_{R_g}$	5.6	kW

## LIMITING VALUES (Absolute max. rating system)

Frequency for full ratings	f	up to	30	MHz
Anode voltage	$V_a$	max.	19.2	kV
Anode current	$I_a$	max.	45	A
Anode input power	$W_{ia}$	max.	750	kW
Anode dissipation	$W_a$	max.	240	kW
Grid voltage	$-V_g$	max.	2.5	kV
Grid current, on load of load	$I_g$	max.	9	A
	$I_g$	max.	11	A
Grid dissipation	$W_g$	max.	6.0	kW
Grid circuit resistance	$R_g$	max.	10	$k\Omega$
Cathode current, mean peak	$I_k$	max.	55	A
	$I_{kp}$	max.	250	A
Envelope temperature	$t_{env}$	max.	240	$^{\circ}C$

**HEATING**: direct; filament thoriated tungsten, mesh construction

Filament voltage	$V_f$		14	V
Filament current	$I_f$		555	A
Peak filament starting current	$I_{fp}$	max.	3500	A
Cold filament resistance	$R_{fo}$		2.6	$m\Omega$
Waiting time	$T_w$	min.	5	s

The filament is designed to accept temporary fluctuations of +5% and -10%.

It is extremely important that the filament be properly decoupled. This should be so done that the resonance of the circuit formed by the filament and decoupling elements remains below the fundamental oscillator frequency. In grounded-grid circuits this resonance should be below the grid-cathode resonance. For further information please see Application Book "Tubes for R.F. heating" or contact the manufacturer.

## CAPACITANCES

Anode to filament	$C_{af}$		3.9	pF
Grid to filament	$C_{gf}$		225	pF
Anode to grid	$C_{ag}$		70	pF

**CHARACTERISTICS** measured at  $V_a = 16$  kV,  $I_a = 15$  A

Transconductance	S		230	mA/V
Amplification factor	$\mu$		33	

## COOLING

With integrated boiler-condensor type K738

Anode + grid dissipation $W_a + W_g$ (kW)	Inlet temperature $t_i$ (°C)	Rate of flow $q_{min}$ (ℓ/min)	Pressure drop $P_i$ (atm)	Outlet temperature $t_o$ (°C)
240	20	80	0.38	64
	35	122	0.75	64
200	20	61	0.33	69
	35	88	0.44	69
	50	158	1.18	69
160	20	42	0.13	77
	35	58	0.22	76
	50	95	0.50	75

To obtain optimum life, the seal/envelope temperature under continuously loaded conditions should be kept at or below 200 °C.

At low frequencies the seals are sufficiently cooled if the filament connectors are water-cooled by a flow of abt. 1 ℓ/min. At high frequencies, however, an additional airflow of abt. 6 m<sup>3</sup>/min must be led along the seals from a 60 mm diameter nozzle positioned at a distance of 300 mm from the tube header.

## ACCESSORIES


Filament connector with cable	type	40695	net weight	1,4	kg
Filament/cathode connector with cable	type	40696	net weight	1,6	kg
Grid connector	type	40737	net weight	525	g
Boiler condenser	type	K738	net weight	150	kg

MECHANICAL DATA


Dimensions in mm

Mounting position: vertical with anode up or down

Net weight : approx. 45 kg.

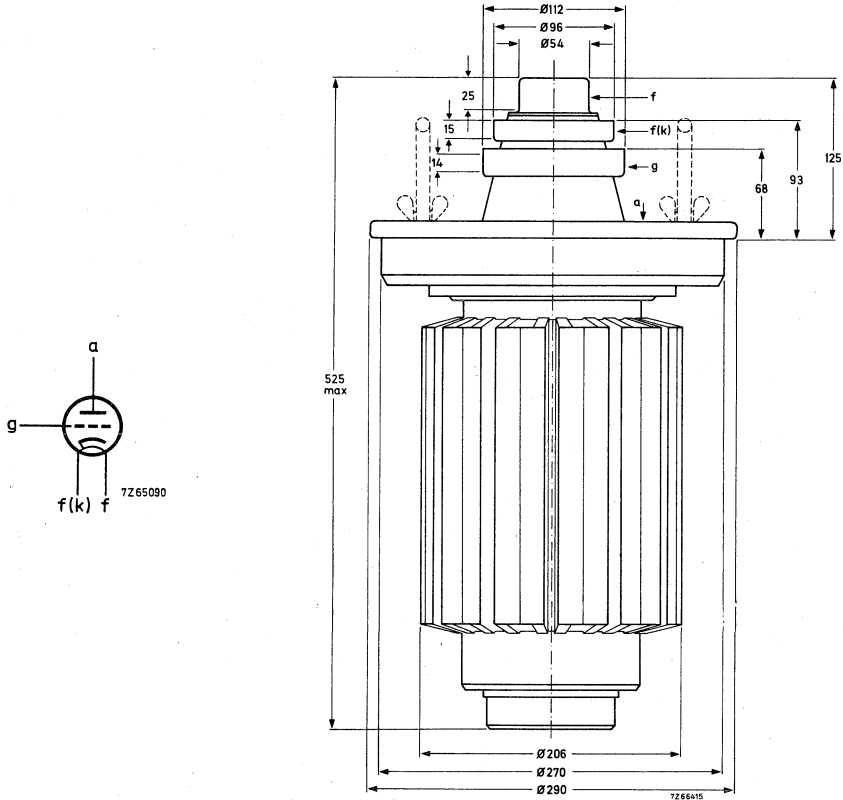

The handles should be removed before switching on the tube.

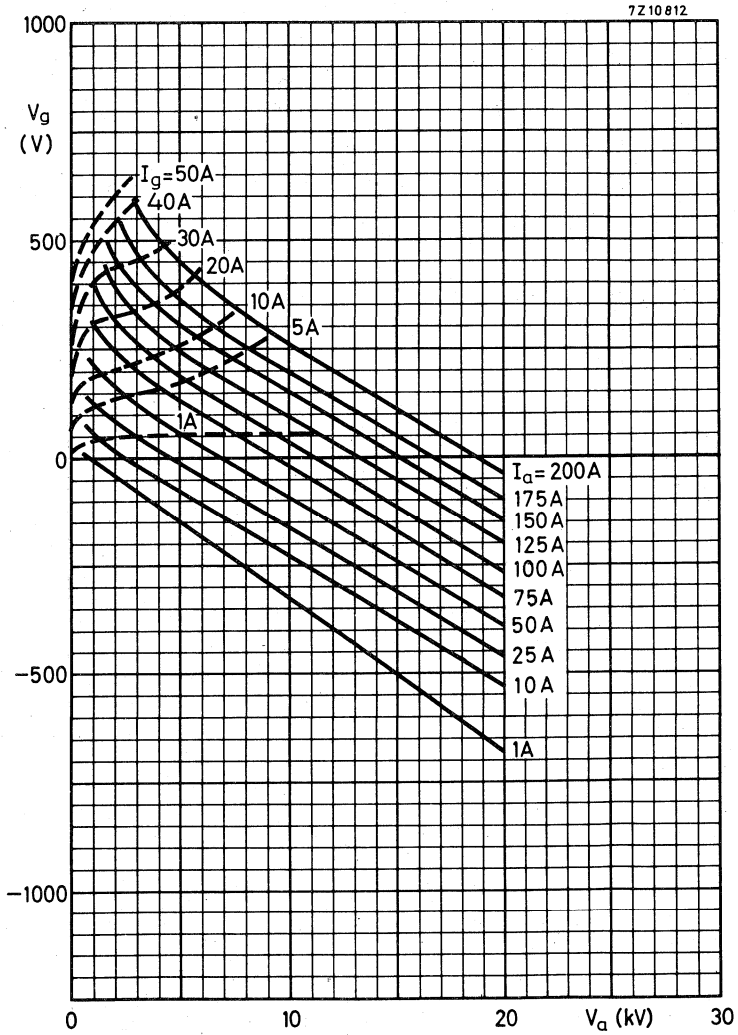





**LIMITING VALUES** (Absolute max. rating system)

Frequency for full ratings	f	max.	5	MHz
Anode voltage, mean	V <sub>a</sub>	max.	4500	V
Anode current, mean	I <sub>a</sub>	max.	725	mA
Anode input power	W <sub>ia</sub>	max.	4	kW
Anode dissipation	W <sub>a</sub>	max.	2	kW
Grid voltage	V <sub>g</sub>	max.	2400	V
Grid current	I <sub>g</sub>	max.		see 1)
Grid dissipation	W <sub>g</sub>	max.	25	W
Grid circuit resistance	R <sub>g</sub>	max.	88	kΩ
Cathode current, mean	I <sub>k</sub>	max.	730	mA
Seal temperature	t	max.	200	°C

**HEATING** : indirect; nickel-oxide cathode, dispenser type

Heater voltage	V <sub>f</sub>		5	V
Heater current	I <sub>f</sub>		6.1	A
Waiting time	T <sub>w</sub> min.		2	min.

The filament is designed to accept temporary fluctuations of +10 % and -10 %.

**CAPACITANCES**

Anode to cathode	C <sub>ak</sub>		0.3	pF
Grid to cathode	C <sub>gk</sub>		9.8	pF
Anode to grid	C <sub>ag</sub>		11.5	pF

**CHARACTERISTICS** measured at V<sub>a</sub> = 3 kV, I<sub>a</sub> = 500 mA

Transconductance	S		4	mA/V
Amplification factor	μ		25	
Magnetic flux density	B	min.	115	mT ( = 1150 Gs)

Care should be taken that the magnetic flux density is not influenced by external magnetic materials.

Data based on pre-production tubes.

1) Limited by W<sub>g</sub> max. and I<sub>k</sub> max.



**COOLING**

Anode + grid dissipation $W_a + W_g$ (kW)	Inlet temperature $t_i$ (°C)	Rate of flow $Q$ min (ℓ/min)	Pressure drop $P_i$ (atm)
2	20	3.8	0.31
	50	5.7	0.62

The waterflow must be maintained for at least 1 minute after anode power is removed. Additional air cooling of the seals may be necessary to keep the temperature below the limiting value. The direction of the water flow must be such that the inflow is below the outlet for either of the two vertical mounting positions.

**ACCESSORIES**

Magnet assembly (magnetic nest)


type 40765 net weight 2.3 kg

Grid connector


40766

**MECHANICAL DATA**

Net weight: approx. 0.45 kg




Dimensions in mm

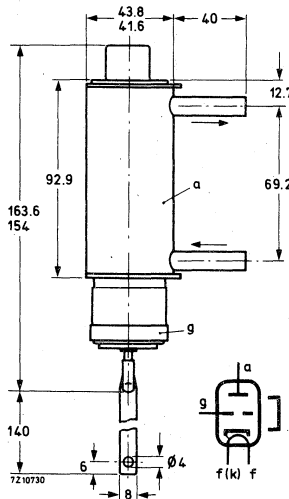


Mounting position: vertical

Due to the very rugged construction of this type, generally it can be shipped mounted in the equipment

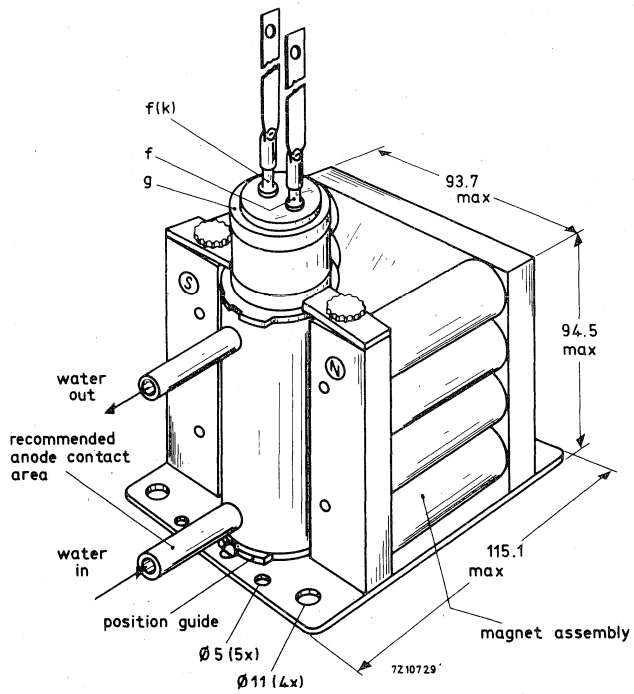

Tube mounted in magnet assembly

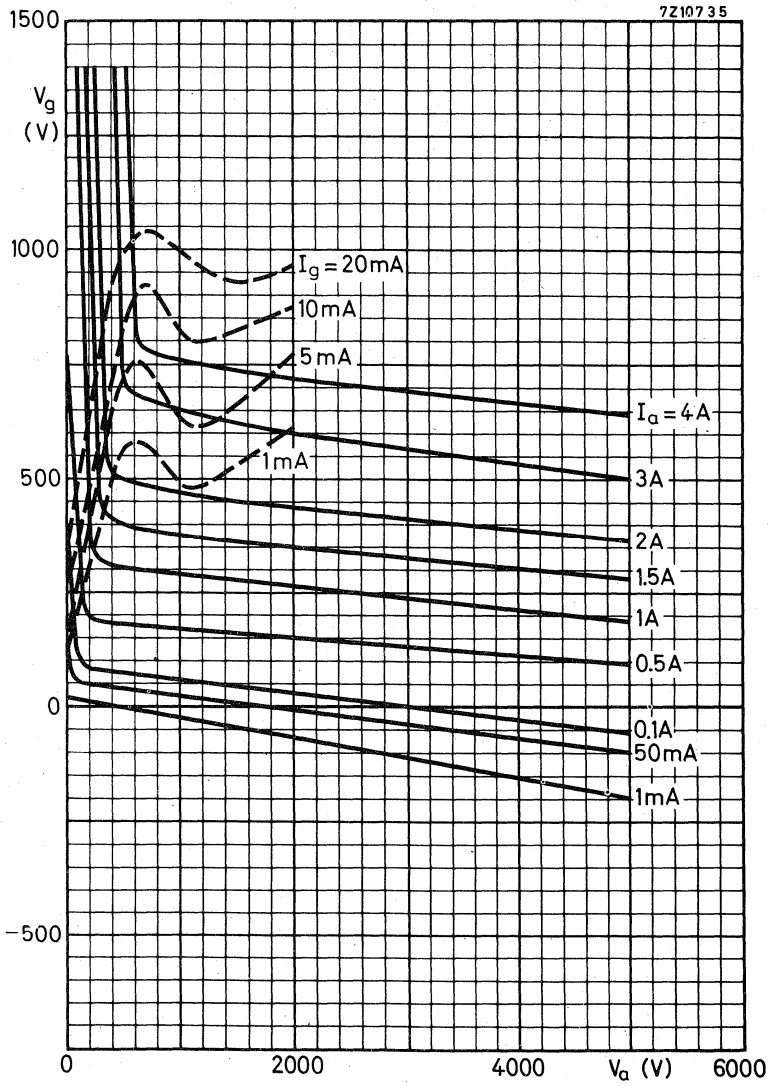



## QUICK HEATING R.F. PENTODE

Quick-heating pentode for use as RF amplifier, oscillator or frequency multiplier up to 200 MHz and as AF modulator. Designed for intermittent or continuous filament operation in transistorised mobile transmitters.

QUICK REFERENCE DATA			
Frequency (MHz)	C telegraphy		
	V <sub>a</sub> (V)	W <sub>drive</sub> (W)	W <sub>load</sub> (W)
50	300	0.2	8
175	250	1.0	3.6

**HEATING:** direct by AC or DC; parallel supply

Filament oxide-coated

Filament voltage  $V_f$  1.1 V  $\pm$  15%

Filament current  $I_f$  0.88 A

Frequency of filament supply

with sinusoidal voltage  $f$  max. 200 Hz

with square-wave voltage  $f$  any

70% of the full output power will be reached within 0.5 sec after switching-on.

### CAPACITANCES

Anode to all except grid No. 1  $C_a$  3.8 pF

Grid No. 1 to all except anode  $C_{g1}$  6.5 pF

Anode to grid No. 1  $C_{ag1}$  0.15 pF

## TYPICAL CHARACTERISTICS

Anode voltage	$V_a$	120 V
Grid No.2 voltage	$V_{g_2}$	120 V
Anode current	$I_a$	30 mA
Amplification factor	$\mu_{g_2g_1}$	8
Mutual conductance	S	4.5 mA/V
Modulation hum		-60 dB relative to carrier (with centre tapped filament supply on a single stage)

## TEMPERATURE LIMITS (Absolute limits)



Bulb temperature	max. 200 °C
Pin seal temperature	max. 120 °C

## MECHANICAL DATA

Dimensions in mm

Base : Noval

Net weight: 15 g



Mounting position: any

## ACCESSORIES

Socket: 2422 502 01003

R.F. CLASS C TELEGRAPHY or F.M. TELEPHONY


LIMITING VALUES (Absolute limits)

Frequency	f		up to 50	up to 175	MHz
Anode voltage	$V_a$	max.	300	300	V
Anode input power	$W_{i_a}$	max.	12	9	W
Anode dissipation	$W_a$	max.	5	5	W
Anode current	$I_a$	max.	40	40	mA
Grid No.2 voltage	$V_{g_2}$	max.	300	300	V
Grid No.2 dissipation	$W_{g_2}$	max.	1	1	W
Negative grid No.1 voltage	$-V_{g_1}$	max.	100	100	V
Grid No.1 current	$I_{g_1}$	max.	2.5	2.5	mA

OPERATING CONDITIONS

f	50			175			MHz
$V_a$	300	250	200	300	250	200	V
$V_{g_2}$	150	150	150	150	150	150	V
$V_{g_1}$	-35	-35	-35	-35	-35	-35	V
$I_a$	40	40	40	30	35	40	mA
$I_{g_2}$	3.5	5	6	2	2.5	3	mA
$I_{g_1}$	0.85	0.95	1.05	0.07	0.2	0.5	mA
$V_{g_{1p}}$	49.5	52	53				V
$W_{g_2}$	0.53	0.75	0.9	0.3	0.38	0.45	W
$W_{i_a}$	12	10	8	9	8.75	8	W
$W_a$	3.6	3.0	2.5	4.6	4.2	3.5	W
$W_{load}$	8	6.7	5.2	3.3	3.6	3.6	W



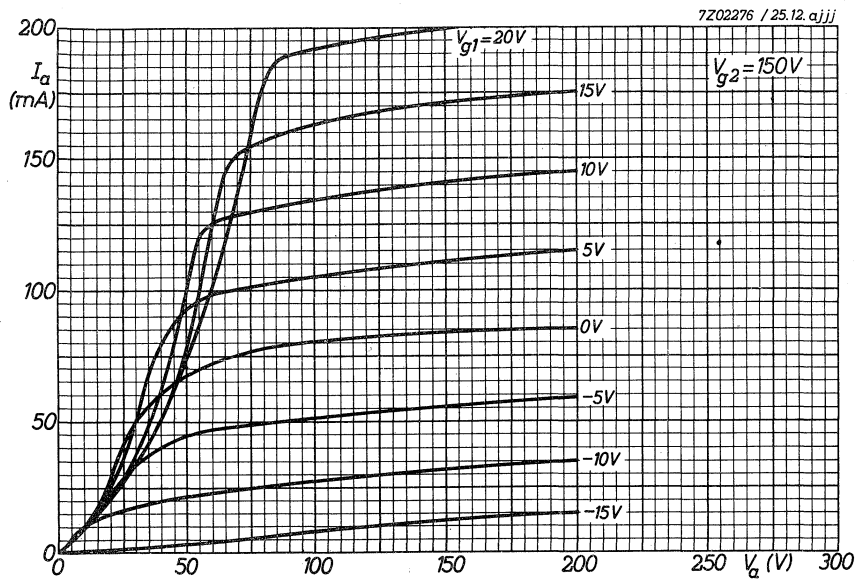



## WATER COOLED R. F. POWER TETRODE

Water cooled R.F. power tetrode in coaxial metal-ceramic construction intended for use as V.H.F. amplifier and S.S.B. amplifier.

QUICK REFERENCE DATA.						
Frequency (MHz)	S.S.B.		C telegr. FM teleph.		C <sub>ag2</sub> mod.	
	V <sub>a</sub> (kV)	W <sub>o</sub> (kW) PEP	V <sub>a</sub> (kV)	W <sub>l</sub> (kW)	V <sub>a</sub> (kV)	W <sub>o</sub> (kW)
30	8	30				
	10	33			10	55
220			5.5	25		

**HEATING:** Direct; filament thoriated tungsten

Filament voltage	V <sub>f</sub>	10 V
Filament current	I <sub>f</sub>	200 A

### CAPACITANCES

Anode to all except grid No. 1	C <sub>a(g1)</sub>	42 pF
Grid No. 1 to all except anode	C <sub>g1(a)</sub>	260 pF
Anode to grid No. 1	C <sub>ag1</sub>	1.5 pF

### TYPICAL CHARACTERISTICS

Anode voltage	V <sub>a</sub>	3 kV
Grid No. 2 voltage	V <sub>g2</sub>	1.2 kV
Anode current	I <sub>a</sub>	2.5 A
Transconductance	S	65 mA/V
Amplification factor	μ <sub>g2g1</sub>	6.6 -

## TEMPERATURE LIMITS AND COOLING


Absolute max. envelope and seal temperature	$t_{env.}$	max. 220 °C
Absolute max. water inlet temperature	$t_i$	max. 50 °C
Required quantity of water		see cooling curves
For temperatures $t_i$ between 20 °C and 50 °C the required quantity of water can be found by linear interpolation.		

## MECHANICAL DATA

Dimensions in mm

Net weight: approx. 7 kg

Mounting position: Vertical with anode down

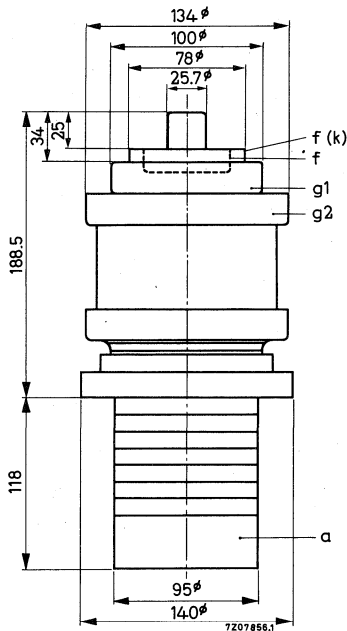

## ACCESSORIES

Water-jacket	type K732
Inner filament connector	type 40725
Outer filament connector	type 40726
Grid No.1 connector	type 40727
Grid No.2 connector	type 40728

**R.F. CLASS AB LINEAR AMPLIFIER , SINGLE SIDE BAND, suppressed carrier**

**LIMITING VALUES** (Absolute max. rating system)

Frequency	f	up to	30	MHz
Anode voltage	$V_a$	max.	12	kV
Grid No.2 voltage	$V_{g2}$	max.	1.4	kV
Grid No.1 voltage	$-V_{g1}$	max.	350	V
Anode current	$I_a$	max.	10	A
Anode input power	$W_{i_a}$	max.	72	kW
Anode dissipation	$W_a$	max.	30	kW
Grid No.2 dissipation	$W_{g2}$	max.	600	W
Grid No.1 dissipation	$W_{g1}$	max.	300	W

**OPERATING CONDITIONS**

Frequency	f	30	MHz		
Anode voltage	$V_a$	8	kV		
Grid No.2 voltage	$V_{g2}$	1.2	kV		
Grid No.1 voltage	$V_{g1}$	-175	V <sup>1)</sup>		
		zero signal	single tone	double tone	
Grid No.1 driving voltage	$V_{g1P}$	0	175	175	V
Anode current	$I_a$	2	5.9	3.8	A
Grid No.2 current	$I_{g2}$	0	250	100	mA
Grid No.1 current	$I_{g1}$	0	0	0	mA
Anode input power	$W_{i_a}$	16	47.2	30.4	kW
Anode dissipation	$W_a$	16	17.2	15.4	kW
Grid No.2 dissipation	$W_{g2}$	0	300	120	W
Output power (P.E.P.)	$W_o$	0	30	30	kW
Efficiency	$\eta$	-	63.5	49	%
Intermodulation distortion					
3 <sup>d</sup> order	$d_3$	-	-	41	dB <sup>2)</sup>
5 <sup>th</sup> order	$d_5$	-	-	54	dB <sup>2)</sup>

1) 2) See page 4

## OPERATING CONDITIONS (continued)

			zero signal	single tone	double tone	
Frequency	f	30				MHz
Anode voltage	V <sub>a</sub>	10				kV
Grid No. 2 voltage	V <sub>g2</sub>	1.2				kV
Grid No. 1 voltage	V <sub>g1</sub>	-185				V <sup>1)</sup>
Grid No. 1 driving voltage	V <sub>g1p</sub>	0	185	185		V
Anode current	I <sub>a</sub>	2	5.2	3.3		A
Grid No. 2 current	I <sub>g2</sub>	0	250	80		mA
Grid No. 1 current	I <sub>g1</sub>	0	0	0		mA
Anode input power	W <sub>i a</sub>	20	52	33		kW
Anode dissipation	W <sub>a</sub>	20	19	16.5		kW
Grid No. 2 dissipation	W <sub>g2</sub>	0	300	96		W
Output power (P.E.P.)	W <sub>o</sub>	0	33	33		kW
Efficiency	η	-	63	50		%
Intermodulation distortion						
	3 <sup>d</sup> order	d <sub>3</sub>	-	-	-41	dB <sup>2)</sup>
	5 <sup>th</sup> order	d <sub>5</sub>	-	-	-54	dB <sup>2)</sup>

1) Adjust to give the zero signal anode current.

2) Maximum values encountered at any level of drive voltage up to full drive referred to the amplitude of either of the two equal tones at that level.

**R.F. CLASS C TELEGRAPHY OR F.M. TELEPHONY, grounded grid****LIMITING VALUES (Absolute max. rating system)**

Frequency	f	up to 220 MHz
Anode voltage	$V_a$	max. 5.6 kV
Grid No. 2 voltage	$V_{g2}$	max. 1 kV
Grid No. 1 voltage	$-V_{g1}$	max. 250 V
Anode current	$I_a$	max. 10 A
Anode input power	$W_{i_a}$	max. 72 kW
Anode dissipation	$W_a$	max. 30 kW
Grid No. 2 dissipation	$W_{g2}$	max. 300 W
Grid No. 1 dissipation	$W_{g1}$	max. 200 W

**OPERATING CONDITIONS**

Frequency	f	220 MHz
Anode voltage	$V_a$	5.5 kV
Grid No. 2 voltage	$V_{g2}$	800 V
Grid No. 1 voltage	$V_{g1}$	-200 V
Anode current	$I_a$	7 A
Grid No. 2 current	$I_{g2}$	250 mA
Grid No. 1 current	$I_{g1}$	150 mA
Driver output power	$W_{dr}$	2 kW
Anode input power	$W_{i_a}$	38.5 kW
Anode dissipation	$W_a$	9 kW
Output power in load	$W_l$	25 kW <sup>1)</sup>
Efficiency	$\eta$	77 %


<sup>1)</sup> Feedthrough power inclusive. Measured in a circuit having an efficiency of approx. 85%.



**R.F. CLASS C ANODE AND SCREEN GRID MODULATION** (carrier conditions)**LIMITING VALUES** (Absolute max. rating system)

Frequency	f	up to 30 MHz
Anode voltage	$V_a$	max. 10 kV
Anode input power	$W_{i_a}$	max. 74 kW
Anode dissipation	$W_a$	max. 20 kW
Anode current	$I_a$	max. 8.5 A
Grid No.2 voltage	$V_{g2}$	max. 900 V
Grid No.2 dissipation	$W_{g2}$	max. 600 W
Grid No.1 voltage	$-V_{g1}$	max. 350 V
Grid No.1 dissipation	$W_{g1}$	max. 300 W

**OPERATING CONDITIONS**

Frequency	f	30 MHz
Anode voltage	$V_a$	10 kV
Grid No.2 voltage	$V_{g2}$	800 V
Grid No.1 voltage	$V_{g1}$	-150 V
Grid No.1 resistor	$R_{g1}$	500 $\Omega$
Anode current	$I_a$	7.4 A
Grid No.2 current	$I_{g2}$	340 mA
Grid No.1 current	$I_{g1}$	310 mA
Driver output power	$W_{dr}$	120 W
Anode input power	$W_{i_a}$	74 kW
Anode dissipation	$W_a$	19 kW
Output power	$W_o$	55 kW
Efficiency	$\eta$	74.4 %
Modulation depth	m	100 %
Modulation power	$W_{mod}$	37 kW
Grid No.2 voltage, peak	$V_{g2p}$	700 V

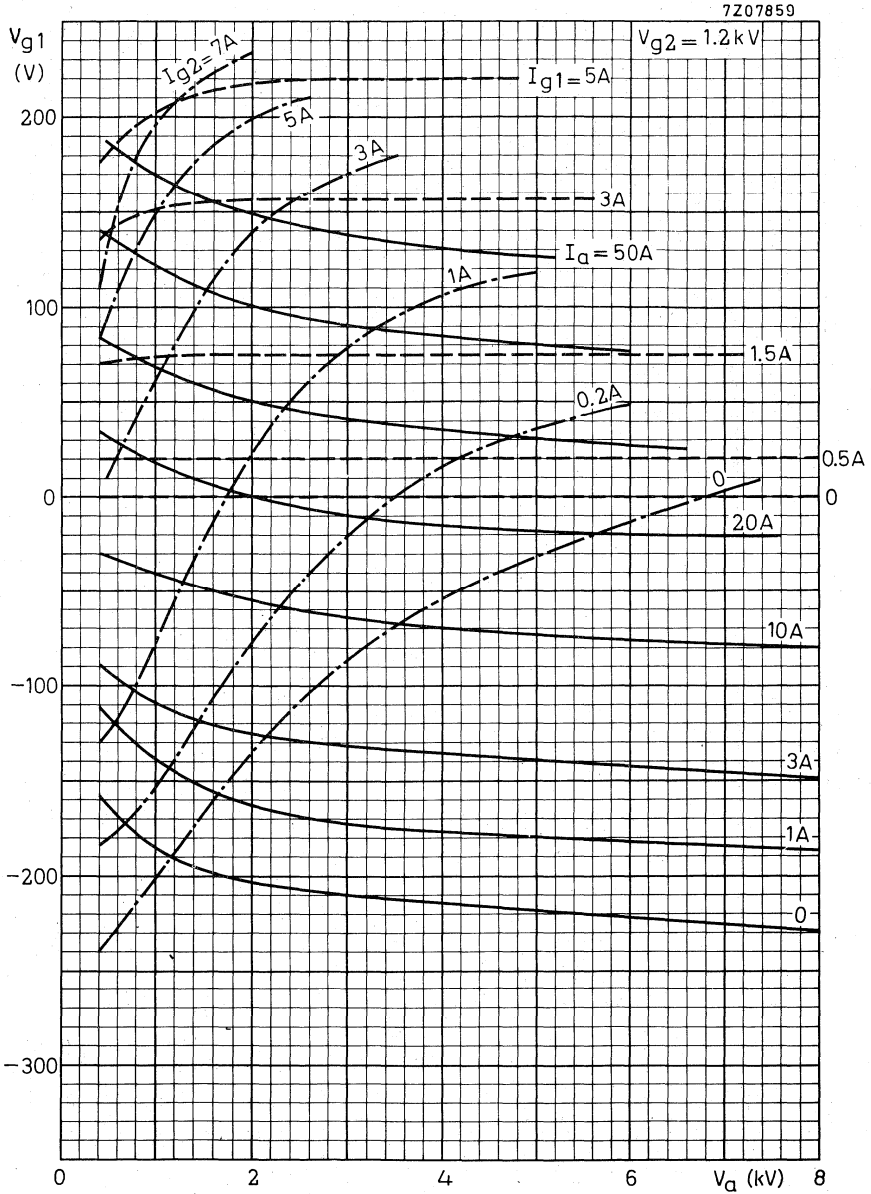

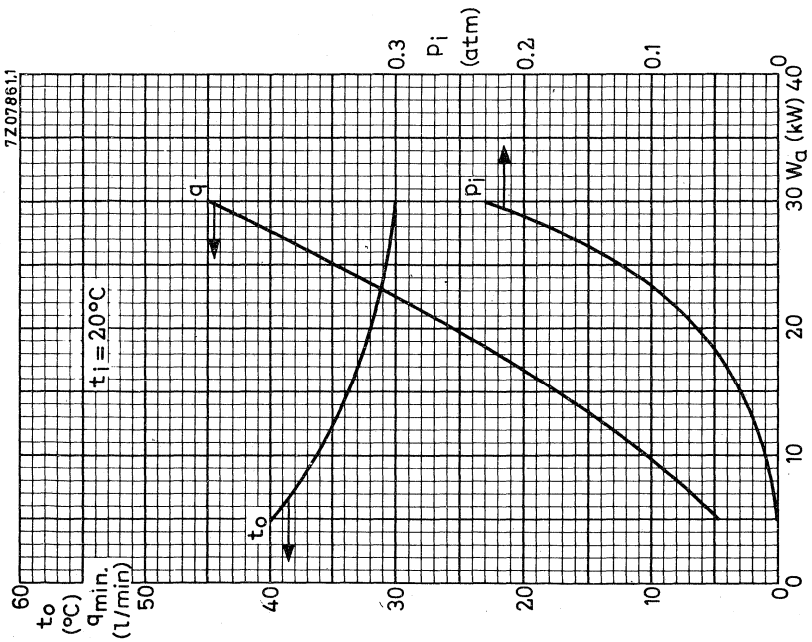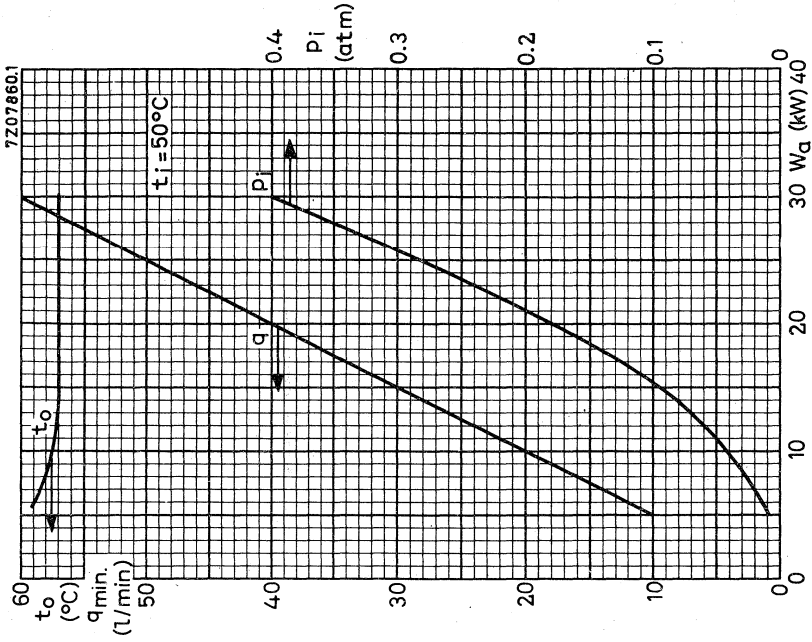



## AIR COOLED R.F. POWER TETRODE

Air cooled R.F. power tetrode in coaxial metal-ceramic construction intended for use as V.H.F. amplifier and S.S.B. amplifier.

QUICK REFERENCE DATA				
Frequency (MHz)	S.S.B.		C telegr. FM teleph.	
	$V_a$ (kV)	$W_o$ (kW) PEP	$V_a$ (kV)	$W_f$ (kW)
30	8	30		
	10	33		
220			5.5	25

**HEATING:** Direct; filament thoriated tungsten

Filament voltage	$V_f$	10 V
Filament current	$I_f$	200 A

### CAPACITANCES

Anode to all except grid No. 1	$C_a(g_1)$	42 pF
Grid No. 1 to all except anode	$C_{g_1(a)}$	260 pF
Anode to grid No. 1	$C_{ag_1}$	1.5 pF

### TYPICAL CHARACTERISTICS

Anode voltage	$V_a$	3 kV
Grid No. 2 voltage	$V_{g_2}$	1.2 kV
Anode current	$I_a$	2.5 A
Transconductance	$S$	65 mA/V
Amplification factor	$\mu_{g_2g_1}$	6.6 -

**TEMPERATURE LIMITS AND COOLING**

Absolute max. envelope and seal temperature


$t_{env.}$  max. 220 °C

**MECHANICAL DATA**

Dimensions in mm

Net weight: approx. 13.5 kg

Mounting position: Vertical with anode down

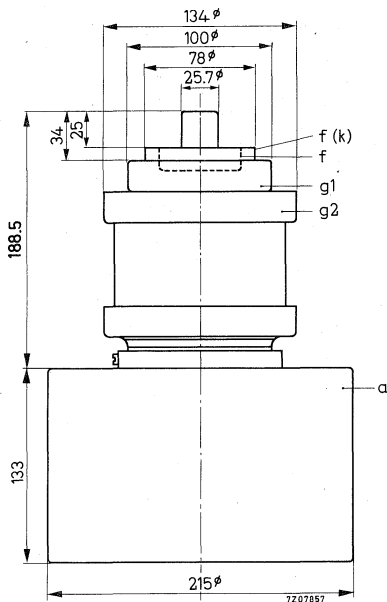

**ACCESSORIES**

- |                          |            |
|--------------------------|------------|
| Insulating pedestal      | type 40729 |
| Inner filament connector | type 40725 |
| Outer filament connector | type 40726 |
| Grid No.1 connector      | type 40727 |
| Grid No.2 connector      | type 40728 |

**R.F. CLASS AB LINEAR AMPLIFIER , SINGLE SIDE BAND, suppressed carrier**

**LIMITING VALUES** (Absolute max. rating system)

Frequency	f	up to	30	MHz
Anode voltage	$V_a$	max.	12	kV
Grid No.2 voltage	$V_{g2}$	max.	1.4	kV
Grid No.1 voltage	$-V_{g1}$	max.	350	V
Anode current	$I_a$	max.	10	A
Anode input power	$W_{i_a}$	max.	72	kW
Anode dissipation	$W_a$	max.	30	kW
Grid No.2 dissipation	$W_{g2}$	max.	600	W
Grid No.1 dissipation	$W_{g1}$	max.	300	W

**OPERATING CONDITIONS**

Frequency	f	30	MHz	
Anode voltage	$V_a$	8	kV	
Grid No.2 voltage	$V_{g2}$	1.2	kV	
Grid No.1 voltage	$V_{g1}$	-175	V <sup>1)</sup>	
		zero signal	single tone	double tone
Grid No.1 driving voltage	$V_{g1p}$	0	175	175 V
Anode current	$I_a$	2	5.9	3.8 A
Grid No.2 current	$I_{g2}$	0	250	100 mA
Grid No.1 current	$I_{g1}$	0	0	0 mA
Anode input power	$W_{i_a}$	16	47.2	30.4 kW
Anode dissipation	$W_a$	16	17.2	15.4 kW
Grid No.2 dissipation	$W_{g2}$	0	300	120 W
Output power (P.E.P.)	$W_o$	0	30	30 kW
Efficiency	$\eta$	-	63.5	49 %
Intermodulation distortion				
3d order	$d_3$	-	-	41 dB <sup>2)</sup>
5th order	$d_5$	-	-	54 dB <sup>2)</sup>

1) 2) See page 4

## OPERATING CONDITIONS(continued)

		zero signal	single tone	double tone
Frequency	f	30		MHz
Anode voltage	V <sub>a</sub>	10		kV
Grid No.2 voltage	V <sub>g2</sub>	1.2		kV
Grid No.1 voltage	V <sub>g1</sub>	-185		V <sup>1)</sup>
Grid No.1 driving voltage	V <sub>g1p</sub>	0	185	185 V
Anode current	I <sub>a</sub>	2	5.2	3.3 A
Grid No.2 current	I <sub>g2</sub>	0	250	80 mA
Grid No.1 current	I <sub>g1</sub>	0	0	0 mA
Anode input power	W <sub>ia</sub>	20	52	33 kW
Anode dissipation	W <sub>a</sub>	20	19	16.5 kW
Grid No.2 dissipation	W <sub>g2</sub>	0	300	96 W
Output power (P.E.P.)	W <sub>o</sub>	0	33	33 kW
Efficiency	$\eta$	-	63	50 %
Intermodulation distortion				
3 <sup>d</sup> order	d <sub>3</sub>	-	-	-41 dB <sup>2)</sup>
5 <sup>th</sup> order	d <sub>5</sub>	-	-	-54 dB <sup>2)</sup>

<sup>1)</sup> Adjust to give the zero signal anode current.

<sup>2)</sup> Maximum values encountered at any level of drive voltage up to full drive referred to the amplitude of either of the two equal tones at that level.

## R.F. CLASS C TELEGRAPHY OR F.M. TELEPHONY , grounded grid

## LIMITING VALUES (Absolute max. rating system)


Frequency	f	up to 220 MHz
Anode voltage	$V_a$	max. 5.6 kV
Grid No.2 voltage	$V_{g2}$	max. 1 kV
Grid No.1 voltage	$-V_{g1}$	max. 250 V
Anode current	$I_a$	max. 10 A
Anode input power	$W_{i_a}$	max. 72 kW
Anode dissipation	$W_a$	max. 30 kW
Grid No.2 dissipation	$W_{g2}$	max. 300 W
Grid No.1 dissipation	$W_{g1}$	max. 200 W


## OPERATING CONDITIONS

Frequency	f	220 MHz
Anode voltage	$V_a$	5.5 kV
Grid No.2 voltage	$V_{g2}$	800 V
Grid No.1 voltage	$V_{g1}$	-200 V
Anode current	$I_a$	7 A
Grid No.2 current	$I_{g2}$	250 mA
Grid No.1 current	$I_{g1}$	150 mA
Driver output power	$W_{dr}$	2 kW
Anode input power	$W_{i_a}$	38.5 kW
Anode dissipation	$W_a$	9 kW
Output power in load	$W_l$	25 kW <sup>1)</sup>
Efficiency	$\eta$	77 %

<sup>1)</sup> Feedthrough power inclusive. Measured in a circuit having an efficiency of approx. 85%.

7207859

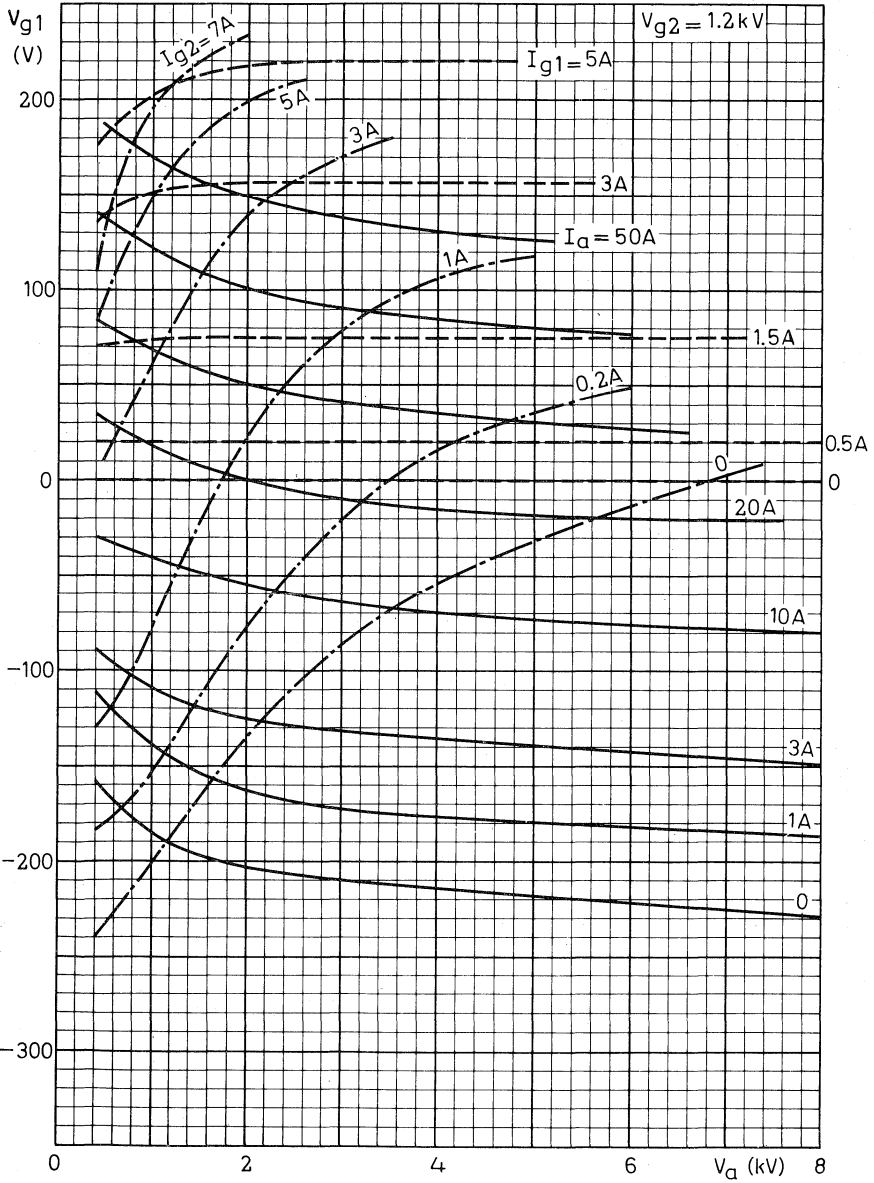

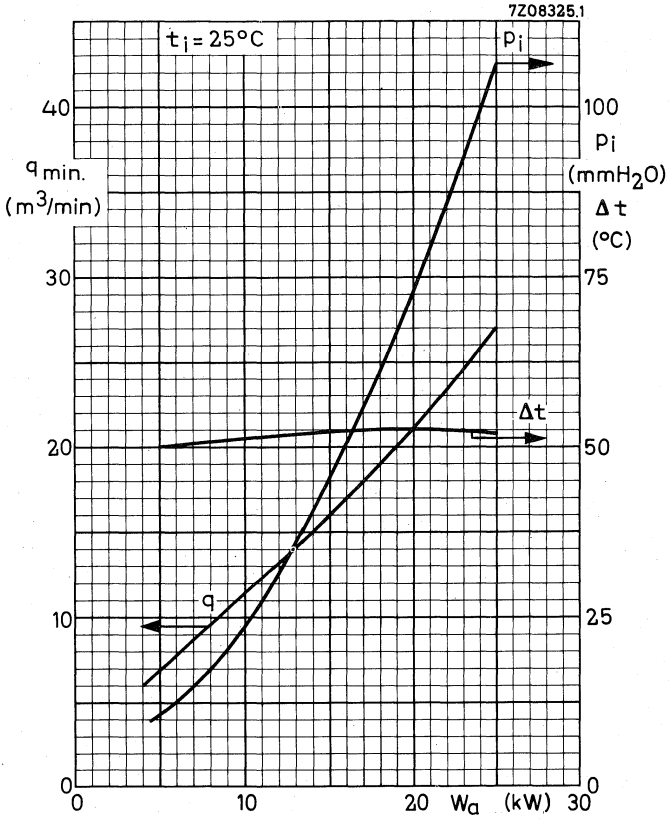





## VAPOUR COOLED R.F. POWER TETRODE

Vapour cooled R.F. power tetrode in coaxial metal-ceramic construction intended for use as V.H.F. amplifier and S.S.B. amplifier.

QUICK REFERENCE DATA						
Frequency (MHz)	S.S.B.		C telegr. FM teleph.		C <sub>ag2</sub> mod.	
	V <sub>a</sub> (kV)	W <sub>o</sub> (kW) PEP	V <sub>a</sub> (kV)	W <sub>l</sub> (kW)	V <sub>a</sub> (kV)	W <sub>o</sub> (kW)
30	8	30			10	55
220	10	33	5.5	25		

**HEATING:** Direct; filament thoriated tungsten

Filament voltage	V <sub>f</sub>	10 V
Filament current	I <sub>f</sub>	200 A

### CAPACITANCES

Anode to all except grid No. 1	C <sub>a(g1)</sub>	42 pF
Grid No. 1 to all except anode	C <sub>g1(a)</sub>	260 pF
Anode to grid No. 1	C <sub>ag1</sub>	1.5 pF

### TYPICAL CHARACTERISTICS

Anode voltage	V <sub>a</sub>	3 kV
Grid No. 2 voltage	V <sub>g2</sub>	1.2 kV
Anode current	I <sub>a</sub>	2.5 A
Transconductance	S	65 mA/V
Amplification factor	μ <sub>g2g1</sub>	6.6 -

**TEMPERATURE LIMITS AND COOLING**

Absolute max. envelope and seal temperature


$t_{env.}$  max. 220 °C

**MECHANICAL DATA**

Dimensions in mm

Net weight: approx. 14.7 kg

Mounting position: Vertical with anode down

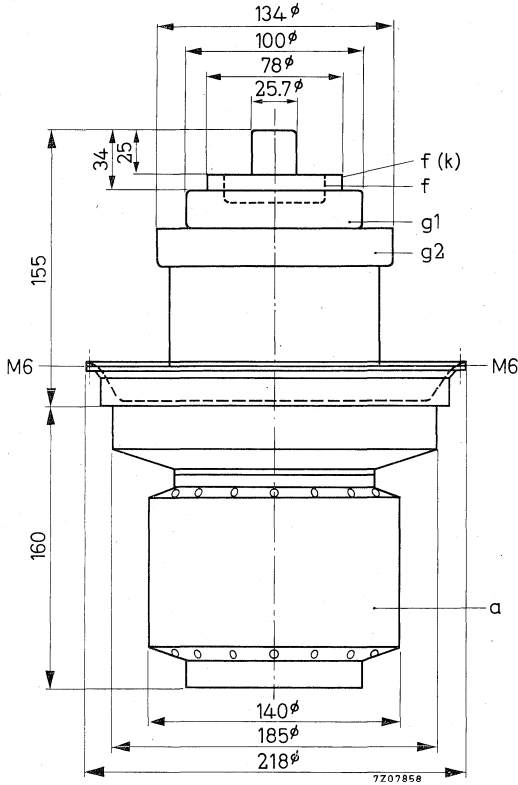

**ACCESSORIES**

- |                          |            |
|--------------------------|------------|
| Boiler                   | type K 728 |
| Inner filament connector | type 40725 |
| Outer filament connector | type 40726 |
| Grid No.1 connector      | type 40727 |
| Grid No.2 connector      | type 40728 |

R.F. CLASS AB LINEAR AMPLIFIER, SINGLE SIDE BAND, suppressed carrier

**LIMITING VALUES** (Absolute max. rating system)

Frequency	f	up to	30	MHz
Anode voltage	$V_a$	max.	12	kV
Grid No. 2 voltage	$V_{g2}$	max.	1.4	kV
Grid No. 1 voltage	$-V_{g1}$	max.	350	V
Anode current	$I_a$	max.	10	A
Anode input power	$W_{i_a}$	max.	72	kW
Anode dissipation	$W_a$	max.	45	kW
Grid No. 2 dissipation	$W_{g2}$	max.	600	W
Grid No. 1 dissipation	$W_{g1}$	max.	300	W

**OPERATING CONDITIONS**

Frequency	f	30			MHz
Anode voltage	$V_a$	8			kV
Grid No. 2 voltage	$V_{g2}$	1.2			kV
Grid No. 1 voltage	$V_{g1}$	-175			V 1)
		zero signal	single tone	double tone	
Grid No. 1 driving voltage	$V_{g1P}$	0	175	175	V
Anode current	$I_a$	2	5.9	3.8	A
Grid No. 2 current	$I_{g2}$	0	250	100	mA
Grid No. 1 current	$I_{g1}$	0	0	0	mA
Anode input power	$W_{i_a}$	16	47.2	30.4	kW
Anode dissipation	$W_a$	16	17.2	15.4	kW
Grid No. 2 dissipation	$W_{g2}$	0	300	120	W
Output power (P.E.P.)	$W_o$	0	30	30	kW
Efficiency	$\eta$	-	63.5	49	%
Intermodulation distortion					
3 <sup>d</sup> order	$d_3$	-	-	41	dB 2)
5 <sup>th</sup> order	$d_5$	-	-	54	dB 2)

1) 2) See page 4

## OPERATING CONDITIONS (continued)

		zero signal	single tone	double tone	
Frequency	f		30		MHz
Anode voltage	V <sub>a</sub>		10		kV
Grid No.2 voltage	V <sub>g2</sub>		1.2		kV
Grid No.1 voltage	V <sub>g1</sub>		-185		V <sup>1)</sup>
Grid No.1 driving voltage	V <sub>g1p</sub>	0	185	185	V
Anode current	I <sub>a</sub>	2	5.2	3.3	A
Grid No.2 current	I <sub>g2</sub>	0	250	80	mA
Grid No.1 current	I <sub>g1</sub>	0	0	0	mA
Anode input power	W <sub>i<sub>a</sub></sub>	20	52	33	kW
Anode dissipation	W <sub>a</sub>	20	19	16.5	kW
Grid No.2 dissipation	W <sub>g2</sub>	0	300	96	W
Output power (P.E.P.)	W <sub>o</sub>	0	33	33	kW
Efficiency	η	-	63	50	%
Intermodulation distortion					
3 <sup>d</sup> order	d <sub>3</sub>	-	-	-41	dB <sup>2)</sup>
5 <sup>th</sup> order	d <sub>5</sub>	-	-	-54	dB <sup>2)</sup>

<sup>1)</sup> Adjust to give the zero signal anode current.

<sup>2)</sup> Maximum values encountered at any level of drive voltage up to full drive referred to the amplitude of either of the two equal tones at that level.

## R.F. CLASS C TELEGRAPHY OR F.M. TELEPHONY, grounded grid

## LIMITING VALUES (Absolute max. rating system)

Frequency	f	up to	220 MHz
Anode voltage	$V_a$	max.	5.6 kV
Grid No.2 voltage	$V_{g2}$	max.	1 kV
Grid No.1 voltage	$-V_{g1}$	max.	250 V
Anode current	$I_a$	max.	10 A
Anode input power	$W_{i_a}$	max.	72 kW
Anode dissipation	$W_a$	max.	45 kW
Grid No.2 dissipation	$W_{g2}$	max.	300 W
Grid No.1 dissipation	$W_{g1}$	max.	200 W

## OPERATING CONDITIONS

Frequency	f	220 MHz
Anode voltage	$V_a$	5.5 kV
Grid No.2 voltage	$V_{g2}$	800 V
Grid No.1 voltage	$V_{g1}$	-200 V
Anode current	$I_a$	7 A
Grid No.2 current	$I_{g2}$	250 mA
Grid No.1 current	$I_{g1}$	150 mA
Driver output power	$W_{dr}$	2 kW
Anode input power	$W_{i_a}$	38.5 kW
Anode dissipation	$W_a$	9 kW
Output power in load	$W_l$	25 kW <sup>1)</sup>
Efficiency	$\eta$	77 %

<sup>1)</sup> Feedthrough power inclusive. Measured in a circuit having an efficiency of approx. 85%.


**R.F. CLASS C ANODE AND SCREEN GRID MODULATION (carrier conditions)**

**LIMITING VALUES (Absolute max. rating system)**

Frequency	f	up to 30 MHz
Anode voltage	$V_a$	max. 10 kV
Anode input power	$W_{i_a}$	max. 74 kW
Anode dissipation	$W_a$	max. 30 kW
Anode current	$I_a$	max. 8.5 A
Grid No.2 voltage	$V_{g_2}$	max. 900 V
Grid No.2 dissipation	$W_{g_2}$	max. 600 W
Grid No.1 voltage	$-V_{g_1}$	max. 350 V
Grid No.1 dissipation	$W_{g_1}$	max. 300 W

**OPERATING CONDITIONS**

Frequency	f	30 MHz
Anode voltage	$V_a$	10 kV
Grid No.2 voltage	$V_{g_2}$	800 V
Grid No.1 voltage	$V_{g_1}$	-150 V
Grid No.1 resistor	$R_{g_1}$	500 $\Omega$
Anode current	$I_a$	7.4 A
Grid No.2 current	$I_{g_2}$	340 mA
Grid No.1 current	$I_{g_1}$	310 mA
Driver output power	$W_{dr}$	120 W
Anode input power	$W_{i_a}$	74 kW
Anode dissipation	$W_a$	19 kW
Output power	$W_o$	55 kW
Efficiency	$\eta$	74.4 %
Modulation depth	m	100 %
Modulation power	$W_{mod}$	37 kW
Grid No.2 voltage, peak	$V_{g_2p}$	700 V

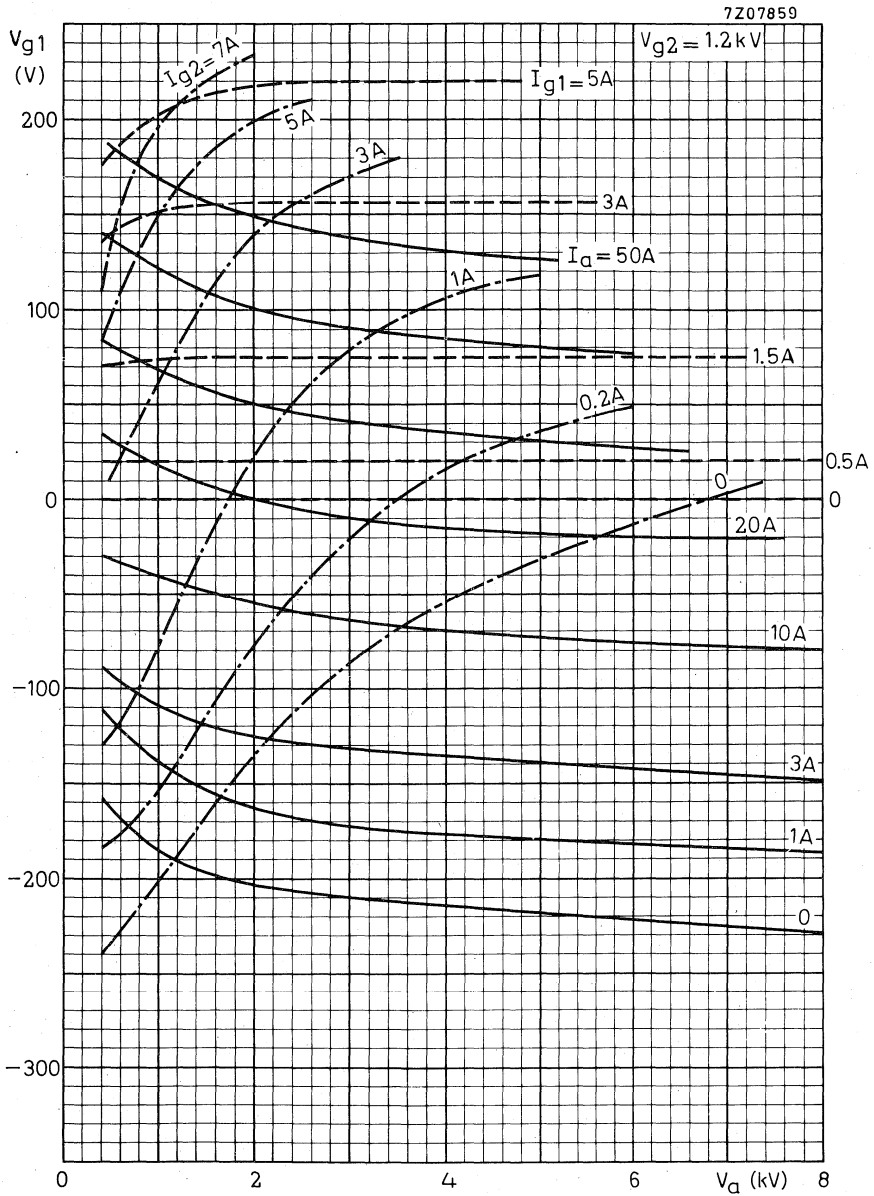





## QUICK HEATING R.F. DOUBLE TETRODE

Quick heating double tetrode for use as R.F. amplifier and frequency multiplier up to 500 MHz. Designed for intermittent service in transistorised mobile equipment.

QUICK REFERENCE DATA						
Freq. (MHz)	C teleg.		C <sub>a-g2</sub> mod.		C freq. tripler	
	V <sub>a</sub> (V)	W <sub>ℓ</sub> <sup>1)</sup> (W)	V <sub>a</sub> (V)	W <sub>ℓ</sub> <sup>1)</sup> (W)	V <sub>a</sub> (V)	W <sub>ℓ</sub> <sup>1)</sup> (W)
200	300	16	300	13		
	400	22	500	22		
	600	35				
460	400	17				
66.7/200					300	7
153/460					300	5.5

**HEATING:** Direct by A.C. or D.C. Filament oxide coated

Filament voltage  $V_f$  max. 1.6 V

Filament current at  $V_f = 1.6$  V  $I_f = 4.0$  A

Heating time for  $W_o = 70\%$  of full output power  $T_h < 0.5$  sec

The filament has been designed to accept temporary variations in supply voltage of  $-25\%$ .

The frequency of the A.C. filament supply may be

for sinusoidal supply voltages max. 200 Hz

for square wave supply voltages any

**CAPACITANCES** in push-pull connection

Input capacitance  $C_i = 4.0$  pF

Output capacitance  $C_o = 1.5$  pF

The tube is internally neutralised

<sup>1)</sup> Useful power in the load

## TYPICAL CHARACTERISTICS (each system)

Filament voltage	$V_f$	=	1.4	V
Anode voltage	$V_a$	=	300	V
Grid No. 2 voltage	$V_{g2}$	=	250	V
Anode current	$I_a$	=	40	mA
Mutual conductance	$S$	=	4.0	mA/V
Amplification factor	$\mu_{g2g1}$	=	9	

## TEMPERATURE LIMITS (Absolute limits)

Bulb and anode seal temperature	= max.	250	°C
Base seal temperature	= max.	180	°C



Anode connectors providing a high degree of heat transfer by radiation or conduction should be used

## MECHANICAL DATA

Net weight 50 g

Dimensions in mm

Base : Septar  
 Socket : 2422 513 00001  
 Anode connector : 40623



Mounting position: any

If the tube is mounted with its main axis horizontally it is recommended that the plane of the anodes be vertical

Contacts 1 and 7 should be strapped together externally to reduce the effective contact resistance

1) Location of the anode pins within these circles.

**R.F. CLASS C TELEGRAPHY OR F.M. TELEPHONY.** Two systems in push-pull intermittent mobile service

**LIMITING VALUES** (Absolute limits)

Frequency	f	up to 200	up to 500	MHz
Anode voltage	$V_a$	= max. 600	max. 450	V
Anode input power	$W_{ia}$	= max. 70	max. 50	W
Anode dissipation	$W_a$	= max. 2x10	max. 2x10	W
Grid No.2 voltage	$V_{g2}$	= max. 300	max. 300	V
Grid No.2 dissipation	$W_{g2}$	= max. 2x1.5	max. 2x1.5	W
Negative grid No.1 voltage	$-V_{g1}$	= max. 75	max. 75	V
Grid No.1 current	$I_{g1}$	= max. 2x2.5	max. 2x2.5	mA
Grid No.1 dissipation	$W_{g1}$	= max. 2x0.5	max. 2x0.5	W
Cathode current	$I_k$	= max. 2x60	max. 2x60	mA

**OPERATING CHARACTERISTICS**

Frequency	f	= 200	200	200	460	MHz
Anode voltage	$V_a$	= 300	400	600	400	V
Grid No.2 voltage	$V_{g2}$	= 250	250	250	250	V
Grid No.1 voltage	$V_{g1}$	= -40	-50	-60	-50	V
Driving voltage	$V_{g1g1'p}$	= 106	136	156	-	V
Anode current	$I_a$	= 2x50	2x50	2x50	2x50	mA
Grid No.2 current	$I_{g2}$	= 2x4	2x3.5	2x3.0	2x3.0	mA
Grid No.1 current	$I_{g1}$	= 2x1.5	2x1.5	2x1.0	2x0.6	mA
Driver output power	$W_{dr}$	= 1.2	1.3	1.5	5.0	W
Anode input power	$W_{ia}$	= 30	40	60	40	W
Anode dissipation	$W_a$	= 2x5.5	2x6.0	2x7.5	2x9.5	W
Output power	$W_o$	= 19	28	45	21	W
Efficiency	$\eta$	= 63	70	75	52.5	%
Output power in load	$W_l$	= 16	22	35	17	W

**R.F. CLASS C ANODE AND SCREEN GRID MODULATION.** Two systems in push-pull; intermittent mobile service

**LIMITING VALUES** (Absolute limits)

Frequency	f	up to	200	up to	500	MHz
Anode voltage	$V_a$	= max.	500	max.	373	V
Anode input power	$W_{ia}$	= max.	50	max.	37	W
Anode dissipation	$W_a$	= max.	2x7	max.	2x7	W
Grid No.2 voltage	$V_{g2}$	= max.	300	max.	300	V
Grid No.2 dissipation	$W_{g2}$	= max.	2x1.2	max.	2x1.2	W
Negative grid No.1 voltage	$-V_{g1}$	= max.	100	max.	100	V
Grid No.1 current	$I_{g1}$	= max.	2x2.5	max.	2x2.5	mA
Grid No.1 dissipation	$W_{g1}$	= max.	2x0.5	max.	2x0.5	W
Cathode current	$I_k$	= max.	2x55	max.	2x55	mA

**OPERATING CHARACTERISTICS**

Frequency	f	=	200	200	MHz
Anode voltage	$V_a$	=	300	500	V
Grid No.2 voltage	$V_{g2}$	=	250	250	V
Grid No.1 voltage	$V_{g1}$	=	-50	-80	V
Driving voltage	$V_{g1g1'p}$	=	166	220	V
Anode current	$I_a$	=	2x40	2x40	mA
Grid No.2 current	$I_{g2}$	=	2x3.5	2x4.0	mA
Grid No.1 current	$I_{g1}$	=	2x1.5	2x1.5	mA
Anode input power	$W_{ia}$	=	24	40	W
Anode dissipation	$W_a$	=	2x4	2x5.5	W
Output power	$W_o$	=	16	29	W
Efficiency	$\eta$	=	67	73	%
Output power in load	$W_l$	=	13	22	W



**R.F. CLASS C FREQUENCY TRIPLER** . Two systems in push-pull, intermittent mobile service:

**LIMITING VALUES** (Absolute limits)

Frequency	f	up to	500	MHz
Anode voltage	$V_a$	= max.	600	V
Anode input power	$W_{ia}$	= max.	54	W
Anode dissipation	$W_a$	= max.	2x10	W
Grid No.2 voltage	$V_{g2}$	= max.	250	V
Grid No.2 dissipation	$W_{g2}$	= max.	2x1.5	W
Negative grid No.1 voltage	$-V_{g1}$	= max.	200	V
Grid No.1 current	$I_{g1}$	= max.	2x4.5	mA
Grid No.1 dissipation	$W_{g1}$	= max.	2x0.5	W
Cathode current	$I_k$	= max.	2x55	mA

**OPERATING CHARACTERISTICS**

Frequency	f	=	66.7/200	153/460	MHz
Anode voltage	$V_a$	=	300	300	V
Grid No.2 voltage	$V_{g2}$	=	250	250	V
Grid No.1 voltage	$V_{g1}$	=	-175	-175	V
Driving voltage	$V_{g1g1'p}$	=	410	410	V
Anode current	$I_a$	=	2x45	2x45	mA
Grid No.2 current	$I_{g2}$	=	2x4.0	2x3.5	mA
Grid No.1 current	$I_{g1}$	=	2x3.0	2x2.5	mA
Driver output power	$W_{dr}$	=	3	5	W
Anode input power	$W_{ia}$	=	27	27	W
Anode dissipation	$W_a$	=	2x9	2x10	W
Output power	$W_o$	=	9	7	W
Efficiency	$\eta$	=	33	26	%
Output power in load	$W_l$	=	7	5.5	W

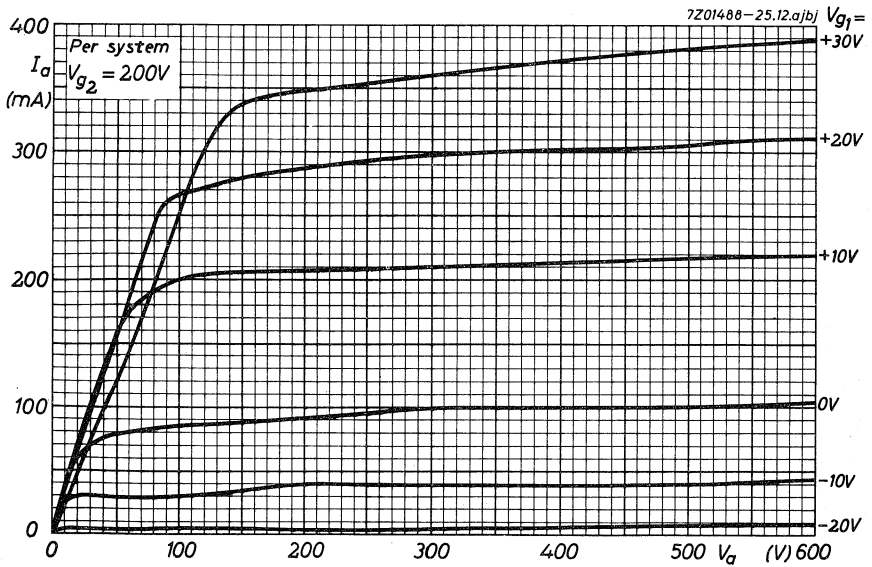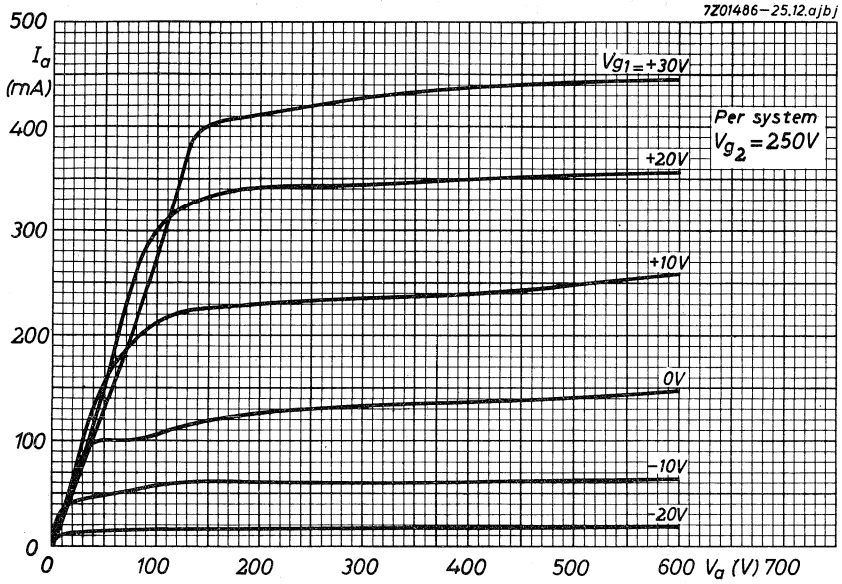

## QUICK HEATING R.F. DOUBLE TETRODE

Quick heating, radiation and convection cooled double tetrode for use as R.F. power amplifier or frequency multiplier in mobile transmitters.

QUICK REFERENCE DATA						
Freq. (MHz)	R.F. class C telegr.		R.F. class C ag <sub>2</sub> mod.		Frequency multiplier	
	C.C.S. W <sub>ℓ</sub> (W) <sup>1</sup>	I.C.A.S. W <sub>ℓ</sub> (W) <sup>1</sup>	C.C.S. W <sub>ℓ</sub> (W) <sup>1</sup>	I.C.A.S. W <sub>ℓ</sub> (W) <sup>1</sup>	C.C.S. W <sub>ℓ</sub> (W) <sup>1</sup>	I.C.A.S. W <sub>ℓ</sub> (W) <sup>1</sup>
180	45	75	32	53	16	
50/150						
157/470						12

**HEATING:** direct by A.C. or D.C.; filament oxide coated

Filament voltage  $V_f = 2.1 \text{ V}$

Filament current  $I_f = 4.5 \text{ A}$

Heating time for  $W_o = 70\%$  of  $W_o \text{ max.}$   $T_h < 0.5 \text{ sec}$

The frequency of the A.C. filament supply may be

with sinusoidal supply voltages  $\text{max. } 200 \text{ Hz}$

with square-wave supply voltages.  $\text{any}$

The filament has been designed to accept temporary fluctuations of supply voltage of  $\pm 15\%$ .

**CAPACITANCES;** two sections in push-pull connection

Input capacitance  $C_i = 6.0 \text{ pF}$

Output capacitance  $C_o = 2.0 \text{ pF}$

**TYPICAL CHARACTERISTICS;** each section

Anode voltage  $V_a = 600 \text{ V}$

Grid No.2 voltage  $V_{g2} = 250 \text{ V}$

Anode current  $I_a = 40 \text{ mA}$

Mutual conductance  $S = 4.5 \text{ mA/V}$

Amplification factor  $\mu_{g2g1} = 8$

1) Output power in the load

**TEMPERATURE LIMITS** (Absolute limits)

Bulb temperature = max. 250 °C  
 Temperature of all seals = max. 250 °C  
 Pin temperature = max. 180 °C



**COOLING**

Radiation and convection  
 Anode connectors providing a high degree of heat transfer by radiation or conduction should be used.

**MECHANICAL DATA**

Dimensions in mm

Base : Septar  
 Socket : 2422 513 00001  
 Anode connector : 40623  
 Net weight : 16 g

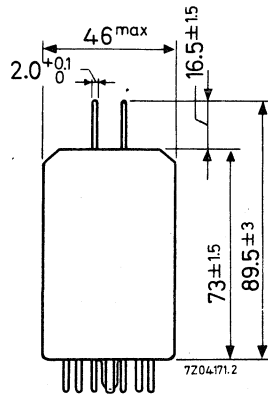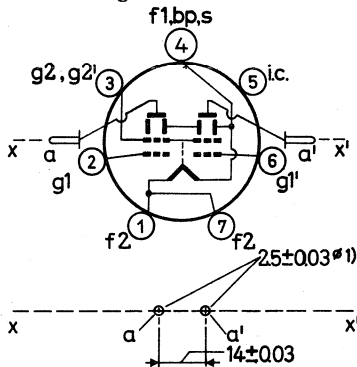

Mounting position: any

Contacts 1 and 7 should be strapped together externally to reduce the effective contact resistance.

1) Location of anode pins within these circles.



## R.F. CLASS C TELEGRAPHY OR F.M. TELEPHONY

## LIMITING VALUES (Each system; absolute limits)

Frequency	f	up to	200	500	MHz
Anode voltage	$V_a$	= max.	750	500	V
Anode input power	$W_{ia}$	= max.	72	48	W
Anode dissipation	$W_a$	= max.	20	20	W
Grid No.2 voltage	$V_{g2}$	= max.	300	300	V
Grid No.2 dissipation	$W_{g2}$	= max.	3.5	3.5	W
Negative grid No.1 voltage	$-V_{g1}$	= max.	100	100	V
Grid No.1 current	$I_{g1}$	= max.	5.0	5.0	mA
Grid No.1 dissipation	$W_{g1}$	= max.	1.0	1.0	W
Grid No.1 circuit resistance					
with fixed bias	$R_{g1}$	= max.	50	50	k $\Omega$
with automatic bias	$R_{g1}$	= max.	100	100	k $\Omega$
Cathode current	$I_k$	= max.	120	120	mA

## OPERATING CONDITIONS; two systems in push-pull

Frequency	f	CCS		ICAS	MHz
		180	475		
Anode voltage	$V_a$	= 400	350	600	V
Grid No.2 voltage	$V_{g2}$	= 250	250	250	V
Grid No.1 voltage	$V_{g1}$	= -60	-45	-80	V
Anode current	$I_a$	= 2x100	2x100	2x100	mA
Grid No.2 current	$I_{g2}$	= 2x8	2x4.5	2x9	mA
Grid No.1 current	$I_{g1}$	= 2x3.0	2x2.0	2x3.5	mA
Driving power	$W_{dr}$	= 3	10	4	W
Anode input power	$W_{ia}$	= 2x40	2x35	2x60	W
Anode dissipation	$W_a$	= 2x13.5	2x16	2x17.5	W
Output power	$W_o$	= 53	38	85	W
Tube efficiency	$\eta$	= 66	54	71	%
Output power in the load	$W_l$	= 45	-	75	W

## R.F. CLASS C ANODE AND SCREEN GRID MODULATION

## LIMITING VALUES (Each system; absolute limits)

Frequency	f	up to 200	500	MHz
Anode voltage	$V_a$	= max. 600	400	V
Anode input power	$W_{i_a}$	= max. 57.5	38.5	W
Anode dissipation	$W_a$	= max. 14	14	W
Grid No.2 voltage	$V_{g_2}$	= max. 300	300	V
Grid No.2 dissipation	$W_{g_2}$	= max. 2.3	2.3	W
Negative grid No.1 voltage	$-V_{g_1}$	= max. 175	175	V
Grid No.1 current	$I_{g_1}$	= max. 5.0	5.0	mA
Grid No.1 dissipation	$W_{g_1}$	= max. 1.0	1.0	W
Grid No.1 circuit resistance				
with fixed bias	$R_{g_1}$	= max. 50	50	k $\Omega$
with automatic bias	$R_{g_1}$	= max. 100	100	k $\Omega$
Cathode current	$I_k$	= max. 120	120	mA

## OPERATING CONDITIONS; two systems in push-pull

		CCS	ICAS	
Frequency	f	= 180	180	MHz
Anode voltage	$V_a$	= 400	600	V
Grid No.2 voltage	$V_{g_2}$	= 250	250	V
Grid No.1 voltage	$V_{g_1}$	= -70	-80	V
Anode current	$I_a$	= 2x75	2x75	mA
Grid No.2 current	$I_{g_2}$	= 2x9	2x9	mA
Grid No.1 current	$I_{g_1}$	= 2x2	2x2	mA
Driving power	$W_{dr}$	= 4	5	W
Anode input power	$W_{i_a}$	= 2x30	2x45	W
Anode dissipation	$W_a$	= 2x10.5	2x13	W
Output power	$W_o$	= 39	64	W
Tube efficiency	$\eta$	= 65	71	%
Output power in the load	$W_l$	= 32	53	W
Modulation depth	m	= 100	100	%
Modulation power	$W_{mod}$	= 47	47	W
Grid No.2 peak voltage	$V_{g_2p}$	= 185	185	V

**R.F. CLASS C FREQUENCY MULTIPLIER**


**LIMITING VALUES** (Each system; absolute limits)

Output frequency	$f_{out}$	up to	500	MHz
Anode voltage	$V_a$	=	max. 750	V
Anode input power	$W_{ia}$	=	max. 60	W
Anode dissipation	$W_a$	=	max. 20	W
Grid No.2 voltage	$V_{g2}$	=	max. 300	V
Grid No.2 dissipation	$W_{g2}$	=	max. 3.5	W
Negative grid No.1 voltage	$-V_{g1}$	=	max. 175	V
Grid No.1 dissipation	$W_{g1}$	=	max. 1.0	W
Grid No.1 circuit resistance				
with fixed bias	$R_{g1}$	=	max. 50	k $\Omega$
with automatic bias	$R_{g1}$	=	max. 100	k $\Omega$
Cathode current	$I_k$	=	max. 100	mA


**OPERATING CONDITIONS;** two systems in push-pull

Frequency	$f$	CCS		ICAS	MHz	
		50/150	50/150	157/470		
Anode voltage	$V_a$	=	400	500	400	V
Grid No.2 voltage	$V_{g2}$	=	250	250	250	V
Grid No.1 voltage	$V_{g1}$	=	-150	-150	-175	V
Peak grid No.1 driving voltage	$V_{g1p}$	=	360	360	360	V
Anode current	$I_a$	=	2x72	2x60	2x65	mA
Grid No.2 current	$I_{g2}$	=	2x8	2x5	2x6	mA
Grid No.1 current	$I_{g1}$	=	2x2.5	2x3.0	2x2.9	mA
Driving power	$W_{dr}$	=	9	10	8	W
Anode input power	$W_{ia}$	=	2x29	2x30	2x26	W
Anode dissipation	$W_a$	=	2x20	2x20	2x18	W
Output power	$W_o$	=	18	20	16	W
Tube efficiency	$\eta$	=	31	33	31	%
Output power in the load	$W_l$	=	14.5	16	12	W

7204175-2.512.ajcj

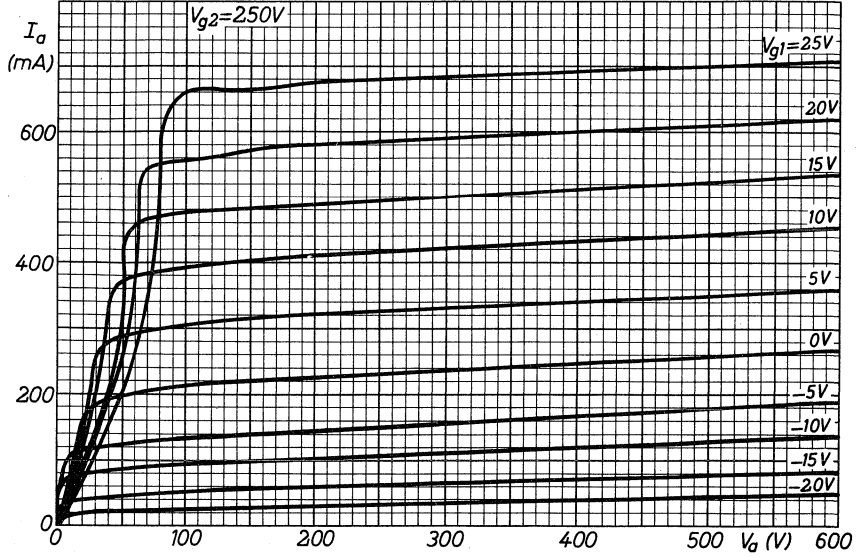

7204173-2.512.ajcj

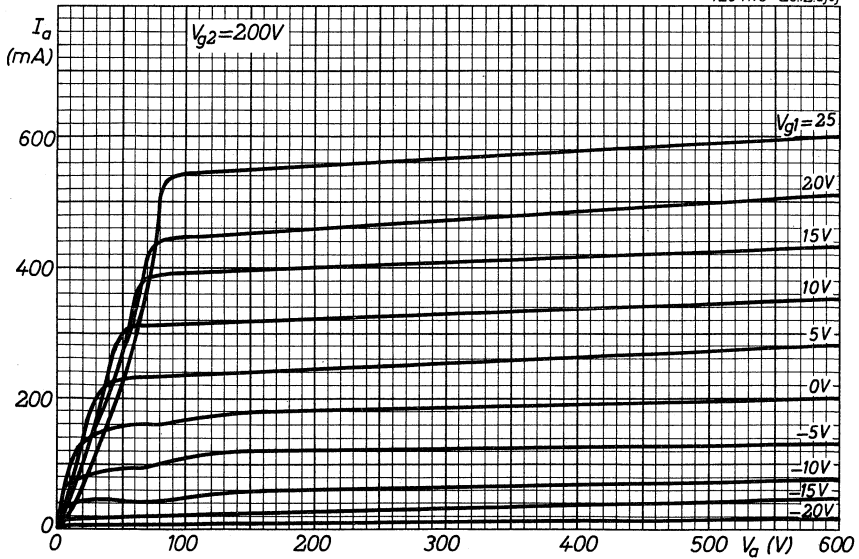

## R.F. DOUBLE TETRODE

QUICK REFERENCE DATA								
Freq. (MHz)	C telegr.				$C_{ag2}$ mod.			
	C.C.S.		I.C.A.S.		C.C.S.		I.C.A.S.	
	$V_a$ (V)	$W_p^{1)}$ (W)	$V_a$ (V)	$W_p^{1)}$ (W)	$V_a$ (V)	$W_p^{1)}$ (W)	$V_a$ (V)	$W_p^{1)}$ (W)
175	900	132	1000	163	750	85	800	107

**HEATING:** indirect by A.C. or D.C. Cathode oxide coated

Heater voltage	$V_f = 6.3$ V	12.6 V
Heater current	$I_f = 1.8$ A	0.9 A
Pins	5-(1+7)	1-7

**CAPACITANCES** (each system, the elements of the other system being earthed)

Anode to all other elements except grid No.1	$C_a = 3.2$ pF
Grid No.1 to all other elements except anode	$C_{g1} = 10.5$ pF
Anode to grid No.1	$C_{ag1} < 0.09$ pF

For internal neutralization ( $C_n, C_n'$ ) please refer to the electrode connections

**TYPICAL CHARACTERISTICS** (each system)

Anode current	$I_a = 30$ mA
Mutual conductance	$S = 4.5$ mA/V
Amplification factor	$\mu_{g2g1} = 8.2$

<sup>1)</sup> Useful power in the load

**COOLING:** radiation

When the tube is used near its limiting values it may be necessary to direct an air flow on the bulb and the anode seals. In general an air flow of approximately 0.56 m<sup>3</sup>/min. will be sufficient.

**TEMPERATURE LIMITS** (Absolute limits)



Temperature of bulb and anode seals = max. 250 °C

Temperature of base pin seals = max. 180 °C

**MECHANICAL DATA**

- Base : Septar
- Socket : 2422 513 00001
- Anode connector: 40681
- Net weight : 71 g

Dimensions in mm

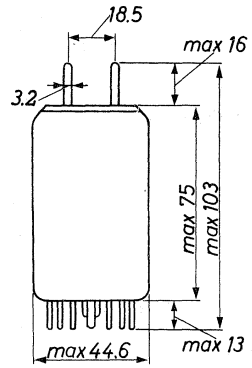

Mounting position: Vertical with base up or down  
or horizontal with the anode pins in a horizontal plane

## R.F. CLASS C TELEGRAPHY, two systems in push-pull

## LIMITING VALUES (continuous service; absolute limits)

C. C. S.

Frequency	f	up to	175	MHz
Anode voltage	$V_a$	= max.	1000	V
Anode current	$I_a$	= max.	2x110	mA
Anode dissipation	$W_a$	= max.	2x30	W
Anode input power	$W_{ia}$	= max.	2x100	W
Grids No.2 voltage	$V_{g_2, g_2'}$	= max.	300	V
Grids No.2 dissipation	$W_{g_2+g_2'}$	= max.	7	W
Negative grid No.1 voltage	$-V_{g_1}$	= max.	175	V
Grid No.1 current	$I_{g_1}$	= max.	2x5	mA
Grid No.1 circuit resistance	$R_{g_1}$	= max.	50	k $\Omega$ <sup>1)</sup>
Heater to cathode voltage	$V_{kf}$	= max.	100	V

## OPERATING CONDITIONS (continuous service)

C. C. S.

Frequency	f	=	175	175	MHz
Anode voltage	$V_a$	=	1000	900	V
Grids No.2 voltage	$V_{g_2, g_2'}$	=	230	245	V
Grid No.1 voltage	$V_{g_1}$	=	-85	-90	V
Common grids No.1 resistor	$R_{g_1, g_1'}$	=	15	15	k $\Omega$
Anode current	$I_a$	=	2x100	2x110	mA
Grids No.2 current	$I_{g_2+g_2'}$	=	11.2	12.5	mA
Grids No.1 current	$I_{g_1+g_1'}$	=	5.7	5.9	mA
Anode input power	$W_{ia}$	=	200	198	W
Anode dissipation	$W_a$	=	2x27	2x25	W
Grids No.2 dissipation	$W_{g_2+g_2'}$	=	2.5	3.0	W
Driver output power	$W_{dr}$	=	3.5	3.5	W
Output power	$W_o$	=	146	150	W
Efficiency	$\eta$	=	73	75	%
Useful power in the load	$W_l$	=	125	132	W

1) Each section

**R.F. CLASS C TELEGRAPHY**, two systems in push-pull (continued)**LIMITING VALUES** (Intermittent service; absolute limits)**I. C. A. S.**

Frequency	f	up to	175	MHz
Anode voltage	$V_a$	= max.	1000	V
Anode current	$I_a$	= max.	2x120	mA
Anode dissipation	$W_a$	= max.	2x34	W
Anode input power	$W_{ia}$	= max.	2x120	W
Grids No.2 voltage	$V_{g_2, g_2'}$	= max.	300	V
Grids No.2 dissipation	$W_{g_2+g_2'}$	= max.	8	W
Negative grid No.1 voltage	$-V_{g_1}$	= max.	175	V
Grid No.1 current	$I_{g_1}$	= max.	2x5	mA
Grid No.1 circuit resistance	$R_{g_1}$	= max.	50	$k\Omega^1)$
Heater to cathode voltage	$V_{kf}$	= max.	100	V

**OPERATING CONDITIONS**(Intermittent service)**I. C. A. S.**

Frequency	f	=	175	175	MHz
Anode voltage	$V_a$	=	1000	900	V
Grids No.2 voltage	$V_{g_2, g_2'}$	=	260	260	V
Grid No.1 voltage	$V_{g_1}$	=	-85	-85	V
Common grids No.1 resistor	$R_{g_1, g_1'}$	=	15	15	$k\Omega$
Anode current	$I_a$	=	2x120	2x120	mA
Grids No.2 current	$I_{g_2+g_2'}$	=	16.5	17.0	mA
Grids No.1 current	$I_{g_1+g_1'}$	=	5.7	5.7	mA
Anode input power	$W_{ia}$	=	240	216	W
Anode dissipation	$W_a$	=	2x30	2x25	W
Grids No.2 dissipation	$W_{g_2+g_2'}$	=	4.3	4.5	W
Driver output power	$W_{dr}$	=	3.5	3.5	W
Output power	$W_o$	=	180	166	W
Efficiency	$\eta$	=	75	77	%
Useful power in the load	$W_l$	=	163	147	W

1) Each section



**R.F. CLASS C ANODE AND SCREEN GRID MODULATION**, two systems in push-pull



**LIMITING VALUES** (Absolute limits)

	f	C. C. S.		I. C. A. S.	
		up to	175	up to	175 MHz
Anode voltage	$V_a$	= max.	800	max.	800 V
Anode current	$I_a$	= max.	2x90	max.	2x100 mA
Anode dissipation	$W_a$	= max.	2x21	max.	2x23.5 W
Anode input power	$W_{ia}$	= max.	140	max.	160 W
Grids No.2 voltage	$V_{g_2, g_2'}$	= max.	250	max.	250 V
Grids No.2 dissipation	$W_{g_2+g_2'}$	= max.	5.0	max.	5.5 W
Negative grid No.1 voltage	$-V_{g_1}$	= max.	175	max.	175 V
Grid No.1 current	$I_{g_1}$	= max.	2x5	max.	2x5 mA
Grid No.1 circuit resistance	$R_{g_1}$	= max.	50	max.	50 $k\Omega$ <sup>1)</sup>
Heater to cathode voltage	$V_{kf}$	= max.	100	max.	100 V

**OPERATING CONDITIONS**

		C. C. S.	I. C. A. S.
Frequency	f	= 175	175 MHz
Anode voltage	$V_a$	= 750	800 V
Grids No.2 voltage	$V_{g_2, g_2'}$	= 250	225 V
Grid No.1 voltage	$V_{g_1}$	= -66	-75 V
Common grids No.1 resistor	$R_{g_1, g_1'}$	= 15	15 $k\Omega$
Anode current	$I_a$	= 2x90	2x100 mA
Grids No.2 current	$I_{g_2+g_2'}$	= 10.2	8.8 mA
Grids No.1 current	$I_{g_1+g_1'}$	= 4.4	5.0 mA
Anode input power	$W_{ia}$	= 135	160 W
Anode dissipation	$W_a$	= 2x19	2x21 W
Grids No.2 dissipation	$W_{g_2+g_2'}$	= 2.6	2.0 W
Driver output power	$W_{dr}$	= 3.4	3.0 W
Output power	$W_o$	= 97	122 W
Efficiency	$\eta$	= 72	74 %
Useful power in the load	$W_L$	= 85	107 W
Modulation depth	m	= 100	100 %
Peak grids No.2 modulation voltage	$V_{g_2, g_2'p}$	= 90	80 V
Modulation power	$W_{mod}$	= 68	80 W

<sup>1)</sup> Each section

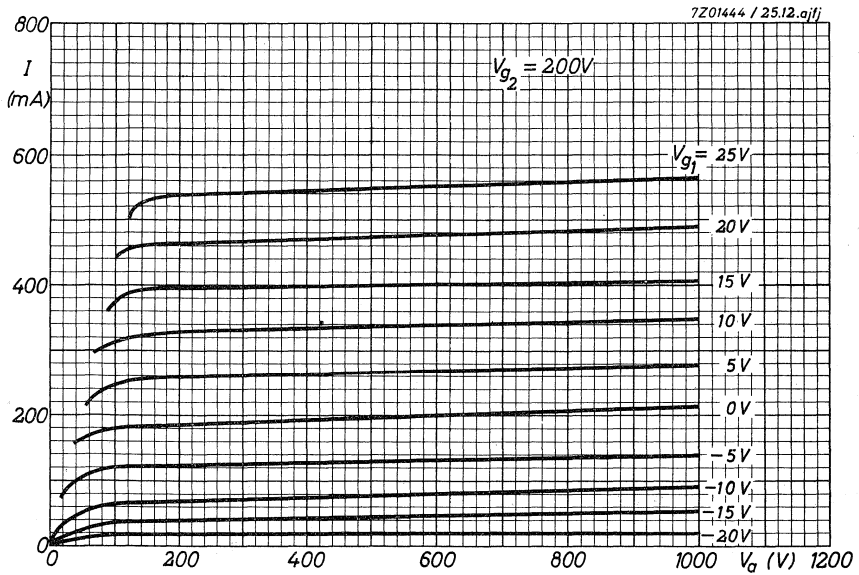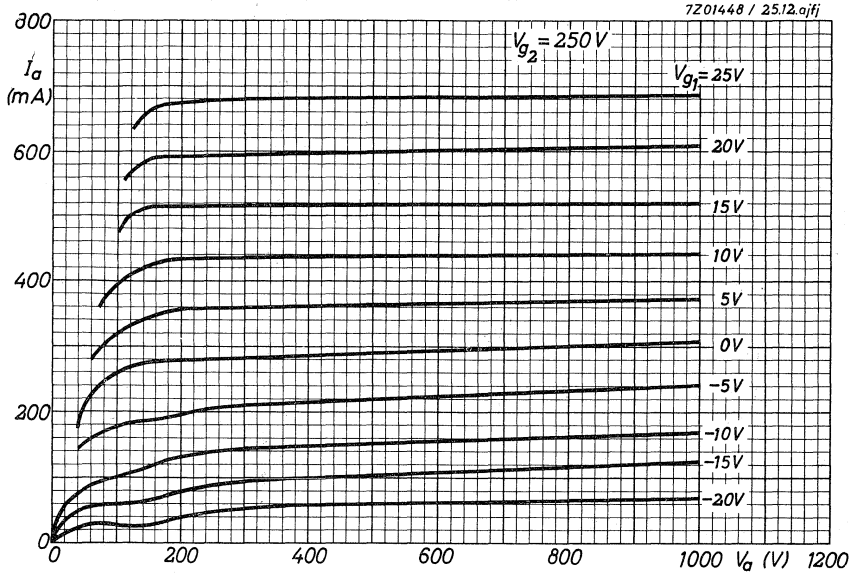

## DOUBLE TETRODES

Double tetrodes for use as linear single side band amplifier.

The YL1071 is electrically identical to the YL1070 except for the heater, and has been designed to fit into heatsink cooling equipment.

<b>QUICK REFERENCE DATA</b>				
ABI linear S.S.B. amplifier, sections in parallel				
Freq. (MHz)	C.C.S.		I.C.A.S.	
	$V_a$ (V)	$W_{OPEP}$ (W)	$V_a$ (V)	$W_{OPEP}$ (W)
7	1000	141	1000	158

**HEATING:**

Indirect by A.C. or D.C.; parallel supply; oxide coated cathode

	Pins 5-(1+7)	1-7
YL1070: Heater voltage	$V_f = 6.3$	12.6 V
Heater current	$I_f = 1.8$	0.9 A
YL1071: Heater voltage	$V_f = 13.25$	26.5 V
Heater current	$I_f = 0.866$	0.433 A

**CAPACITANCES** (each section)

Anode to all other elements except grid No.1	$C_a = 3.15$ pF
Grid No.1 to all other elements except anode	$C_{g1} = 10.6$ pF
Anode to grid No.1	$C_{ag1} < 0.09$ pF


**YL 1070**  
**YL 1071**

**TYPICAL CHARACTERISTICS** (each section)

Anode voltage	$V_a$	=	600	V
Grid No.2 voltage	$V_{g_2}$	=	250	V
Anode current	$I_a$	=	40	mA
Amplification factor of grid No.2 with respect to grid No.1	$\mu_{g_2g_1}$	=	7	

**MECHANICAL DATA**

Dimensions in mm

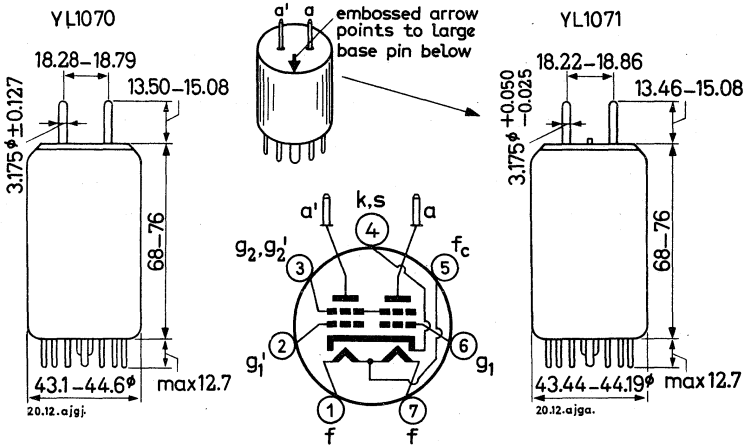

- Base: Septar
- Accessories: Anode connector 40681  
Socket 2422 513 00001
- Mounting position: Vertical with base up or down  
Horizontal with anode pins in a horizontal plane
- Net weight: 70 g

**COOLING:** Radiation and convection

When the tube is used at maximum permissible values it may be necessary to direct an air flow of approx.  $0.6 \text{ m}^3/\text{min}$  to the bulb and to the anode seals. The YL1071 has a calibrated bulb held to close tolerances. This permits an accurate fit into heatsink cooling equipment.

7Z2 8844

**TEMPERATURE LIMITS (Absolute limits)**

Temperature of bulb and all seals max. 250 °C

**R.F. CLASS C TELEGRAPHY AND F.M. TELEPHONY**

**LIMITING VALUES (Absolute limits) (each section)**

Frequency	f	up to 60	up to 175	MHz
Anode voltage	$V_a$	= max. 850	max. 750	V
Anode input power	$W_{ia}$	= max. 90	max. 75	W
Anode dissipation	$W_a$	= max. 30	max. 30	W
Anode current	$I_a$	= max. 110	max. 110	mA
Grid No.2 voltage	$V_{g2}$	= max. 300	max. 300	V
Grid No.2 dissipation	$W_{g2}$	= max. 7	max. 7	W
Negative grid No.1 voltage	$-V_{g1}$	= max. 175	max. 175	V
Grid No.1 current	$I_{g1}$	= max. 5	max. 5	mA
Cathode to heater voltage	$V_{kf}$	= max. 100	max. 100	V

**R. F. CLASS AB<sub>1</sub> LINEAR S. S. B. AMPLIFIER** suppressed carrier

**LIMITING VALUES (Absolute limits) (each section)**

Frequency	f	up to 60		MHz
		C.C.S.	I.C.A.S.	
Anode voltage	$V_a$	= max. 1000	max. 1000	V
Anode input power	$W_{ia}$	= max. 100	max. 110	W
Anode dissipation	$W_a$	= max. 30	max. 34	W
Anode current	$I_a$	= max. 110	max. 110	mA
Grid No.2 voltage	$V_{g2}$	= max. 360	max. 360	V
Grid No.2 dissipation	$W_{g2}$	= max. 3.5	max. 4	W
Negative grid No.1 voltage	$-V_{g1}$	= max. 175	max. 175	V
Grid No.1 current	$I_{g1}$	= max. 5	max. 5	mA
Cathode to heater voltage	$V_{kf}$	= max. 100	max. 100	V

7Z2 2885

**OPERATING CONDITIONS** (two sections in parallel)

Table A		C.C.S.		
Frequency	$f$	=	7	MHz
Anode voltage	$V_a$	=	1000	V
Grid No.2 voltage	$V_{g2}$	=	250	V
Grid No.1 voltage	$V_{g1}$	=	-34	V 1)
Load resistance	$R_{a\sim}$	=	3100 $\Omega$	
			zero signal	single tone
				two tone
Peak grid No.1 driving voltage	$V_{g1\sim p}$	=	0	34 V
Anode current	$I_{a+a'}$	=	50	195 131 mA
Grid No.2 current	$I_{g2+g2'}$	=	1.2	26 11.5 mA
Grid No.1 current	$I_{g1+g1'}$	=	0	0.01 0.01 mA
Anode input power	$W_{ia+a'}$	=	50	195 131 W
Anode dissipation	$W_{a+a'}$	=	50	54 61 W
Output power	$W_o$	=	-	141 141 <sup>2</sup> ) W
Intermodulation distortion				
of the third order	$d_{i3}$	=	-	- < -30 dB <sup>3)</sup>
of the fifth order	$d_{i5}$	=	-	- < -45 dB <sup>3)</sup>

1) Adjust to obtain the stated zero signal anode current.

2) Peak envelope power value.

3) Distortion level, referred to the amplitude of either of the tones, at full drive; also highest distortion encountered at any driving level up to full drive.

OPERATING CONDITIONS (two sections in parallel) (continued)

Table B

Frequency	f	=	7	MHz	
Anode voltage	$V_a$	=	800	V	
Grid No.2 voltage	$V_{g_2}$	=	250	V	
Grid No.1 voltage	$V_{g_1}$	=	-34	V <sup>1)</sup>	
Load resistance	$R_a$	=	2300		$\Omega$
			zero signal	single tone	
Peak grid No.1 driving voltage	$V_{g_{1\sim p}}$	=	0	34	34 V
Anode current	$I_{a+a'}$	=	50	197	130 mA
Grid No.2 current	$I_{g_2+g_2'}$	=	1.2	26	12.5 mA
Grid No.1 current	$I_{g_1+g_1'}$	=	0	0.01	0 mA
Anode input power	$W_{ia+a'}$	=	40	158	104 W
Anode dissipation	$W_{a+a'}$	=	40	46	43 W
Output power	$W_o$	=	-	112	112 <sup>2)</sup> W
Intermodulation distortion					
of the third order	$d_{i_3}$	=	-	-	< -30 dB <sup>3)</sup>
of the fifth order	$d_{i_5}$	=	-	-	< -45 dB <sup>3)</sup>

<sup>1)</sup> Adjust to obtain the stated zero signal anode current.

<sup>2)</sup> Peak envelope power value

<sup>3)</sup> Distortion level, referred to the amplitude of either of the tones, at full drive; also highest distortion encountered at any driving level up to full drive.

OPERATING CONDITIONS (two sections in parallel) (continued)

Table C		C. C. S.					
Frequency	$f$	=	7	MHz			
Anode voltage	$V_a$	=	600	V			
Grid No.2 voltage	$V_{g_2}$	=	250	V			
Grid No.1 voltage	$V_{g_1}$	=	-32.5	V <sup>1)</sup>			
Load resistance	$R_a$	=	1410	$\Omega$			
			<table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>zero signal</th> <th>single tone</th> <th>two tone</th> </tr> </thead> </table>	zero signal	single tone	two tone	
zero signal	single tone	two tone					
Peak grid No.1 driving voltage	$V_{g_{1\sim p}}$	=	0	32.5	32.5	V	
Anode current	$I_{a+a'}$	=	60	212	144	mA	
Grid No.2 current	$I_{g_2+g_2'}$	=	1.9	25	13.5	mA	
Grid No.1 current	$I_{g_1+g_1'}$	=	0	0.01	0	mA	
Anode input power	$W_{i a+a'}$	=	36	127	86	W	
Anode dissipation	$W_{a+a'}$	=	36	88	48	W	
Output power	$W_o$	=	-	76	76 <sup>2)</sup>	W	
Intermodulation distortion							
of the third order	$d_{i_3}$	=	-	-	< -30	dB <sup>3)</sup>	
of the fifth order	$d_{i_5}$	=	-	-	< -45	dB <sup>3)</sup>	

1) Adjust to obtain the stated zero signal anode current.

2) Peak envelope power value.

3) Distortion level, referred to the amplitude of either of the tones, at full drive; also highest distortion encountered at any driving level up to full drive.



OPERATING CONDITIONS (two sections in parallel) (continued)



Table D		I. C. A. S.			
Frequency	$f$	=	7	MHz	
Anode voltage	$V_a$	=	1000	V	
Grid No.2 voltage	$V_{g_2}$	=	250	V	
Grid No.1 voltage	$V_{g_1}$	=	-36	V <sup>1)</sup>	
Load resistance	$R_a$	=	3000	$\Omega$	
			<div style="border-top: 1px solid black; width: 100%; margin: 0 auto;"></div>		
			zero	single	two
			signal	tone	tone
Peak grid No.1 driving voltage	$V_{g_1 \sim p}$	=	0	36	36 V
Anode current	$I_{a+a'}$	=	55	216	144 mA
Grid No.2 current	$I_{g_2+g_2'}$	=	1	25	13 mA
Grid No.1 current	$I_{g_1+g_1'}$	=	0	0.05	0.02 mA
Anode input power	$W_{ia+a'}$	=	55	216	144 W
Anode dissipation	$W_{a+a'}$	=	55	58	65 W
Output power	$W_o$	=	-	158	158 <sup>2)</sup> W
Intermodulation distortion					
of the third order	$d_{i_3}$	=	-	-	< -30 dB <sup>3)</sup>
of the fifth order	$d_{i_5}$	=	-	-	< -45 dB <sup>3)</sup>

<sup>1)</sup> Adjust to obtain the stated zero signal anode current.

<sup>2)</sup> Peak envelope power value.

<sup>3)</sup> Distortion level, referred to the amplitude of either of the tones, at full drive; also highest distortion encountered at any driving level up to full drive.

YL 1070  
YL 1071

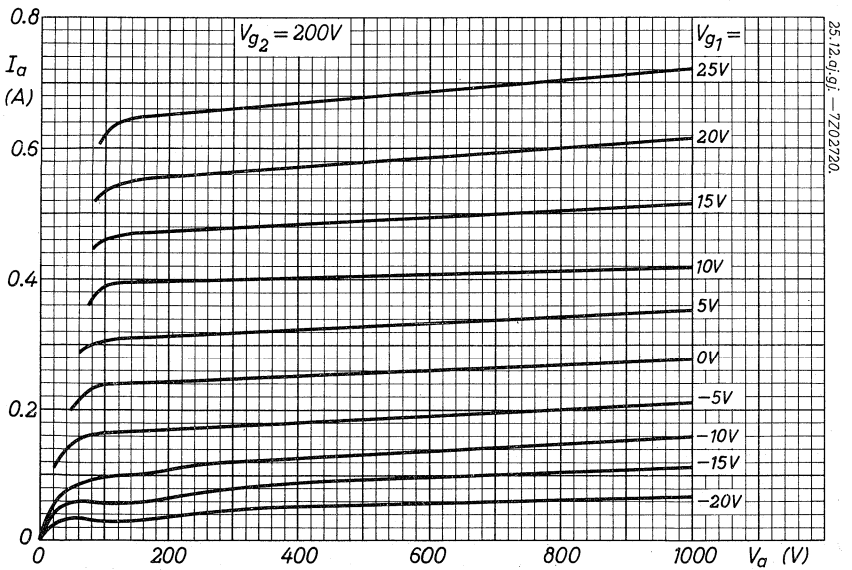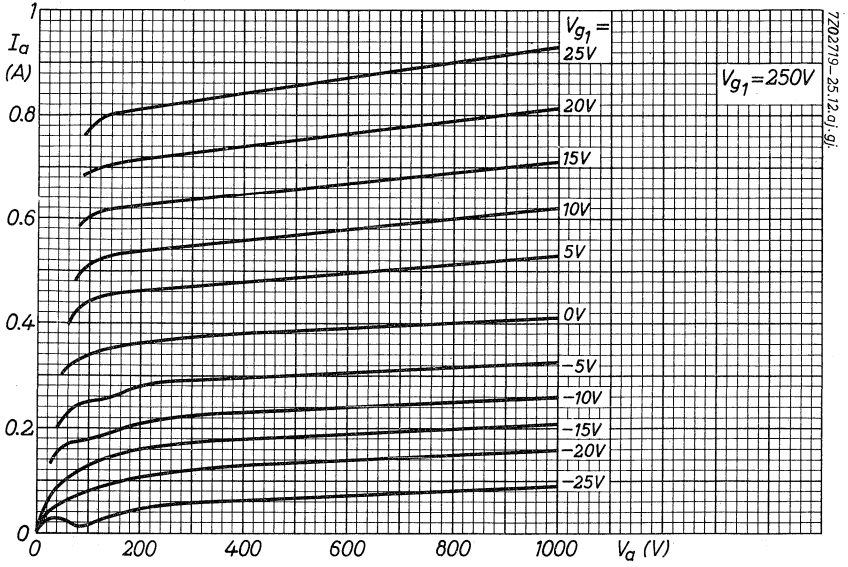

## QUICK HEATING R.F. DOUBLE TETRODE

Quick heating double tetrode intended for use in mobile equipment as R.F. amplifier or frequency multiplier up to 200 MHz or as modulator.

QUICK REFERENCE DATA									
Freq. (MHz)	R.F. class C telegraphy			R.F. class C a-g <sub>2</sub> modulator			R.F. class C freq. multiplier		
	V <sub>a</sub> (V)	W <sub>dr</sub> <sup>1)</sup> (W)	W <sub>l</sub> <sup>2)</sup> (W)	V <sub>a</sub> (V)	W <sub>dr</sub> <sup>1)</sup> (W)	W <sub>l</sub> <sup>2)</sup> (W)	V <sub>a</sub> (V)	W <sub>dr</sub> <sup>1)</sup> (W)	W <sub>l</sub> <sup>2)</sup> (W)
200	300	1.0	12	200	1.0	7.0			
67/200							300	1.0	3.5

**HEATING:** direct by A.C. or D.C.; parallel or series supply  
Filament oxide coated, harp type.

Frequency of the filament supply:

for sinusoidal supply voltage 50 to 60 Hz

for square wave supply voltage  
(e.g. from a D.C. - A.C. converter) any

Sinusoidal supply voltages within the frequency range from 200 to 5000 Hz shall not be used.

Filament voltage  $V_f = 1.6 V \pm 15\%$ <sup>3)</sup>

Filament current  $I_f = 2.5 A$

Heating time for  $W_o = 70\%$  of full output power  $T_h < 0.5 \text{ sec}$

**COOLING:** radiation and convection

The use of a closed tube shield is not recommended.

<sup>1)</sup> Driver output power

<sup>2)</sup> Useful power in the load

<sup>3)</sup> Total permissible variation due to variations of supply voltage and setting of  $V_f$ .

**CAPACITANCES**

Anode to all other elements except grid No. 1	$C_a = C_{a'} = 3.1 \text{ pF}$
Grid No. 1 to all other elements except anode	$C_{g1} = C_{g1'} = 7.5 \text{ pF}$
Anode to grid No. 1	$C_{ag1} = C_{a'g1'} < 0.1 \text{ pF}$
Anode of one system to grid No. 1 of the other system	$C_{ag1'} = C_{a'g1} < 0.1 \text{ pF}$
Between the grids No. 1	$C_{g1g1'} = 2 \text{ pF}$
Between the anodes	$C_{aa'} = 0.06 \text{ pF}$



The tube is internally neutralised up to 200 MHz

**TYPICAL CHARACTERISTICS**

Anode voltage	$V_a = 200 \text{ V}$
Grid No. 2 voltage	$V_{g2} = 200 \text{ V}$
Anode current	$I_a = 30 \text{ mA}$
Amplification factor	$\mu_{g2g1} = 7$
Mutual conductance	$S = 3.3 \text{ mA/V}$

**MECHANICAL DATA** (Dimensions in mm)

Base	: Noval
Socket	: 2422 502 01003
Tube retainer	: 40647
Net weight	: 16 g



Mounting position: any. If the tube is mounted with its main axis deviating from the vertical, it is recommended that pins 2 and 7 be in a vertical plane.

**TEMPERATURE LIMITS** (Absolute limits)

Bulb temperature	= max. 250 °C
Pin temperature	= max. 120 °C

**R.F. CLASS C TELEGRAPHY OR F.M. TELEPHONY**

**LIMITING VALUES** (each system; absolute limits)

Frequency	f	up to	200	MHz
Anode voltage	$V_a$	= max.	300	V
Anode current	$I_a$	= max.	45	mA
Anode dissipation	$W_a$	= max.	5	W
Grid No. 2 voltage	$V_{g_2}$	= max.	200	V
Grid No. 2 dissipation	$W_{g_2}$	= max.	1	W
Negative grid No. 1 voltage	$-V_{g_1}$	= max.	150	V
Grid No. 1 current	$I_{g_1}$	= max.	3	mA
Grid No. 1 dissipation	$W_{g_1}$	= max.	0.2	W
Grid No. 1 circuit resistance	$R_{g_1}$	= max.	100	k $\Omega$
Cathode current	$I_k$	= max.	50	mA
Peak cathode current	$I_{k_p}$	= max.	225	mA

**OPERATING CONDITIONS**, two systems in push-pull

Frequency	f	=	200	200	200	MHz
Anode voltage	$V_a$	=	300	250	200	V
Grid No. 2 supply voltage	$V_{bg_2}$	=	300	250	200	V
Grid No. 2 resistor	$R_{g_2}$	=	56	47	22	k $\Omega$
Grid No. 1 voltage	$V_{g_1}$	=	-40	-	-	V
Common grid No. 1 resistor	$R_{g_1}$	=	-	18	15	k $\Omega$
Peak grid-to-grid A.C. voltage	$V_{g_1g_1'}$ $V_{g_1g_1'p}$	=	110	110	115	V
Anode current	$I_a$	=	2 x 37.5	2 x 33.5	2 x 35	mA
Grid No. 2 current	$I_{g_2+g_2'}$	=	2.3	1.8	2.2	mA
Grid No. 1 current	$I_{g_1+g_1'}$	=	2 x 0.9	2.2	2.7	mA
Grid No. 2 dissipation	$W_{g_2+g_2'}$	=	0.4	0.3	0.33	W
Driver output power	$W_{dr}$	=	1.0	1.0	1.0	W
Anode input power	$W_{i_a}$	=	2 x 11.3	2 x 8.4	2 x 7.0	W
Anode dissipation	$W_a$	=	2 x 4.0	2 x 2.9	2 x 2.8	W
Tube efficiency	$\eta$	=	65	65	60	%
Output power in the load	$W_l$	=	12	9.0	7.4	W


**R.F. CLASS C ANODE AND SCREEN GRID MODULATION**

**LIMITING VALUES** (each system; absolute limits)

Frequency	f	up to	200	MHz
Anode voltage	$V_a$	= max.	240	V
Anode current	$I_a$	= max.	37.5	mA
Anode input power	$W_{i_a}$	= max.	7.5	W
Anode dissipation	$W_a$	= max.	3.3	W
Grid No. 2 voltage	$V_{g_2}$	= max.	200	V
Grid No. 2 dissipation	$W_{g_2}$	= max.	0.65	W
Negative grid No. 1 voltage	$-V_{g_1}$	= max.	150	V
Grid No. 1 current	$I_{g_1}$	= max.	3	mA
Grid No. 1 dissipation	$W_{g_1}$	= max.	0.2	W
Cathode current	$I_k$	= max.	40	mA
Peak cathode current	$I_{k_p}$	= max.	180	mA

**OPERATING CONDITIONS**, two systems in push-pull

Frequency	f	=	200	MHz
Anode voltage	$V_a$	=	200	V
Grid No. 2 supply voltage (see fig. below)	$V_{bg_2}$	=	200	V
Common grid No. 1 resistor	$R_{g_1}$	=	33	k $\Omega$
Peak grid-to-grid A.C. voltage	$V_{g_1g_1'p}$	=	130	V
Anode current	$I_a$	=	2 x 33.5	mA
Grid No. 2 current	$I_{g_2+g_2'}$	=	2.6	mA
Grid No. 1 current	$I_{g_1+g_1'}$	=	1.5	mA
Grid No. 2 dissipation	$W_{g_2}$	=	0.46	W
Driver output power	$W_{dr}$	=	1.0	W
Anode input power	$W_{i_a}$	=	2 x 6.7	W
Anode dissipation	$W_a$	=	2 x 2.65	W
Tube efficiency	$\eta$	=	60	%
Useful power in the load	$W_\ell$	=	7.0	W
Modulation depth	m	=	100	%
Modulation power	$W_{mod}$	=	6.7	W





## R.F. CLASS C FREQUENCY TRIPLER

## LIMITING VALUES (each system; absolute limits)

Frequency	f	up to	200	MHz
Anode voltage	$V_a$	= max.	300	V
Anode current	$I_a$	= max.	30	mA
Anode dissipation	$W_a$	= max.	5	W
Grid No.2 voltage	$V_{g_2}$	= max.	200	V
Grid No.2 dissipation	$W_{g_2}$	= max.	1	W
Negative grid No.1 voltage	$-V_{g_1}$	= max.	150	V
Grid No.1 current	$I_{g_1}$	= max.	2	mA
Grid No.1 dissipation	$W_{g_1}$	= max.	0.2	W
Grid No.1 circuit resistance	$R_{g_1}$	= max.	100	k $\Omega$
Cathode current	$I_k$	= max.	35	mA
Peak cathode current	$I_{k_p}$	= max.	225	mA

## OPERATING CONDITIONS, two systems in push-pull

Frequency	f	=	67/200	67/200	67/200	MHz
Anode voltage	$V_a$	=	300	250	200	V
Grid No.2 supply voltage	$V_{bg_2}$	=	300	250	200	V
Grid No.2 resistor	$R_{g_2}$	=	72	47	15	k $\Omega$
Grid No.1 voltage	$V_{g_1}$	=	-100	-	-	V
Common grid No.1 resistor	$R_{g_1}$	=	-	47	33	k $\Omega$
Peak grid-to-grid A.C. voltage	$V_{g_1g_1'}$	=	230	230	230	V
Anode current	$I_a$	=	2 x 24	2 x 25	2 x 28.5	mA
Grid No.2 current	$I_{g_2+g_2'}$	=	2.0	1.9	3.0	mA
Grid No.1 current	$I_{g_1+g_1'}$	=	2 x 1.0	2.0	3.2	mA
Grid No.2 dissipation	$W_{g_2+g_2'}$	=	0.30	0.31	0.46	W
Driver output power	$W_{dr}$	=	1.0	1.0	2.0	W
Anode input power	$W_{i_a}$	=	2 x 7.2	2 x 6.25	2 x 5.7	W
Anode dissipation	$W_a$	=	2 x 4.0	2 x 3.75	2 x 3.8	W
Tube efficiency	$\eta$	=	45	40	33.5	%
Output power in the load	$W_l$	=	3.5	3.0	2.8	W

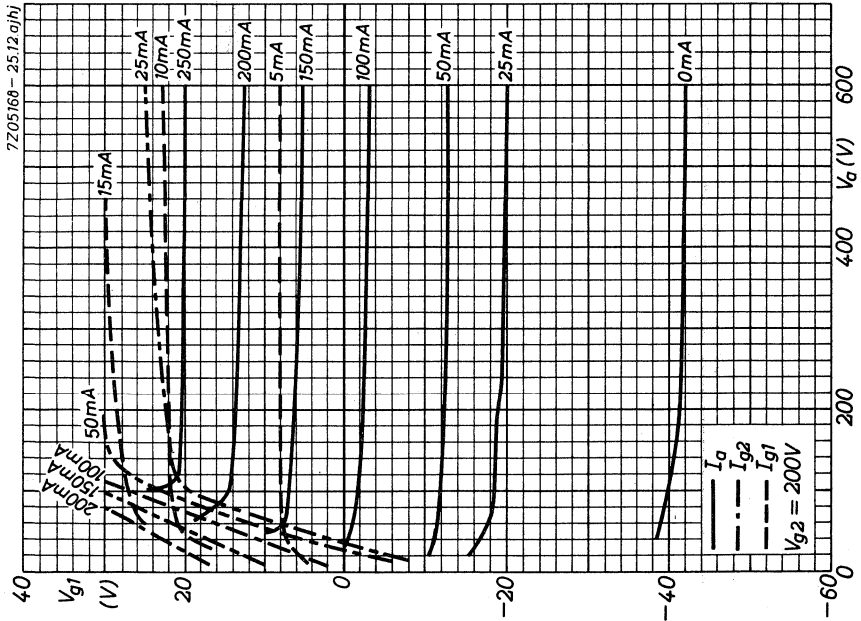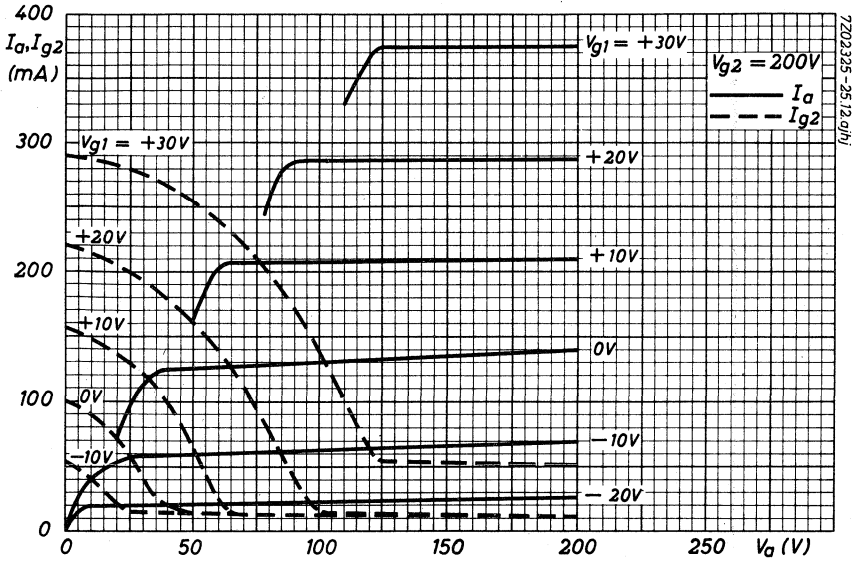



## VAPOUR COOLED R.F. POWER TETRODE

Vapour cooled power tetrode in coaxial construction intended for use as R.F. amplifier in SSB transmitters and as A.M. amplifier.

QUICK REFERENCE DATA						
Frequency MHz	S.S.B.		C <sub>a-g<sub>2</sub></sub> mod.		Class B mod.	
	V <sub>a</sub> (kV)	W <sub>O</sub> (kW) P. E. P.	V <sub>a</sub> (kV)	W <sub>O</sub> (kW)	V <sub>a</sub> (kV)	W <sub>O</sub> (kW)
30	9	120	11	220	11	320

**HEATING:** Direct, filament thoriated tungsten

Filament voltage	V <sub>f</sub>	20 V
Filament current	I <sub>f</sub>	345 A

### CAPACITANCES

Anode to all except grid No.1	C <sub>a(g<sub>1</sub>)</sub>	120 pF
Grid No.1 to all except anode	C <sub>g<sub>1</sub>(a)</sub>	600 pF
Anode to grid No.1	C <sub>ag<sub>1</sub></sub>	8.5 pF <sup>1)</sup>

### TYPICAL CHARACTERISTICS

Anode voltage	V <sub>a</sub>	.3 kV
Grid No.2 voltage	V <sub>g<sub>2</sub></sub>	1 kV
Anode current	I <sub>a</sub>	10 A
Transconductance	S	130 mA/V
Amplification factor	μ <sub>g<sub>2</sub>g<sub>1</sub></sub>	4 -



<sup>1)</sup> Measured with a flat shield of 500 mm diameter in the plane of grid No.2

**MECHANICAL DATA**

Dimensions in mm

Net weight: approx. 51 kg

Mounting position: vertical with anode down

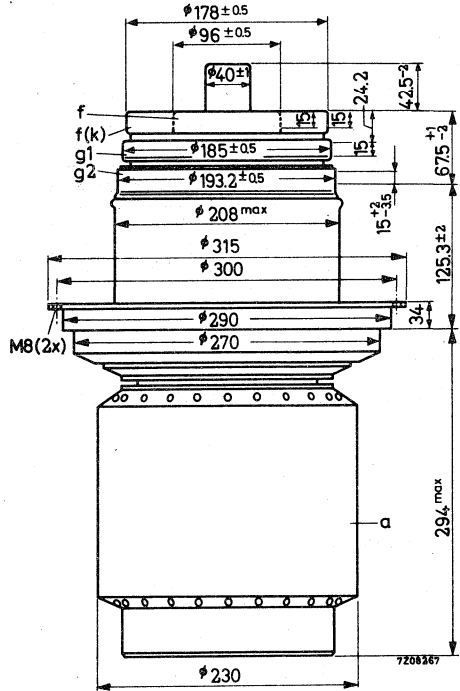

**ACCESSORIES**

- |   |            |
|---|------------|
| Boiler  | type K729  |
| Filament connector (one required)             | type 40732 |
| Grid No.1 connector                           | type 40733 |
| Grid No.2 connector                           | type 40734 |
| Filament connector with cable (four required) | type 40670 |

**R.F. CLASS AB LINEAR AMPLIFIER, SINGLE SIDE BAND, suppressed carrier**

**LIMITING VALUES** (Absolute max. rating system)

Frequency	f	up to	30	MHz
Anode voltage	$V_a$	max.	15	kV
Grid No.2 voltage	$V_{g2}$	max.	1.6	kV
Grid No.1 voltage	$-V_{g1}$	max.	800	V
Anode current	$I_a$	max.	40	A
Grid No.1 current	$I_{g1}$	max.	3	A
Anode input power	$W_{i_a}$	max.	360	kW
Anode dissipation	$W_a$	max.	150	kW
Grid No.2 dissipation	$W_{g2}$	max.	2.7	kW
Grid No.1 dissipation	$W_{g1}$	max.	1.2	kW

**OPERATING CONDITIONS**

Frequency	f	30	MHz		
Anode voltage	$V_a$	9	kV		
Grid No.2 voltage	$V_{g2}$	1.5	kV		
Grid No.1 voltage	$V_{g1}$	-450	V <sup>1)</sup>		
		zero signal	single tone	double tone	
Grid No.1 driving voltage	$V_{g1p}$	0	450	450	V
Anode current	$I_a$	5	21	13.2	A
Grid No.2 current	$I_{g2}$	0	0.8	0.5	A
Anode input power	$W_{i_a}$	45	189	118.8	kW
Anode dissipation	$W_a$	45	69	58.8	kW
Grid No.2 dissipation	$W_{g2}$	0	1.2	0.75	kW
Output power (P.E.P.)	$W_o$	-	120	120	kW

<sup>1)</sup> Adjust to give the zero signal anode current.

**R.F. CLASS C ANODE AND SCREEN GRID MODULATION (carrier conditions)**

**LIMITING VALUES (Absolute max. rating system)**

Frequency	f	up to	30 MHz
Anode voltage	$V_a$	max.	11.5 kV
Grid No.2 voltage	$V_{g2}$	max.	1 kV
Grid No.1 voltage	$-V_{g1}$	max.	800 V
Anode current	$I_a$	max.	32 A
Grid No.1 current	$I_{g1}$	max.	3 A
Anode input power	$W_{i_a}$	max.	300 kW
Anode dissipation	$W_a$	max.	100 kW
Grid No.2 dissipation	$W_{g2}$	max.	2.7 kW
Grid No.1 dissipation	$W_{g1}$	max.	1.2 kW

**OPERATING CONDITIONS**

Frequency	f	30 MHz
Anode voltage	$V_a$	11 kV
Grid No.2 voltage	$V_{g2}$	800 V
Grid No.1 voltage	$V_{g1}$	-590 V
Grid No.1 resistor	$R_{g1}$	60 $\Omega$
Grid No.1 driving voltage	$V_{g1p}$	960 V
Anode current	$I_a$	25 A
Grid No.2 current	$I_{g2}$	3 A
Grid No.1 current	$I_{g1}$	1.6 A
Driving power	$W_{dr}$	1.4 kW
Grid No.2 dissipation	$W_{g2}$	2.4 kW
Anode input power	$W_{i_a}$	275 kW
Output power	$W_o$	220 kW
Anode dissipation	$W_a$	55 kW
Efficiency	$\eta$	80 %
Modulation depth	m	100 %
Modulation power	$W_{mod}$	140 kW
Grid No.2 voltage, peak	$V_{g2p}$	700 V

A.F. CLASS B AMPLIFIER AND MODULATOR


LIMITING VALUES (Absolute max. rating system)


Anode voltage	$V_a$	max.	12	kV
Anode input power	$W_{ia}$	max.	300	kW
Anode dissipation	$W_a$	max.	150	kW
Cathode current	$I_k$	max.	50	A
Cathode current (peak)	$I_{kp}$	max.	280	A
Grid No.2 voltage	$V_{g2}$	max.	1.7	kV
Grid No.2 dissipation	$W_{g2}$	max.	2.7	kW
Grid No.1 resistance	$R_{g1}$	max.	1	k $\Omega$
Grid No.1 dissipation	$W_{g1}$	max.	1.2	kW

OPERATING CONDITIONS; two tubes in push-pull

Anode voltage	$V_a$	11	11	kV		
Grid No.2 voltage	$V_{g2}$	1.5	1.5	kV		
Grid No.1 voltage	$V_{g1}$	-520	-520	V		
Load resistance	$R_{aa}$	500	670	$\Omega$		
Peak driving voltage	$V_{g1g1p}$	0	1100	0	950	V
Anode current	$I_a$	2x3	2x22	2x3	2x16.5	A
Grid No.2 current	$I_{g2}$	0	2x0.45	0	2x0.35	A
Grid No.1 current	$I_{g1}$	0	2x0.04	0	0	A
Grid No.2 dissipation	$W_{g2}$	0	2x680	0	2x530	W
Anode input power	$W_{ia}$	2x33	2x242	2x33	2x182	kW
Anode dissipation	$W_a$	2x33	2x82	2x33	2x62	kW
Output power	$W_o$	0	320	0	240	kW
Efficiency	$\eta$		66		66	%

7Z07864

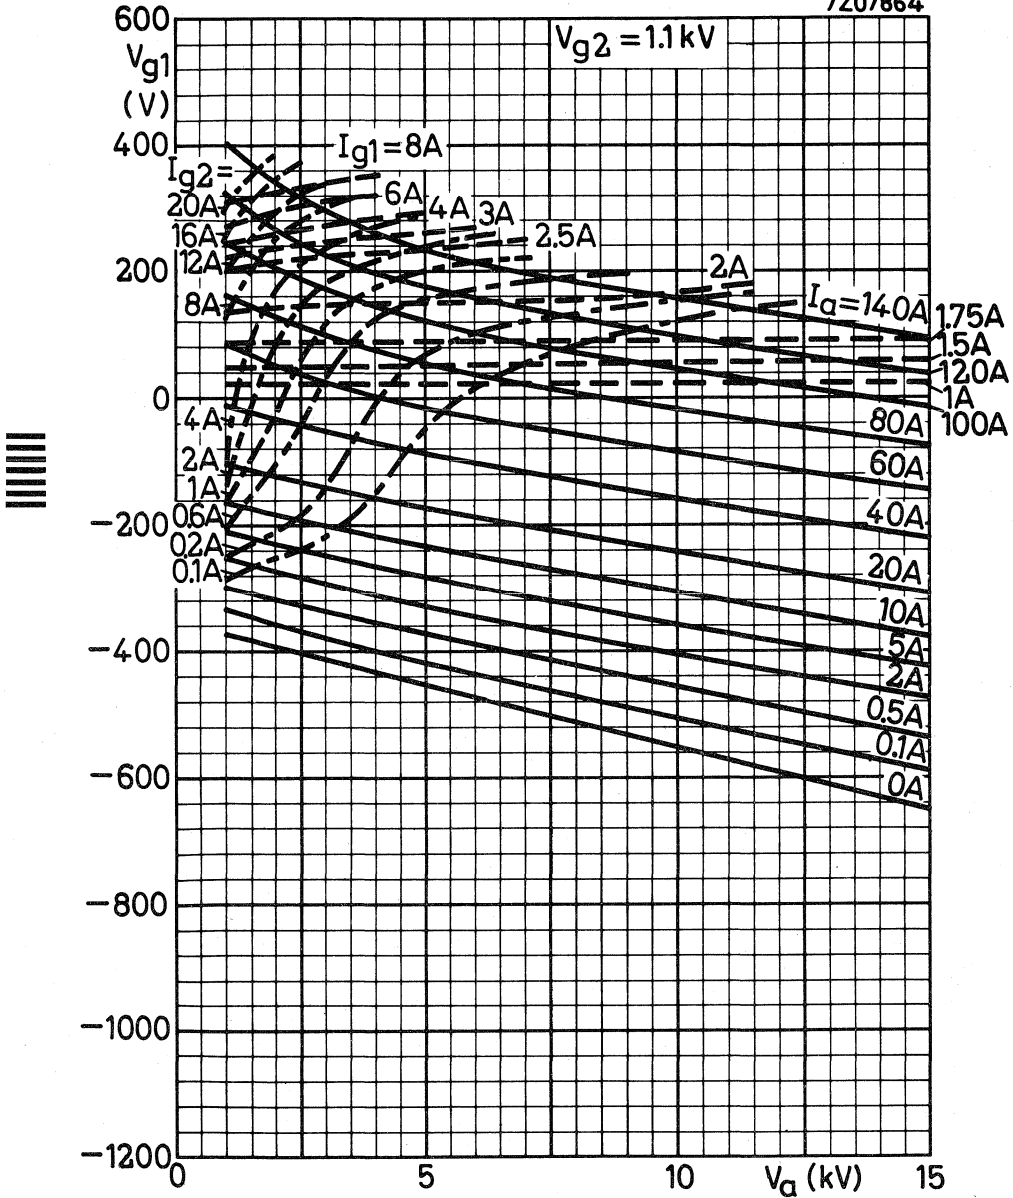

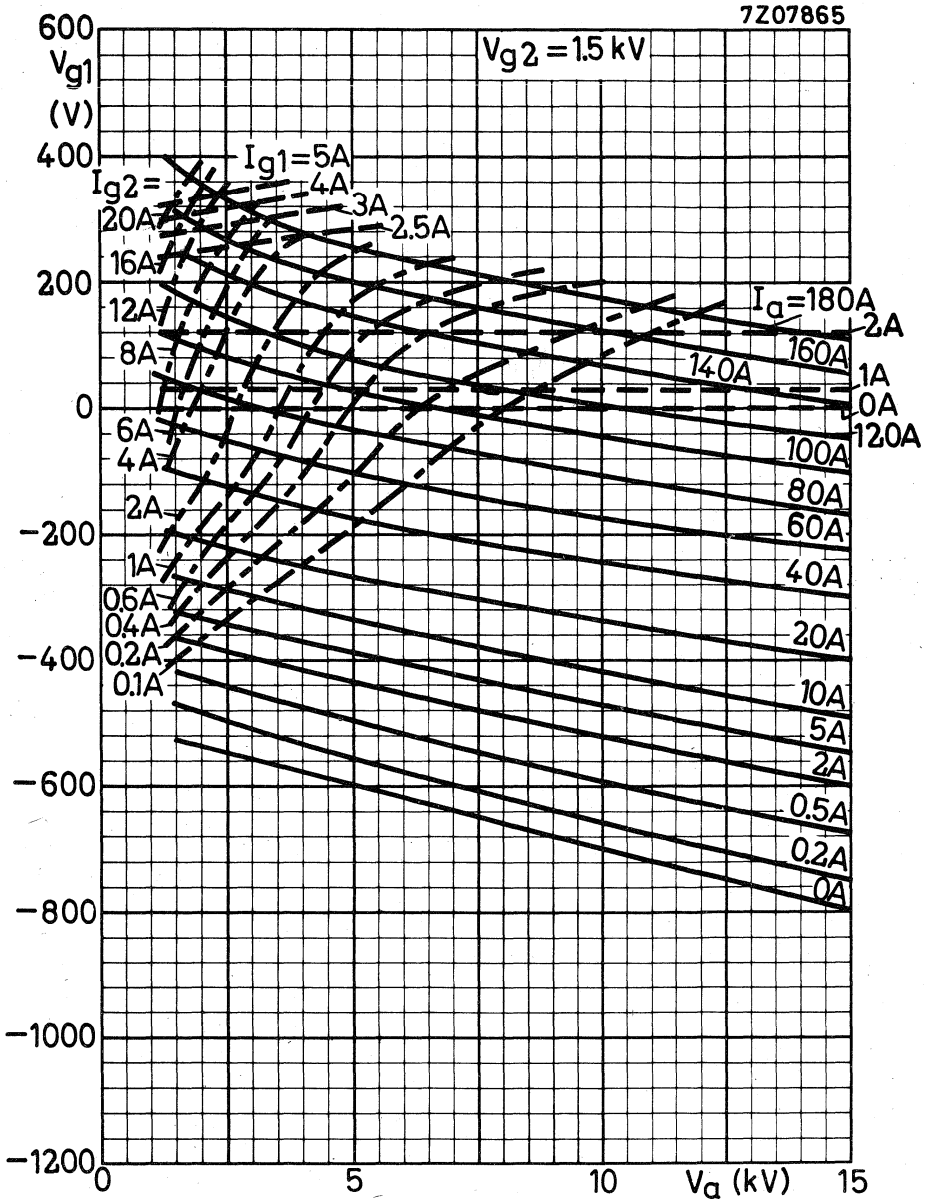





## COAXIAL BEAM POWER TETRODES

Beam power tetrodes with ceramic-to-metal seals and coaxial arrangement of the terminals. The tubes are intended for use as R.F. power amplifier, oscillator and frequency multiplier, and as A.F. amplifier and modulator in A.M., F.M. and S.S.B. transmitters for frequencies up to 2000 MHz.

QUICK REFERENCE DATA						
Frequency (MHz)	C teleg.		C ag2 mod.		S.S.B.	
	V <sub>a</sub> (V)	W <sub>o</sub> (W)	V <sub>a</sub> (V)	W <sub>o</sub> (W)	V <sub>a</sub> (V)	W <sub>o</sub> (W) <sup>1)</sup>
1200	900	40				
400	900	80	700	45		
60					850	40

### COOLING

Forced air cooling of radiator and seals.

**HEATING:** indirect by a.c. or d.c.; oxide coated cathode.

#### YL1100

Heater voltage	V <sub>f</sub>	26,5	V
Heater current	I <sub>f</sub>	0,52	A
Heating time	T <sub>h</sub>	min. 60	s

#### YL1101

Heater voltage	V <sub>f</sub>	6,3	V
Heater current	I <sub>f</sub>	2,1	A
Heating time	T <sub>h</sub>	min. 60	s


The heater voltage must be reduced dependent on the operating conditions and the frequency.

<sup>1)</sup> single tone operation

**MECHANICAL DATA**

Dimensions in mm

Mounting position : any  
Net weight : 60 g

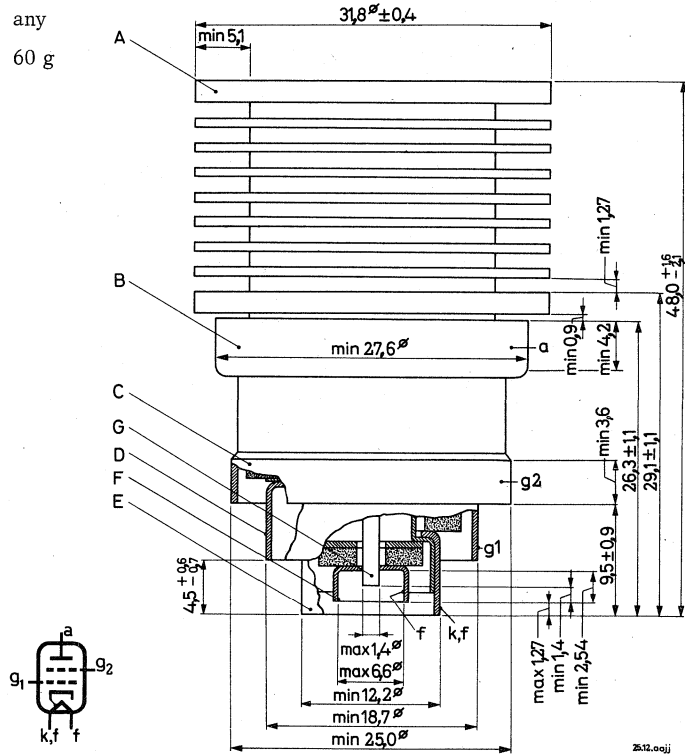

Radiator and terminals lie inside or outside concentric cylinders with the following diameters:

Radiator	:	A	inside	24,15	mm diameter
Anode terminal	:	B	inside	28,40	mm diameter
$g_2$ terminal	:	C	inside	25,86	mm diameter
$g_1$ terminal	:	D	inside	19,38	mm diameter
Cathode terminal	:	E	inside	13,16	mm diameter
Heater terminal	:	F	outside	6,07	mm diameter
		G	inside	1,78	mm diameter

**CAPACITANCES**

Anode to grid no.1	$C_{ag1}$	< 0,065	pF
Grid no.1 to cathode and heater	$C_{g1/kf}$	14	pF
Anode to cathode and heater	$C_{a/kf}$	< 0,015	pF
Grid no.2 to grid no.1	$C_{g1g2}$	19	pF
Anode to grid no.2	$C_{ag2}$	4,4	pF
Grid no.2 to cathode and heater	$C_{g2/kf}$	< 0,4	pF

**TYPICAL CHARACTERISTICS**

Anode voltage	$V_a$	1000	V
Grid no.2 voltage	$V_{g2}$	250	V
Anode current	$I_a$	100	mA
Amplification factor	$\mu_{g2g1}$	18	

**TEMPERATURE LIMITS:** (Absolute limits)

Anode seal temperature	t	max. 250	°C
------------------------	---	----------	----

Notes to page 4

- 1) Fixed supply or supply derived from the anode supply by means of a voltage divider.
- 2) Power transferred from driving stage included.

R.F. CLASS C TELEGRAPHY or F.M. TELEPHONY

**LIMITING VALUES** (Absolute max. rating system)

Frequency	f	up to	1200	MHz
Anode voltage	$V_a$	max.	1000	V
Anode input power	$W_{ia}$	max.	180	W
Anode dissipation	$W_a$	max.	115	W
Anode current	$I_a$	max.	180	mA
Grid no.2 voltage	$V_{g2}$	max.	300	V
Grid no.2 dissipation	$W_{g2}$	max.	4,5	W
Grid no.1 voltage, negative	$-V_{g1}$	max.	100	V
Grid no.1 current	$I_{g1}$	max.	30	mA
Grid no.1 circuit resistance	$R_{g1}$	max.	30	k $\Omega$

**OPERATING CONDITIONS** (grid drive)

Frequency	f	400	1200	MHz
Anode voltage	$V_a$	900	900	V
Grid no.2 voltage	$V_{g2}$	300	300	V <sup>1)</sup>
Grid no.1 voltage	$V_{g1}$	-30	-22	V
Anode current	$I_a$	170	170	mA
Grid no.2 current	$I_{g2}$	1	1	mA
Grid no.1 current	$I_{g1}$	10	4	mA
Driving power	$W_{dr}$	3	5	W
Output power in load	$W_\ell$	80	40	W

**OPERATING CONDITIONS** (cathode drive)

Frequency	f	1200	MHz
Anode voltage	$V_a$	900	V
Grid no.2 voltage	$V_{g2}$	300	V
Grid no.1 voltage	$V_{g1}$	-31	V
Anode current	$I_a$	170	mA
Grid no.2 current	$I_{g2}$	3,2	mA
Grid no.1 current	$I_{g1}$	3,4	mA
Driving power	$W_{dr}$	8	W
Output power in load	$W_\ell$	40	W <sup>2)</sup>

Notes see page 3

R.F. CLASS C ANODE AND SCREEN GRID MODULATION

**LIMITING VALUES** (Absolute max. rating system)

(Carrier conditions with modulation up to 100%)

Frequency	f	up to	1200	MHz
Anode voltage	$V_a$	max.	800	V
Anode input power	$W_{ia}$	max.	120	W
Anode dissipation	$W_a$	max.	75	W
Anode current	$I_a$	max.	150	mA
Grid no.2 voltage	$V_{g2}$	max.	300	V
Grid no.2 dissipation	$W_{g2}$	max.	3	W
Grid no.1 voltage, negative	$-V_{g1}$	max.	100	V
Grid no.1 current	$I_{g1}$	max.	30	mA
Grid no.1 circuit resistance	$R_{g1}$	max.	30	k $\Omega$

**OPERATING CONDITIONS**

Frequency	f	400	MHz
Anode voltage	$V_a$	700	V
Grid no.2 voltage	$V_{g2}$	250	V
Grid no.1 voltage	$V_{g1}$	-50	V
Anode current	$I_a$	130	mA
Grid no.2 current	$I_{g2}$	10	mA
Grid no.1 current	$I_{g1}$	10	mA
Driving power	$W_{dr}$	3	W
Output power in load	$W_\ell$	45	W



R.F. CLASS AB 1 SINGLE SIDEBAND AMPLIFIER



LIMITING VALUES (Absolute max. rating system)

Frequency	f	up to	1200	MHz
Anode voltage	$V_a$	max.	1000	V
Anode input power	$W_{ia}$	max.	180	W
Anode dissipation	$W_a$	max.	115	W
Anode current	$I_a$	max.	180	mA
Grid no.2 voltage	$V_{g2}$	max.	300	V
Grid no.2 dissipation	$W_{g2}$	max.	4,5	W
Grid no.1 voltage, negative	$-V_{g1}$	max.	100	V
Grid no.1 circuit resistance	$R_{g1}$	max.	30	$k\Omega$


OPERATING CONDITIONS



Frequency	f	60	60	MHz
Anode voltage	$V_a$	650	850	V
Grid no.2 voltage	$V_{g2}$	300	300	V
Grid no.1 voltage	$V_{g1}$	-15	-15	V
		zero signal	double tone	zero signal
Driving voltage, peak	$V_{g1p}$	0	15	0 15 V
Anode current	$I_a$	40	100	40 100 mA
Grid no.2 current	$I_{g2}$	0	10	0 10 mA
Grid no.1 current	$I_{g1}$	0	0	0 0 mA
Driving power	$W_{dr}$	0	0	0 0 W
Peak envelope output power	$W_{oPEP}$	0	25	0 40 W

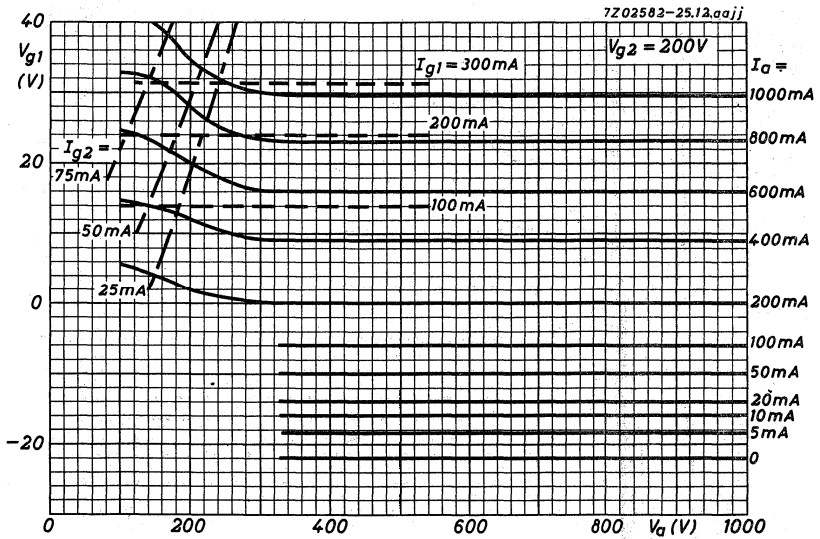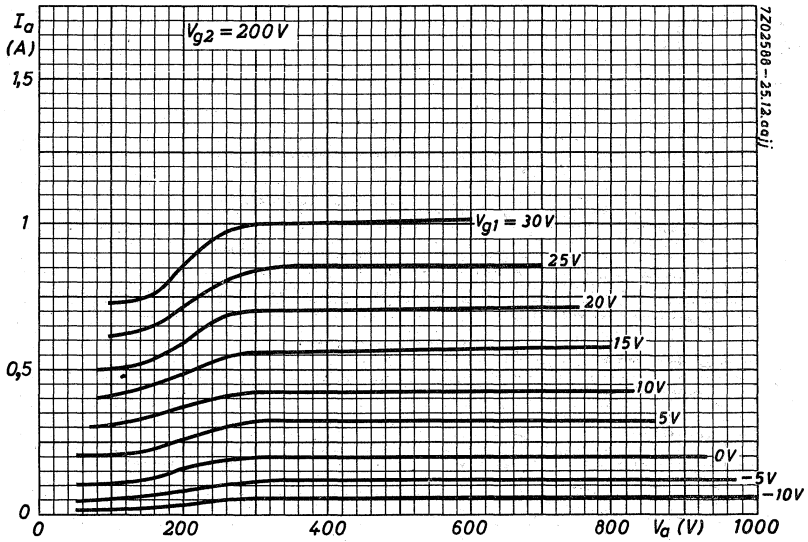

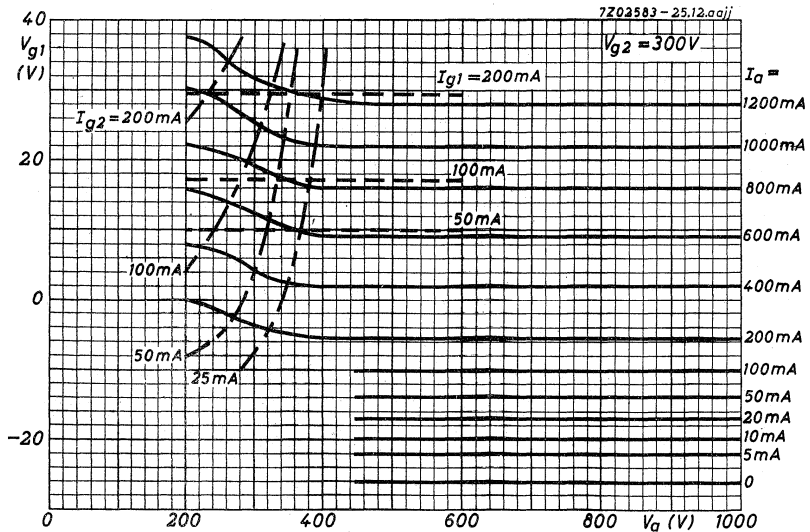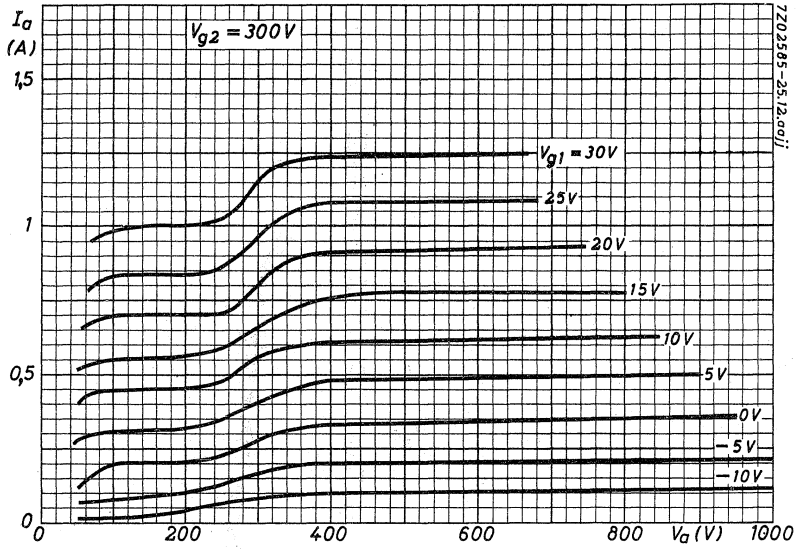



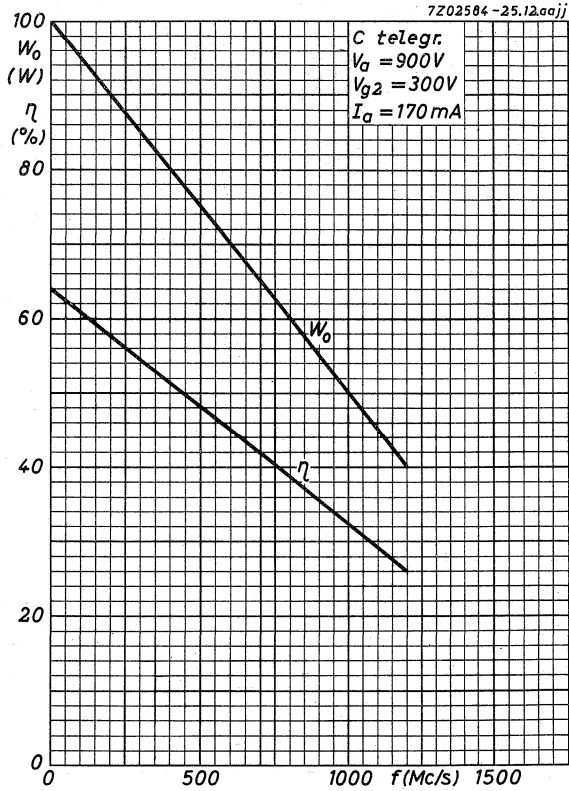

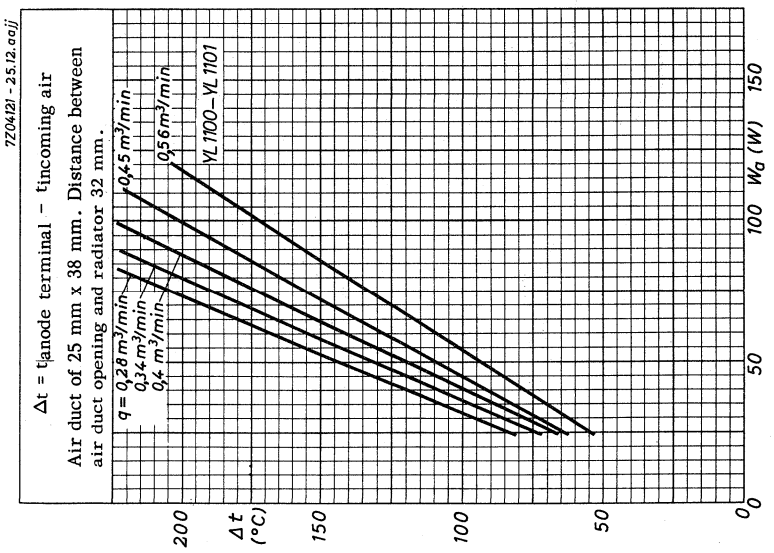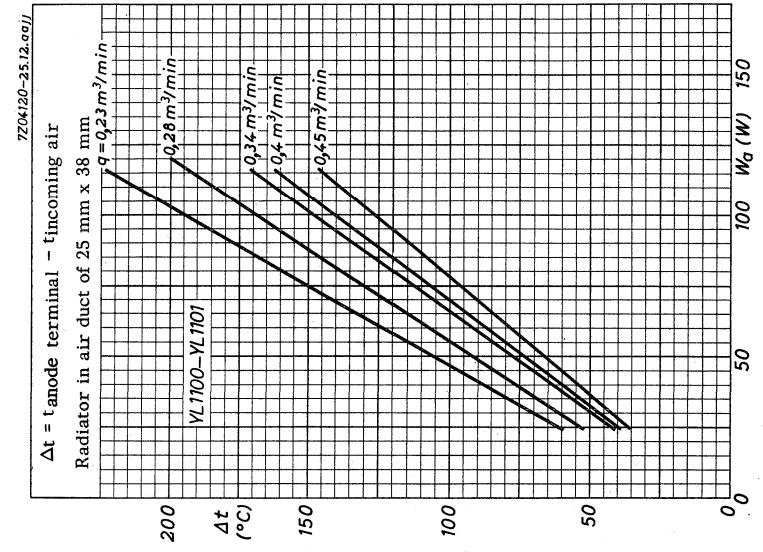

## AIR COOLED COAXIAL BEAM POWER TETRODE

Forced air cooled beam power tetrode with integral radiator and coaxial, ceramic insulated terminals. Intended for use as UHF amplifier or oscillator at frequencies up to 1215 MHz.

QUICK REFERENCE DATA					
Frequency (MHz)	Anode voltage $V_a$ (V)	RF class C telegraphy	RF class A linear ampl.	RF class B SSB	RF class C ag <sub>2</sub> mod.
		$W_{load}$ (W)	$W_{load}$ (W)	$W_o$ PEP (W)	$W_{load}$ (W)
790	2500	590	55	680	600
	1400				
470	2500	730			
400	2000				
30	2500				

**HEATING:** indirect by A.C. or D.C.; cathode oxide coated, matrix type

Heater voltage  $V_f = 6.3 \text{ V} \pm 10\%$

Heater current  $I_f = 7.85 \text{ A}$

Heating time  $T_h = \text{min. } 120 \text{ sec}$

The heater voltage must be reduced dependent on the operating conditions and the frequency.

### CAPACITANCES

Anode to grid No.1  $C_{ag1} < 0.11 \text{ pF}$

Grid No.1 to cathode and heater  $C_{g1/kf} = 29 \text{ pF}$

Anode to cathode and heater  $C_{a/kf} < 0.011 \text{ pF}$

Grid No.1 to grid No.2  $C_{g1g2} = 37 \text{ pF}$

Grid No.2 to cathode and heater  $C_{g2/kf} < 1.1 \text{ pF}$



TYPICAL CHARACTERISTICS

Anode voltage	$V_a$	=	225	2500	V
Grid No.2 voltage	$V_{g_2}$	=	225	400	V
Anode current	$I_a$	=	100	240	mA
Amplification factor	$\mu_{g_2g_1}$	=	13	-	
Mutual conductance	$S$	=	-	22	mA/V

MECHANICAL DATA

Dimensions in mm

Net weight: 340 g

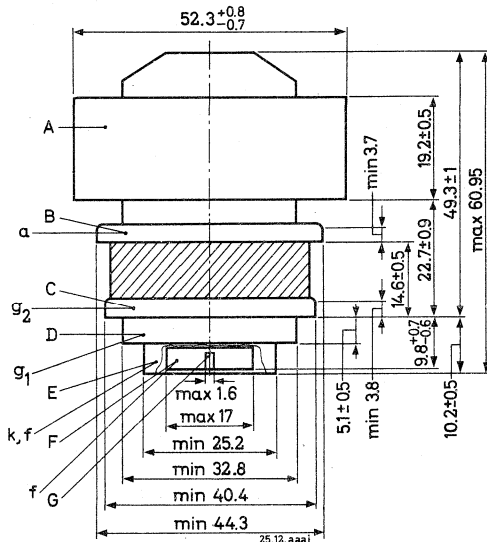

Radiator and terminals lie inside or outside concentric cylinders with the following diameters:

Radiator	:	A	inside	53.54	mm diameter
Anode terminal	:	B	inside	45.69	mm diameter
$g_2$ terminal	:	C	inside	40.87	mm diameter
$g_1$ terminal	:	D	inside	33.50	mm diameter
Cathode terminal	:	E	inside	25.88	mm diameter
Heater terminal	:	F	outside	15.72	mm diameter
		G	inside	2.51	mm diameter

Mounting position: any

**TEMPERATURE LIMITS** (Absolute limits)

Anode temperature	=	max. 250	°C
Temperature of all seals	=	max. 250	°C

**COOLING CHARACTERISTICS**

Forced air cooling of the anode at an air inlet temperature of 25 °C:

Anode dissipation	$W_a$	=	100	300	600	700	W
Min. required air flow	$q_{min}$	=	0.06	0.12	0.32	0.46	m <sup>3</sup> /min
Pressure loss	$p_i$	=	2	4	17	25	mm H <sub>2</sub> O

A low velocity air flow is required for all electrodes and seals.

**R.F. CLASS C TELEGRAPHY****LIMITING VALUES** (Absolute limits)

Frequency	$f$		up to	1215	MHz
Anode voltage	$V_a$	=	max.	2500	V
Anode input power	$W_{i_a}$	=	max.	1250	W
Anode dissipation	$W_a$	=	max.	700	W
Anode current	$I_a$	=	max.	500	mA
Grid No.2 voltage	$V_{g_2}$	=	max.	1200	V
Grid No.2 dissipation	$W_{g_2}$	=	max.	25	W
Negative grid No.1 voltage	$-V_{g_1}$	=	max.	250	V
Grid No.1 current	$I_{g_1}$	=	max.	100	mA
Grid No.1 circuit resistance	$R_{g_1}$	=	max.	15	k $\Omega$

**OPERATING CONDITIONS** in grounded grid circuit

Frequency	$f$	=	790	470	MHz
Anode voltage	$V_a$	=	2500	2500	V
Grid No.2 voltage	$V_{g_2}$	=	400	400	V
Grid No.1 voltage	$V_{g_1}$	=	-45	-35	V
Anode current	$I_a$	=	500	500	mA
Grid No.2 current	$I_{g_2}$	=	7	8	mA
Grid No.1 current	$I_{g_1}$	=	10	12	mA
Driving power	$W_{dr}$	=	60	35	W
Output power in load	$W_{load}$	=	590	730	W

**R.F. CLASS A LINEAR AMPLIFIER, T.V. TRANSLATOR SERVICE, SOUND AND VISION**
**LIMITING VALUES (Absolute limits)**

Frequency	f	up to 1215	MHz
Anode voltage	$V_a$	= max.	2500 V
Anode input power	$W_{ia}$	= max.	1250 W
Anode dissipation	$W_a$	= max.	600 W
Anode current	$I_a$	= max.	500 mA
Grid No.2 voltage	$V_{g2}$	= max.	1200 V
Grid No.2 dissipation	$W_{g2}$	= max.	25 W
Negative grid No.1 voltage	$-V_{g1}$	= max.	250 V
Grid No.1 current	$I_{g1}$	= max.	100 mA
Grid No.1 circuit resistance	$R_{g1}$	= max.	15 k $\Omega$

**OPERATING CONDITIONS**

Frequency	f	=	790	MHz
Bandwidth	B	>	6.5	MHz
Anode voltage	$V_a$	=	1400	V
Grid No.2 voltage	$V_{g2}$	=	400	V
Grid No.1 voltage	$V_{g1}$	=	-30	V
Anode current	$I_a$	=	400	mA
Grid No.2 current	$I_{g2}$	=	-10	mA
Driving power	$W_{dr}$	=	5	W
Output power in load	$W_{load}$	=	55	W

## R.F. CLASS B SINGLE SIDE BAND AMPLIFIER

## LIMITING VALUES (Absolute limits)

Frequency	f	up to	1215	MHz
Anode voltage	$V_a$	= max.	2500	V
Anode input power	$W_{ia}$	= max.	1250	W
Anode dissipation	$W_a$	= max.	600	W
Anode current	$I_a$	= max.	500	mA
Grid No.2 voltage	$V_{g2}$	= max.	1200	V
Grid No.2 dissipation	$W_{g2}$	= max.	25	W
Negative grid No.1 voltage	$-V_{g1}$	= max.	250	V
Grid No.1 current	$I_{g1}$	= max.	100	mA
Grid No.1 circuit resistance	$R_{g1}$	= max.	15	k $\Omega$

## OPERATING CONDITIONS

Frequency	f	=	30	MHz
Anode voltage	$V_a$	=	2500	V
Grid No.2 voltage	$V_{g2}$	=	450	V
Grid No.1 voltage	$V_{g1}$	=	-37	V
			zero	double tone
			signal	signal
Anode current	$I_a$	=	160	350 mA
Grid No.2 current	$I_{g2}$	=	0	2.5 mA
Grid No.1 current	$I_{g1}$	=	0	0 mA
Driving power	$W_{dr}$	=	0	1 W
Peak envelope power output	$W_{oPEP}$	=	-	680 W
Intermodulation distortion:				
of the third order	$d_{i3}$	=	-	-31 dB
of the fifth order	$d_{i5}$	=	-	-36 dB

## R.F. CLASS C ANODE AND SCREEN GRID MODULATION

## LIMITING VALUES (Absolute limits)

Frequency	f	up to	1215	MHz
Anode voltage	$V_a$	=	max.	2000 V
Anode input power	$W_{ia}$	=	max.	1000 W
Anode dissipation	$W_a$	=	max.	400 W
Anode current	$I_a$	=	max.	500 mA
Grid No.2 voltage	$V_{g2}$	=	max.	1200 V
Grid No.2 dissipation	$W_{g2}$	=	max.	17 W
Negative grid No.1 voltage	$-V_{g1}$	=	max.	250 V
Grid No.1 current	$I_{g1}$	=	max.	100 mA
Grid No.1 circuit resistance	$R_{g1}$	=	max.	15 k $\Omega$


## OPERATING CONDITIONS (cathode drive)

Frequency	f	=	400	MHz
Anode voltage	$V_a$	=	2000	V
Grid No.2 voltage	$V_{g2}$	=	400	V 1)
Grid No.1 voltage	$V_{g1}$	=	-35	V 2)
Anode current	$I_a$	=	500	mA
Grid No.2 current	$I_{g2}$	=	8	mA
Grid No.1 current	$I_{g1}$	=	12	mA
Driving power	$W_{dr}$	=	35	W
Output power in load	$W_{load}$	=	600	W

1) Obtained preferably from a separate source, modulated along with the anode supply.

2) Obtained from the grid resistor or from a combination of the grid resistor and either a fixed supply or a cathode resistor.



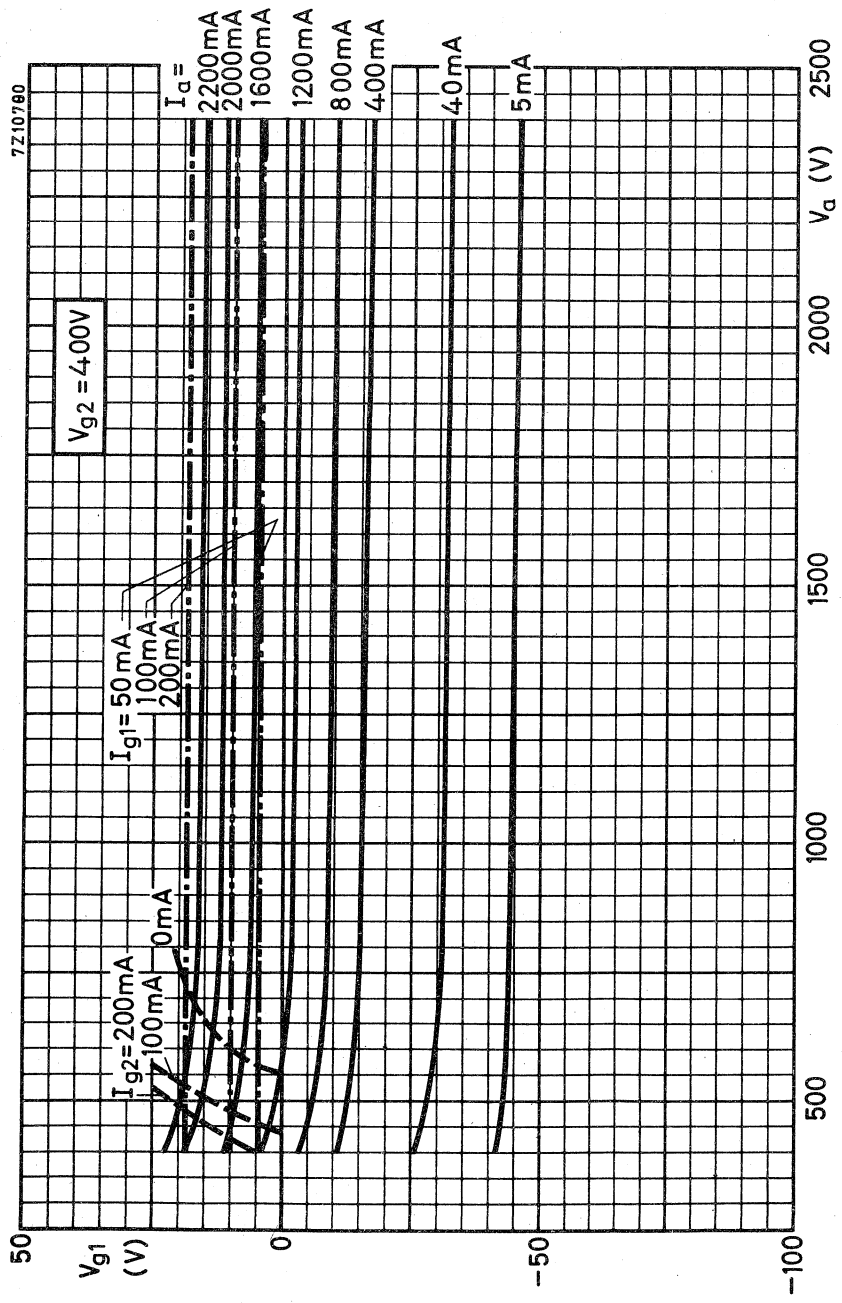



## AIR COOLED COAXIAL R.F. POWER TETRODE

QUICK REFERENCE DATA		
Freq. (MHz)	Class AB1 linear SSB amplifier	
	$V_a$ (V)	$W_p$ 1) (kW, PEP)
13	5000	5.1
28	5000	5.1

**HEATING:** indirect. Cathode oxide-coated

Heater voltage	$V_f = 12.6 \text{ V} \pm 10 \%$
Heater current	$I_f = 14.5 \text{ A}$
Heating time	$T_w = \text{min. } 10 \text{ min.}$

### CAPACITANCES

Grid No.1 to all other elements except anode	$C_{g1} = 115 \text{ pF}$
Anode to all other elements except grid No.1	$C_a = 41 \text{ pF}$
Anode to grid No.1	$C_{ag1} = 0.2 \text{ pF}$

### TYPICAL CHARACTERISTICS

Anode voltage	$V_a = 5 \text{ kV}$
Grid No.2 voltage	$V_{g2} = 700 \text{ V}$
Anode current	$I_a = 0.7 \text{ A}$
Amplification factor	$\mu_{g2g1} = 3.5$
Mutual conductance	$S = 45 \text{ mA/V}$

1) Useful power in the load

**TEMPERATURE LIMITS** (Absolute limits)

Envelope temperature = max. 200 °C

Air inlet temperature = max. 45 °C


**AIR COOLING CHARACTERISTICS**

	$W_a$ (kW)	$q_{min}$ (m <sup>3</sup> /min)	$P_i$ (mm H <sub>2</sub> O)
Anode radiator	4	6	20
Socket		0.5	20

**MECHANICAL DATA**

Socket	40682
Air duct or	40683
Insulating pedestal	40654
Net weight of tube	4.5 kg

Dimensions in mm

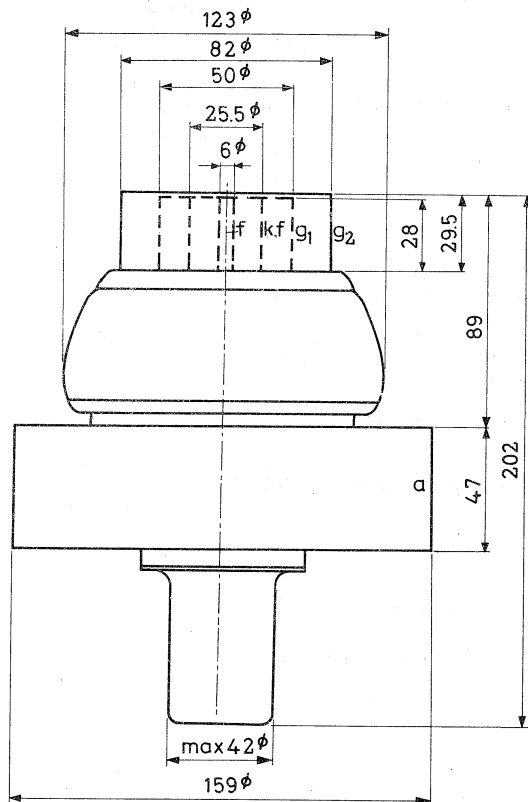

Mounting position: vertical with anode up or down

**CLASS AB LINEAR S. S. B. AMPLIFIER**, suppressed carrier service

**LIMITING VALUES** (Absolute limits)

Frequency	f	up to	60	MHz
Anode voltage	$V_a$	= max.	5.5	kV
Anode current	$I_a$	= max.	2	A
Anode input power	$W_{i_a}$	= max.	10	kW
Anode dissipation	$W_a$	= max.	4	kW
Grid No.2 voltage	$V_{g_2}$	= max.	1	kV
Grid No.2 dissipation	$W_{g_2}$	= max.	150	W
Negative grid No.1 voltage	$-V_{g_1}$	= max.	250	V
Grid No.1 current	$I_{g_1}$	= max.	25	mA

**OPERATING CHARACTERISTICS**

Frequency	f	=	13	MHz								
Anode voltage	$V_a$	=	5	kV								
Grid No.2 voltage	$V_{g_2}$	=	700	V								
Grid No.1 voltage	$V_{g_1}$	=	-150	V 1)								
			<table border="0" style="margin-left: auto; margin-right: auto;"> <tr> <td style="text-align: center;">zero</td> <td style="text-align: center;">single tone</td> <td style="text-align: center;">double tone</td> <td></td> </tr> <tr> <td style="text-align: center;">signal</td> <td style="text-align: center;">signal</td> <td style="text-align: center;">signal</td> <td></td> </tr> </table>	zero	single tone	double tone		signal	signal	signal		
zero	single tone	double tone										
signal	signal	signal										
Peak driving voltage	$V_{g_{1p}}$	=	0	150	150	V						
Anode current	$I_a$	=	0.7	1.8	1.26	A						
Grid No.2 current	$I_{g_2}$	=	-10 to +10	120	40	mA						
Grid No.1 current	$I_{g_1}$	=	0	-1	-0.3	mA						
Anode input power	$W_{i_a}$	=	3.5	9	6.3	kW						
Anode dissipation	$W_a$	=	3.5	2.85	3.2	kW						
Output power in the load (PEP)	$W_l$	=	-	5.1	5.1	kW						
Total efficiency	$\eta$	=	-	57	45	%						
3 <sup>rd</sup> order intermodulation distortion	$d_3$	=	-	-	<-35	dB 2)						
5 <sup>th</sup> order intermodulation distortion	$d_5$	=	-	-	<-40	dB 2)						

1)2) See page 4

CLASS AB LINEAR S. S. B. AMPLIFIER, suppressed carrier service



OPERATING CHARACTERISTICS (continued)


Frequency	$f$	=	28	MHz																																	
Anode voltage	$V_a$	=	5	kV																																	
Grid No.2 voltage	$V_{g2}$	=	700	V																																	
Grid No.1 voltage	$V_{g1}$	=	-150	V <sup>1)</sup>																																	
			<table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>zero signal</th> <th>single tone signal</th> <th>double tone signal</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>150</td> <td>150</td> </tr> <tr> <td>0.7</td> <td>1.8</td> <td>1.26</td> </tr> <tr> <td>-10 to +10</td> <td>120</td> <td>40</td> </tr> <tr> <td>0</td> <td>-4</td> <td>-1</td> </tr> <tr> <td>3.5</td> <td>9</td> <td>6.3</td> </tr> <tr> <td>3.5</td> <td>2.85</td> <td>3.2</td> </tr> <tr> <td>-</td> <td>5.1</td> <td>5.1</td> </tr> <tr> <td>-</td> <td>57</td> <td>45</td> </tr> <tr> <td>-</td> <td>-</td> <td>&lt;-35</td> </tr> <tr> <td>-</td> <td>-</td> <td>&lt;-40</td> </tr> </tbody> </table>	zero signal	single tone signal	double tone signal	0	150	150	0.7	1.8	1.26	-10 to +10	120	40	0	-4	-1	3.5	9	6.3	3.5	2.85	3.2	-	5.1	5.1	-	57	45	-	-	<-35	-	-	<-40	
zero signal	single tone signal	double tone signal																																			
0	150	150																																			
0.7	1.8	1.26																																			
-10 to +10	120	40																																			
0	-4	-1																																			
3.5	9	6.3																																			
3.5	2.85	3.2																																			
-	5.1	5.1																																			
-	57	45																																			
-	-	<-35																																			
-	-	<-40																																			
Peak driving voltage	$V_{g1p}$	=	0	V																																	
Anode current	$I_a$	=	0.7	A																																	
Grid No.2 current	$I_{g2}$	=	-10 to +10	mA																																	
Grid No.1 current	$I_{g1}$	=	0	mA																																	
Anode input power	$W_{i_a}$	=	3.5	kW																																	
Anode dissipation	$W_a$	=	3.5	kW																																	
Output power in the load (PEP)	$W_p$	=	-	kW																																	
Total efficiency	$\eta$	=	-	%																																	
3rd order intermodulation distortion	$d_3$	=	-	<-35 dB <sup>2)</sup>																																	
5th order intermodulation distortion	$d_5$	=	-	<-40 dB <sup>2)</sup>																																	

1) To be adjusted for zero signal anode current.

2) Maximum values encountered at any level of drive voltage referred to the amplitude of either of the two equal tones at that level.

Relative to the peak envelope power these figures will be increased by 6 dB. Considerably better distortion figures can be achieved with  $I_a$  at zero signal = 0.8 A at the cost of higher zero signal anode dissipation. Efficiency for full drive is hardly deteriorated by this higher value of zero signal anode current.

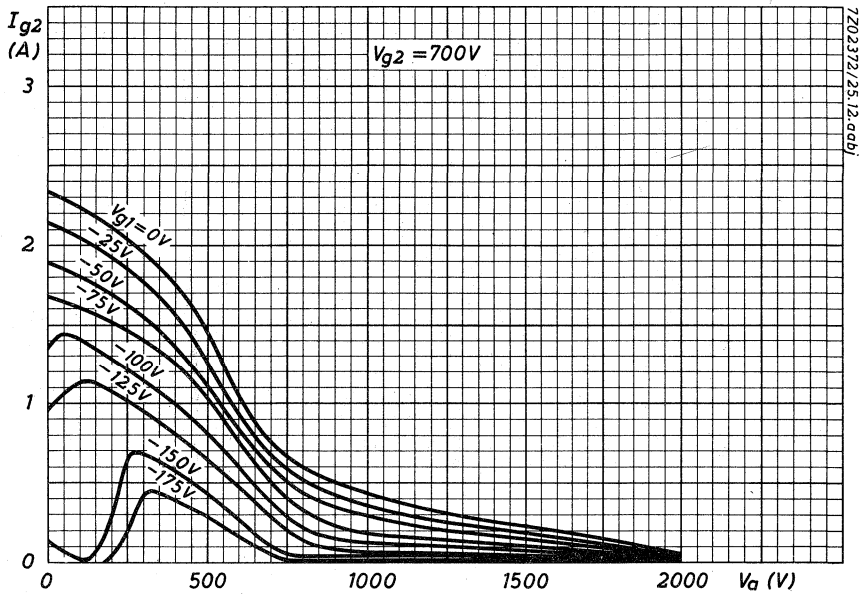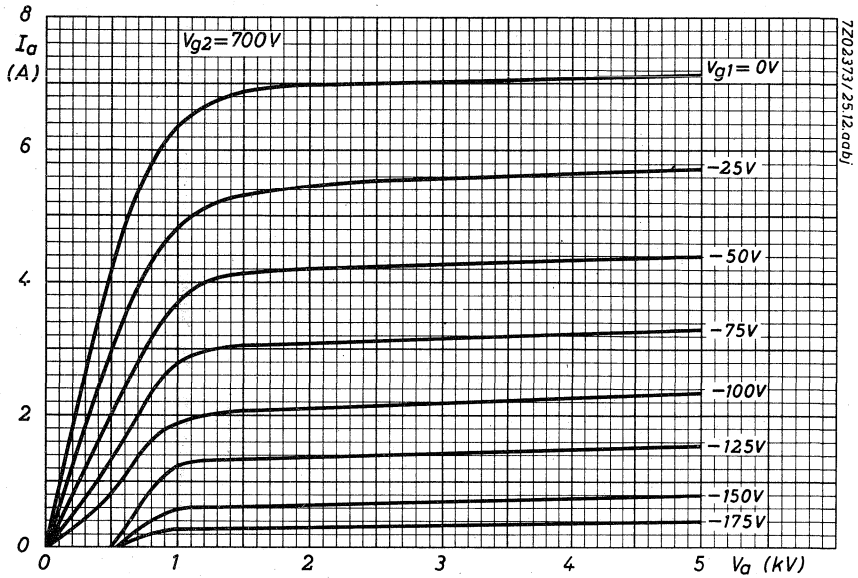

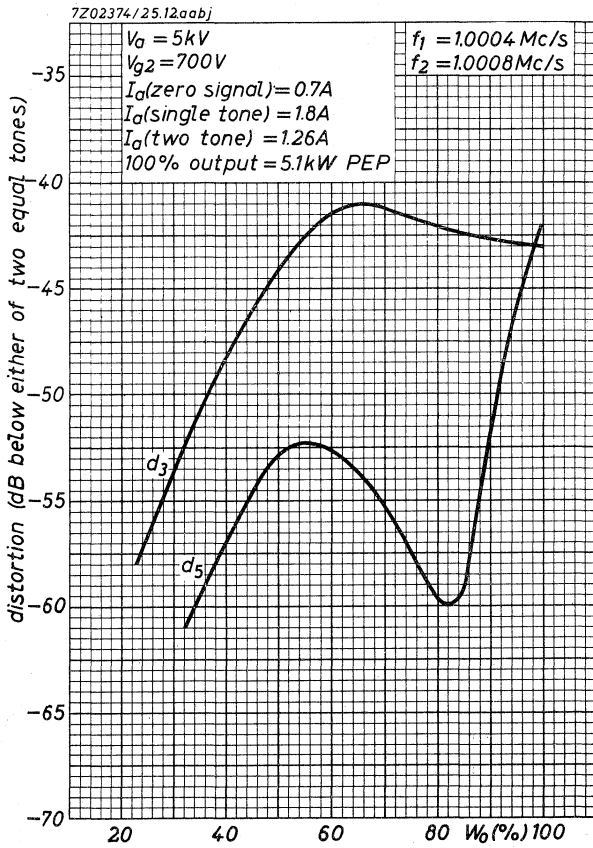



## AIR COOLED R.F. POWER TETRODE

Forced air cooled coaxial tetrode intended for use as linear amplifier for single side band, suppressed carrier service.

QUICK REFERENCE DATA				
Frequency (MHz)	Class AB1 SSB		Class B anode mod.	
	$V_a$ (kV)	$W_o$ PEP(kW)	$V_a$ (kV)	$W_o$ (kW)
1	5.0	5.7	5.0	5.1
30	5.0	5.0		

**HEATING:** indirect by A.C. or D.C.; cathode oxide coated

Heater voltage	$V_f$	=	12.6 V
Heater current	$I_f$	=	14.5 A
Waiting time	$T_w$	= min.	10 min.

### CAPACITANCES

Anode to all except grid No.1	$C_a$	=	33 pF
Grid No.1 to all except anode	$C_{g1}$	=	156 pF
Anode to grid No.1	$C_{ag1}$	=	0.16 pF

### TYPICAL CHARACTERISTICS

Anode voltage	$V_a$	=	1 5 kV
Grid No.2 voltage	$V_{g2}$	=	650 650 V
Anode current	$I_a$	=	6 0.7 A
Amplification factor	$\mu_{g2g1}$	=	3
Mutual conductance	$S$	=	45 mA/V

### TEMPERATURE LIMITS (Absolute limits)

Envelope temperature	$t$	= max.	200 °C
Air inlet temperature	$t_i$	= max.	45 °C

**COOLING DATA**


$W_a$ (kW)	$h$ (m)	$t_1$ (°C)	$Q_{min}$ (m <sup>3</sup> /min)	$P_1$ (mm H <sub>2</sub> O)
4.0	0	45	5	23

Required air flow on socket  $q = \text{min. } 0.55 \text{ m}^3/\text{min}$   
 at a pressure loss  $p_1 = 16 \text{ mm H}_2\text{O}$

**MECHANICAL DATA**

Net weight : 5.8 kg

Dimensions in mm

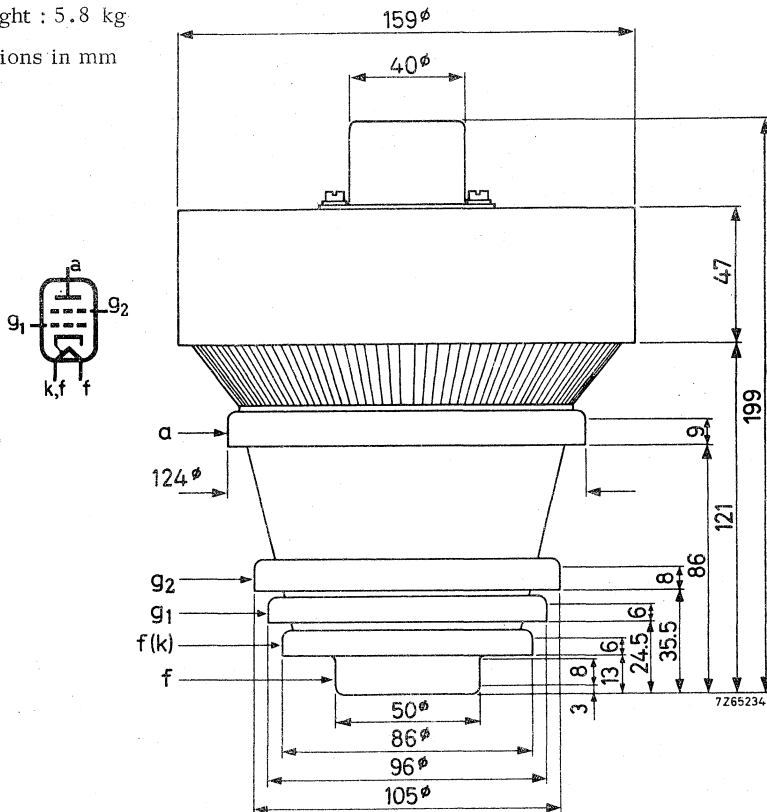

**ACCESSORIES**

- Socket 40699
- Chimney 40683

Mounting position : vertical  
 with anode up or down

## R. F. CLASS AB LINEAR AMPLIFIER, SINGLE SIDE BAND, suppressed carrier

## LIMITING VALUES (Absolute limits)

Frequency	f	up to 30 MHz
Anode voltage	$V_a$	= max. 5.5 kV
Anode input power	$W_{ia}$	= max. 9.5 kW
Anode dissipation	$W_a$	= max. 4 kW
Anode current	$I_a$	= max. 2 A
Grid No.2 voltage	$V_{g2}$	= max. 1 kV
Grid No.2 dissipation	$W_{g2}$	= max. 140 W
Negative grid No.1 voltage	$-V_{g1}$	= max. 250 V
Grid No.1 circuit resistance	$R_{g1}$	= max. 10 k $\Omega$

## OPERATING CONDITIONS

Frequency	f	=	1	MHz						
Anode voltage	$V_a$	=	5.0	kV						
Grid No.2 voltage	$V_{g2}$	=	650	V						
Grid No.1 voltage	$V_{g1}$	=	-185	V 1)						
			<table> <thead> <tr> <th>zero signal</th> <th>single tone signal</th> <th>double tone signal</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>160<sup>2)</sup></td> <td>160<sup>2)</sup></td> </tr> </tbody> </table>	zero signal	single tone signal	double tone signal	0	160 <sup>2)</sup>	160 <sup>2)</sup>	V
zero signal	single tone signal	double tone signal								
0	160 <sup>2)</sup>	160 <sup>2)</sup>								
Grid No.1 driving voltage	$V_{g1p}$	=	0	V						
Anode current	$I_a$	=	0.7	A						
Grid No.2 current	$I_{g2}$	=	-10 to +10	mA						
Grid No.1 current	$I_{g1}$	=	0	mA						
Anode input power	$W_{ia}$	=	3.5	kW						
Anode dissipation	$W_a$	=	3.5	kW						
Output power in load	$W_\ell$	=	0	kW <sup>3)</sup>						
PEP output power in load	$W_\ell$	=	0	kW <sup>3)</sup>						
Total efficiency	$\eta$	=	-	61.5						
				43.5 %						
Intermodulation distortion										
of the 3rd order	$d_3$	=	-	-40 dB <sup>4)</sup>						
of the 5th order	$d_5$	=	-	-40 dB <sup>4)</sup>						

1)2)3)4) See page 4.

## R. F. CLASS AB LINEAR AMPLIFIER, SINGLE SIDE BAND, suppressed carrier

## OPERATING CONDITIONS (continued)

Frequency	$f$	=	30	MHz						
Anode voltage	$V_a$	=	5.0	kV						
Grid No.2 voltage	$V_{g2}$	=	650	V						
Grid No.1 voltage	$V_{g1}$	=	-185	V <sup>1)</sup>						
			<table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>zero signal</th> <th>single tone signal</th> <th>double tone signal</th> </tr> </thead> <tbody> <tr> <td></td> <td></td> <td></td> </tr> </tbody> </table>	zero signal	single tone signal	double tone signal				
zero signal	single tone signal	double tone signal								
Grid No.1 driving voltage	$V_{g1p}$	=	0	160 <sup>2)</sup>	160 <sup>2)</sup> V					
Anode current	$I_a$	=	0.7	1.85	1.30 A					
Grid No.2 current	$I_{g2}$	=	-10 to +10	140	40 mA					
Grid No.1 current	$I_{g1}$	=	0	< 5	< 5 mA					
Anode input power	$W_{ia}$	=	3.5	9.25	6.5 kW					
Anode dissipation	$W_a$	=	3.5	3.35	3.55 kW					
Output power in load	$W_\ell$	=	0	5.0	- kW <sup>5)</sup>					
PEP output power in load	$W_\ell$	=	0	-	5.0 kW <sup>5)</sup>					
Total efficiency	$\eta$	=	-	54	38 %					
Intermodulation distortion										
of the 3rd order	$d_3$	=	-	-	-38 dB <sup>4)</sup>					
of the 5th order	$d_5$	=	-	-	-40 dB <sup>4)</sup>					

1) To be adjusted for zero signal anode current of 0.7 A; characteristic range values 150 to 215 V.

2) Maximum 175 V.

3) Measured in a circuit having an efficiency of 95%.

4) Maximum values encountered at any level of drive voltage referred to the amplitude of either of the two equal tones at that level.

Relative to the peak envelope power these figures will be increased by 6 dB.

5) Measured in a circuit having an efficiency of 85%.

## R.F. CLASS B ANODE MODULATION



## LIMITING VALUES (Absolute limits)

Frequency	f	=	up to 60 MHz
Anode voltage	$V_a$	=	max. 5.5 kV
Anode input power	$W_{ia}$	=	max. 7.5 kW
Anode dissipation	$W_a$	=	max. 2.6 kW
Anode current	$I_a$	=	max. 1.6 A
Grid No.2 voltage	$V_{g2}$	=	max. 800 V
Grid No.2 dissipation	$W_{g2}$	=	max. 140 W
Negative grid No.1 voltage	$-V_{g1}$	=	max. 250 V
Grid No.1 circuit resistance	$R_{g1}$	=	max. 10 k $\Omega$

## OPERATING CONDITIONS

Frequency	f	=	1 MHz
Anode voltage	$V_a$	=	5.0 kV
Grid No.2 voltage	$V_{g2}$	=	600 V
Grid No.1 voltage	$V_{g1}$	=	-230 V
Peak grid No.1 driving voltage	$V_{g1p}$	=	230 V
Anode current	$I_a$	=	1.46 A
Grid No.2 current	$I_{g2}$	=	100 mA
Grid No.1 current	$I_{g1}$	=	0 mA
Grid No.2 dissipation	$W_{g2}$	=	60 W
Driving power	$W_{dr}$	=	0 W
Anode input power	$W_{ia}$	=	7.3 kW
Anode dissipation	$W_a$	=	2.2 kW
Output power in the load	$W_l$	=	4.6 kW <sup>1)</sup>
Tube efficiency	$\eta$	=	70 %
Modulation depth	m	=	100 %
Modulation power	$W_{mod}$	=	3.65 kW

<sup>1)</sup> Measured in a circuit having an efficiency of 90 %.

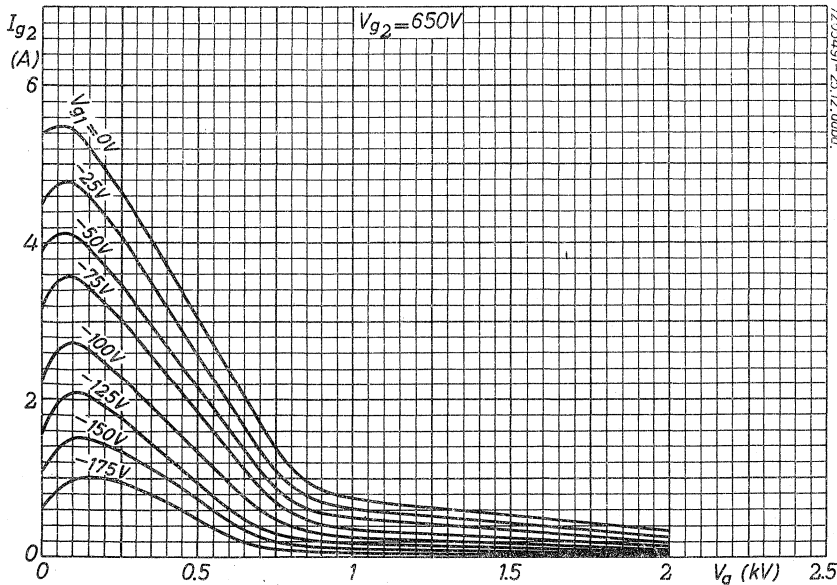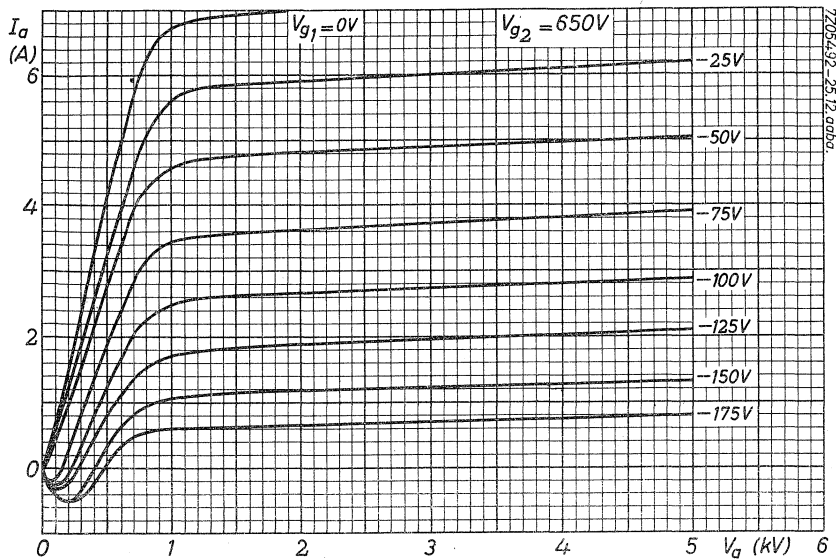

## QUICK HEATING R.F. DOUBLE TETRODE

Quick heating radiation and convection cooled double tetrode for use as R.F. amplifier and frequency multiplier up to 500 MHz, designed for intermittent filament operation in transistorised mobile transmitters.

QUICK REFERENCE DATA						
Freq. (MHz)	Class C telegraphy			Class C frequency multiplier		
	V <sub>a</sub> (V)	W <sub>dr</sub> <sup>1)</sup> (W)	W <sub>ℓ</sub> <sup>2)</sup> (W)	V <sub>a</sub> (V)	W <sub>dr</sub> <sup>1)</sup> (W)	W <sub>ℓ</sub> <sup>2)</sup> (W)
200	275	0.7	12.5			
500	175	1.5	6.0			
167/500				175	1.5	2.0

**HEATING:** direct by A.C. or D.C.; series or parallel supply  
Filament oxide coated

Filament voltage  $V_f = 1.1 \text{ V} \pm 15\%$

Filament current  $I_f = 2.9 \text{ A}$

Heating time for  $W_o = 70\%$  of full output power  $T_h < 0.5 \text{ sec}$

The frequency of the A.C. filament supply may be

for sinusoidal supply voltage max. 200 Hz

for square wave supply voltage any

**CAPACITANCES**, two systems in push-pull connection

Input capacitance  $C_i = 4.1 \text{ pF}$

Output capacitance  $C_o = 1.2 \text{ pF}$

The tube is internally neutralised for frequencies up to 500 MHz

<sup>1)</sup> Driver output power

<sup>2)</sup> Useful power in the load

**TYPICAL CHARACTERISTICS**

Anode voltage	$V_a$	=	175	V
Grid No.2 voltage	$V_{g_2}$	=	175	V
Anode current	$I_a$	=	40	mA
Amplification factor	$\mu_{g_2g_1}$	=	22	
Mutual conductance	S	=	7	mA/V

**COOLING:** Radiation and convection

The use of a closed tube shield is not recommended



**TEMPERATURE LIMITS** (Absolute limits)

Bulb temperature = max. 230 °C

**MECHANICAL DATA**

- Base : Noval
- Socket : 2422 502 01004 <sup>1)</sup>
- Net weight: 16 g

Dimensions in mm

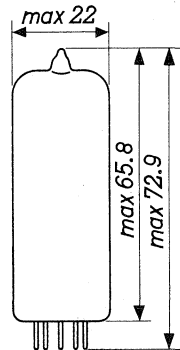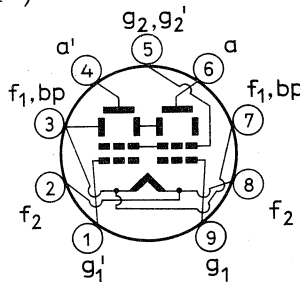

Mounting position: any

If the tube is mounted with its main axis horizontally, it is recommended that the pins 3 and 7 be in a horizontal plane.

The filament connections (tags 3-7 and 2-8) should be connected in parallel on the socket.

<sup>1)</sup> Or equivalent type suitable for the high filament current



R.F. CLASS C TELEGRAPHY OR F.M. TELEPHONY; two systems in push-pull

**LIMITING VALUES** (Absolute limits)

Frequency	f	up to	200	500	MHz
Anode voltage	$V_a$	= max.	300	200	V
Anode current	$I_a$	= max.	2x50	2x50	mA
Anode input power	$W_{i_a}$	= max.	30	20	W
Anode dissipation	$W_a$	= max.	2x4	2x4	W
Grid No.2 voltage	$V_{g_2}$	= max.	200	200	V
Grid No.2 dissipation	$W_{g_2}$	= max.	3	3	W
Negative grid No.1 voltage	$-V_{g_1}$	= max.	150	150	V
Grid No.1 current	$I_{g_1}$	= max.	2x5	2x5	mA
Grid No.1 circuit resistance	$R_{g_1}$	= max.	100	100	k $\Omega$

**OPERATING CONDITIONS**

Frequency	f	=	200	500	MHz
Anode voltage	$V_a$	=	275	175	V
Grid No.2 supply voltage	$V_{bg_2}$	=	275	175	V
Grid No.2 series resistor	$R_{g_2}$	=	6,8	0.1	k $\Omega$
Grid No.1 voltage	$V_{g_1}$	=	-20	-22	V
Grid No.1 resistor	$R_{g_1}$	=	3,9 <sup>1)</sup>	9,4 <sup>2)</sup>	k $\Omega$
Driving voltage	$V_{g_1 g_1' p}$	=	65	65	V
Anode current	$I_a$	=	2x42.5	2x40	mA
Grid No.2 current	$I_{g_2}$	=	14	12	mA
Grid No.1 current	$I_{g_1}$	=	2x2.6	2x2.3	mA
Grid No.2 dissipation	$W_{g_2}$	=	2.5	2.1	W
Driver output power	$W_{dr}$	=	0.7	1.5	W
Anode input power	$W_{i_a}$	=	23.4	14	W
Anode dissipation	$W_a$	=	2x3.5	2x3	W
Output power	$W_o$	=	16	8	W
Efficiency	$\eta$	=	68	57	%
Output power in the load	$W_l$	=	13	6.5	W <sup>3)</sup>

1) Common for both units.

2) It is recommended to use two fixed resistors, one for each unit, in series with a common adjustable resistor.

3) For optimum conditions  $R_{g_1}$  should be adjusted to obtain the desired anode current.

## R.F. CLASS C FREQUENCY TRIPLER , two systems in push-pull

## LIMITING VALUES (Absolute limits)



Frequency	f	up to	500	MHz
Anode voltage	$V_a$	= max.	200	V
Anode current	$I_a$	= max.	2x35	mA
Anode input power	$W_{i_a}$	= max.	12	W
Anode dissipation	$W_a$	= max.	2x4	W
Grid No.2 voltage	$V_{g_2}$	= max.	200	V
Grid No.2 dissipation	$W_{g_2}$	= max.	2.5	W
Negative grid No.1 voltage	$-V_{g_1}$	= max.	150	V
Grid No.1 current	$I_{g_1}$	= max.	2x3	mA
Grid No.1 circuit resistance	$R_{g_1}$	= max.	100	k $\Omega$



## OPERATING CONDITIONS

Frequency	f	=	167/500	MHz
Anode voltage	$V_a$	=	175	V
Grid No.2 supply voltage	$V_{bg_2}$	=	175	V
Grid No.2 series resistor	$R_{g_2}$	=	100	$\Omega$
Grid No.1 resistor	$R_{g_1}$	=	56	k $\Omega$ <sup>1)</sup>
Driving voltage	$V_{g_1 g_1' p}$	=	175	V
Anode current	$I_a$	=	2x30	mA
Grid No.2 current	$I_{g_2}$	=	9	mA
Grid No.1 current	$I_{g_1}$	=	2x1.2	mA
Grid No.2 dissipation	$W_{g_2}$	=	1.6	W
Driver output power	$W_{dr}$	=	1.5	W
Anode input power	$W_{i_a}$	=	10.5	W
Anode dissipation	$W_a$	=	2x3.5	W
Output power	$W_o$	=	3.5	W
Efficiency	$\eta$	=	33	%
Output power in the load	$W_\ell$	=	2	W <sup>2)</sup>

1) It is recommended to use two fixed resistors, one for each unit, in series with a common adjustable resistor.

2) For optimum conditions  $R_{g_1}$  should be adjusted to obtain the desired anode current.

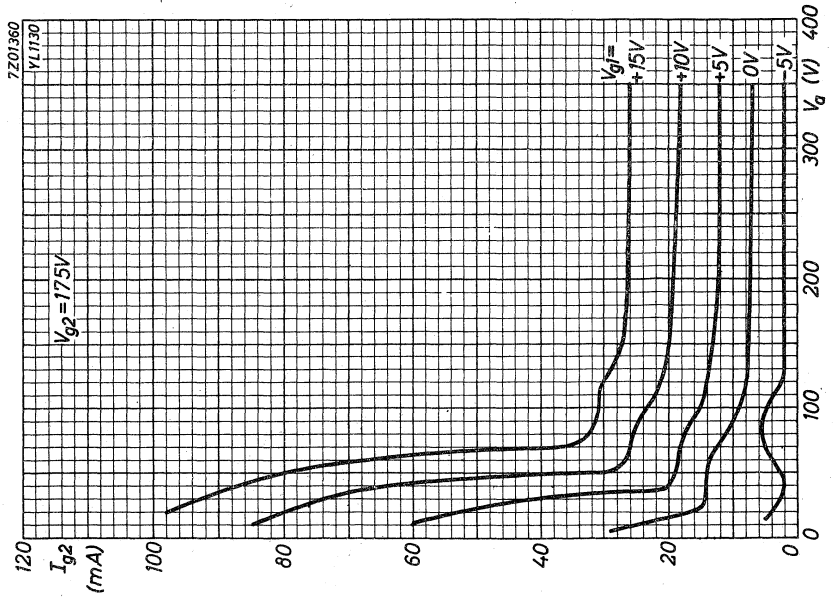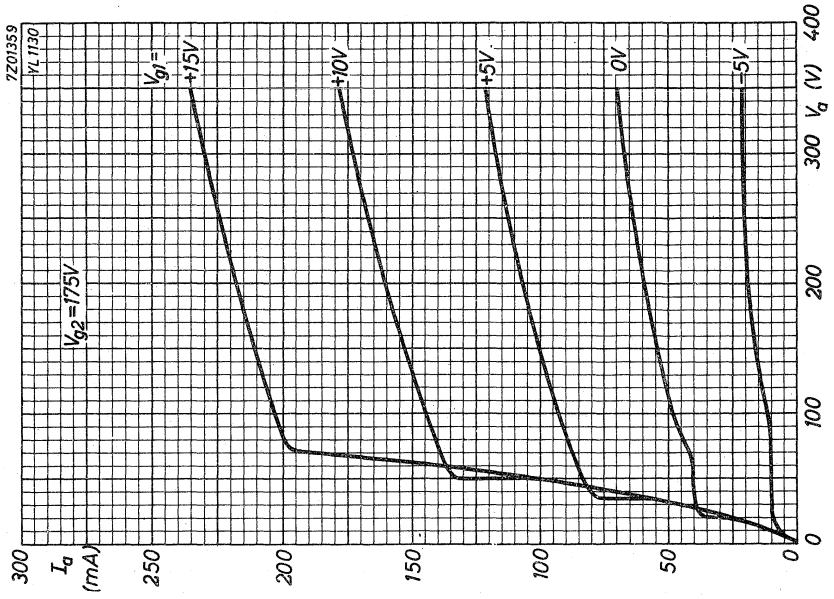

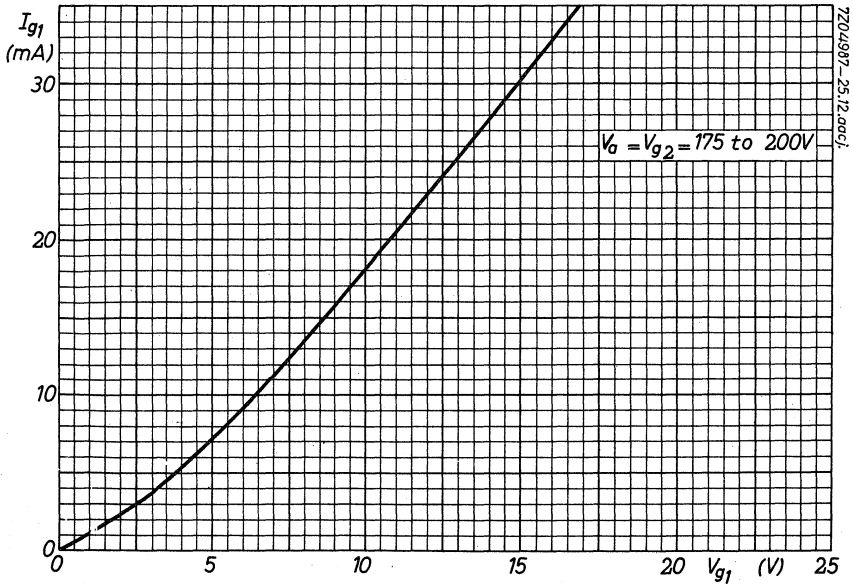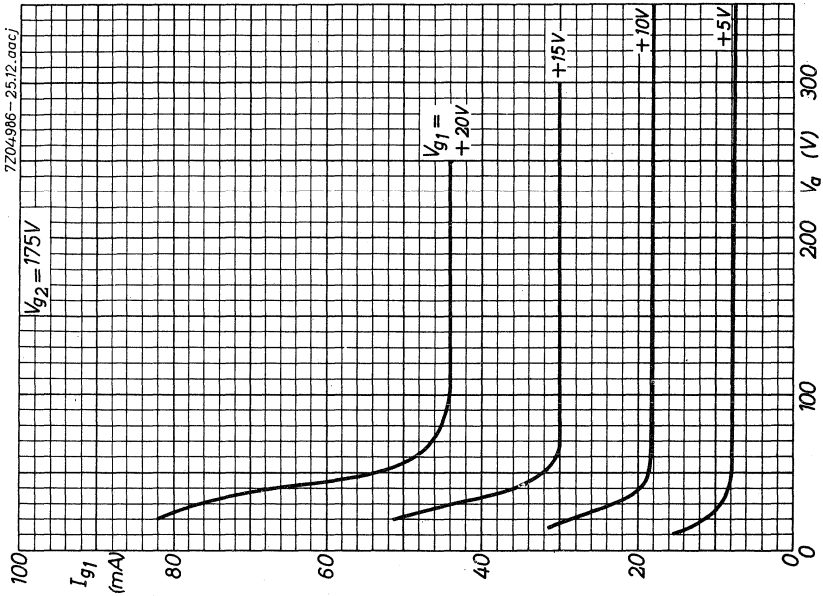

## R.F. BEAM POWER TETRODE

QUICK REFERENCE DATA				
Freq. (MHz)	Class AB Single sideband		Class AB mod. Two tubes	
	V <sub>a</sub> (V)	W <sub>l</sub> <sup>1)</sup> (W)	V <sub>a</sub> (V)	W <sub>o</sub> (W)
30	600	110	600	200
60	600	100		

**HEATING:** Indirect by A.C. or D.C.; cathode oxide coated

Heater voltage	V <sub>f</sub> =	6.3 V	12.6 V
Heater current	I <sub>f</sub> =	1.90 A	0.95 A
Pins		(5+6)-2	5-6
Heating time	T <sub>h</sub> =	min. 30	sec

### CAPACITANCES

Anode to all other elements except grid No.1	C <sub>a</sub> =	10.7 pF
Grid No.1 to all other elements except anode	C <sub>g1</sub> =	24.5 pF
Anode to grid No.1	C <sub>ag1</sub> =	0.23 pF

### TYPICAL CHARACTERISTICS

Anode voltage	V <sub>a</sub> =	600 V
Grid No.2 voltage	V <sub>g2</sub> =	250 V
Anode current	I <sub>a</sub> =	100 mA
Amplification factor	μ <sub>g2g1</sub> =	4.0
Mutual conductance	S =	10 mA/V

1) Peak envelope power. Useful power in the load.

**TEMPERATURE LIMITS** (Absolute limits)

Bulb temperature	=	max. 250 °C
Base pin seal temperature	=	max. 180 °C
Anode seal temperature	=	max. 220 °C



**COOLING**

Radiation and convection. In order to keep the temperatures below the maximum permitted values it may be necessary to direct an air flow to the bulb or seals.

**MECHANICAL DATA**

Dimensions in mm

Base	:	Septar
Socket	:	2422 513 00001
Anode connector:		40634
Net weight	:	110 g

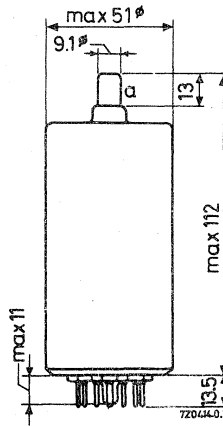

Mounting position: any

R. F. CLASS AB LINEAR AMPLIFIER , single sideband, suppressed carrier

LIMITING VALUES (Absolute limits)

Frequency	f	up to	60	MHz
Anode voltage	$V_a$	= max.	750	V
Anode current	$I_a$	= max.	350	mA
Anode dissipation	$W_a$	= max.	75	W
Grid No.2 voltage	$V_{g2}$	= max.	300	V
Grid No.2 dissipation	$W_{g2}$	= max.	7.5	W
Negative grid No.1 voltage	$-V_{g1}$	= max.	100	V
Grid No.1 dissipation	$W_{g1}$	= max.	0.5	W
Grid No.1 circuit resistance	$R_{g1}$	= max.	10	k $\Omega$

OPERATING CONDITIONS

Frequency	f	=	30	MHz		
Anode voltage	$V_a$	=	600	V		
Grid No.2 voltage	$V_{g2}$	=	250	V		
Grid No.1 voltage	$V_{g1}$	=	-50	V 1)		
			zero signal	single tone signal	double tone signal	
Peak driving voltage	$V_{g1p}$	=	0	50	50	V
Anode current	$I_a$	=	100	325	220	mA
Grid No.2 current	$I_{g2}$	=	3	22	12	mA
Grid No.1 current	$I_{g1}$	=	0	0	0	mA <sup>2)</sup>
Grid No.2 dissipation	$W_{g2}$	=	0.75	7	3.5	W
Driving power	$W_{dr}$	=	-	2	2	W
Anode input power	$W_{i_a}$	=	60	195	132	W
Anode dissipation	$W_a$	=	60	71	70	W
Output power in the load	$W_{\ell}$	=	-	110	110 <sup>3)</sup>	W
Efficiency	$\eta$	=	-	57	42	%
Intermodulation products						
third order	$d_3$	=	-	-	< 30	dB <sup>4)</sup>
fifth order	$d_5$	=	-	-	< 40	dB <sup>4)</sup>

1)2)3)4) See page 4

**R. F. CLASS AB LINEAR AMPLIFIER** , single sideband, suppressed carrier  
(continued)

**OPERATING CONDITIONS**(continued)

Frequency	$f$	=	60	MHz
Anode voltage	$V_a$	=	600	V
Grid No.2 voltage	$V_{g_2}$	=	250	V
Grid No.1 voltage	$V_{g_1}$	=	-50	V <sup>1)</sup>
			<div style="display: flex; justify-content: space-around; border-top: 1px solid black; border-bottom: 1px solid black;"> <span>zero signal</span> <span>single tone signal</span> <span>double tone signal</span> </div>	
Peak driving voltage	$V_{g_{1p}}$	=	0      50      50	V
Anode current	$I_a$	=	100    325    220	mA
Grid No.2 current	$I_{g_2}$	=	3      22      12	mA
Grid No.1 current	$I_{g_1}$	=	0      0      0	mA <sup>2)</sup>
Grid No.2 dissipation	$W_{g_2}$	=	0.75    7      3.5	W
Driving power	$W_{dr}$	=	-      2      2	W
Anode input power	$W_{i_a}$	=	60    195    132	W
Anode dissipation	$W_a$	=	60    75      72	W
Output power in the load	$W_\ell$	=	-      100    100 <sup>3)</sup>	W
Efficiency	$\eta$	=	-      51      38	%
Intermodulation products				
third order	$d_3$	=	-      -      < 30	dB <sup>4)</sup>
fifth order	$d_5$	=	-      -      < 40	dB <sup>4)</sup>

1) To be adjusted for the stated value of the zero-signal anode current.

2) Due to transit-time effects this value can differ from 0 mA and vary between +1 mA and -1 mA. This value will increase with increasing frequency.

3) Peak envelope power.

4) Maximum values encountered at any level of drive voltage referred to the amplitude of either of the two equal tones at that level.

Relative to the peak envelope power these figures will be increased by 6 dB.



## A.F. CLASS AB AMPLIFIER AND MODULATOR



## LIMITING VALUES (Absolute limits)

Anode voltage	$V_a$	=	max.	750	V
Anode current	$I_a$	=	max.	350	mA
Anode dissipation	$W_a$	=	max.	75	W
Grid No.2 voltage	$V_{g2}$	=	max.	300	V
Grid No.2 dissipation	$W_{g2}$	=	max.	7.5	W
Negative grid No.1 voltage	$-V_{g1}$	=	max.	100	V
Grid No.1 current	$I_{g1}$	=	max.	10	mA
Grid No.1 circuit resistance	$R_{g1}$	=	max.	10	k $\Omega$

## OPERATING CONDITIONS, two tubes in push-pull

Anode voltage	$V_a$	=	600	V	
Grid No.2 voltage	$V_{g2}$	=	250	V	
Grid No.1 voltage	$V_{g1}$	=	-50	V <sup>1)</sup>	
Load resistance	$R_{aa\sim}$	=	2.8	k $\Omega$	
Peak driving voltage	$V_{g1g1p}$	=	0	100	V
Anode current	$I_a$	=	2x100	2x260	mA
Grid No.2 current	$I_{g2}$	=	2x3	2x24	mA
Grid No.1 current	$I_{g1}$	=	0	0	mA
Grid No.2 dissipation	$W_{g2}$	=	2x0.75	2x6	W
Anode input power	$W_{i_a}$	=	2x60	2x156	W
Anode dissipation	$W_a$	=	2x60	2x56	W
Output power	$W_o$	=	0	200	W
Efficiency	$\eta$	=	-	64	%
Total harmonic distortion	$dt_{tot}$	=	-	< 2	%

1) To be adjusted for the stated value of the zero-signal anode current

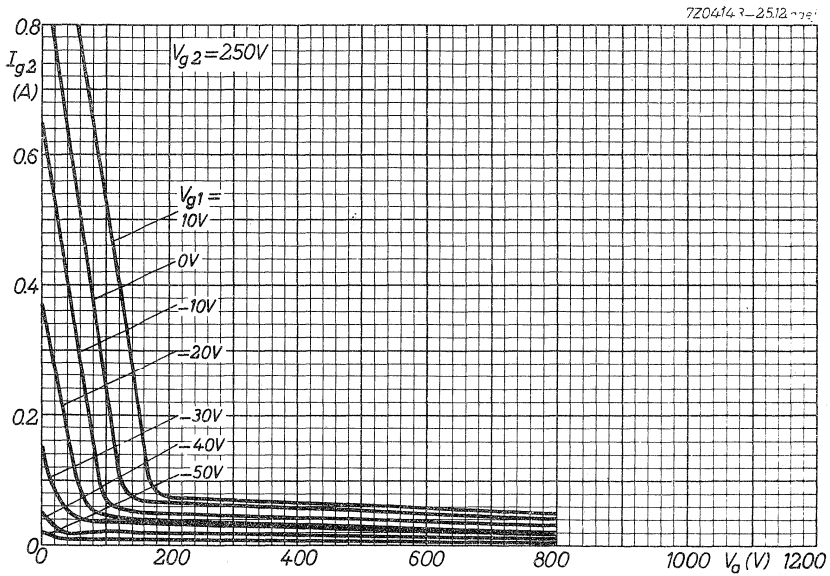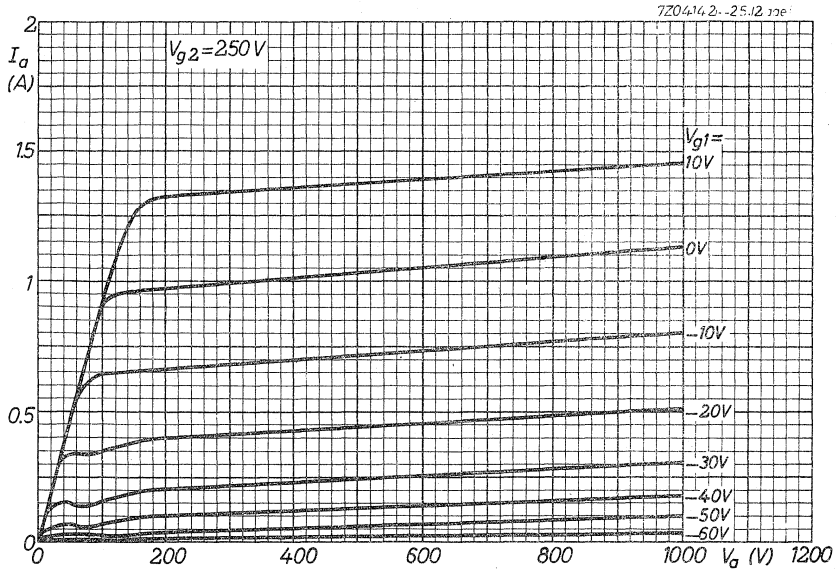

## AIR COOLED R.F. POWER TETRODE

Forced air cooled power tetrode in coaxial metal-glass construction intended for use as S.S.B. amplifier and amplifier in T.V. transmitters.

QUICK REFERENCE DATA				
Frequency (MHz)	S.S.B.		Class B television service	
	$V_a$ (kV)	$W_f$ (kW)	$V_a$ (kV)	$W_f$ sync (kW)
30	4.5	3		
230			4	5.5

**HEATING:** Direct; filament thoriated tungsten

Filament voltage	$V_f$	5 V
Filament current	$I_f$	64 A

### CAPACITANCES

Anode to all except grid No.1	$C_a(g_1)$	14 pF
Grid No.1 to all except anode	$C_{g_1(a)}$	78 pF
Anode to grid No.1	$C_{ag_1}$	0.23 pF

### TYPICAL CHARACTERISTICS

Anode voltage	$V_a$	3 kV
Grid No.2 voltage	$V_{g_2}$	600 V
Anode current	$I_a$	1 A
Transconductance	S	22 mA/V
Amplification factor	$\mu_{g_2g_1}$	5.2

**TEMPERATURE LIMITS AND COOLING**

Absolute max. envelope temperature

$t_{env}$  max. 220 °C

Cooling data

$W_a$ (kW)	$h$ (m)	$t_i$ (°C)	$q$ ( $m^3/min.$ )	$p_i$ mm H <sub>2</sub> O
2.5	0	25	2.7	50
4	0	25	4.3	130

See also cooling curve.

A low velocity air flow ( $> 0.5 m^3/min$ ) should be directed to the filament and grid seals.

**MECHANICAL DATA**


Dimensions in mm

Mounting position: vertical, anode up or down

Net weight: approx. 2.5 kg

Accessories:

- Filament connector (one required) type 40721
- Grid No.1 connector type 40722
- Grid No.2 connector type 40723
- Insulating pedestal type 40724

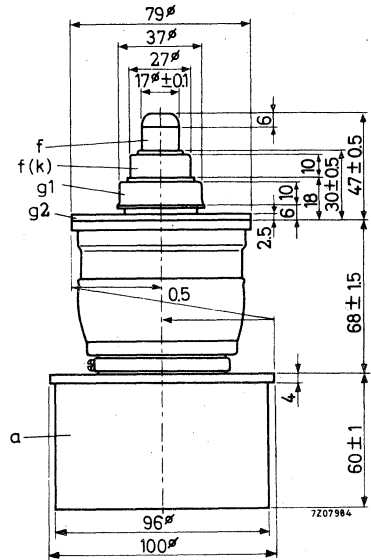

**H.F. CLASS AB LINEAR POWER AMPLIFIER, SINGLE SIDE BAND, suppressed carrier.**

**LIMITING VALUES** (Absolute max. rating system)

Frequency	f	max.	30	MHz
Anode voltage	$V_a$	max.	6	kV
Grid No.2 voltage	$V_{g2}$	max.	800	V
Grid No.1 voltage	$-V_{g1}$	max.	400	V
Anode current	$I_a$	max.	2.5	A
Grid No.1 current	$I_{g1}$	max.	0.2	A
Anode input power	$W_{i_a}$	max.	8	kW
Anode dissipation	$W_a$	max.	4	kW
Grid No.2 dissipation	$W_{g2}$	max.	120	W
Grid No.1 dissipation	$W_{g1}$	max.	40	W

**OPERATING CONDITIONS**

Frequency	f	30	MHz	
Anode voltage	$V_a$	4.5	kV	
Grid No.2 voltage	$V_{g2}$	800	V	
Grid No.1 voltage	$V_{g1}$	-140	V <sup>1)</sup>	
		zero signal	single tone	double tone
Grid No.1 driving voltage	$V_{g1p}$	0	140	140 V
Anode current	$I_a$	0.5	1.33	0.93 A
Grid No.2 current	$I_{g2}$	0	30	8 mA
Grid No.1 current	$I_{g1}$	0	0	0 mA
Anode input power	$W_{i_a}$	2.25	6	4.2 kW
Anode dissipation	$W_a$	2.25	2.8	2.6 kW
Grid No.2 dissipation	$W_{g2}$	0	24	6.4 W
Driver output power	$W_{dr}$	0	30	30 W <sup>3)</sup>
Output power in load (P.E.P.)	$W_l$		3	3 kW <sup>2)</sup>

1) Adjust to give the zero signal anode current.

2) Measured in a circuit having an efficiency of 95%.

3) The indicated driver output power is required to take care of losses in damping resistors and circuit losses.

**R.F. CLASS B TELEPHONY FOR TELEVISION SERVICE**; linear grounded-grid amplifier. Negative modulation, positive synchronisation (CCIR and FCC system)

**LIMITING VALUES** (Absolute max. rating system)


Frequency	f	max. 230 MHz
Anode voltage	$V_a$	max. 4.2 kV
Grid No.2 voltage	$V_{g2}$	max. 800 V
Grid No.1 voltage	$-V_{g1}$	max. 400 V
Anode current	$I_a$	max. 2.5 A
Grid No.1 current	$I_{g1}$	max. 200 mA
Anode input power	$W_{i_a}$	max. 8 kW
Anode dissipation	$W_a$	max. 4 kW
Grid No.2 dissipation	$W_{g2}$	max. 100 W
Grid No.1 dissipation	$W_{g1}$	max. 30 W

**OPERATING CONDITIONS**


Frequency	f	230 MHz
Bandwidth (-3 dB)	B (-3 dB)	10 MHz <sup>1)</sup>
Anode voltage	$V_a$	4 kV
Grid No.2 voltage	$V_{g2}$	600 V
Grid No.1 voltage	$V_{g1}$	-115 V
Input A.C. voltage, peak	$V_{g1p}$ sync	280 V
Anode current	$I_a$ black	1.5 A
Grid No.2 current	$I_{g2}$ black	40 mA
Grid No.1 current	$I_{g1}$ black	60 mA
Driver output power	$W_{dr}$ sync	550 W
Output power in load	$W_l$ sync black	5.5 kW <sup>2)</sup> 3 kW <sup>2)</sup>
Anode dissipation	$W_a$ black	3 kW

<sup>1)</sup> Bandwidth obtained with secondary circuit.

<sup>2)</sup>  $W_l$  represents the useful power in the load inclusive feedthrough power and assumes a circuit transfer efficiency of 90%.

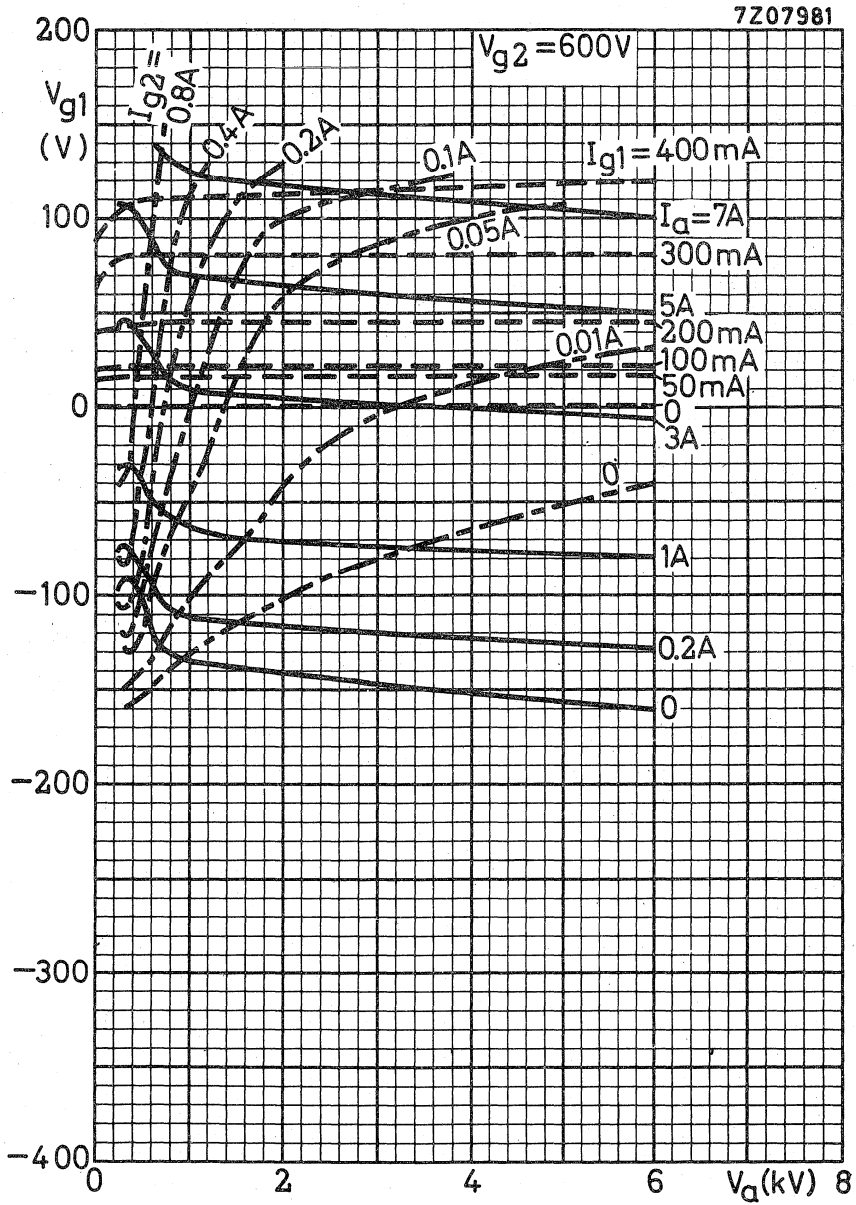


7Z07982

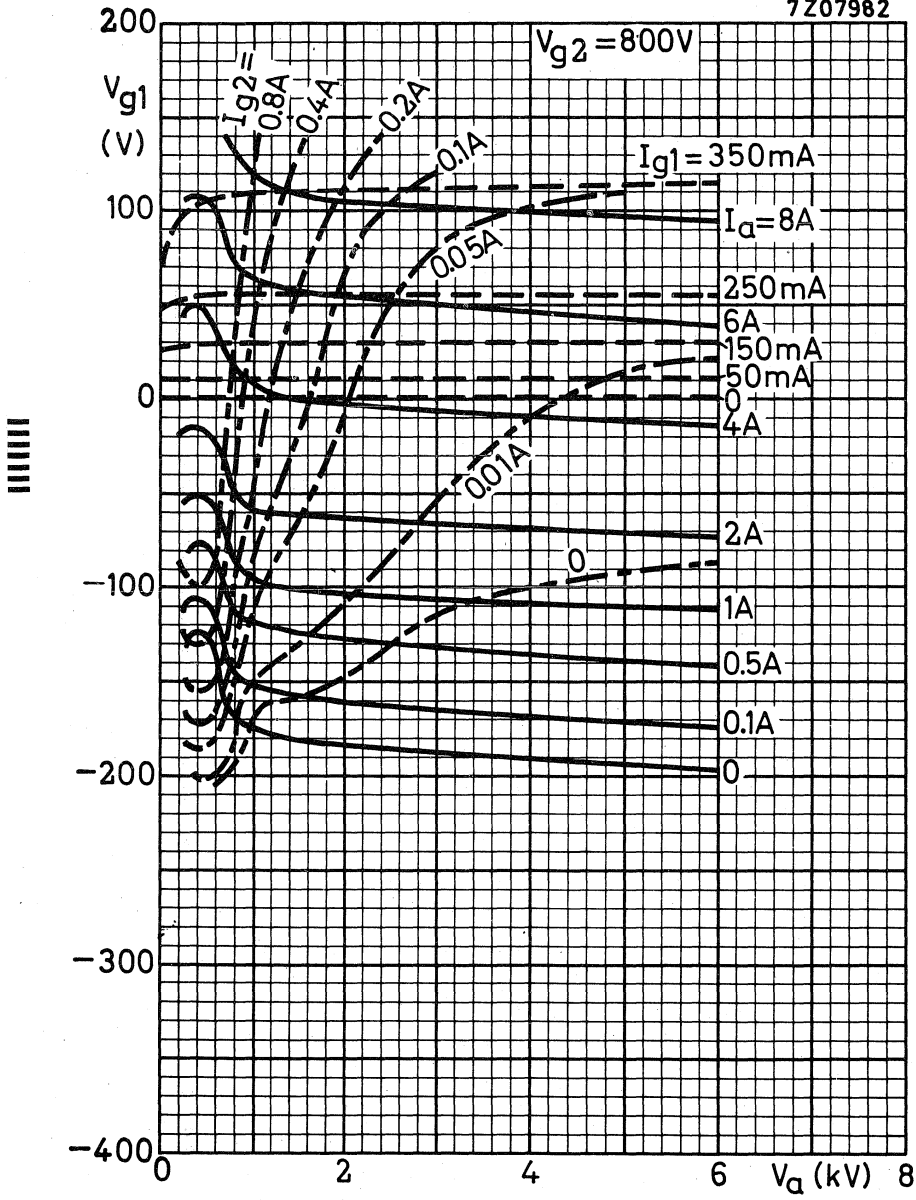



7Z07983

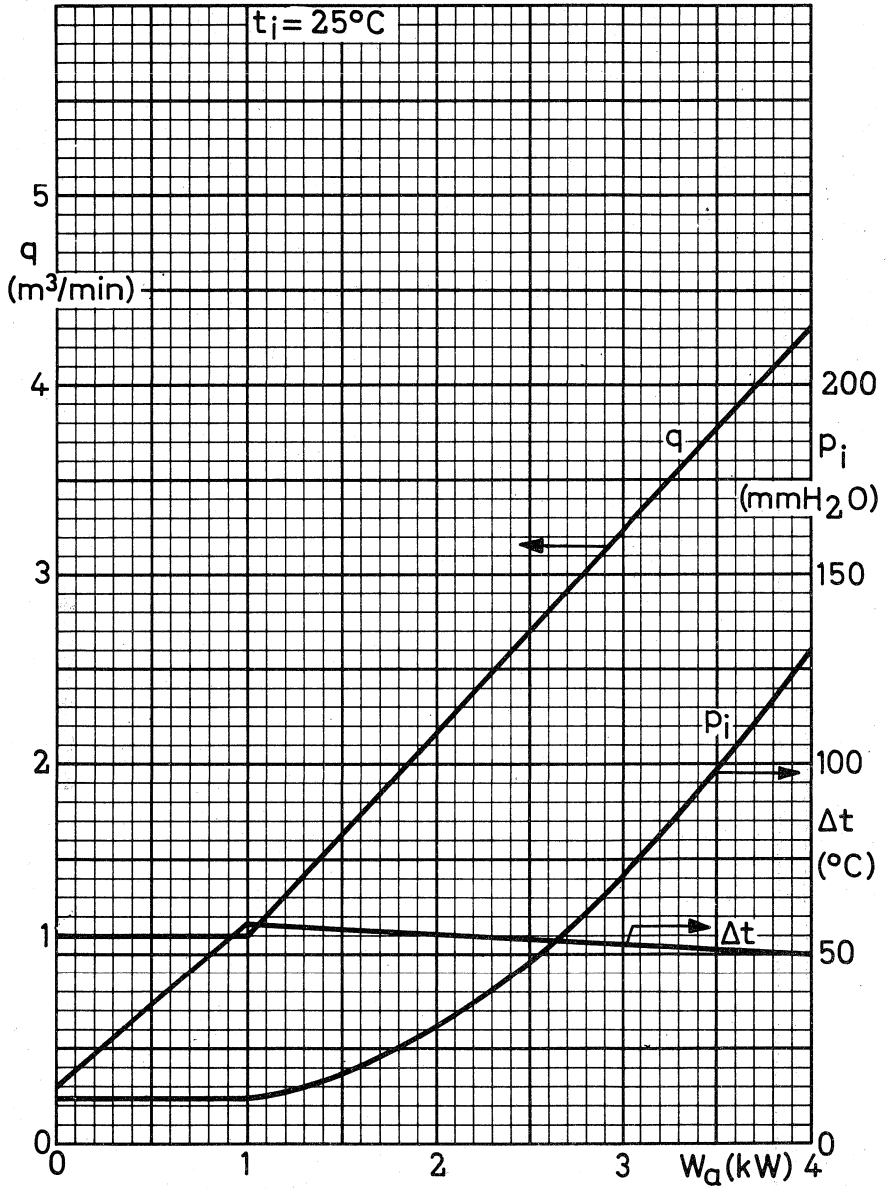



## VAPOUR COOLED R.F. POWER TETRODE

Vapour cooled power tetrode in coaxial metal-glass construction intended for use as S.S.B. amplifier and amplifier in T.V. transmitters.

QUICK REFERENCE DATA				
Frequency (MHz)	S.S.B.		Class B television service	
	$V_a$ (kV)	$W_\ell$ (kW)	$V_a$ (kV)	$W_\ell$ sync (kW)
30	4.5	3		
230			4	5.5

**HEATING:** Direct; filament thoriated tungsten

Filament voltage  $V_f$  5 V

Filament current  $I_f$  64 A

### CAPACITANCES

Anode to all except grid No.1  $C_a(g_1)$  14 pF

Grid No.1 to all except anode  $C_{g_1(a)}$  78 pF

Anode to grid No.1  $C_{ag_1}$  0.23 pF

### TYPICAL CHARACTERISTICS

Anode voltage  $V_a$  3 kV

Grid No.2 voltage  $V_{g_2}$  600 V

Anode current  $I_a$  1 A

Transconductance  $S$  22 mA/V

Amplification factor  $\mu_{g_2g_1}$  5.2

**TEMPERATURE LIMITS AND COOLING**

Absolute max. envelope temperature  $t_{env}$  max. 220 °C

A low velocity air flow ( $> 0.5 \text{ m}^3/\text{min}$ ) should be directed to the filament and grid seals.

**MECHANICAL DATA**


Dimensions in mm

Mounting position: vertical, anode down

Net weight: approx. 1.7 kg

Accessories

- Filament connector (one required) type 40721
- Grid No.1 connector type 40722
- Grid No.2 connector type 40723
- Boiler type K 731

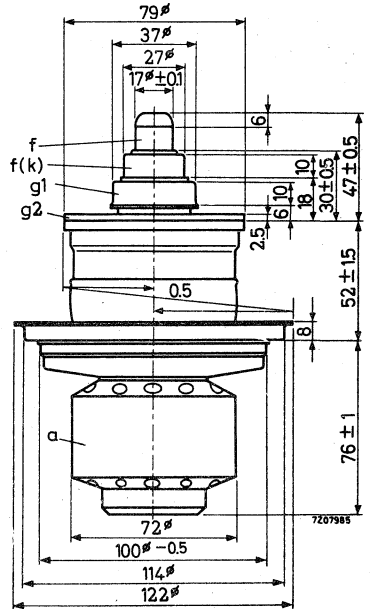

**H.F. CLASS AB LINEAR POWER AMPLIFIER, SINGLE SIDE BAND, suppressed carrier.**

**LIMITING VALUES (Absolute max. rating system)**

Frequency	f	max. 30	MHz
Anode voltage	$V_a$	max. 6	kV
Grid No.2 voltage	$V_{g2}$	max. 800	V
Grid No.1 voltage	$-V_{g1}$	max. 400	V
Anode current	$I_a$	max. 2.5	A
Anode input power	$W_{i_a}$	max. 8	kW
Anode dissipation	$W_a$	max. 6	kW
Grid No.2 dissipation	$W_{g2}$	max. 120	W
Grid No.1 dissipation	$W_{g1}$	max. 40	W

**OPERATING CONDITIONS**

Frequency	f	30	MHz
Anode voltage	$V_a$	4.5	kV
Grid No.2 voltage	$V_{g2}$	800	V
Grid No.1 voltage	$V_{g1}$	-140	V <sup>1)</sup>
		zero signal	single tone
Grid No.1 driving voltage	$V_{g1p}$	0	140 V
Anode current	$I_a$	0.5	1.33 0.93 A
Grid No.2 current	$I_{g2}$	0	30 8 mA
Grid No.1 current	$I_{g1}$	0	0 0 mA
Anode input power	$W_{i_a}$	2.25	6 4.2 kW
Anode dissipation	$W_a$	2.25	2.8 2.6 kW
Grid No.2 dissipation	$W_{g2}$	0	24 6.4 W
Driver output power	$W_{dr}$	0	30 30 W <sup>3)</sup>
Output power in load (P.E.P.)	$W_l$	-	3 3 kW <sup>2)</sup>

1) Adjust to give the zero signal anode current.

2) Measured in a circuit having an efficiency of 95%.

3) The indicated driver output power is required to take care of losses in damping resistors and circuit losses.

**R.F. CLASS B TELEPHONY FOR TELEVISION SERVICE** ; linear grounded-grid amplifier.

Negative modulation, positive synchronisation (CCIR and FCC system)

**LIMITING VALUES** (Absolute max. rating system)


Frequency	$f$	max. 230 MHz
Anode voltage	$V_a$	max. 4.2 kV
Grid No. 2 voltage	$V_{g2}$	max. 800 V
Grid No. 1 voltage	$-V_{g1}$	max. 400 V
Anode current	$I_a$	max. 2.5 A
Grid No. 1 current	$I_{g1}$	max. 0.2 A
Anode input power	$W_{i_a}$	max. 8 kW
Anode dissipation	$W_a$	max. 6 kW
Grid No. 2 dissipation	$W_{g2}$	max. 100 W
Grid No. 1 dissipation	$W_{g1}$	max. 30 W


**OPERATING CONDITIONS**

Frequency	$f$	230 MHz
Bandwidth (-3 dB)	$B$ (-3 dB)	10 MHz <sup>1)</sup>
Anode voltage	$V_a$	4 kV
Grid No. 2 voltage	$V_{g2}$	600 V
Grid No. 1 voltage	$V_{g1}$	-115 V
Input A.C. voltage, peak	$V_{g1p}$ sync	280 V
Anode current	$I_a$ black	1.5 A
Grid No. 2 current	$I_{g2}$ black	40 mA
Grid No. 1 current	$I_{g1}$ black	60 mA
Driver output power	$W_{dr}$ sync	550 W
Output power in load	$W_l$ sync black	5.5 kW <sup>2)</sup> 3 kW <sup>2)</sup>
Anode dissipation	$W_a$ black	3 kW

<sup>1)</sup> Bandwidth obtained with secondary circuit.

<sup>2)</sup>  $W_l$  represents the useful power in the load inclusive feedthrough power and assumes a circuit transfer efficiency of 90%.

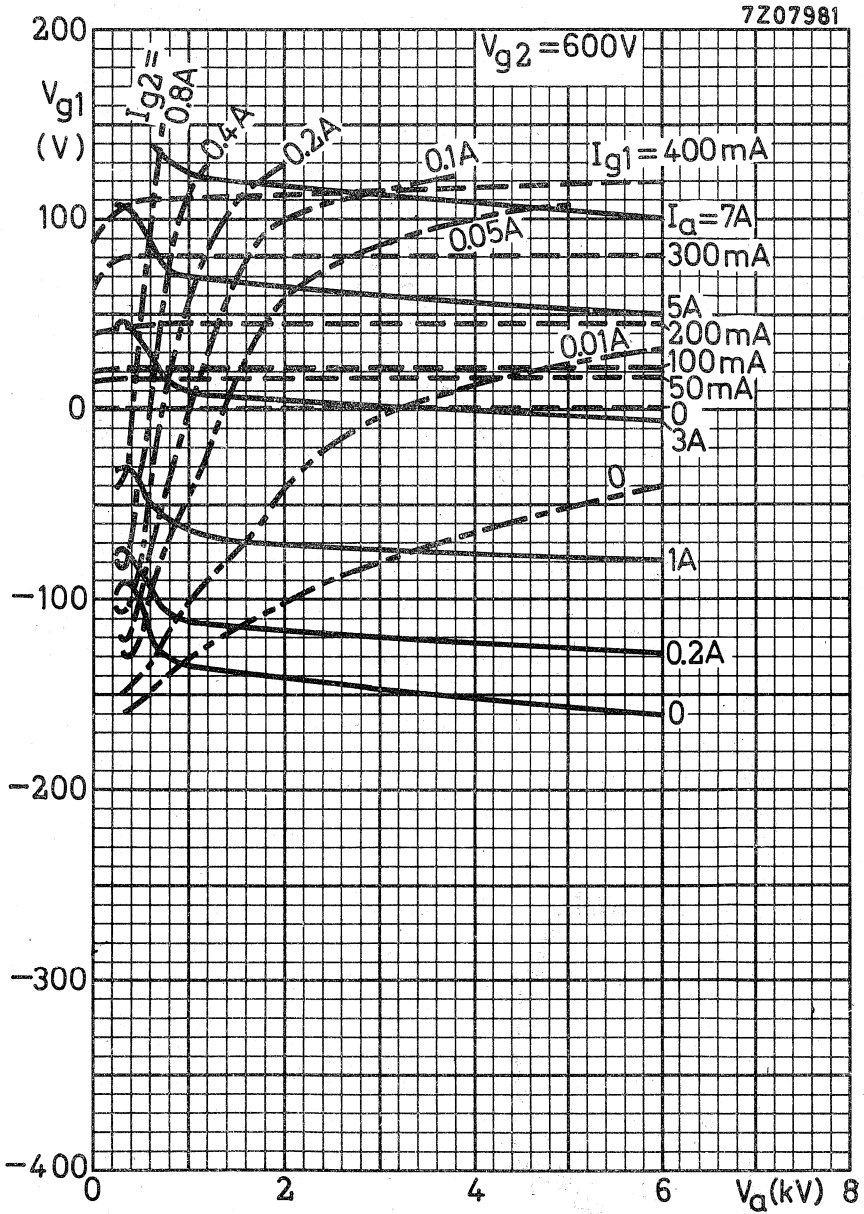

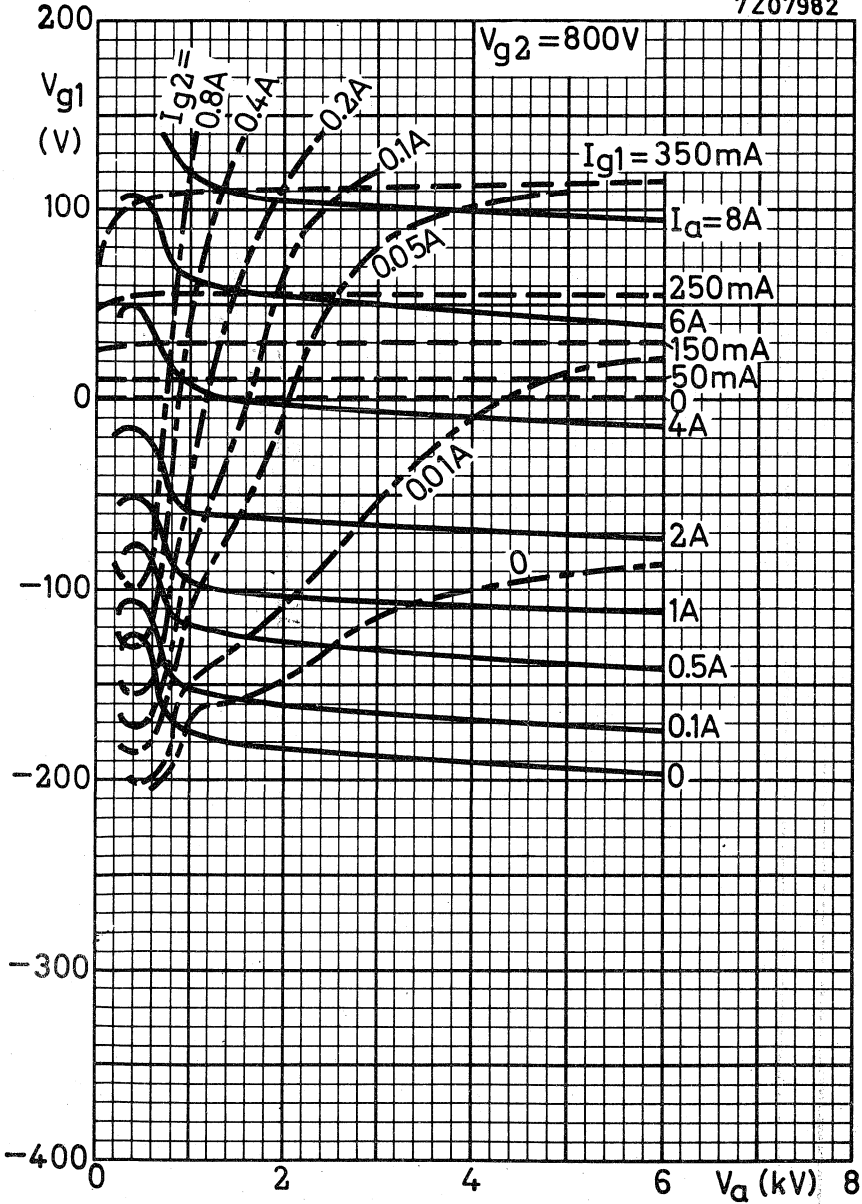



## QUICK HEATING R.F. DOUBLE TETRODE

Radiation and convection cooled double tetrode intended for use as RF amplifier and frequency multiplier up to 500 MHz, designed for intermittent filament operation in transistorized mobile transmitters.

QUICK REFERENCE DATA					
RF class C telegraphy	f	200 MHz	$V_a$	350 V	
	$W_{dr}$	1.0 W	$W_l$	26 W	
RF class C telegraphy	f	500 MHz	$V_a$	250 V	
	$W_{dr}$	2.5 W	$W_l$	14.5 W	
RF class C frequency multiplier	f	167/500 MHz	$V_a$	250 V	
	$W_{dr}$	2.2 W	$W_l$	2.5 W	
RF class C $a/g_2$ mod.	f	175 MHz	$V_a$	280 V	
	$W_{dr}$	1.5 W	$W_l$	15 W	

**FILAMENT** oxide coated

**HEATING:** Direct by A.C. or D.C.; series and parallel supply

The frequency of A.C. filament supply may be:

sinusoidal supply voltage max. 200 Hz

square wave supply voltage: any

Filament voltage  $V_f$  1.1 V  $\pm 15\%$

Filament current  $I_f$  4.2 A

Heating time for  $W_o = 70\%$  of  $W_o \text{ max.}$  max. 0.5 s

### CAPACITANCES

Units in push-pull



Input  $C_i$  4.7 pF

Output  $C_o$  1.2 pF

The tube is internally neutralized for frequencies up to 500 MHz

**DIMENSIONS AND CONNECTIONS**

Base: Magnoval

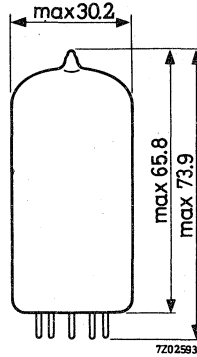

**TYPICAL CHARACTERISTICS, each unit**

Amplification factor

at  $V_a = 150 \text{ V}$ ,  $V_{g2} = 150 \text{ V}$ ,  $I_a = 45 \text{ mA}$   $\mu_{g2g1} \quad 20$

Transconductance

at  $V_a = 150 \text{ V}$ ,  $V_{g2} = 150 \text{ V}$ ,  $I_a = 45 \text{ mA}$   $S \quad 9.5 \text{ mA/V}$

**MOUNTING POSITION any**

If the tube is mounted with its main axis horizontally it is recommended that the pins 3 and 7 be in a horizontal plane.

**ACCESSORIES**

Socket: magnoval 2422 502 05001 or equivalent typesuitable for the high filament current.

Filament connections (tags 3-7 and 2-8) should be connected in parallel on the socket.

**WEIGHT**

Net weight 27 g

**TEMPERATURE LIMITS AND COOLING**

Radiation and convection cooling. The use of a closed tube shield is not recommended.

Absolute maximum bulb temperature  $t_{bulb} \quad \text{max.} \quad 230 \text{ } ^\circ\text{C}$

**R.F. CLASS C TELEGRAPHY AND F.M. TELEPHONY**, two units in push-pull**LIMITING VALUES** (Absolute limits). Intermittent service, **ICAS**

Frequency	f	max.	200	500	MHz
Anode voltage	$V_a$	max.	400	300	V
Grid No.2 voltage	$V_{g_2}$	max.	200	200	V
Grid No.1 voltage	$-V_{g_1}$	max.	150	100	V
Anode current	$I_a$	max.	2x75	2x75	mA
Grid No.1 current	$I_{g_1}$	max.	2x7	2x7	mA
Anode input power	$W_{ia}$	max.	56	42	W
Anode dissipation	$W_a$	max.	2x8	2x8	W
Grid No.2 dissipation	$W_{g_2}$	max.	3.5	3.5	W
Grid No.1 circuit resistance	$R_{g_1}$	max.	100	100	k $\Omega$

**OPERATING CONDITIONS** Intermittent service, **ICAS**

Frequency	f	200	200	500	MHz
Anode voltage	$V_a$	350	350	260	V
Grid No.2 supply voltage	$V_{bg_2}$	350	350	260	V
Grid No.2 series resistor	$R_{g_2}$	9	9	4.3	k $\Omega$
Grid No.1 voltage	$V_{g_1}$	-26	-13	-22.5	V
Grid No.1 circuit resistance	$R_{g_1}$	4.7 <sup>1)</sup>	2 <sup>1)</sup>	6.9 <sup>2)</sup>	k $\Omega$
Driving voltage	$V_{g_1 g_1' p}$	85	85	65	V
Anode current	$I_a$	2x70	2x70	2x70	mA
Grid No.2 current	$I_{g_2}$	20	23.5	20	mA
Grid No.1 current	$I_{g_1}$	2x6.5	2x6.5	2x3.25	mA
Anode input power	$W_{ia}$	49	49	36.5	W
Anode dissipation	$W_a$	2x8	2x8	2x8	W
Grid No.2 dissipation	$W_{g_2}$	3.4	3.3	3.5	W
Driver output power	$W_{dr}$	1.0	1.0	2.5	W
Output power	$W_o$	33	33	19	W
Efficiency	$\eta$	67	67	52	%
Output power in load	$W_\ell$	26	26	14	W <sup>3)</sup>

1) Common for both units.

2) It is recommended to use two fixed resistors, one for each unit, in series with a common adjustable resistor.

3) For optimal conditions  $R_{g_1}$  should be adjusted to obtain the desired anode current.

**R.F. CLASS C FREQUENCY TRIPLER**, two units in push-pull**LIMITING VALUES** (Absolute limits). Intermittent service, **ICAS**

Frequency	$f$	max.	500	MHz
Anode voltage	$V_a$	max.	300	V
Grid No.2 voltage	$V_{g2}$	max.	200	V
Grid No.1 voltage	$-V_{g1}$	max.	150	V
Anode current	$I_a$	max.	2x50	mA
Grid No.1 current	$I_{g1}$	max.	2x3	mA
Anode input power	$W_{ia}$	max.	27	W
Anode dissipation	$W_a$	max.	2x8	W
Grid No.2 dissipation	$W_{g2}$	max.	3.5	W
Grid No.1 circuit resistance	$R_{g1}$	max.	100	k $\Omega$

**OPERATING CONDITIONS** Intermittent service, **ICAS**

Frequency	$f$	167/500	MHz
Anode voltage	$V_a$	250	V
Grid No.2 supply voltage	$V_{bg2}$	250	V
Grid No.2 series resistor	$R_{g2}$	5.6	k $\Omega$
Grid No.1 circuit resistance-each unit	$R_{g1}$	27	k $\Omega$ <sup>1)</sup>
Driving voltage	$V_{g1g1'p}$	170	V
Anode current	$I_a$	2x45	mA
Grid No.2 current	$I_{g2}$	14	mA
Grid No.1 current	$I_{g1}$	2x2.5	mA
Anode input power	$W_{ia}$	22.5	W
Anode dissipation	$W_a$	2x8	W
Grid No.2 dissipation	$W_{g2}$	2.4	W
Driver output power	$W_{dr}$	2.2	W
Output power	$W_o$	6.5	W
Efficiency	$\eta$	29	%
Output power in load	$W_l$	3	W <sup>2)</sup>

1) It is recommended to use two fixed resistors, one for each unit, in series with a common adjustable resistor.



2) For optimal conditions  $R_{g1}$  should be adjusted to obtain the desired anode current.

**R.F. CLASS C ANODE AND SCREEN GRID MODULATION**, two units in push-pull**LIMITING VALUES** (Absolute limits). Intermittent service, **ICAS**

Frequency	f	max.	200	500	MHz
Anode voltage	$V_a$	max.	330	260	V
Grid No. 2 voltage	$V_{g2}$	max.	200	200	V
Grid No. 1 voltage	$-V_{g1}$	max.	150	150	V
Anode current	$I_a$	max.	2x56	2x56	mA
Grid No. 1 current	$I_{g1}$	max.	2x5	2x5	mA
Anode input power	$W_{ia}$	max.	40	40	W
Anode dissipation	$W_a$	max.	2x5.5	2x5.5	W
Grid No. 2 dissipation	$W_{g2}$	max.	2x1.5	2x1.5	W
Grid No. 1 circuit resistance	$R_{g1}$	max.	100	100	k $\Omega$

**OPERATING CONDITIONS ;** intermittent service, **ICAS**

Frequency	f		175	500	MHz
Anode voltage	$V_a$		280	225	V
Grid No. 2 voltage	$V_{g2}$		150	150	V
Grid No. 1 voltage	$-V_{g1}$		35	25	V
Anode current	$I_a$		2x50	2x50	mA
Grid No. 2 current	$I_{g2}$		19	17	mA
Grid No. 1 current	$I_{g1}$		2x4	2x3	mA
Anode input power	$W_{ia}$		28	22.5	W
Anode dissipation	$W_a$		2x4.5	2x4.5	W
Driver output power	$W_{dr}$		1.5	3.0	W
Output power	$W_o$		19	13	W
Efficiency	$\eta$		68	58	%
Output power in load	$W_l$		15	10	W
Depth of modulation	m		100	100	%
Modulator output power	$W_o \text{ mod}$		16	12.5	W
Grid No. 2 peak modulator voltage	$V_{g2p \text{ mod}}$		120	120	V

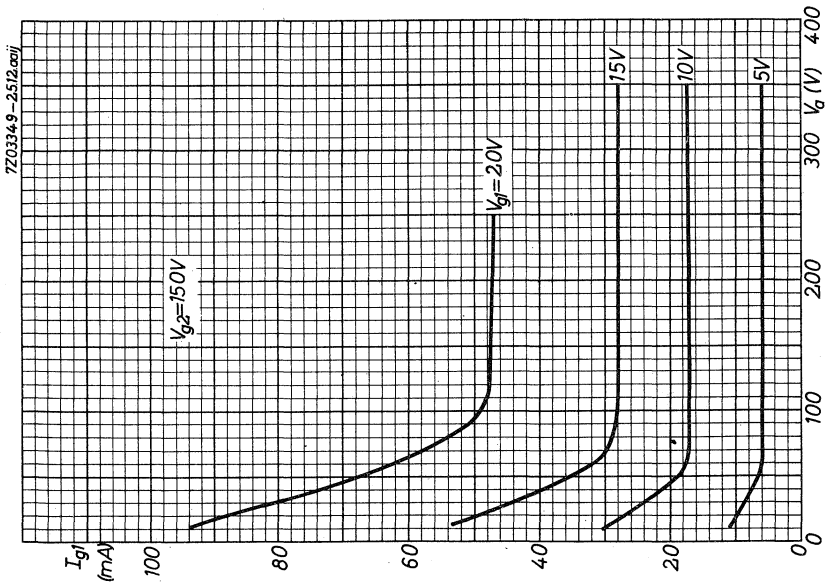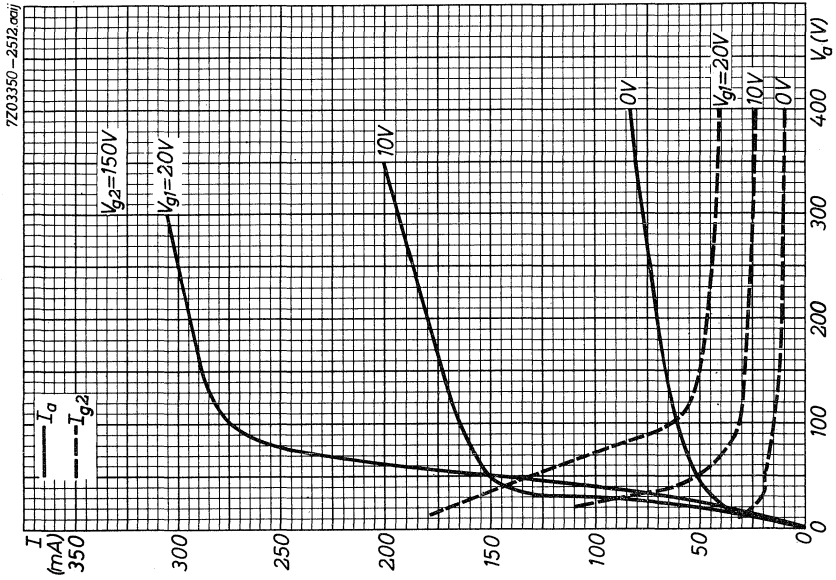

## R.F. POWER PENTODE

### QUICK REFERENCE DATA

Heater voltage	$V_f$	=	12.6 V
Amplification factor	$\mu_{g_2g_1}$	=	6.7
Mutual conductance	S	=	6 mA/V

**HEATING:** indirect by A. C. or D. C.; parallel supply  
Cathode oxide coated

Heater voltage	$V_f$	=	12.6 V
Heater current	$I_f$	=	1.3 A

### CAPACITANCES

Grid No. 1 to all other elements except anode	$C_{g_1}$	=	20.5 pF
Anode to all other elements except grid No. 1	$C_a$	=	12 pF
Anode to grid No. 1	$C_{ag_1}$	=	0.1 pF

### TYPICAL CHARACTERISTICS

Anode voltage	$V_a$	=	1000 V
Grid No. 2 voltage	$V_{g_2}$	=	250 V
Anode current	$I_a$	=	40 mA
Amplification factor	$\mu_{g_2g_1}$	=	6.7
Mutual conductance	S	=	6 mA/V

### TEMPERATURE LIMITS (Absolute limits)

Bulb temperature	=	max. 300 °C
Pin seal temperature	=	max. 180 °C




### COOLING

Radiation and convection

**MECHANICAL DATA**

Base : Septar  
 Socket : 2422 513 00001  
 Net weight : 80 g

Dimensions in mm



Mounting position: any

**LIMITING VALUES** (Absolute limits)

Anode voltage without cathode current	$V_{a0}$	= max.	3 kV
Anode voltage at $W_a = 45$ W	$V_a$	= max.	1 kV
Anode dissipation	$W_a$	= max.	45 W
Positive grid No. 3 voltage	$V_{g3}$	= max.	200 V
Negative grid No. 3 voltage	$-V_{g3}$	= max.	200 V
Grid No. 3 dissipation	$W_{g3}$	= max.	1 W
Grid No. 3 circuit resistance	$R_{g3}$	= max.	50 k $\Omega$
Grid No. 2 voltage without cathode current	$V_{g20}$	= max.	1 kV
Grid No. 2 voltage at $W_{g2} = 7$ W	$V_{g2}$	= max.	300 V
Grid No. 2 dissipation	$W_{g2}$	= max.	7 W
Negative grid No. 1 voltage	$-V_{g1}$	= max.	300 V
Grid No. 1 dissipation	$W_{g1}$	= max.	0.5 W
Grid No. 1 circuit resistance	$R_{g1}$	= max.	25 k $\Omega$
Average cathode current	$I_k$	= max.	240 mA
Peak cathode current	$I_{kp}$	= max.	1.5 A
Cathode to heater voltage	$V_{kf}$	= max.	100 V
Heater voltage	$V_f$	= max.	13.9 V
		= min.	11.3 V



## CHARACTERISTICS AND RANGE VALUES

Column I : Setting of the tube and typical (average) measuring results of new tubes

II : Characteristic range values for equipment design

III : Data indicating the end point of life

<u>Heater current</u>		I	II	III
Heater voltage	$V_f$	= 12.6		V
Heater current	$I_f$	= 1.3	1.1-1.5	1.1-1.5 A
<u>Characteristics</u>				
Heater voltage	$V_f$	= 12.6		V
Anode voltage	$V_a$	= 100		V
Grid No.3 voltage	$V_{g_3}$	= 0		V
Grid No.2 voltage	$V_{g_2}$	= 250		V
Anode current	$I_a$	= 100		mA
Grid No.1 voltage	$-V_{g_1}$	= 18	14 - 20	12 - 22 V
Grid No.2 current	$I_{g_2}$	=	12 - 25	8 - 30 mA
Grid No.1 current	$-I_{g_1}$	=		20 $\mu$ A
<u>Cut-off voltage</u>				
Heater voltage	$V_f$	= 12.6		V
Anode voltage	$V_a$	= 100		V
Grid No.3 voltage	$V_{g_3}$	= 0		V
Grid No.2 voltage	$V_{g_2}$	= 250		V
Anode current	$I_a$	= 0.2		mA
Cut-off voltage	$-V_{g_1}$	=	<60	65 V
<u>Capacitances</u>				
Anode to all other elements except grid No.1	$C_{a(g_1)}$	= 12	11 - 13	pF
Grid No.1 to all other elements except anode	$C_{g_1(a)}$	= 20.5	19 - 22	pF
Anode to grid No.1	$C_{ag_1}$	=	<0.22	pF

**CHARACTERISTICS AND RANGE VALUES (continued)**

Insulation between the electrodes

A leakage current of 10  $\mu$ A is not exceeded when the following voltages, with polarity as indicated are applied to the indicated electrodes via a series resistor of 10 M $\Omega$

	I	II	III
Grid No. 1 (-) to grids No. 2 and 3 and anode (+) $V_{g_1(-)/a, g_2, g_3(+)}$	= 1000		550 V
Grid No. 2 (+) to grid No. 3 (-) $V_{g_2(+)/g_3(-)}$	= 1000		550 V
Anode (+) to grid No. 3 (-) $V_{a(+)/g_3(-)}$	= 3000		1200 V
Cathode (+) to grid No. 1 (-) $V_{k(+)/g_1(-)}$	= 200		150 V

**LIFE EXPECTANCY**

3000 hours under the following conditions:

Heater voltage	$V_f$	= 12.6 V
Anode voltage	$V_a$	= 100 V
Grid No. 3 voltage	$V_{g_3}$	= 0 V
Grid No. 2 voltage	$V_{g_2}$	= 250 V
Grid No. 1 voltage	$V_{g_1}$	= -20 V
Grid No. 1 pulse voltage (pulse substantially square)	$V_{g_{1p}}$	= 40 V
Pulse repetition frequency	$f_{imp}$	= 80 Hz
Pulse duration	$T_{imp}$	= 8 ms

**AGEING**

In order to detect "early failures" and to ensure that the tubes are properly stabilised, all tubes are aged prior to testing during 200 hours under the following conditions:

Heater voltage	$V_f$	= 12.6 V
Anode current	$I_a$	= 70 mA
Anode dissipation	$W_a$	= 20 W
Peak anode voltage	$V_{ap}$	= 515 V

**STAND-BY PERFORMANCE** <sup>1)</sup>

After 200 hours of operation with  $V_f = 14$  V only, the tubes are criticised for Cathode interface resistance  $>10 \Omega$  (continuous wave method IEC Publ. 151-9, two frequency method)

**LIFE PERFORMANCE** <sup>1)</sup>

After 3000 hours of operation under the following conditions

Heater voltage	$V_f$	=	12.6	V
Anode voltage	$V_a$	=	100	V
Grid No.3 voltage	$V_{g3}$	=	0	V
Grid No.2 voltage	$V_{g2}$	=	250	V
Grid No.1 voltage	$V_{g1}$	=	-20	V
Grid No.1 pulse voltage (pulse substantially square)	$V_{g1p}$	=	40	V
Pulse repetition frequency	$f_{imp}$	=	80	Hz
Pulse duration	$T_{imp}$	=	8	ms

the tubes are criticised for

Inoperatives

Control grid voltage for cut-off

Control grid current

Leakage current

} See section  
"Characteristics and range values".

<sup>1)</sup> This test is performed on a sample taken from each production run.

**VIBRATIONAL NOISE OUTPUT 1)2)**



Conditions:


Anode voltage	$V_a = 100$	V
Grid No.2 voltage	$V_{g_2} = 150$	V
Grid No.3 voltage	$V_{g_3} = 0$	V
Anode current	$I_a = 10$	mA
Vibrational acceleration	$= 10$	g
Duration	$T = 60$	sec in each of the three directions
Frequency	$f = 25$	Hz $X_1, X_2$ and Y
Anode load resistance	$R_a = 2$	k $\Omega$

Limit of the vibrational noise output  $V_{noise} = \max. 750$  mV(RMS)**FATIGUE : 2.5 g 1)2)**Vibrational forces for a period of 32 hours at a frequency of 50 Hz in each of the three directions  $X_1, X_2$  and Y**VIBRATION: 5 g 1)2)**Vibrational forces for a period of 2 hours at a frequency of 25 Hz in each of the three directions  $X_1, X_2$  and Y

1) This test is performed on a sample taken from each production run.

2) These test conditions are only given for evaluation of the ruggedness of the tube and should by no means be interpreted as suitable operating conditions. Fatigue and vibration are destructive tests.

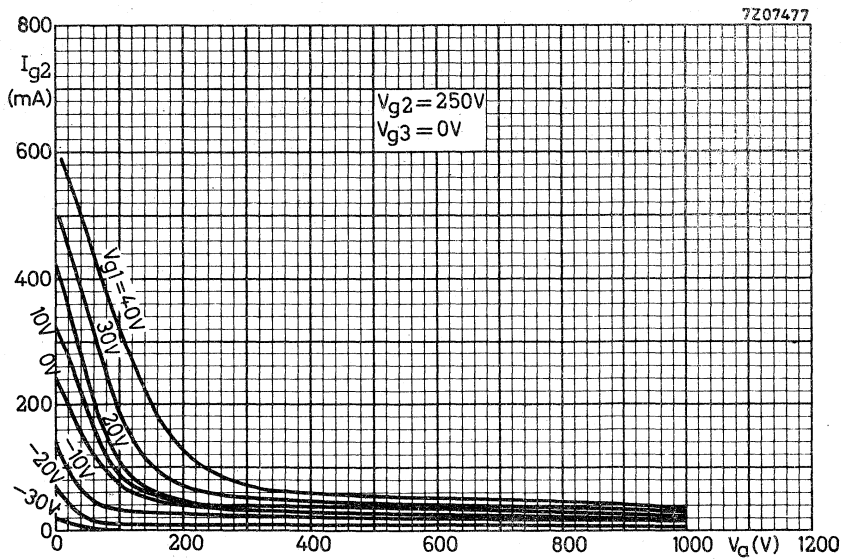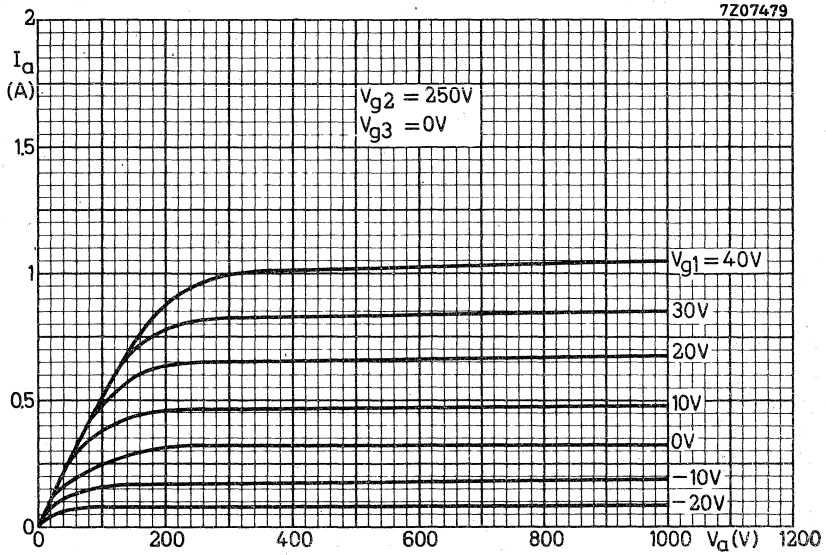

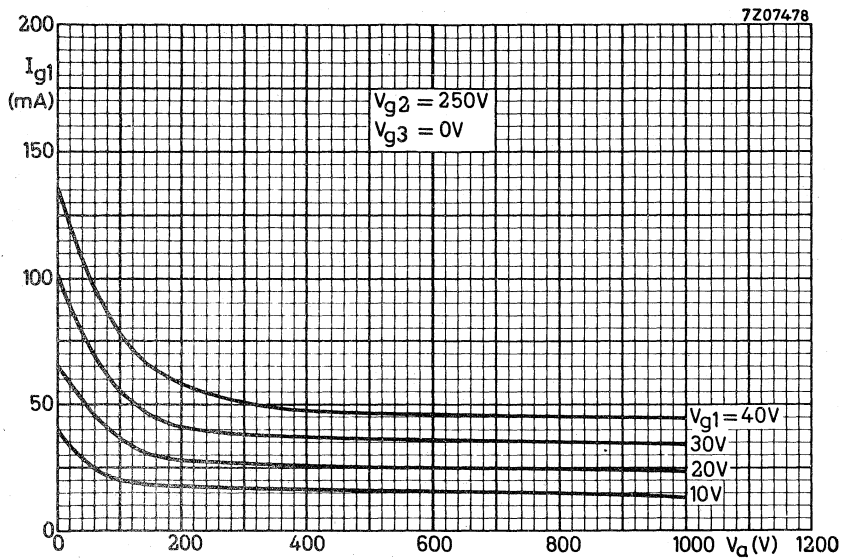

**R.F. DOUBLE TETRODE****HEATING:** indirect; cathode oxide coated

Heater voltage	$V_f =$	6.75 V	13.5 V
Heater current	$I_f =$	720 mA	360 mA
Pin connections		9-(4+5)	4-5

-----  
For further data and curves of this type  
please refer to type QQE03/12  
-----





**R.F. DOUBLE TETRODE****HEATING:** indirect; cathode oxide coated

Heater voltage	$V_f =$	6.75 V	13.5 V
Heater current	$I_f =$	560 mA	280 mA
Pin connections		9-(4+5)	4-5

-----  
For further data and curves of this type  
please refer to type QQE02/5  
-----



## AIR COOLED R.F. POWER TETRODE

QUICK REFERENCE DATA				
Freq. (MHz)	Class B amplifier		Class AB SSB	
	$V_a$ (V)	$W_{load}$ (W)	$V_a$ (V)	$W_o$ PEP (W)
220 30	3000	1000	3000	> 1050

**HEATING** : indirect by a. c. or d. c.; oxide -coated cathode, matrix type

Heater voltage	$V_f$	5.0	V $\pm$ 3%
Heater current	$I_f$	18	A
		< 20	A
Waiting time	$T_w$ min.	5	min

### CAPACITANCES

Anode to cathode and heater	$C_{a/kf}$	< 0.08	pF
Anode to grid no.1	$C_{ag1}$	< 0.1	pF
Anode to grid no.2	$C_{ag2}$	13 to 17	pF
Grid no.1 to cathode and heater	$C_{g1/kf}$	33 to 42	pF
Grid no1 to grid no.2	$C_{g1g2}$	48 to 64	pF
Grid no.2 to cathode and heater	$C_{g2/kf}$	< 1.7	pF

### TYPICAL CHARACTERISTICS

Anode voltage	$V_a$	3	kV
Grid no.2 voltage	$V_{g2}$	550	V
Anode current	$I_a$	500	mA
Transconductance	S	20	mA/V
Amplification factor	$\mu_{g2g1}$	7.5	

**TEMPERATURE LIMITS** (Absolute limits)

Temperature of all seals (see also outline drawing)  $t_s$  max. 200 °C  
 Air inlet temperature  $t_i$  max. 45 °C

**COOLING**

Forced air cooling for the anode. For cooling characteristics see page 5. Low velocity air flow for the ceramic to metal seals.  
 Cooling will also be necessary when only the heater voltage is applied to the tube.


**MECHANICAL DATA**

Dimensions in mm

Anode connector (for frequencies < 30MHz): 40689

Socket : 40704

Net weight : 90 g

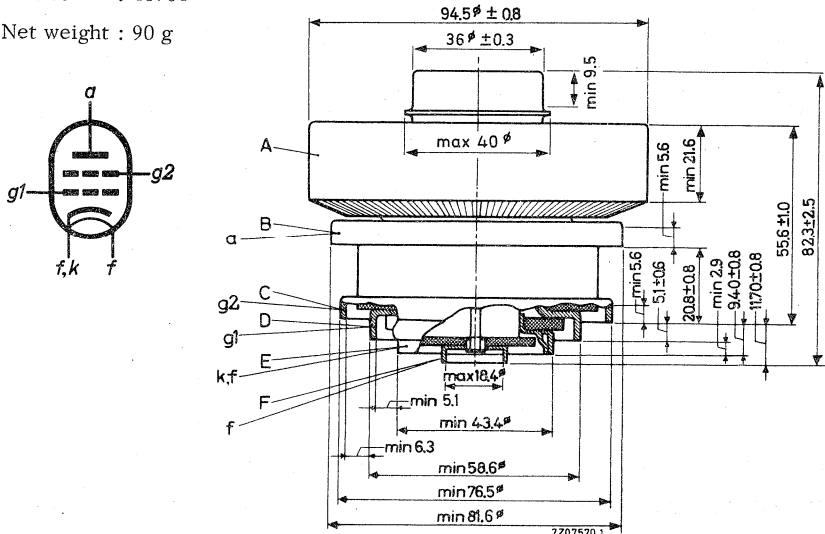

The radiator and the terminals lie inside or outside concentric cylinders with the following dimensions:

Radiator	A : inside	96.0 mm
Anode	B : inside	82.8 mm
Grid No.2 connection	C : inside	77.7 mm
Grid No.1 connection	D : inside	59.4 mm
Cathode and heater connection	E : inside	44.3 mm
Heater connection	F : outside	17.6 mm

Mounting position: any

## CLASS B AMPLIFIER

## LIMITING VALUES (Absolute limits)

Frequency	f	up to	220	MHz
Anode voltage	$V_a$	max.	3500	V
		max.	2500	V 1)
Anode input power	$W_{i_a}$	max.	3	kW
		max.	2	kW 1)
Anode dissipation	$W_a$	max.	1.5	kW
Anode current	$I_a$	max.	1	A
Grid No.2 voltage	$V_{g_2}$	max.	1000	V
Grid No.2 input power	$W_{i_{g_2}}$	max.	50	W
Grid No.2 current	$I_{g_2}$	max.	50	mA
	$-I_{g_2}$	max.	50	mA
Negative grid No.1 voltage	$-V_{g_1}$	max.	300	V
Grid No.1 current	$I_{g_1}$	max.	10	mA
Grid No.1 circuit resistance	$R_{g_1}$	max.	5	k $\Omega$

## OPERATING CHARACTERISTICS

Frequency	f	220	MHz
Anode voltage	$V_a$	3000	V
Grid No.2 voltage	$V_{g_2}$	450	V
Grid No.1 voltage	$V_{g_1}$	-60	V
Anode current	$I_a$	150	830 mA
Grid No.2 current	$I_{g_2}$	-5	-20 mA
Grid No.1 current	$I_{g_1}$	-	5 mA
Driver output power	$W_{dr}$	-	40 W
Anode input power	$W_{i_a}$	0.45	2.49 kW
Anode dissipation	$W_a$	0.45	1.35 kW
Output power in the load	$W_l$	0	1.0 kW

1) For AM.

**R.F. CLASS AB SINGLE SIDE BAND AMPLIFIER suppressed carrier**



**LIMITING VALUES (Absolute limits)**

Frequency	f	up to	60	MHz
Anode voltage	$V_a$	max.	3.5	kV
Anode input power	$W_{i_a}$	max.	3.0	kW
Anode dissipation	$W_a$	max.	1.5	kW
Anode current	$I_a$	max.	1.0	A
Grid No.2 voltage	$V_{g_2}$	max.	1	kV
Grid No.2 dissipation	$W_{i_{g_2}}$	max.	50	W
Grid No.2 current	$I_{g_2}$	max.	50	mA
	$-I_{g_2}$	max.	50	mA
Negative grid No.1 voltage	$-V_{g_1}$	max.	300	V
Grid No.1 current	$I_{g_1}$	max.	0	mA
Grid No.1 circuit resistance	$R_{g_1}$	max.	5	k $\Omega$


**OPERATING CONDITIONS**

Frequency	f	1 to 30	MHz	
Anode voltage	$V_a$	3.0	kV	
Grid No.2 voltage	$V_{g_2}$	560	V	
Grid No.1 voltage	$V_{g_1}$	-55	V	
		zero signal	single tone signal	double tone signal
Peak driving voltage	$V_{g_{1p}}$	0	48 (<53)	46 (<51) V
Anode current	$I_a$	380	750	570 mA
Grid No.2 current	$I_{g_2}$	-5	-20	-15 mA
Grid No.1 current	$I_{g_1}$	0	0	0 mA
Grid No.1 resistor	$R_{g_1}$	2	2	2 k $\Omega$
Driver output power	$W_{dr}$	0	< 5	< 5 W
Anode input power	$W_{i_a}$	1140	2250	1710 W
Anode dissipation	$W_a$	1140	1080	1100 W
Output power in load	$W_l$	0	1050	- W
PEP output power in load	$W_l$	0	-	1050 W
Intermodulation distortion				
1 MHz. of the 3rd order	$d_3$	-	-	< -38 dB 2)
of the 5th order	$d_5$	-	-	< -38 dB 2)
30 MHz. of the 3rd order	$d_3$	-	-	< -36 dB 2)
of the 5th order	$d_5$	-	-	< -36 dB 2)

2) Maximum values encountered at any level of drive voltage up to full drive referred to the amplitude of either of the two equal tones at that level.

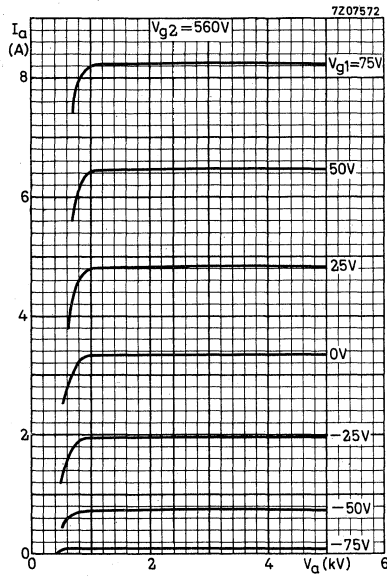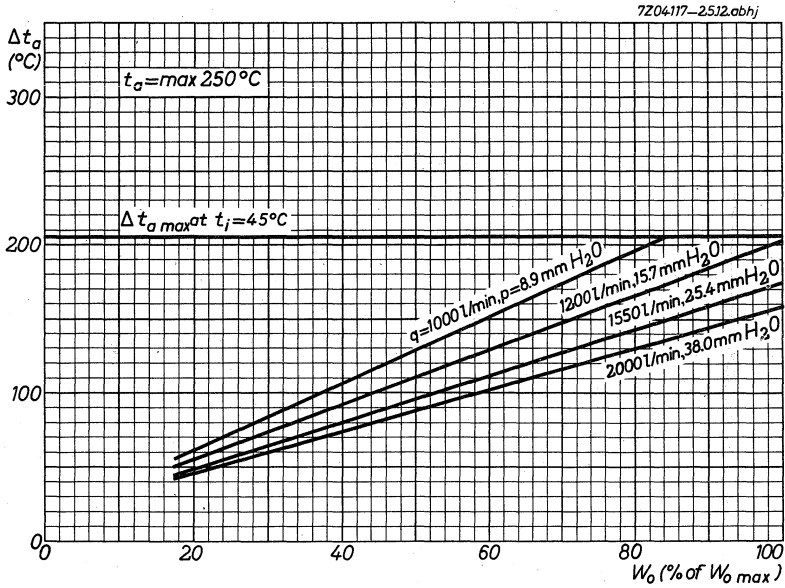

7207571

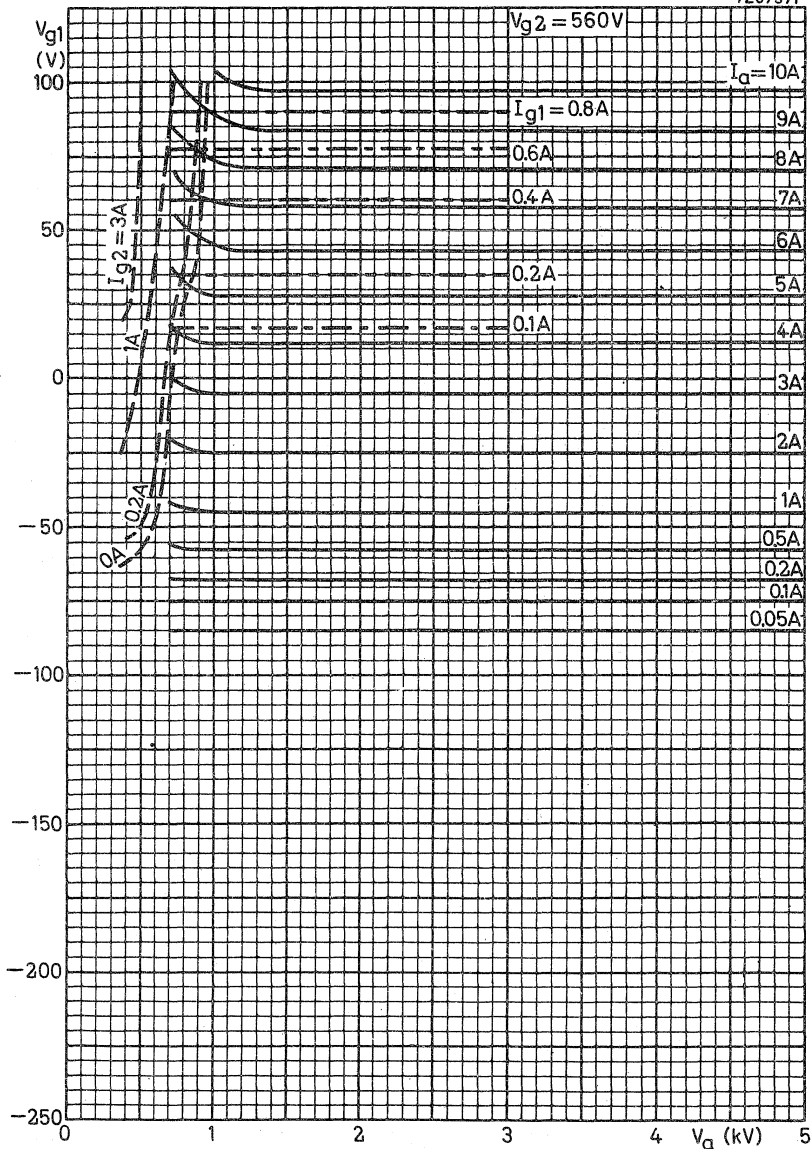



## R.F. DOUBLE TETRODE

Single-ended double tetrode, indirectly heated, with novar base. Designed for mobile service as class C amplifier, oscillator or frequency multiplier up to 200 MHz. The tube is internally neutralised.

QUICK REFERENCE DATA				
		R.F. class C telegraphy or F.M. telephony	R.F. class C a-g <sub>2</sub> modulator	R.F. class C freq. tripler
		ICAS	ICAS	ICAS
Frequency	$f =$	up to 200 MHz	up to 200 MHz	up to 200 MHz
Anode voltage	$V_a = \text{max.}$	450 V	360 V	450 V
Anode dissipation	$W_a = \text{max.}$	2 x 10 W	2 x 6.5 W	2 x 10 W
Frequency	$f =$	175 MHz	175 MHz	58/174 MHz
Output power in load	$W_\ell =$	30 W	19 W	10 W

**HEATING:** indirect by A.C. or D.C.; cathode oxide coated

Heater voltage	$V_f =$	6.75 V	13.5 V
Heater current	$I_f =$	0.8 A	0.4 A
Pins		9-(4+5)	4-5

### CAPACITANCES

Input capacitance, each system	$C_i =$	6.2 pF
Output capacitance, each system	$C_o =$	2.7 pF
Anode to grid No.1, each system	$C_{ag_1} <$	0.1 pF
Input capacitance, push-pull connection	$C_i =$	5.1 pF
Output capacitance, push-pull connection	$C_o =$	1.5 pF

**TYPICAL CHARACTERISTICS**

Anode current	$I_a$	=	30	mA
Amplification factor	$\mu_{g_2g_1}$	=	7.5	
Mutual conductance	S	=	3.3	mA/V

**TEMPERATURE LIMITS** (Absolute limits)

Bulb temperature	=	max. 225 °C
Pin seal temperature	=	max. 120 °C



**COOLING:** radiation and convection

The use of a closed tube shield is not recommended

**MECHANICAL DATA**

Base : Novar

Net weight: 28.5 g

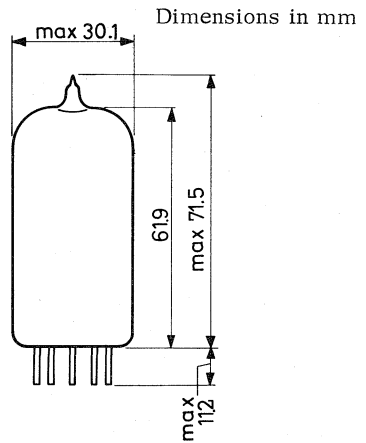

Mounting position: any

## R.F. CLASS C TELEGRAPHY OR F.M. TELEPHONY

LIMITING VALUES (Each system; absolute limits)

Frequency	f	CCS	ICAS	MHz
		up to 200	up to 200	
Anode voltage	$V_a$	= max. 400	max. 450	V
Anode current	$I_a$	= max. 45	max. 55	mA
Anode input power	$W_{ia}$	= max. 18	max. 25	W
Anode dissipation	$W_a$	= max. 7.5	max. 10	W
Grid No.2 voltage	$V_{g2}$	= max. 200	max. 200	V
Grid No.2 dissipation	$W_{g2}$	= max. 1	max. 1	W
Negative grid No.1 voltage	$-V_{g1}$	= max. 150	max. 150	V
Grid No.1 current	$I_{g1}$	= max. 3	max. 4	mA
Grid No.1 dissipation	$W_{g1}$	= max. 0.2	max. 0.2	W
Heater to cathode voltage	$V_{kf}$	= max. 100	max. 100	V

OPERATING CONDITIONS; two systems in push-pull

Frequency	f	CCS	ICAS	ICAS	MHz
		= 175	175	175	
Anode voltage	$V_a$	= 400	400	450	V
Grid No.2 voltage	$V_{g2}$	= 180	190	190	V
Grid No.1 voltage	$V_{g1}$	= -50	-50	-50	V
Grid No.1 resistor	$R_{g1}$	= 31	28	26	k $\Omega$
Anode current	$I_a$	= 2x45	2x55	2x55	mA
Grid No.2 current	$I_{g2+g2'}$	= 3.8	5.0	4.5	mA
Grid No.1 current	$I_{g1}$	= 2x0.8	2x0.9	2x0.95	mA
Grid No.2 dissipation	$W_{g2+g2'}$	= 0.68	0.95	0.85	W
Driving power	$W_{dr}$	= 1.0	1.1	1.2	W
Output power in the load	$W_l$	= 21	26.5	30	W
Overall efficiency	$\eta$	= 58	60	61	%

**R.F. CLASS C ANODE AND SCREEN GRID MODULATION.** Grid No.3 modulated by a tertiary winding with a number of turns equal to 44% of that of the anode winding.

**LIMITING VALUES** (Each system; absolute limits)

Frequency	f	CCS		ICAS	
		up to	200	up to	200 MHz
Anode voltage	$V_a$	= max.	320	max.	360 V
Anode current	$I_a$	= max.	37.5	max.	46 mA
Anode input power	$W_{ia}$	= max.	12	max.	16.5 W
Anode dissipation	$W_a$	= max.	5.0	max.	6.5 W
Grid No.2 voltage	$V_{g2}$	= max.	200	max.	200 V
Grid No.2 dissipation	$W_{g2}$	= max.	0.65	max.	0.65 W
Negative grid No.1 voltage	$-V_{g1}$	= max.	150	max.	150 V
Grid No.1 current	$I_{g1}$	= max.	3	max.	4 mA
Heater to cathode voltage	$V_{kf}$	= max.	100	max.	100 V

**OPERATING CONDITIONS;** two systems in push-pull

Frequency	f	CCS		ICAS	
		=	175		175 MHz
Anode voltage	$V_a$	=	320		360 V
Grid No.2 voltage	$V_{g2}$	=	140		160 V
Grid No.1 voltage	$V_{g1}$	=	-20		-25 V
Anode current	$I_a$	=	2x37.5		2x46 mA
Grid No.2 current	$I_{g2+g2'}$	=	5.0		6.0 mA
Grid No.1 current	$I_{g1}$	=	2x1.25		2x1.5 mA
Grid No.2 dissipation	$W_{g2+g2'}$	=	0.7		1.0 W
Driving power	$W_{dr}$	=	2.0		2.5 W
Output power in the load	$W_l$	=	13.5		19 W <sup>1)</sup>
Overall efficiency	$\eta$	=	56		57 %
Modulation depth	m	=	100		100 %
Modulation power	$W_{mod}$	=	12.5		17 W

1) Measured in a circuit having an efficiency of 80%.



## R.F. CLASS C FREQUENCY TRIPLER

## LIMITING VALUES (Each system; absolute limits)

Frequency	f	CCS	ICAS
		up to 200	up to 200 MHz
Anode voltage	$V_a$	= max. 400	max. 450 V
Anode current	$I_a$	= max. 30	max. 44 mA
Anode input power	$W_{ia}$	= max. 11	max. 15 W
Anode dissipation	$W_a$	= max. 7.5	max. 10 W
Grid No.2 voltage	$V_{g2}$	= max. 200	max. 200 V
Grid No.2 dissipation	$W_{g2}$	= max. 1	max. 1 W
Negative grid No.1 voltage	$-V_{g1}$	= max. 150	max. 150 V
Grid No.1 current	$I_{g1}$	= max. 2	max. 3 mA
Heater to cathode voltage	$V_{kf}$	= max. 100	max. 100 V

## OPERATING CONDITIONS ; two systems in push-pull

		ICAS
Frequency	f	= 58/174 MHz
Anode voltage	$V_a$	= 350 V
Grid No.2 voltage	$V_{g2}$	= 165 V
Grid No.1 voltage	$V_{g1}$	= -150 V
Grid No.1 resistor	$R_{g1}$	= 34 k $\Omega$
Anode current	$I_a$	= 2x43 mA
Grid No.2 current	$I_{g2+g2'}$	= 5.0 mA
Grid No.1 current	$I_{g1}$	= 2x2.2 mA
Driving power	$W_{dr}$	= 2.0 W
Output power in the load	$W_l$	= 10 W
Overall efficiency	$\eta$	= 33 %

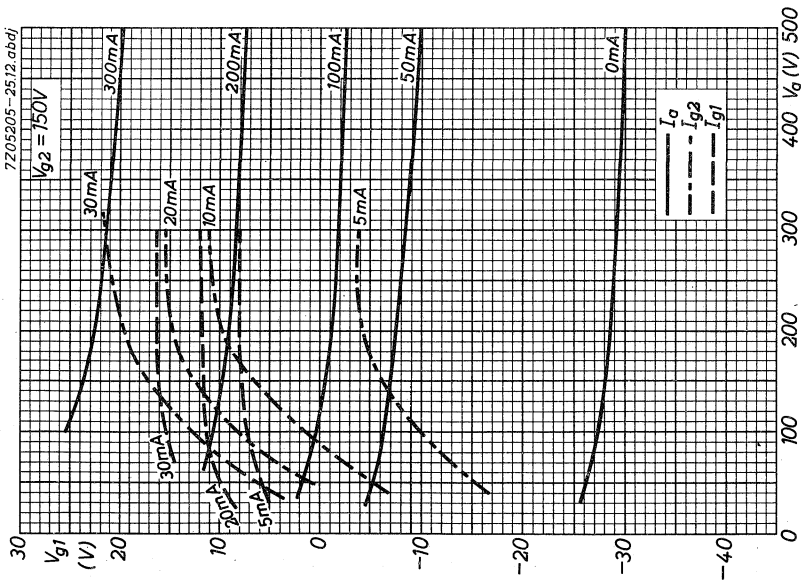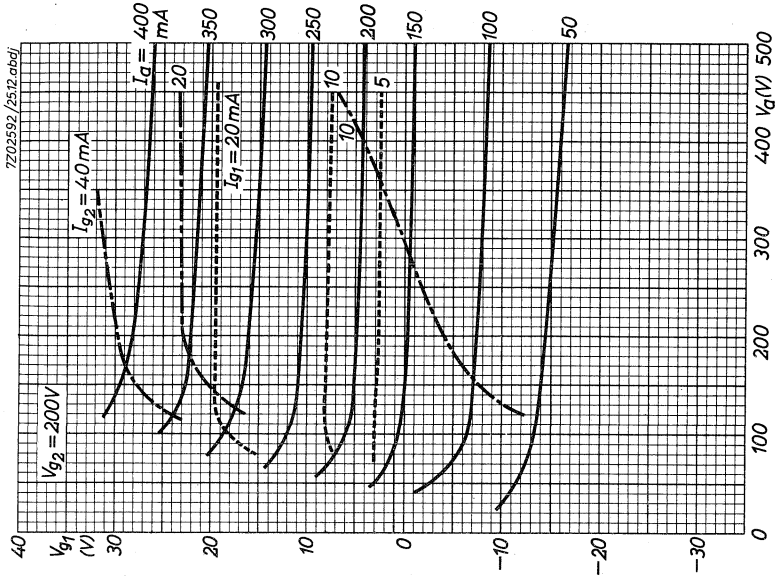

## R.F. BEAM POWER TETRODE

Indirectly heated beam power tetrode designed for use as R.F. power amplifier, oscillator, frequency multiplier and A.F. amplifier or modulator for fixed or mobile equipment.

QUICK REFERENCE DATA			
Freq. (MHz)	R.F. class C telegraphy		
	$V_a$ (V)	$W_o$ (W)	
		CCS	ICAS
75	550	52	58.5
	600		
175	400	38	46
	450	38	
	500		
250	400		32

**HEATING:** indirect by A.C. or D.C.; cathode oxide coated

Heater voltage	$V_f$	=	6.75 V	13.5 V
Heater current	$I_f$	=	1.2 A	0.6 A
Pins			3-(6+7)	6-7

### CAPACITANCES

Grid No. 1 to all other elements except anode	$C_{g1}$	=	11.5 pF
Anode to all other elements except grid No. 1	$C_a$	=	5.0 pF

### TYPICAL CHARACTERISTICS

Anode current	$I_a$	=	80 mA
Amplification factor	$\mu_{g2g1}$	=	8
Mutual conductance	S	=	7 mA/V

## TEMPERATURE LIMITS (Absolute limits)

Bulb temperature = max. 250 °C

Seal temperature = max. 230 °C

## MECHANICAL DATA


Dimensions in mm

Base : Magnoval

The anode pin is brought out through the base separated from the magnoval pin circle for convenient under-chassis circuitry.

Socket : 40685

Net weight: 36 g

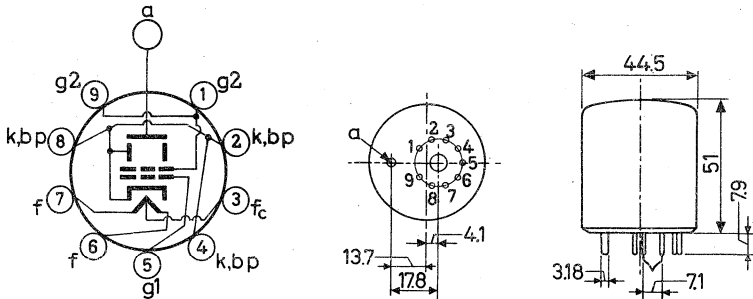

Mounting position: any



**R.F. AMPLIFIER AND OSCILLATOR, CLASS C TELEGRAPHY**

**CCS** Continuous service

**LIMITING VALUES** (Absolute limits)

Frequency	f	up to 75	up to 175	MHz
Anode voltage	$V_a$	= max. 550	max. 450	V
Anode current	$I_a$	= max. 150	max. 150	mA
Anode input power	$W_{ia}$	= max. 75	max. 60	W
Anode dissipation	$W_a$	= max. 25	max. 25	W
Grid No.2 voltage	$V_{g2}$	= max. 300	max. 300	V
Grid No.2 input power	$W_{ig2}$	= max. 4	max. 4	W
Negative grid No.1 voltage	$-V_{g1}$	= max. 200	max. 200	V
Grid No.1 circuit resistance				
with fixed bias	$R_{g1}$	= max. 50	max. 50	k $\Omega$
with automatic bias	$R_{g1}$	= max. 100	max. 100	k $\Omega$
Cathode current	$I_k$	= max. 165	max. 165	mA
Heater to cathode voltage (any polarity)	$V_{kf}$	= max. 100	max. 100	V

**OPERATING CONDITIONS** **CCS** Continuous service

Frequency	f	= 75	175	175	MHz
Anode voltage	$V_a$	= 550	450	400	V
Grid No.2 voltage	$V_{g2}$	= 235	250	230	V
Grid No.1 voltage	$V_{g1}$	= -50	-55	-51	V
Grid No.1 resistor	$R_{g1}$	= 10	21	11	k $\Omega$
Anode current	$I_a$	= 136	134	150	mA
Grid No.2 current	$I_{g2}$	= 11	11	10	mA
Grid No.1 current	$I_{g1}$	= 5.0	2.6	4.6	mA
Driving power	$W_{dr}$	= 0.5	1.5	1.5	W
Anode input power	$W_{ia}$	= 75	60	60	W
Output power in the load	$W_l$	= 52	38	38	W
Overall efficiency	$\eta$	= 69	63.5	63.5	%

**R.F. AMPLIFIER AND OSCILLATOR, CLASS C TELEGRAPHY**


**ICAS** Intermittent service

**LIMITING VALUES** (Absolute limits)

Frequency	f	up to	75	175	250	MHz
Anode voltage	$V_a$	= max.	600	500	400	V
Anode current	$I_a$	= max.	150	150	150	mA
Anode input power	$W_{ia}$	= max.	90	75	60	W
Anode dissipation	$W_a$	= max.	30	30	30	W
Grid No.2 voltage	$V_{g2}$	= max.	300	300	300	V
Grid No.2 input power	$W_{ig2}$	= max.	4	4	4	W
Negative grid No.1 voltage	$-V_{g1}$	= max.	200	200	200	V
Grid No.1 circuit resistance						
with fixed bias	$R_{g1}$	= max.	50	50	50	k $\Omega$
with automatic bias	$R_{g1}$	= max.	100	100	100	k $\Omega$
Cathode current	$I_k$	= max.	165	165	165	mA
Heater to cathode voltage (any polarity)	$V_{kf}$	= max.	100	100	100	V

**OPERATING CONDITIONS** **ICAS** Intermittent service

Frequency	f	=	75	175	250	MHz
Anode voltage	$V_a$	=	600	500	400	V
Grid No.2 voltage	$V_{g2}$	=	255	225	235	V
Grid No.1 voltage	$V_{g1}$	=	-50	-55	-54	V
Grid No.1 resistor	$R_{g1}$	=	10	11	11	k $\Omega$
Anode current	$I_a$	=	150	150	150	mA
Grid No.2 current	$I_{g2}$	=	10	10	4	mA
Grid No.1 current	$I_{g1}$	=	5.0	5.0	4.9	mA
Driving power	$W_{dr}$	=	0.7	1.5	2.0	W
Anode input power	$W_{ia}$	=	90	75	60	W
Output power in the load	$W_l$	=	58.5	46	32	W
Overall efficiency	$\eta$	=	65	61.5	53.5	%

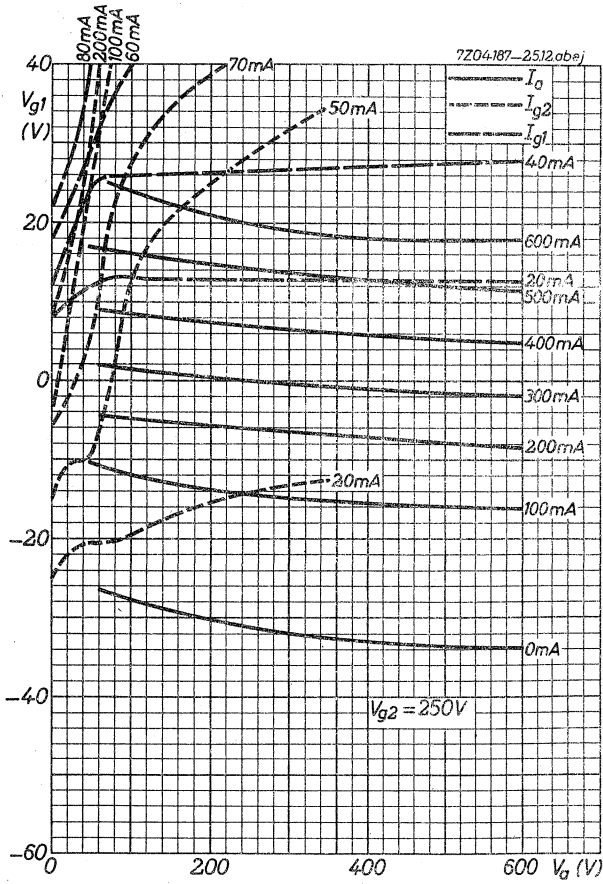



**R.F. BEAM POWER TETRODE****HEATING:** indirect; cathode oxide coated

Heater voltage

$$V_f = 19 \text{ V}$$

Heater current

$$I_f = 2.3 \text{ A}$$

-----  
For further data and curves of this type  
please refer to type QE08/200  
-----



## HEATSINK COOLED R.F. POWER TETRODE

QUICK REFERENCE DATA		
Frequency (MHz)	Class C telegraphy	
	$V_a$ (V)	$W_o$ (W)
175	2000	270
470	800	100

**HEATING:** indirect by AC or DC; cathode oxide coated

Heater voltage	$V_f$	=	6.0 V
Heater current	$I_f$	=	2.6 A
Waiting time	$T_w$	=	min. 30 sec

At frequencies between 400 MHz and 500 MHz the heater voltage should be reduced to 5.0 V.

### CAPACITANCES

Anode to all except grid No.1	$C_a$	=	4.5 pF
Grid No.1 to all except anode	$C_{g1}$	=	15.7 pF
Anode to grid No.1	$C_{ag1}$	=	0.03 pF

### TYPICAL CHARACTERISTICS

Anode and grid No.2 voltage (interconnected)	$V_a = V_{g2}$	=	300 V
Cathode current	$I_k$	=	50 mA
Amplification factor	$\mu_{g2g1}$	=	5.2

### TEMPERATURE LIMITS (Absolute limits)

Temperature of all seals	$t_s$	=	max. 250 °C
--------------------------	-------	---	-------------

### COOLING DATA





Thermal contact area		=	3.2 cm <sup>2</sup>
Thermal resistance from seal to thermal contact area	$R_{th}$	=	0.03 °C/W

See also operating notes

MECHANICAL DATA

Net weight: 230 g

Dimensions in mm

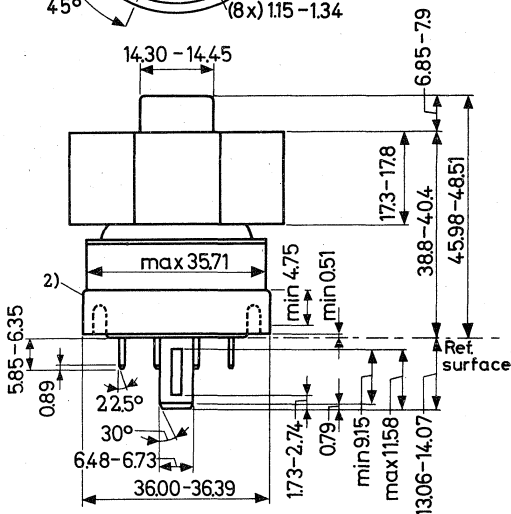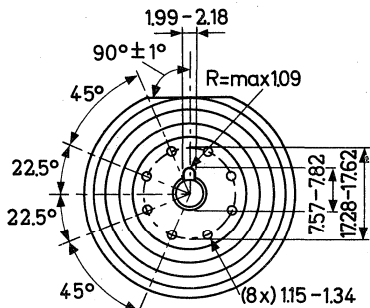

Mounting position: any

1) Heat sink contact area

2) Grid No.2 contact



## R.F. CLASS C TELEGRAPHY or F.M. TELEPHONY

## LIMITING VALUES (Absolute limits)

Frequency	f	up to	500	MHz
Anode voltage	$V_a$	= max.	2000	V
Anode input power	$W_{i_a}$	= max.	500	W
Anode dissipation		See operating notes		
Anode current	$I_a$	= max.	250	mA
Grid No.2 voltage	$V_{g_2}$	= max.	300	V
Grid No.2 dissipation	$W_{g_2}$	= max.	12	W
Negative grid No.1 voltage	$-V_{g_1}$	= max.	250	V
Grid No.1 dissipation	$W_{g_1}$	= max.	2	W

## OPERATING CONDITIONS

Frequency	f	=	175	470 <sup>1)</sup> MHz
Anode voltage	$V_a$	=	2000	800 V
Grid No.2 voltage	$V_{g_2}$	=	200	2) V
Grid No.1 voltage	$V_{g_1}$	=	-90	-60 V
Anode current	$I_a$	=	250	250 mA
Grid No.2 current	$I_{g_2}$	=	8	-4 to +10 mA
Grid No.1 current	$I_{g_1}$	=	16	3 mA
Grid No.1 driving voltage	$V_{g_1p}$	=	112	2) V
Driving power	$W_{dr}$	=	4	11 W
Anode input power	$W_{i_a}$	=	400	200 W
Output power	$W_o$	=	270	100 W
Efficiency	$\eta$	=	67.5	50 %

1)  $V_f$  should be reduced to 5.0 V at f = 470 MHz

2) To be adjusted for operating conditions

## OPERATING NOTES

### Heatsink or conduction cooling

Through the properties of beryllia (beryllium oxide), it is possible to remove heat directly from the anode of a tube to a safe point or "sink" while still maintaining the electrical insulation between the anode and the "sink", which is usually grounded. The path between the anode of the tube and the point of dissipation is known as a thermal system. This includes the anode of the tube, the beryllia insulating material, and the heatsink, plus all thermal compounds used to reduce the heat resistance between these parts. Consequently it is evident that a conduction cooled tube does not have an anode dissipation rating by itself. Only the entire thermal system has a dissipation rating. The purpose of this note is to assist in the understanding of the thermodynamics involved in a system of this type.

### Thermal considerations


Page A shows a set of curves relating anode dissipation and ambient temperature to the maximum thermal resistance that will permit operation within the maximum allowable seal temperature. It is assumed that the equipment designer knows the anode power that must be dissipated (from circuit efficiencies) and the maximum ambient temperature in which his equipment must function. The problem is simply to devise a thermal circuit whose total thermal resistance is not more than that allowed. In order to determine the maximum thermal resistance of the system, the following equation may be used:

$$R_{th \max} = \frac{t_{s \max} - t_{amb}}{W_d} \quad (1)$$

where  $t_{s \max}$  = max. seal temperature ( $^{\circ}\text{C}$ )  
 $t_{amb}$  = ambient temperature ( $^{\circ}\text{C}$ )  
 $W_d$  = power to be dissipated (W)

The graphs on page A illustrate a plot of this equation assuming the maximum seal temperature to be  $250^{\circ}\text{C}$ . To use these graphs all that need be known is the maximum occurring anode dissipation and the ambient temperature.

As an example, suppose we wish to dissipate 100 W at an ambient temperature of  $50^{\circ}\text{C}$  and a maximum allowable seal temperature of  $250^{\circ}\text{C}$ . Through the use of either equation (1) or the curves of page A we see that the maximum allowable thermal resistance is  $2.0^{\circ}\text{C}/\text{W}$ .

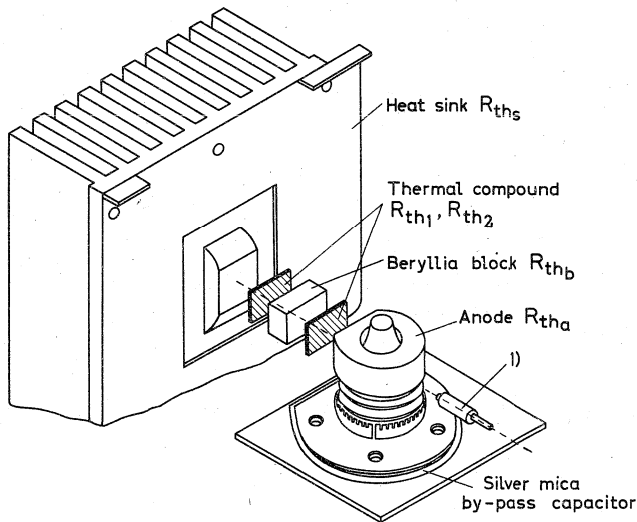

According to the figure above the entire cooling system may be considered as the series circuit of a number of components, viz.:

The anode with a thermal resistance  $R_{tha}$ ,

the compound, if used, between anode and beryllia block with thermal resistance  $R_{th1}$ ,

the beryllia block with thermal resistance  $R_{thb}$ ,

the compound between the beryllia block and the heat sink with thermal resistance  $R_{th2}$

and the heatsink with thermal resistance  $R_{ths}$ .

The total thermal resistance of these components must be less than the maximum allowable thermal resistance  $R_{thmax}$  of the entire system. This can be summarized in the following equation:

$$R_{tha} + R_{th1} + R_{thb} + R_{th2} + R_{ths} \leq R_{thmax} \quad (2)$$

<sup>1)</sup> In order to assure a good thermal connection to the heat sink, it is necessary to apply a force of approximately 11.5 kg to the side of the tube opposite the heat sink. The method shown uses a small ceramic cylinder to apply this pressure while maintaining the high voltage insulation necessary for proper operation.

The thermal resistance of the beryllia block and the compounds may be calculated from

$$R_{th_x} = \frac{\text{thickness}}{\text{standard thickness}} \times \frac{\text{standard area}}{\text{area}} \times R_{th} \quad (3)$$

where  $R_{th_x}$  is either  $R_{th_b}$  or  $R_{th_1}$  or  $R_{th_2}$

and  $R_{th}$  is the specific thermal resistance of the material involved.

The specific thermal resistance of a number of materials is given in table 1.

The standard thickness in this table is taken as 1 cm for cubes and as 0.001 cm for films; the standard area for cubes as well as for films is 1 cm<sup>2</sup>. The same values should be used for the standard thickness and the standard area in formula (3).

For the thermal resistance of a beryllia block of 3.2 cm<sup>2</sup> x 4.45 cm is found in this way:

$$R_{th_b} = \frac{4.45}{1} \times \frac{1}{3.2} \times 0.635 = 0.88 \text{ } ^\circ\text{C/W}.$$

The value of  $R_{th_a}$  is given in the data sheets as 0.03  $^\circ\text{C/W}$ .

Assuming a value of 0.2  $^\circ\text{C/W}$  for the sum of  $R_{th_1}$  and  $R_{th_2}$  and the previous found value of 2.0  $^\circ\text{C/W}$  for  $R_{th_{max}}$ , equation (2) yields:


$$0.03 + 0.2 + 0.88 + R_{th_s} \leq 2.0$$

thus leaving for  $R_{th_s}$  a value of max. 0.89  $^\circ\text{C/W}$ .

With this figure a convenient heat sink can be selected from standard heat sink catalogues.

Table 1. Approximate thermal resistance  $R_{th}$  of typical materials

Films 0.001 cm x 1 cm <sup>2</sup>		Cubes 1 cm x 1 cm <sup>2</sup>	
Item	$^\circ\text{C/W}$	Item	$^\circ\text{C/W}$
Wakefield	0.127	Copper	0.28
Mica	0.254	Aluminium	0.51
Silicone	0.51	Beryllia	0.635
Mylar	0.61	Brass	0.89
Air (still)	3.1	Molybdenum	1.02
		Alumina	3.56

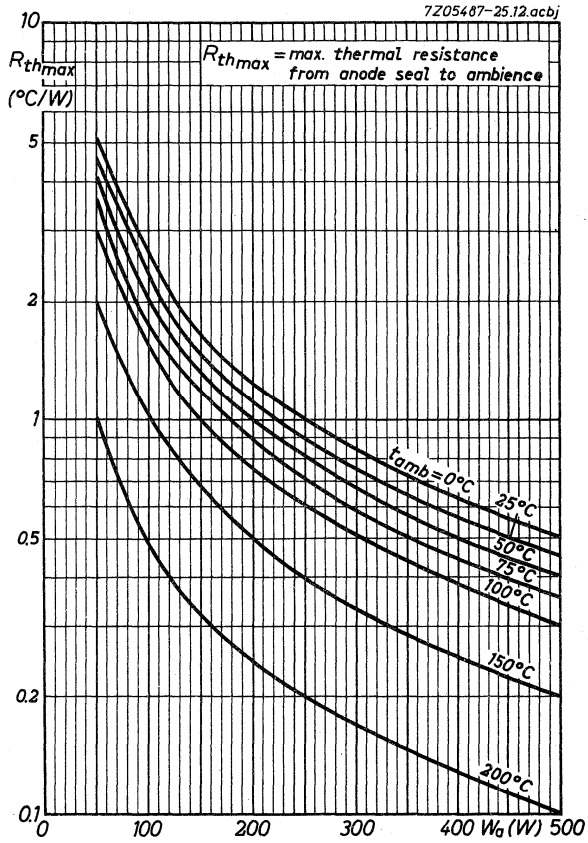



## AIR COOLED R.F. POWER TETRODE

Forced air cooled beam power tetrode in ceramic-metal construction intended for use in Class AB audio or R.F. amplifier service.

QUICK REFERENCE DATA				
Freq. (MHz)	S.S.B.		AB Mod.	
	V <sub>a</sub> (V)	W <sub>o</sub> (W)	V <sub>a</sub> (V)	W <sub>o</sub> (W) <sup>1)</sup>
30	2200	318		
A.F.			2200	770
			1000	190

**HEATING:** indirect; oxide coated cathode

Heater voltage	V <sub>f</sub>	6.0	V
Heater current	I <sub>f</sub>	3.2	A
Waiting time	T <sub>w</sub>	min. 30	s

### CAPACITANCES

#### Grounded cathode

Grid No. 1 to all except anode	C <sub>g1(a)</sub>	24.2	pF
Anode to all except grid No. 1	C <sub>a(g1)</sub>	5.5	pF
Anode to grid No. 1	C <sub>ag1</sub>	0.05	pF

#### Grounded grid

Input	C <sub>kf(a)</sub>	19.9	pF
Output	C <sub>a(kf)</sub>	5.5	pF
Anode to cathode	C <sub>a/kf</sub>	0.01	pF

### TYPICAL CHARACTERISTICS

Anode voltage	V <sub>a</sub>	2200	V
Grid No. 2 voltage	V <sub>g2</sub>	400	V
Anode current	I <sub>a</sub>	150	mA
Transconductance	S	22	mA/V
Amplification factor	μ <sub>g2g1</sub>	13	

### TEMPERATURE LIMITS (Absolute max. rating system)

Temperature of all seals	t <sub>s</sub>	max. 250	°C
Temperature of anode core	t <sub>a</sub>	max. 250	°C

<sup>1)</sup> Two tubes





## A.F. CLASS AB AMPLIFIER AND MODULATOR

## LIMITING VALUES (Absolute max. rating system)

Anode voltage	$V_a$	max.	2500	V
Anode current	$I_a$	max.	300	mA
Anode dissipation	$W_a$	max.	350	W
Grid No. 2 voltage	$V_{g2}$	max.	400	V
Grid No. 2 dissipation	$W_{g2}$	max.	8	W
Grid No. 1 voltage	$-V_{g1}$	max.	250	V
Grid No. 1 current	$I_{g1}$	max.	2	mA
Cathode to heater voltage, peak	$V_{kfp}$	max.	150	V

## OPERATING CONDITIONS two tubes in push-pull

Anode voltage	$V_a$	1000	1500	2200	V			
Grid No. 2 voltage	$V_{g2}$	400	400	400	V			
Grid No. 1 voltage	$V_{g1}$	-27	-27	-27	V <sup>1)</sup>			
Load resistance	$R_{aa}$	2600	5000	7800	$\Omega$			
Driving voltage, peak	$V_{g1p}$	0	21	0	21	0	50	V
Anode current	$I_a$	2x100	2x260	2x100	2x265	2x100	2x290	mA
Grid No. 2 current	$I_{g2}$	-	2x -4	-	2x -5	-	2x -3	mA
Driving power	$W_{dr}$	-	0	-	0	-	0	
Anode input power	$W_{ia}$	2x100	2x260	2x150	2x400	2x220	2x640	W
Output power	$W_o$	0	190	0	400	0	770	W

<sup>1)</sup> To be adjusted for zero signal anode current.

## R.F. SINGLE SIDE BAND AMPLIFIER

## LIMITING VALUES (Absolute max. rating system)

Frequency	f	up to	175	MHz
Anode voltage	$V_a$	max.	2500	V
Anode current	$I_a$	max.	300	mA
Anode dissipation	$W_a$	max.	350	W
Grid No.2 voltage	$V_{g2}$	max.	400	V
Grid No.2 dissipation	$W_{g2}$	max.	8	W
Grid No.1 voltage	$-V_{g1}$	max.	250	V
Grid No.1 current	$I_{g1}$	max.	2	mA
Cathode to heater voltage, peak	$V_{kfp}$	max.	150	V

## OPERATING CONDITIONS


Frequency	f	30	MHz
Anode voltage	$V_a$	2200	V
Grid No.2 voltage	$V_{g2}$	300	V
Grid No.1 voltage	$V_{g1}$	-20	V 1)
Load resistance	$R_{a\sim}$	6000	$\Omega$

		zero signal	single tone	double tone	
Driving voltage, peak	$V_{g1p}$	0	18	18	V
Anode current	$I_a$	100	215	167	mA
Grid No.2 current	$I_{g2}$	-	-2.5	-6	mA
Grid No.1 current	$I_{g1}$	0	0	0	mA
Anode input power	$W_{i_a}$	220	473	430	W
Output power in the load	$W_{\ell}$ (PEP)	0	318	318	W 2)
Intermodulation distortion					
of the 3 <sup>d</sup> order	$d_3$			29	dB 3)
of the 5 <sup>th</sup> order	$d_5$			30	dB 3)


1) To be adjusted for zero signal anode current.

2) Measured in a typical circuit having an efficiency of 85%.

3) Maximum values encountered at any level of drive voltage up to full drive referred to the amplitude of either of the two equal tones at that level.

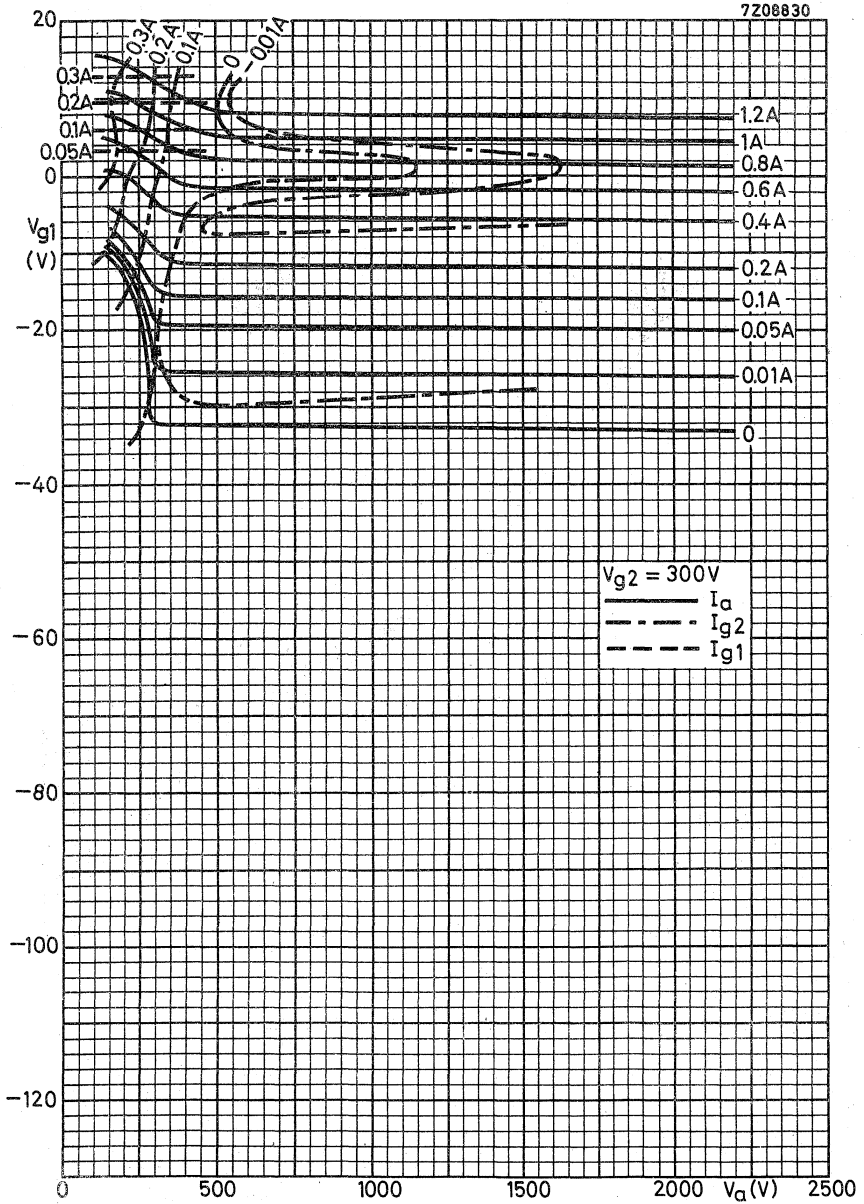

7208829

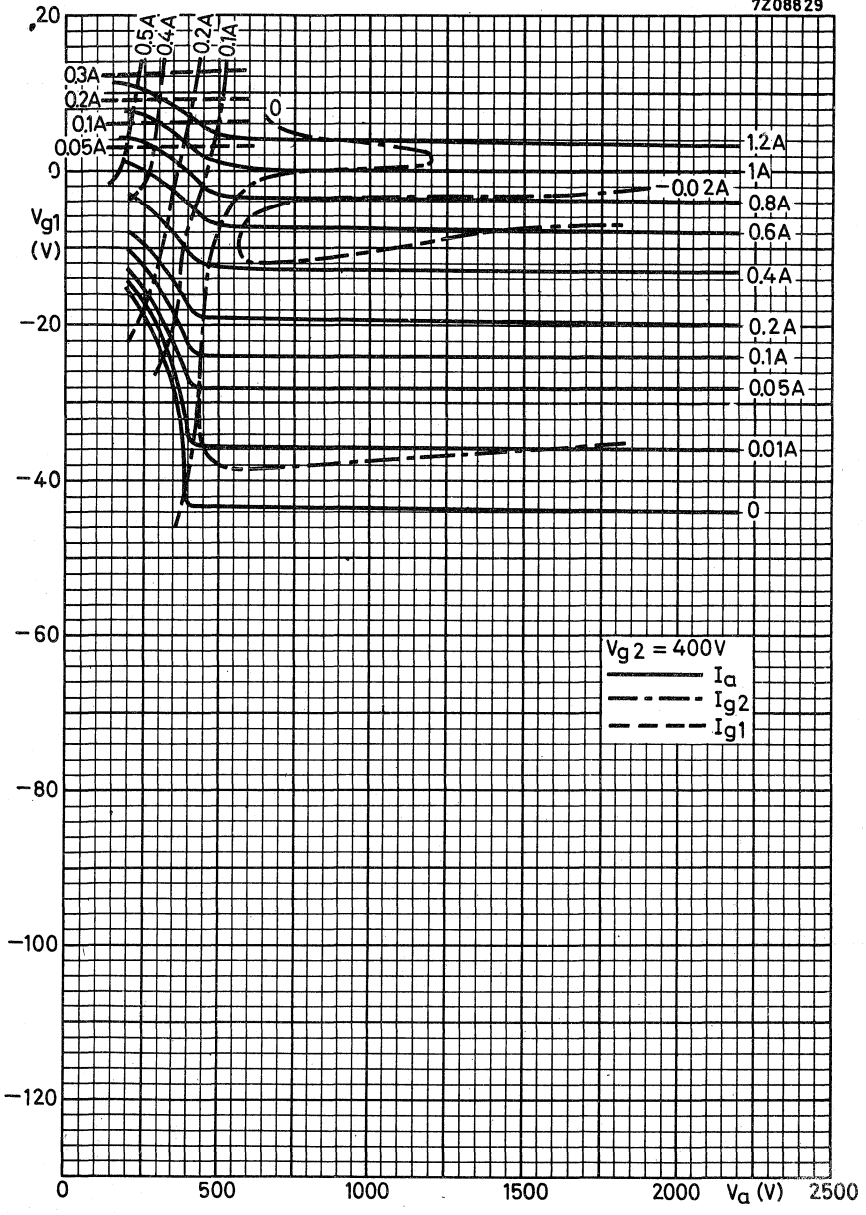

## AIR COOLED R.F. POWER TETRODE

Forced air cooled beam power tetrode in ceramic-metal construction intended for use in Class AB audio or R.F. amplifier service.

**HEATING:** Indirect; oxide coated cathode

Heater voltage	$V_f$	26.5	V
Heater current	$I_f$	730	mA
Waiting time	$T_w$	min. 30	s

-----  
For further data please refer to type YL1340  
-----



**R.F. DOUBLE TETRODE****HEATING:** Indirect; cathode oxide-coated

Heater voltage

 $V_f = 13.5 \text{ V}$ 

Heater current

 $I_f = 280 \text{ mA}$ 

Pin connections

1-8

-----  
For further data and curves of this type  
please refer to type QQE04/5  
-----





## R.F. BEAM POWER TETRODE

R.F. Beam power tetrode intended for use as R.F. power amplifier, oscillator, A.F. power amplifier and modulator in both mobile and fixed equipment.

QUICK REFERENCE DATA										
C teleg.				C <sub>ag2</sub> mod.			Class AB SSB			
Freq. (MHz)	V <sub>a</sub> (V)	W <sub>o</sub> (W)		V <sub>a</sub> (V)	W <sub>o</sub> (W)		Freq. (MHz)	V <sub>a</sub> (V)	W <sub>o</sub> PEP (W)	
		CCS	ICAS		CCS	ICAS			CCS	ICAS
60	750		85	600		62	30	750		61
60	600	63		475	42		30	600	49	
175	400		40							
175	320	29								
A.F. class AB 1)2)				A.F. class AB 1)3)						
	V <sub>a</sub> (V)	W <sub>o</sub> (W)		V <sub>a</sub> (V)	W <sub>o</sub> (W)					
		CCS	ICAS		CCS	ICAS				
	750		124	750		150				
	600	96		600	110	130				
				500	100					

**HEATING:** indirect by A.C. or D.C.; cathode oxide-coated

Heater voltage V<sub>f</sub> 6.3 V

Heater current at V<sub>f</sub> = 6.3 V I<sub>f</sub> 1.125 A

Cathode heating time T<sub>h</sub> min. 60 s

See "Special performance data" for heater operation in stationary and mobile equipment.

1) Two tubes

2) Without grid current

3) With grid current

## CAPACITANCES

Grid No. 1 to all except anode	$C_{g1(a)}$	13.0 pF
Anode to all except grid No. 1	$C_{a(g1)}$	8.5 pF
Anode to grid No. 1	$C_{ag1}$	< 0.22 pF

## TYPICAL CHARACTERISTICS

Anode voltage	$V_a$	200 V
Grid No. 2 voltage	$V_{g2}$	200 V
Anode current	$I_a$	100 mA
Transconductance	$S$	7 mA/V
Amplification factor	$\mu_{g2g1}$	4.5 -



## MECHANICAL DATA

Dimensions in mm

Base: octal 8 pin

Socket: 2422 501 03001

Net weight: 65 g



Mounting position: any

## TEMPERATURE LIMIT (Absolute limit)

Bulb temperature  $t_{bulb}$  max. 260 °C

## R.F. CLASS C TELEGRAPHY AND FM TELEPHONY

## LIMITING VALUES (Absolute max. rating system)

(For maximum anode voltage and maximum anode input power at  $f > 60$  MHz see page 18).

Frequency	f	C.C.S.		I.C.A.S.
		up to 60	MHz	
Anode voltage	$V_a$	max. 600	max. 750	V
Anode input power	$W_{i_a}$	max. 90	max. 120	W
Anode dissipation	$W_a$	max. 27	max. 35	W
Anode current	$I_a$	max. 175	max. 220	mA
Grid No.2 voltage	$V_{g_2}$	max. 250	max. 250	V
Grid No.2 dissipation	$W_{g_2}$	max. 3	max. 3	W
Grid No.1 voltage	$-V_{g_1}$	max. 150	max. 150	V
Grid No.1 current	$I_{g_1}$	max. 3.5	max. 4	mA
Cathode to heater voltage, peak	$V_{kf_p}$	max. 135	max. 135	V
Grid No.1 circuit resistance	$R_{g_1}$	max. 30	max. 30	$k\Omega^1$ )

## OPERATING CONDITIONS

Frequency	f	C.C.S.		I.C.A.S.
		up to 60	MHz	
Anode voltage	$V_a$	600	750	V
Grid No.2 voltage	$V_{g_2}$	200	200	V <sup>2)</sup>
Grid No.1 voltage	$V_{g_1}$	-70	-77	V <sup>3)</sup>
Grid No.1 resistor	$R_{g_1}$	24	28	$k\Omega$
Grid No.1 current	$I_{g_1}$	2.8	2.7	mA
Grid No.1 driving voltage	$V_{g_{1p}}$	90	95	V
Driving power	$W_{dr}$	0.3	0.3	W
Anode current	$I_a$	150	160	mA
Grid No.2 current	$I_{g_2}$	10	10	mA
Anode input power	$W_{i_a}$	90	120	W
Anode dissipation	$W_a$	27	35	W
Output power	$W_o$	63	85	W
Efficiency	$\eta$	70	71	%

Notes see page 11

## R.F. CLASS C TELEGRAPHY AND FM TELEPHONY

## OPERATING CONDITIONS(continued)

Frequency	f	up to	175	MHz
Anode voltage	$V_a$	320	400	V
Grid No.2 voltage	$V_{g2}$	210	220	V <sup>2)</sup>
Grid No.1 voltage	$V_{g1}$	-52	-55	V <sup>3)</sup>
Grid No.1 resistor	$R_{g1}$	26	30	k $\Omega$
Grid No.1 current	$I_{g1}$	2	1.9	mA
Grid No.1 driving voltage	$V_{g1p}$	65	67	V
Driving power	$W_{dr}$	2	2	W
Anode current	$I_a$	170	180	mA
Grid No.2 current	$I_{g2}$	12	12	mA
Anode input power	$W_{i_a}$	55	72	W
Anode dissipation	$W_a$	26	32	W
Output power	$W_o$	29	40	W
Efficiency	$\eta$	53	56	%

Notes see page 11

## R.F. CLASS C ANODE AND SCREEN GRID MODULATION

## LIMITING VALUES (Absolute max. rating system)

(For maximum anode voltage and maximum anode input power at  $f > 60$  MHz see page 18)

		C.C.S.	I.C.A.S.	
Frequency	$f$	up to 60		MHz
Anode voltage	$V_a$	max. 480	max. 600	V
Anode input power	$W_{i_a}$	max. 60	max. 85	W
Anode dissipation	$W_a$	max. 18	max. 23	W
Anode current	$I_a$	max. 145	max. 180	mA
Grid No.2 voltage	$V_{g_2}$	max. 250	max. 250	V
Grid No.2 dissipation	$W_{g_2}$	max. 2	max. 2	W
Grid No.1 voltage	$-V_{g_1}$	max. 150	max. 150	V
Grid No.1 current	$I_{g_1}$	max. 3.5	max. 4	mA
Cathode to heater voltage, peak	$V_{kfp}$	max. 135	max. 135	V
Grid No.1 circuit resistance	$R_{g_1}$	max. 30	max. 30	$k\Omega$ <sup>1)</sup>

## OPERATING CONDITIONS

		C.C.S.	I.C.A.S.	
Frequency	$f$	up to 60		MHz
Anode voltage	$V_a$	475	600	V
Grid No.2 voltage	$V_{g_2}$	165	175	V <sup>4)</sup>
Grid No.1 voltage	$V_{g_1}$	-86	-92	V <sup>3)</sup>
Grid No.1 resistor	$R_{g_1}$	26	27	$k\Omega$
Grid No.1 current	$I_{g_1}$	3.3	3.4	mA
Grid No.1 driving voltage	$V_{g_{1p}}$	106	114	V
Driving power	$W_{dr}$	0.4	0.5	W
Anode current	$I_a$	125	140	mA
Anode input power	$W_{i_a}$	60	84	W
Anode dissipation	$W_a$	18	22	W
Output power	$W_o$	42	62	W
Efficiency	$\eta$	70	74	%
Modulation factor	$m$	100	100	%
Modulation power	$W_{mod}$	25	37	W

Notes see page 11

**R.F. CLASS AB LINEAR AMPLIFIER, SINGLE SIDE BAND, suppressed carrier**  
**LIMITING VALUES** (Absolute max. rating system)

		C.C.S.	I.C.A.S.	
Frequency	f	up to 30		MHz
Anode voltage	$V_a$	max. 600	max. 750	V
Anode input power	$W_{i_a}$	max. 90	max. 126	W
Anode dissipation	$W_a$	max. 27	max. 35	W
Anode current	$I_a$	max. 175	max. 220	mA
Grid No.2 voltage	$V_{g_2}$	max. 250	max. 250	V
Grid No.2 dissipation	$W_{g_2}$	max. 3	max. 3	W
Grid No.1 voltage	$-V_{g_1}$	max. 150	max. 150	V
Cathode to heater voltage, peak	$V_{kf_p}$	max. 135	max. 135	V
Grid No.1 circuit resistance (fixed bias)	$R_{g_1}$	max. 30	max. 30	k $\Omega$

**OPERATING CONDITIONS**

		C.C.S.		
Frequency	f	30		MHz
Anode voltage	$V_a$	600		V
Grid No.2 voltage	$V_{g_2}$	200		V <sup>5)</sup>
Grid No.1 voltage	$V_{g_1}$	-47		V <sup>5)</sup>
		zero signal	single tone signal	double tone signal
Grid No.1 driving voltage	$V_{g_1p}$	0	47	47 V
Anode current	$I_a$	24	125	86 mA
Grid No.2 current	$I_{g_2}$		7.4	5 mA
Grid No.1 current	$I_{g_1}$	0	0	0 mA
Anode input power	$W_{i_a}$	14.4	75	51.5 W
Anode dissipation	$W_a$	14.4	26	27 W
Output power (PEP)	$W_o$	-	49	49 W
Efficiency	$\eta$	-	65.5	47.5 %
Intermodulation distortion				
of the 3rd order	d <sub>3</sub>			24.5 dB <sup>6)</sup>
of the 5th order	d <sub>5</sub>			30 dB <sup>6)</sup>

Notes see page 11

## R.F. CLASS AB LINEAR AMPLIFIER, SINGLE SIDE BAND, suppressed carrier

## OPERATING CONDITIONS (continued)

I.C.A.S.

		I.C.A.S.			
		zero signal	single tone signal	double tone signal	
Frequency	f	30			MHz
Anode voltage	$V_a$	750			V
Grid No. 2 voltage	$V_{g2}$	200			V <sup>5)</sup>
Grid No. 1 voltage	$V_{g1}$	-48			V <sup>5)</sup>
Grid No. 1 driving voltage	$V_{g1p}$	0	48	48	V
Anode current	$I_a$	25	125	86	mA
Grid No. 2 current	$I_{g2}$		6.3	3.9	mA
Grid No. 1 current	$I_{g1}$	0	0	0	mA
Anode input power	$W_{i_a}$	18.8	94	64.5	W
Anode dissipation	$W_a$	18.8	33	34	W
Output power (PEP)	$W_o$	-	61	61	W
Efficiency	$\eta$	-	65	47	%
Intermodulation distortion of the 3rd order	$d_3$			26	dB <sup>6)</sup>
of the 5th order	$d_5$			31	dB <sup>6)</sup>

Notes see page 11

A.F. CLASS AB AMPLIFIER (without grid current)

LIMITING VALUES (Absolute max. rating system)

		C.C.S.	I.C.A.S.
Anode voltage	$V_a$	max. 600	max. 750 V
Anode dissipation	$W_a$	max. 27	max. 35 W
Anode current	$I_a$	max. 175	max. 220 mA
Grid No.2 voltage	$V_{g2}$	max. 250	max. 250 V
Grid No.2 dissipation	$W_{g2}$	max. 3	max. 3 W
Grid No.1 voltage	$-V_{g1}$	max. 150	max. 150 V
Grid No.1 current	$I_{g1}$	max. 0	max. 0 mA
Grid No.1 circuit resistance	$R_{g1}$	max. 100	max. 100 k $\Omega$
Cathode to heater voltage, peak	$V_{kf_p}$	max. 135	max. 135 V

OPERATING CONDITIONS two tubes in push-pull

		C.C.S.		I.C.A.S.	
Anode voltage	$V_a$	600		750 V	
Grid No.2 voltage	$V_{g2}$	200		200 V <sup>7)</sup>	
Grid No.1 voltage	$V_{g1}$	-47		-48 V	
Load resistance	$R_{aa} \sim$	5600		7200 $\Omega$	
Grid to grid voltage, peak	$V_{g1g1p}$	0	94	0	96 V
Anode current	$I_a$	2 x 24	2 x 125	2 x 25	2 x 125 mA
Grid No.2 current	$I_{g2}$	-	2 x 7.4	-	2 x 6.3 mA
Anode input power	$W_{i_a}$	2 x 14.4	2 x 75	2 x 19	2 x 94 W
Anode dissipation	$W_a$	2 x 14.4	2 x 27	2 x 19	2 x 32 W
Output power	$W_o$	0	96	0	124
Efficiency	$\eta$	-	64	-	66 %

Notes see page 11



A.F. CLASS AB AMPLIFIER (with grid current)

LIMITING VALUES (Absolute max. rating system)

		C.C.S.	I.C.A.S.
Anode voltage	$V_a$	max. 600	max. 750 V
Anode dissipation	$W_a$	max. 27	max. 35 W
Anode current	$I_a$	max. 175	max. 220 mA
Grid No.2 voltage	$V_{g2}$	max. 250	max. 250 V
Grid No.2 dissipation	$W_{g2}$	max. 3	max. 3 W
Grid No.1 voltage	$-V_{g1}$	max. 150	max. 150 V
Grid No.1 current	$I_{g1}$	max. 3.5	max. 4 mA
Grid No.1 circuit resistance	$R_{g1}$	max. 30	max. 30 $k\Omega^1$ )
Cathode to heater voltage, peak	$V_{kf_p}$	max. 135	max. 135 V

OPERATING CONDITIONS, two tubes in push-pull

		C.C.S.			
Anode voltage	$V_a$	500	600	V	
Grid No.2 voltage	$V_{g2}$	200	200	V <sup>7)</sup>	
Grid No.1 voltage	$V_{g1}$	-46	-48	V	
Load resistance	$R_{aa\sim}$	3620	5200	$\Omega$	
Grid to grid voltage, peak	$V_{g1g1p}$	0	108	0	106 V
Anode current	$I_a$	2 x 25	2 x 154	2 x 20	2 x 135 mA
Grid No.2 current	$I_{g2}$	-	2 x 13	-	2 x 13.5 mA
Grid No.1 current	$I_{g1}$	0	2 x 1.35	0	2 x 0.65 mA
Driving power	$W_{dr}$	0	0.2	0	0.7 W
Anode input power	$W_{i_a}$	2 x 12.5	2 x 77	2 x 12	2 x 81 W
Anode dissipation	$W_a$	2 x 12.5	2 x 27	2 x 12	2 x 26 W
Output power	$W_o$	0	100	0	110 W
Efficiency	$\eta$	-	65	-	68 %

Notes see page 11

## OPERATING CONDITIONS(continued)

I.C.A.S.

Anode voltage	$V_a$	600	750	V		
Grid No.2 voltage	$V_{g2}$	200	150	V		
Grid No.1 voltage	$V_{g1}$	-47	-39	V		
Load resistance	$R_{aa\sim}$	4160	6050	$\Omega$		
Grid to grid voltage, peak	$V_{g1g1p}$	0	114	0	110	V
Anode current	$I_a$	2 x 25	2 x 164	2 x 20	2 x 147	mA
Grid No.2 current	$I_{g2}$	-	2 x 13	-	2 x 14	mA
Grid No.1 current	$I_{g1}$	0	2 x 1.7	0	2 x 3.8	mA
Driving power	$W_{dr}$	0	0.2	0	0.5	W
Anode input power	$W_{i_a}$	2 x 12	2 x 98	2 x 15	2 x 110	W
Anode dissipation	$W_a$	2 x 12	2 x 33	2 x 15	2 x 35	W
Output power	$W_o$	0	130	0	150	W
Efficiency	$\eta$	-	66	-	68	%

Notes pages 3 through 9

1. For operation at maximum ratings.  
For operation at less than maximum ratings:  
 $R_{g_1} = \text{max. } 100 \text{ k}\Omega$ .
2. Obtained preferably from a separate source, or from the anode supply voltage with a voltage divider, or through a series resistor.  
A series resistor should be used only when the tube is used in a circuit which is not keyed. Grid No.2 voltage must not exceed 435 V under key-up conditions.
3.  $V_{g_1}$  may be obtained from a separate supply, or from  $R_{g_1}$  or  $R_k$ , or by combination methods.
4. Obtained preferably from a separate source modulated with the anode supply, or from the anode supply through a series resistor.
5. Obtained from a separate source.
6. Maximum values encountered at any level of drive voltage up to full drive referred to the amplitude of either of the two equal tones at that level.
7. Obtained preferably from a separate source or from the anode voltage supply with a voltage divider.

**SPECIAL PERFORMANCE DATA**

Stationary equipment operation

	min.	nom.	max.		
Heater voltage	$V_f$	-	6.3	-	V <sup>1)</sup>
Heater current at $V_f = 6.3$ V	$I_f$	1050	-	1200	mA
Grid No.2 current	$I_{g2}$	-	-	15	mA <sup>2)</sup>
Output power in load	$W_\ell$	59	-	-	W <sup>2)</sup>

Mobile equipment operation

	min.	design range	max.		
Heater voltage	$V_f$	-	6.0 to 7.5	-	V <sup>3)</sup>
Heater current at $V_f = 6.75$ V	$I_f$	1100	-	1230	mA
Grid No.2 current	$I_{g2}$	-	-	15	mA <sup>2)</sup>
Output power in load	$W_\ell$	59	-	-	W <sup>2)</sup>
Decrease output power in load	$\Delta W_\ell$	-	-	10	% <sup>4)</sup>

Notes

1. Recommended design centre heater voltage 6.3 V. To ensure long life the heater voltage should not fluctuate more than 10%.
2. In a self-excited oscillator circuit and
 

Heater voltage	$V_f$	6.3	V
Anode voltage	$V_a$	600	V
Grid No.2 voltage	$V_{g2}$	200	V
Grid No.1 resistor	$R_{g1}$	24	k $\Omega$ $\pm 10\%$
Anode current	$I_a$	max. 150	mA
Grid No.1 current	$I_{g1}$	2.5 to 3	mA
Frequency	f	15	MHz
3. Recommended heater voltage within the range  $V_f$  6.0 to 7.5 V  
 In battery operation within the range  $V_f$  5.0 to 8.0 V
4. With the conditions of note 2, reduce the heater voltage to 5.0 V. The decrease in output power  $\Delta W_\ell = \text{max. } 10\%$ .

Over voltage heater life tests

Continuous heater life tests are performed periodically on sample lots of tubes with 8 V on the heater, all electrodes floating.

Intermittent heater life tests are performed periodically on sample lots of tubes with 11 V on the heater, a cycle of 1 minute "on" and 4 minutes "off".

After 1000 h of continuous heater life test, and after 48 h of entermittent life test the following measurements are performed:

Cathode to heater leakage

at  $V_f = 6.75$  V;  $V_{kf} = \pm 100$  V

$I_{kf}$  max. 100  $\mu$ A

Leakage resistance grid No. 1

at  $V_f = 6.75$  V;  $V_{g1} = -200$  V;

$V_a = V_{g2} = V_k = 0$  V

$r_{ins}$  min. 10 M $\Omega$



Leakage resistance anode

at  $V_f = 6.75$  V;  $V_a = -200$  V

$V_{g2}, V_{g1}, V_k = 0$  V

$r_{ins}$  min. 10 M $\Omega$



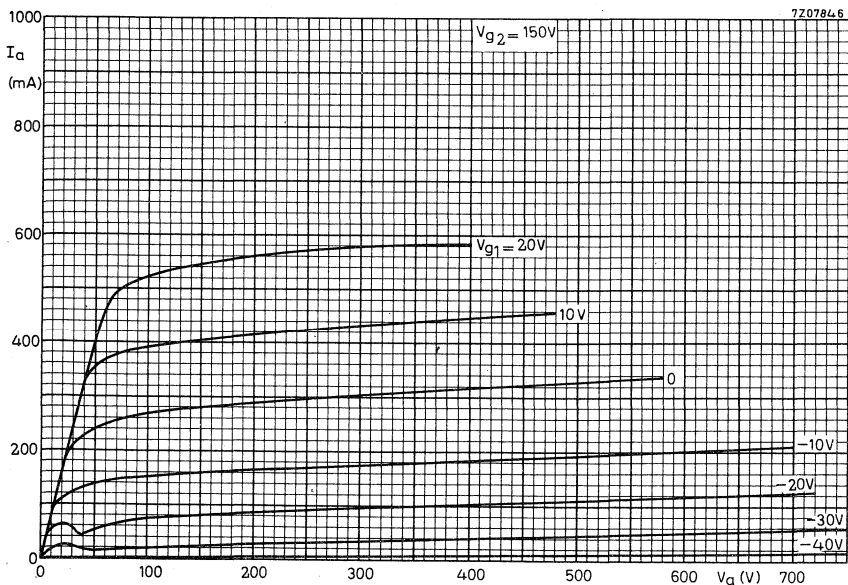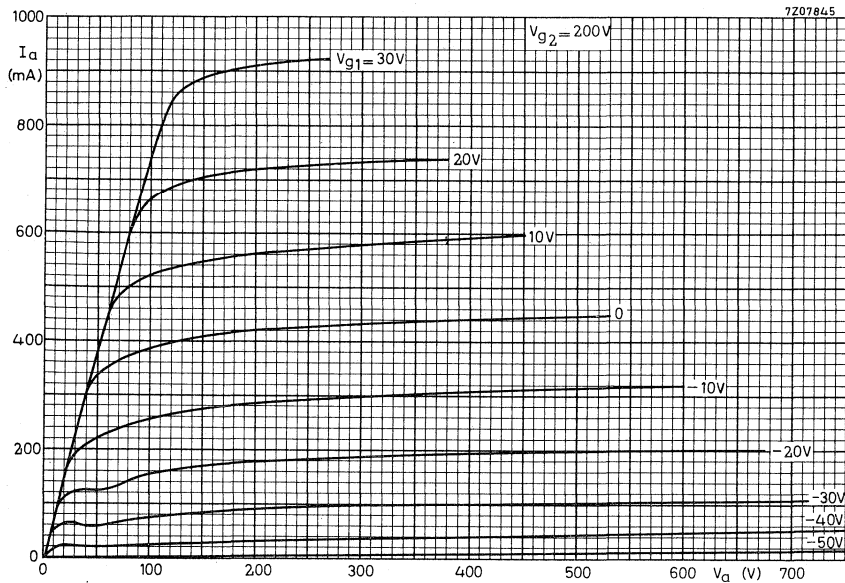

## R.F. BEAM POWER TETRODE

R.F. Beam power tetrode intended for use as R.F. power amplifier, oscillator, A.F. power amplifier and modulator in both mobile and fixed equipment.

**HEATING:** indirect by A.C. or D.C.; cathode oxide coated

Heater voltage	$V_f$	12.6	V
Heater current at $V_f = 12.6$ V	$I_f$	562	mA
Cathode heating time	$T_h$	min. 60	s

### CAPACITANCES

Grid No.1 to all except anode	$C_{g1(a)}$	13.0	pF
Anode to all except grid No.1	$C_a(g1)$	8.5	pF
Anode to grid No.1	$C_{ag1}$	max. 0.24	pF

### SPECIAL PERFORMANCE DATA

#### Stationary equipment operation

	Min.	Nom.	Max.	
Heater voltage	-	12.6	-	V <sup>1)</sup>
Heater current at $V_f = 12.6$ V	525	-	600	mA
Output power in load	59	-	-	W <sup>2)</sup>

#### Mobile equipment operation

	Min.	Design range	Max.	
Heater voltage	-	12 to 15	-	V <sup>3)</sup>
Heater current at $V_f = 13.5$ V	550	-	620	mA
Output power in load	59	-	-	W <sup>2)</sup>
Decrease output power in load	-	-	10	% <sup>4)</sup>

<sup>1)</sup> <sup>2)</sup> <sup>3)</sup> <sup>4)</sup> See page 2

## NOTES

1. Recommended design centre heater voltage 12.6 V.

To ensure long life the heater voltage should not fluctuate more than 10%.

2. In a self-excited oscillator circuit and

Heater voltage	$V_f$	12.6	V
Anode voltage	$V_a$	600	V
Grid No.2 voltage	$V_{g2}$	200	V
Grid No.1 resistor	$R_{g1}$	24	$k\Omega \pm 10\%$
Anode current	$I_a$	max. 150	mA
Grid No.1 current	$I_{g1}$	2.5 to 3	mA
Frequency	$f$	15	MHz

3. Recommended heater voltage within the range 12.0 to 15.0 V.

In battery operation within the range 10 to 15 V.

4. With the conditions of note 2, reduce the heater voltage to 10 V. The decrease in output power  $\Delta W_\ell = \text{max. } 10\%$ .

Overvoltage life tests

Continuous heater life tests are performed periodically on sample lots of tubes with 16 V on the heater, all electrodes floating.

Intermittent heater life tests are performed periodically on sample lots of tubes with 22 V on the heater, a cycle of 1 minute "on" and 4 minutes "off".

After 1000 h of continuous heater life test, and after 48 h of intermittent life test the following measurements are performed:

Cathode to heater leakage at $V_f = 13.5 \text{ V}; V_{kf} = \pm 100 \text{ V}$	$I_{kf}$	max. 100	$\mu\text{A}$
Leakage resistance grid No.1 at $V_f = 13.5 \text{ V}; V_{g1} = -200 \text{ V}$ $V_a = V_{g2} = V_k = 0 \text{ V}$	$r_{ins}$	min. 10	$M\Omega$
Leakage resistance anode at $V_f = 13.5 \text{ V}; V_a = -200 \text{ V}$ $V_{g2} = V_{g1} = V_k = 0 \text{ V}$	$r_{ins}$	min. 10	$M\Omega$

-----  
For further data and curves please refer to type YL1370  
-----



## R.F. BEAM POWER TETRODE

R.F. Beam power tetrode intended for use as R.F. amplifier, oscillator, A.F. power amplifier and modulator in both mobile and fixed equipment.

**HEATING:** indirect by A.C. or D.C.; cathode oxide coated

Heater voltage	$V_f$	26.5	V
Heater current at $V_f = 26.5$ V	$I_f$	300	mA
Cathode heating time	$T_h$	min. 60	s

### CAPACITANCES

Grid No. 1 to all except anode	$C_{g1(a)}$	13.0	pF
Anode to all except grid No. 1	$C_a(g1)$	8.5	pF
Anode to grid No. 1	$C_{ag1}$	min. 0.24	pF

### SPECIAL PERFORMANCE DATA

#### Stationary equipment operation

	Min.	Nom.	Max.		
Heater voltage	$V_f$	-	26.5	-	V 1)
Heater current at $V_f = 26.5$ V	$I_f$	280	-	320	mA
Output power in load	$W_l$	59	-	-	W 2)

#### Mobile equipment operation

	Min.	Design range	Max.		
Heater voltage	$V_f$	-	24 to 29	-	V 3)
Heater current at $V_f = 26.5$ V	$I_f$	280	-	320	mA
Output power in load	$W_l$	59	-	-	2)
Decrease output power in load	$\Delta W_l$	-	-	10	% 4)

1) 2) 3) 4) See page 2.

**NOTES**

1. Recommended design centre heater voltage 26.5 V.  
To ensure long life the heater voltage should not fluctuate more than 10%.

2. In a self excited oscillator circuit and

Heater voltage	$V_f$	26.5	V
Anode voltage	$V_a$	600	V
Grid No.2 voltage	$V_{g2}$	200	V
Grid No.1 resistor	$R_{g1}$	24	$k\Omega \pm 10\%$
Anode current	$I_a$	max. 150	mA
Grid No.1 current	$I_{g1}$	2.5 to 3	mA
Frequency	$f$	15	MHz

3. Recommended heater voltage within the range 24 to 29 V.  
In battery operation within the range 21 to 31 V.

4. With the conditions of note 2, reduce the heater voltage to 10 V. The decrease in output power  $\Delta W_l = \text{max. } 10\%$ .

Overvoltage life tests

Continuous heater life tests are performed periodically on sample lots of tubes with 31 V on the heater, all electrodes floating.

Intermittent heater life tests are performed periodically on sample lots of tubes with 43 V on the heater, a cycle of 1 minute "on" and 4 minutes "off".

After 1000 h of continuous heater life test, and after 48 h of intermittent life test the following measurements are performed:

Cathode to heater leakage  $I_{kf}$  max. 150  $\mu A$   
at  $V_f = 26.5 \text{ V}; V_{kf} = \pm 100 \text{ V}$

Leakage resistance grid No.1  $r_{ins}$  min. 10  $M\Omega$   
at  $V_f = 26.5 \text{ V}; V_{g1} = -200 \text{ V}$   
 $V_a = V_{g2} = V_k = 0 \text{ V}$

Leakage resistance anode  $r_{ins}$  min. 10  $M\Omega$   
at  $V_f = 26.5 \text{ V}; V_a = -200 \text{ V}$   
 $V_{g2} = V_{g1} = V_k = 0 \text{ V}$

-----  
For further data and curves please refer to type YL1370  
-----

## AIR COOLED V.H.F. POWER TETRODE

Forced air cooled coaxial power tetrode in metal-ceramic construction primarily intended for use as a linear broad-band amplifier in T V transmitters in the bands I and III. This type is also very suitable for A. M. and F. M. broadcast, A. F. modulator applications and in T V transposer service.

QUICK REFERENCE DATA			
Class AB linear amplifier (vision)			
Frequency	f	175, 25	MHz
Anode voltage	V <sub>a</sub>	5	kV
Output power in load	W <sub>ℓ</sub>	8, 6	kW
Power gain	G	24	
Class B amplifier			
Frequency	f	260	MHz
Anode voltage	V <sub>a</sub>	7	kV
Output power in load	W <sub>ℓ</sub>	10, 5	kW
Power gain	G	32	
R. F. Class C telegraphy or F. M. telephony			
Frequency	f	260	MHz
Anode voltage	V <sub>a</sub>	7	kV
Output power in load	W <sub>ℓ</sub>	11	kW
Power gain	G	32	
TV transposer service			
Frequency	f	175 to 225	MHz
Anode voltage	V <sub>a</sub>	4	kV
Output power in load	W	2, 5	kW
Power gain	G	30	

**HEATING:** direct; filament thoriated tungsten, mesh type

Filament voltage	V <sub>f</sub>	6, 3	V ± 5%
Filament current	I <sub>f</sub>	120	A
Filament peak starting current	I <sub>fp</sub>	max. 750	A
Cold filament resistance	R <sub>f0</sub>	6	mΩ
Waiting time	T <sub>w</sub>	min. 1	s

**TYPICAL CHARACTERISTICS**

Anode voltage	$V_a$	5	kV
Grid No. 2 voltage	$V_{g2}$	600	V
Anode current	$I_a$	1, 45	A
Transconductance	$S$	30	mA/V
Amplification factor	$\mu_{g2g1}$	7, 5	

**CAPACITANCES**

	(grounded cathode)		(grounded grid)	
Input	$C_{g1(a)}$	90	$C_{f(a)}$	48 pF
Output	$C_{a(g1)}$	16	$C_{a(f)}$	16, 4 pF
Anode to grid No. 1	$C_{ag1}$	0, 55		pF
Anode to filament			$C_{af}$	0, 15 pF

**TEMPERATURE LIMITS**

Absolute max. envelope temperature	$t_{env}$	max.	240	°C
Recommended max. seal temperature	$t$	max.	200	°C

**COOLING**

See curves  
 Direction of air flow: see drawing.

**ACCESSORIES**

Band I amplifier circuit assembly (vision)	type 40757
Band I amplifier circuit assembly (sound)	type 40758
Band III amplifier circuit assembly (vision)	type 40745
Band III amplifier circuit assembly (sound)	type 40746



**R.F. CLASS B SERVICE**

Unless otherwise stated the voltages are specified with respect to cathode

**LIMITING VALUES** (Absolute max. rating system)

Frequency	f	up to	260	MHz
Anode voltage	$V_a$	max.	8,5	kV
Grid no. 2 voltage	$V_{g2}$	max.	1	kV
Grid no. 1 voltage	$-V_{g1}$	max.	500	V
Anode current	$I_a$	max.	4	A
Anode input power	$W_{ia}$	max.	18,5	kW
Anode dissipation	$W_a$	max.	6	kW
Grid no. 2 dissipation	$W_{g2}$	max.	80	W
Grid no. 1 dissipation	$W_{g1}$	max.	40	W
Cathode current	$I_k$	max.	4,5	A

**OPERATING CONDITIONS** ; grounded grid

Frequency	f	up to	260	MHz
Anode voltage	$V_a$		7	kV
Grid no. 2 voltage	$V_{g2}$		600	V
Grid no. 1 voltage	$V_{g1}$		-120	V <sup>1)</sup>
Anode current, no signal condition	$I_a$		0,2	A
Anode current	$I_a$		2,2	A
Grid no.2 current	$I_{g2}$		80	mA
Grid no. 1 current	$I_{g1}$		125	mA
Anode input power	$W_{ia}$		15,4	kW
Anode dissipation	$W_a$		4,3	kW
Output power in load	$W_l$		10,5	kW
Efficiency, total	$\eta$		68	%
Driving power	$W_{dr}$		325	W
Power gain	$\frac{W_l}{W_{dr}}$		32	

Note see page 8







## R.F. CLASS C TELEGRAPHY or F.M. TELEPHONY

## LIMITING VALUES (Absolute max. rating system)

Frequency	f	up to	260	MHz
Anode voltage	$V_a$	max.	8,5	kV
Grid no. 2 voltage	$V_{g2}$	max.	1	kV
Grid no. 1 voltage	$-V_{g1}$	max.	500	V
Anode current	$I_a$	max.	4	A
Anode input power	$W_{ia}$	max.	18,5	kW
Anode dissipation	$W_a$	max.	6	kW
Grid no. 2 dissipation	$W_{g2}$	max.	80	W
Grid no. 1 dissipation	$W_{g1}$	max.	40	W
Cathode current	$I_k$	max.	4,5	A


## OPERATING CONDITIONS





Frequency	f	260	MHz
Anode voltage	$V_a$	7	kV
Grid no. 2 voltage	$V_{g2}$	600	V
Grid no. 1 voltage	$V_{g1}$	-120	V <sup>1)</sup>
Anode current, no signal condition	$I_a$	200	mA
Anode current	$I_a$	2,3	A
Grid no. 2 current	$I_{g2}$	80	mA
Grid no. 1 current	$I_{g1}$	150	mA
Anode input power	$W_{ia}$	16,1	kW
Anode dissipation	$W_a$	5	kW
Output power in load	$W_l$	11	kW
Efficiency, total	$\eta$	68	%
Driving power	$W_{dr}$	325	W
Power gain	$\frac{W_l}{W_{dr}}$	32	

<sup>1)</sup> See page 8


NOTES


- 1) To be adjusted for the stated no signal anode current.
- 2) With double tuned circuit.
- 3) Black signal including line sync pulses
- 4) A picture/sync ratio of 75/25 for the outgoing signal requires a ratio of max. 70/30 for the incoming signal in which case the sync compression sync in/out = 30/25.
- 5) Measured with a saw tooth amplitude, running from 17% to 75% of the peak sync value, with superimposed a 4, 43 MHz sine wave with a 10% peak to peak value.
- 6) At c.w. output power = 2,5 kW
- 7) Three-tone test method (vision carrier -8 dB, sound carrier -7 dB, sideband signal -17 dB with respect to peak sync = 0 dB).

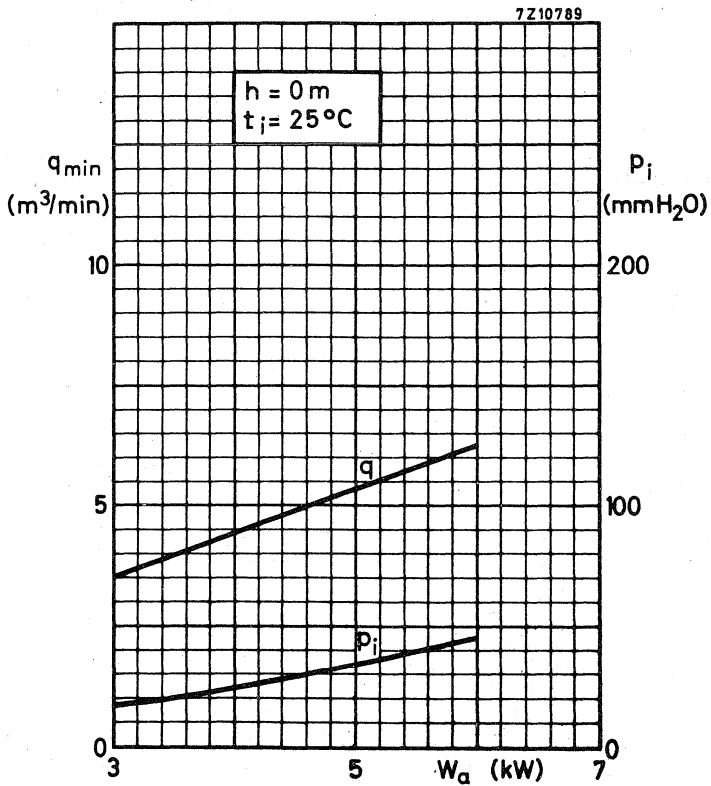

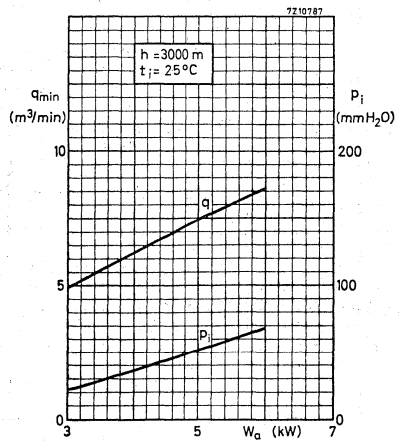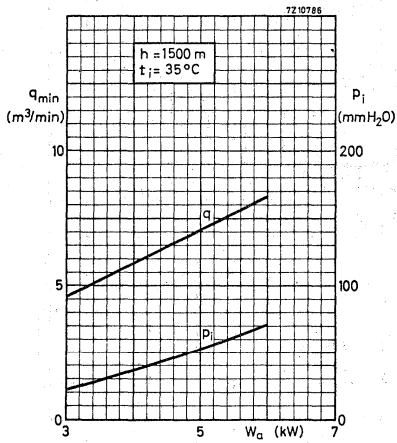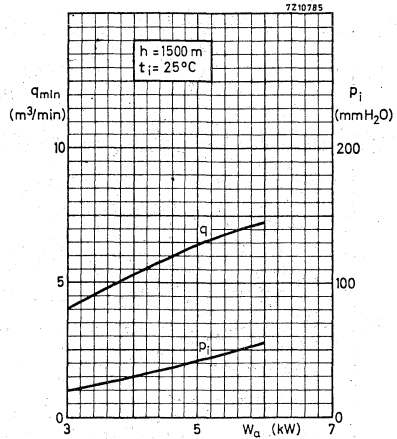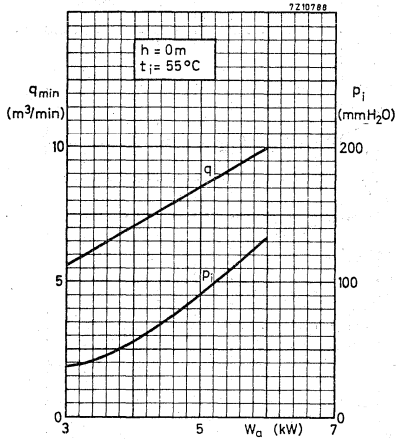


7210804

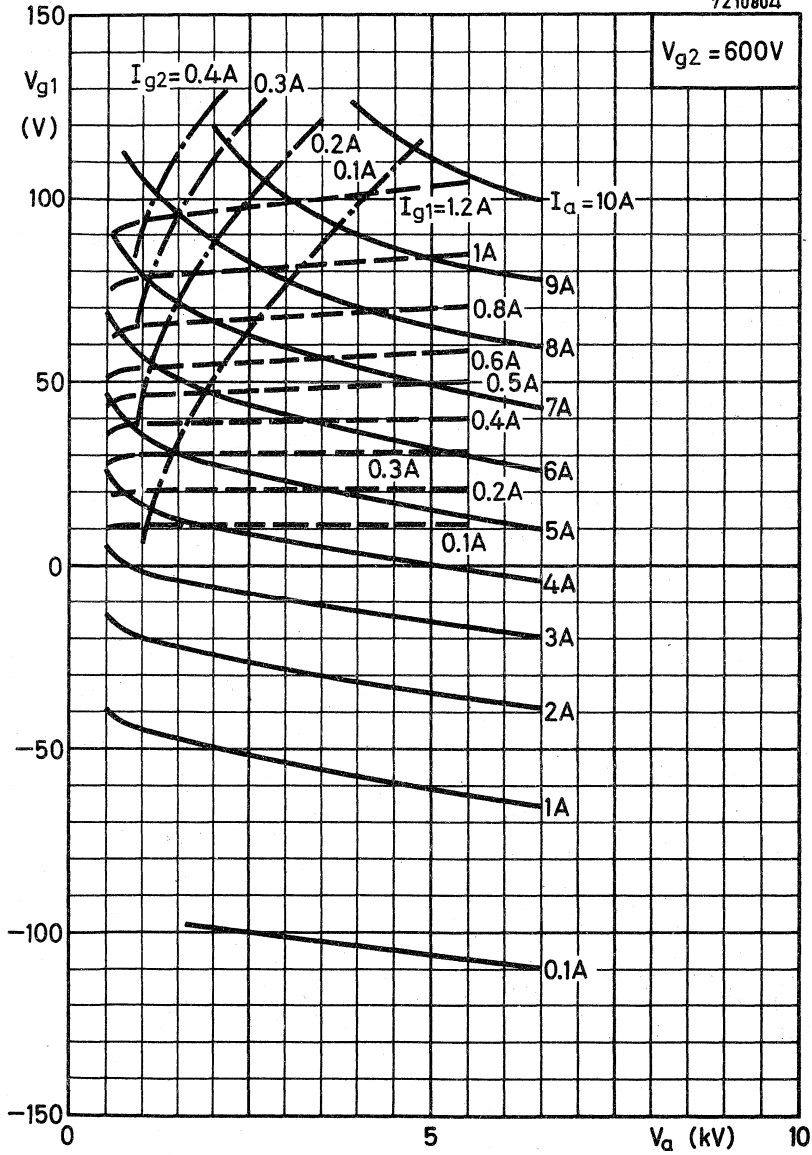

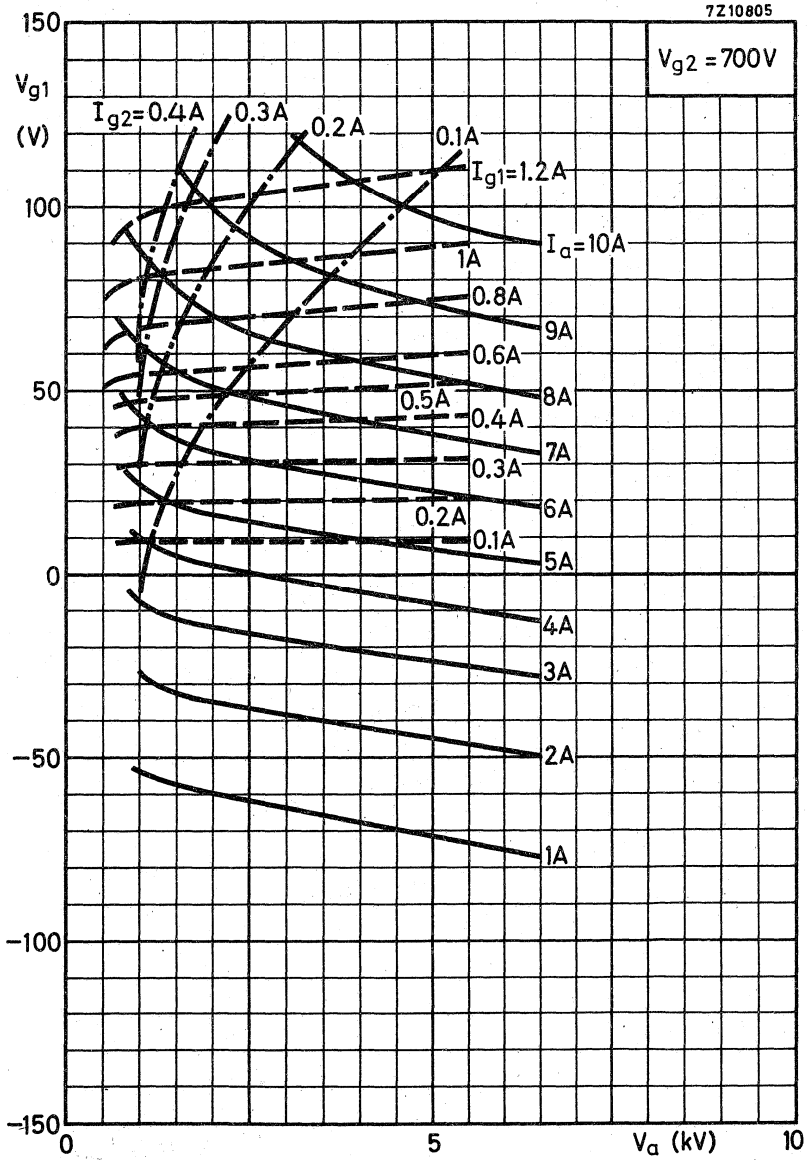

7210803

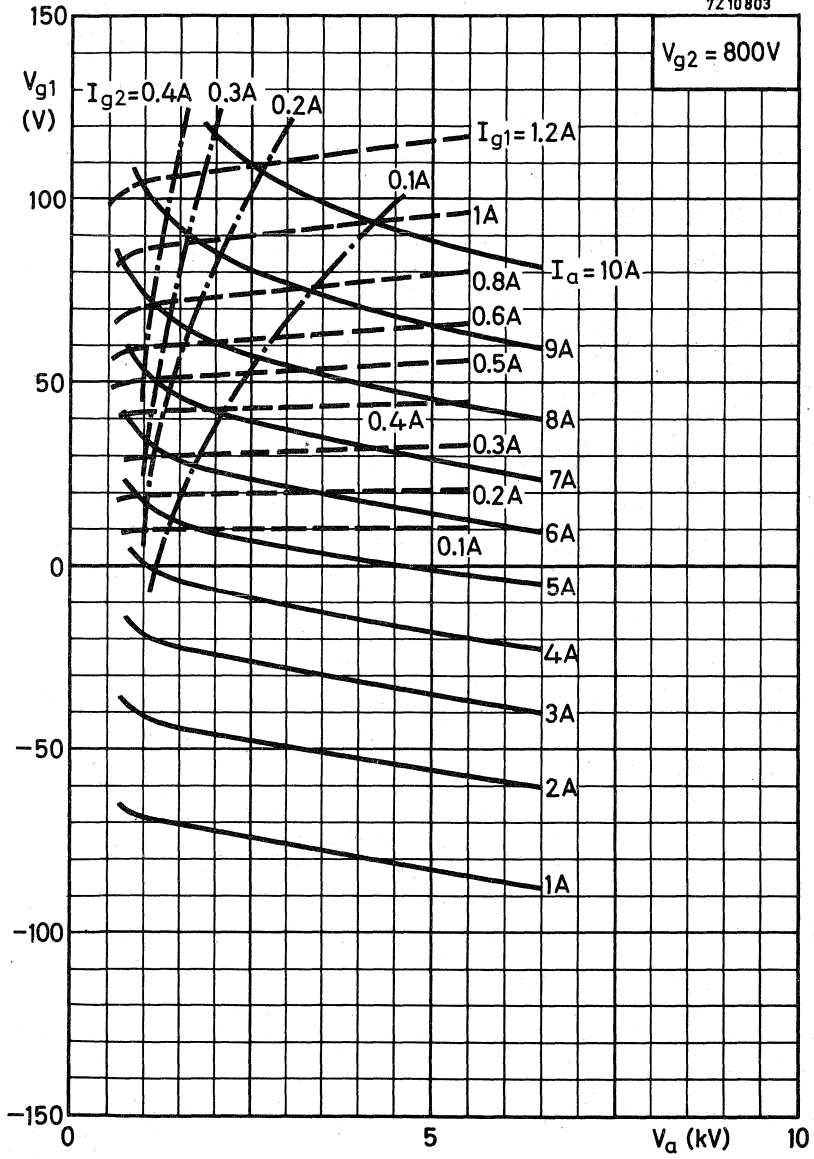

## AIR COOLED V.H.F. POWER TETRODE

Forced air cooled coaxial power tetrode in metal-ceramic construction primarily intended for use as a linear broad-band amplifier in T V transmitters in the bands I and III. This type is also very suitable for A. M. and F. M broadcast, A. F. modulator applications, and in T V transposer service.

QUICK REFERENCE DATA			
Frequency	f	175, 25	MHz
Anode voltage	$V_a$	7	kV
Output power in load	$W_l$	18, 4	kW
Power gain	G	25	
Class B amplifier			
Frequency	f	260	MHz
Anode voltage	$V_a$	7, 5	kV
Output power in load	$W_l$	13	kW
Power gain	G	32, 5	
R. F. Class C telegraphy or F. M. telephony			
Frequency	f	260	MHz
Anode voltage	$V_a$	8	kV
Output power in load	$W_l$	18	kW
Power gain	G	30	
TV transposer service			
Frequency	f	175 to 225	MHz
Anode voltage	$V_a$	6	kV
Output power in load	$W_l$	7	kW
Power gain	G	32	

**HEATING** : direct; filament thoriated tungsten, mesh type.

Filament voltage	$V_f$	8	V $\pm$ 5%
Filament current	$I_f$	120	A
Filament peak starting current	$I_{fp}$	max. 750	A
Cold filament starting current	$R_{fo}$	7, 5	m $\Omega$
Waiting time	$T_w$	min. 1	s

**TYPICAL CHARACTERISTICS**

Anode voltage	$V_a$	6	kV
Grid no. 2 voltage	$V_{g2}$	650	V
Anode current	$I_a$	2, 4	A
Transconductance	S	45	mA/V
Amplification factor	$\mu_{g2g1}$	8, 5	

**CAPACITANCES**

	grounded cathode		grounded grid	
Input	$C_{g1(a)}$	110	$C_{f(a)}$	55 pF
Output	$C_{a(g1)}$	17, 5	$C_{a(f)}$	18 pF
Anode to grid no. 1	$C_{ag1}$	0, 7		pF
Anode to filament			$C_{af}$	0, 2 pF

**TEMPERATURE LIMITS**

Absolute max. envelope temperature	$t_{env}$	max.	240	°C
Recommended max. seal temperature	t	max.	200	°C

**COOLING**

See curves.  
 Direction of air flow: see drawing.

**ACCESSORIES**

Band I amplifier circuit assembly (vision)	type 40759
Band II amplifier circuit assembly (sound)	type 40760
Band III amplifier circuit assembly (vision)	type 40747
Band III amplifier circuit assembly (sound)	type 40748




MECHANICAL DATA

Dimensions in mm

Net weight: approx. 11 kg

Mounting position: vertical with anode up or down

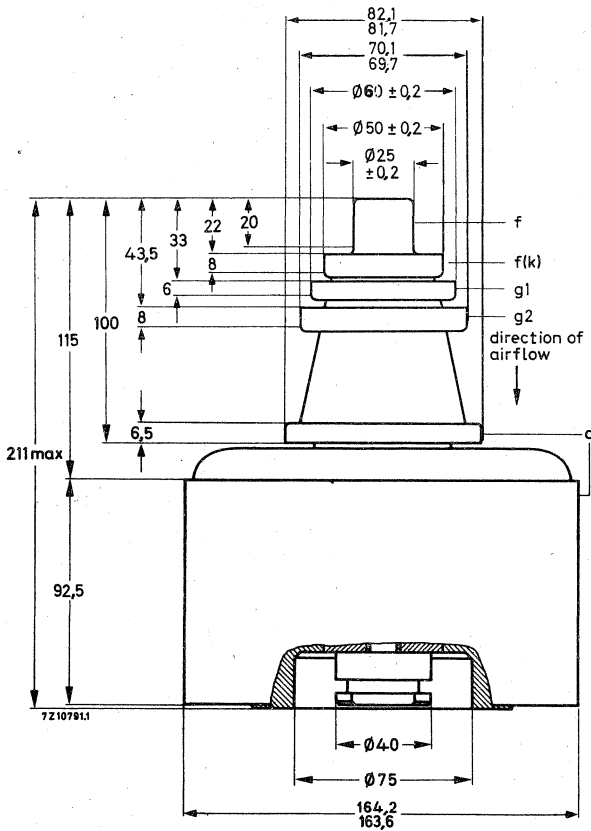

**R.F. CLASS B SERVICE**

Unless otherwise stated the voltages are specified with respect to cathode

**LIMITING VALUES** (Absolute max. rating system)

Frequency	f	up to	260	MHz
Anode voltage	V <sub>a</sub>	max.	9	kV
Grid no. 2 voltage	V <sub>g2</sub>	max.	1	kV
Grid no. 1 voltage	-V <sub>g1</sub>	max.	500	V
Anode current	I <sub>a</sub>	max.	5	A
Anode input power	W <sub>ia</sub>	max.	24	kW
Anode dissipation	W <sub>a</sub>	max.	12	kW
Grid no. 2 dissipation	W <sub>g2</sub>	max.	100	W
Grid no. 1 dissipation	W <sub>g1</sub>	max.	50	W
Cathode current	I <sub>k</sub>	max.	6	A

**OPERATING CONDITIONS** , grounded grid

Frequency	f	up to	260	MHz
Anode voltage	V <sub>a</sub>		7,5	kV
Grid no. 2 voltage	V <sub>g2</sub>		650	V
Grid no. 1 voltage	V <sub>g1</sub>		-125	V <sup>1)</sup>
Anode current, no signal condition	I <sub>a</sub>		0,1	A
Anode current	I <sub>a</sub>		2,5	A
Grid no. 2 current	I <sub>g2</sub>		80	mA
Grid no. 1 current	I <sub>g1</sub>		90	mA
Anode input power	W <sub>ia</sub>		18,75	kW
Anode dissipation	W <sub>a</sub>		5	kW
Output power in load	W <sub>l</sub>		13	kW
Efficiency, total	η		69,3	%
Driving power	W <sub>dr</sub>		400	W
Power gain	$\frac{W_l}{W_{dr}}$		32,5	

Note see page 9





## R.F. CLASS AB AMPLIFIER FOR TELEVISION TRANSPOSER SERVICE , grounded grid

## LIMITING VALUES

See page 5

## OPERATING CONDITIONS , grounded grid

Negative modulation, positive synchronization, combined sound and vision  
(CCIR standard G)

Frequency		f	175 to 225	MHz
Bandwidth (-1 dB)		B	8	MHz
Anode voltage		$V_a$	6	kV
Grid no. 2 voltage		$V_{g2}$	800	V
Grid no. 1 voltage	1)	$V_{g1}$	-80	V
Anode current, no signal condition		$I_a$	1, 2	A
Anode current	6)	$I_a$	2, 5	A
Grid no. 2 current	6)	$I_{g2}$	30	mA
Grid no. 1 current	6)	$I_{g1}$	50	mA
Driving power, sync		$W_{dr}$	220	W
Output power in load, sync		$W_l$	7	kW
Power gain		G	32	
Intermodulation products	7)	d	-52	dB

Notes: see page 9

R.F. CLASS C TELEGRAPHY or F.M. TELEPHONY

**LIMITING VALUES** (Absolute max. rating system)

Frequency	f	up to	260	MHz
Anode voltage	$V_a$	max.	9,5	kV
Grid no. 2 voltage	$V_{g2}$	max.	1	kV
Grid no. 1 voltage	$-V_{g1}$	max.	500	V
Anode current	$I_a$	max.	5	A
Anode input power	$W_{ia}$	max.	30	kW
Anode dissipation	$W_a$	max.	12	kW
Grid no. 2 dissipation	$W_{g2}$	max.	100	W
Grid no. 1 dissipation	$W_{g1}$	max.	50	W
Cathode current	$I_k$	max.	6	A


**OPERATING CONDITIONS**





Frequency	f	260	MHz
Anode voltage	$V_a$	8	kV
Grid no. 2 voltage	$V_{g2}$	700	V
Grid no. 1 voltage	$V_{g1}$	-115	V <sup>1)</sup>
Anode current, no signal condition	$I_a$	300	mA
Anode current	$I_a$	3,5	A
Grid no. 2 current	$I_{g2}$	100	mA
Grid no. 1 current	$I_{g1}$	300	mA
Anode input power	$W_{ia}$	28	kW
Anode dissipation	$W_a$	10	kW
Output power in load	$W_l$	18	kW
Efficiency, total	$\eta$	64,3	%
Driving power	$W_{dr}$	600	W
Power gain	$\frac{W_l}{W_{dr}}$	30	

<sup>1)</sup> see page 9


NOTES


- 1) To be adjusted for the stated no signal anode current.
- 2) With double tuned circuit.
- 3) Black signal including line sync pulses.
- 4) A picture/sync ratio of 72/25 for the outgoing signal requires a ratio of max. 70/30 for the incoming signal in which case the sync compression sync in/out = 30/25.
- 5) Measured with a saw tooth amplitude, running from 17% to 75% of the peak sync value, with superimposed a 4,43 MHz sine wave with a 10% peak to peak value.
- 6) At c.w. output power = 7 kW
- 7) Three-tone test method (vision carrier -8 dB, sound carrier -7 dB, sideband signal -17 dB with respect to peak sync = 0 dB).

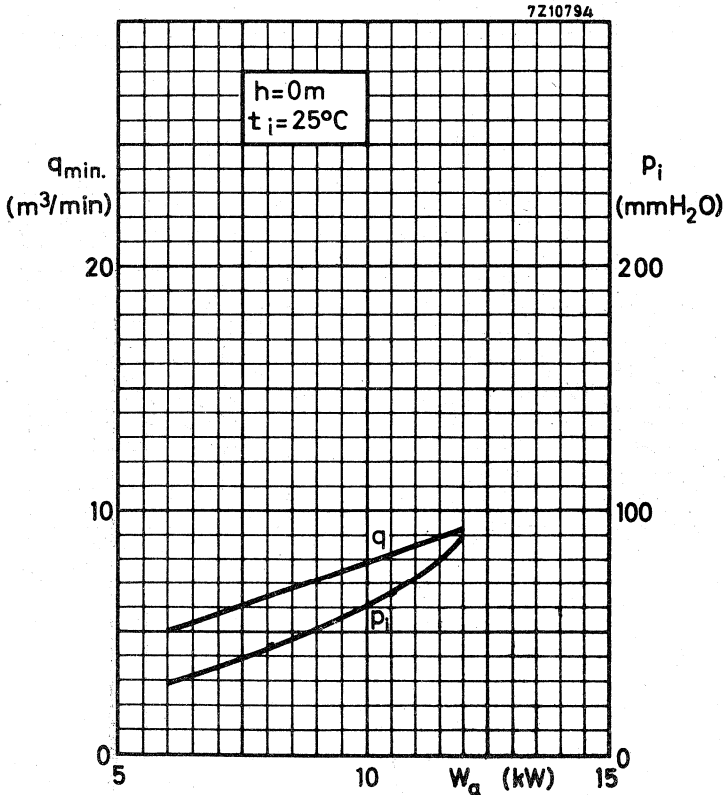


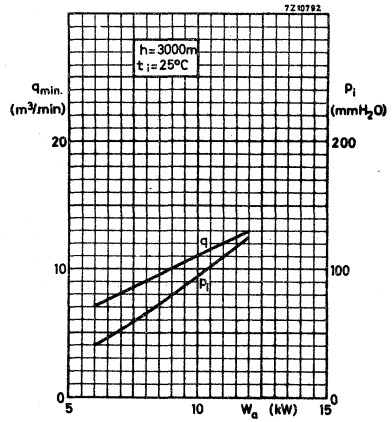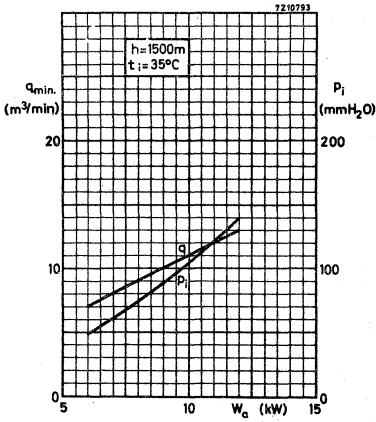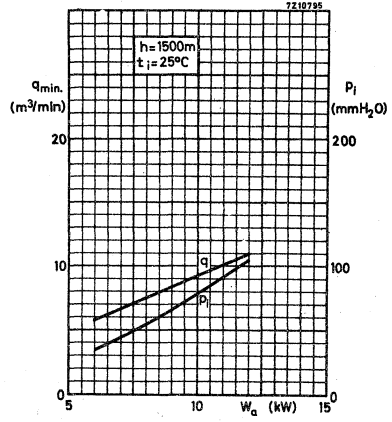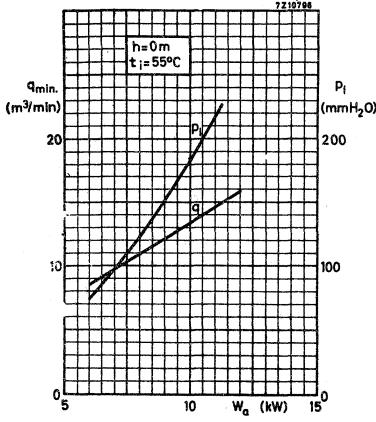



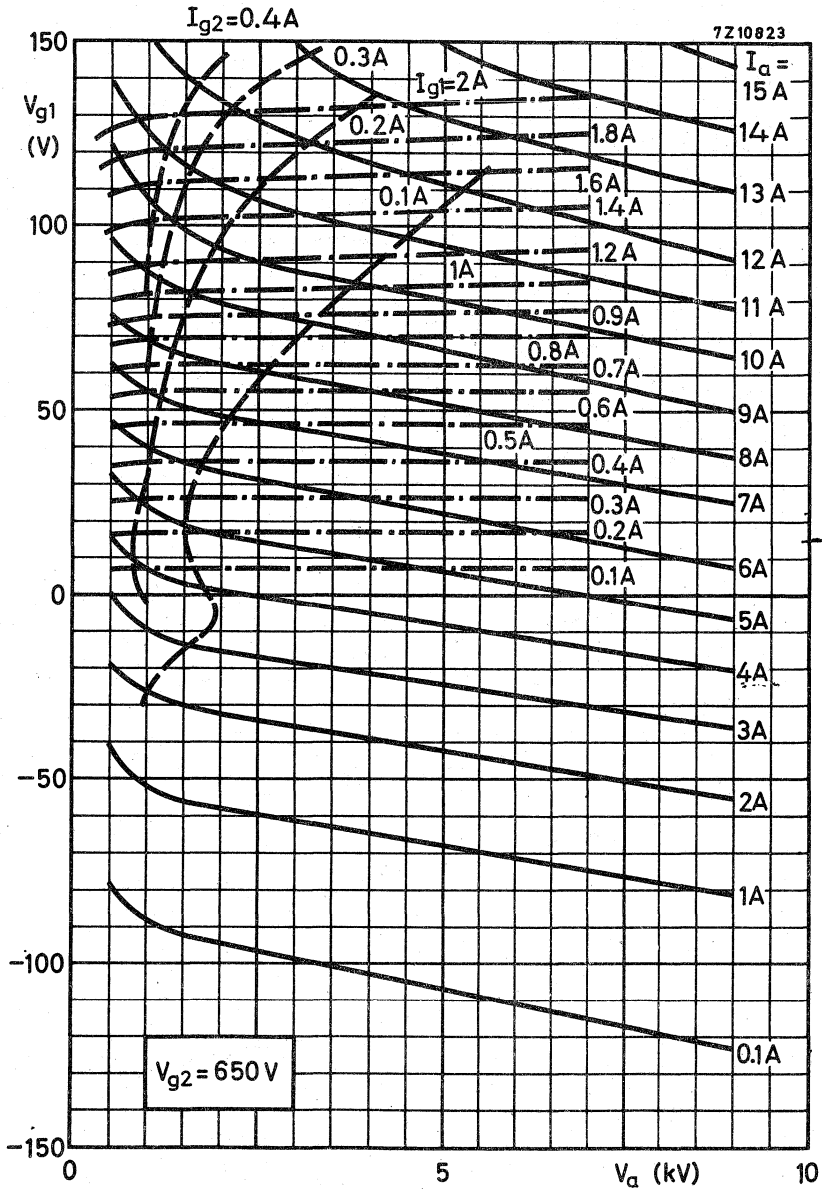

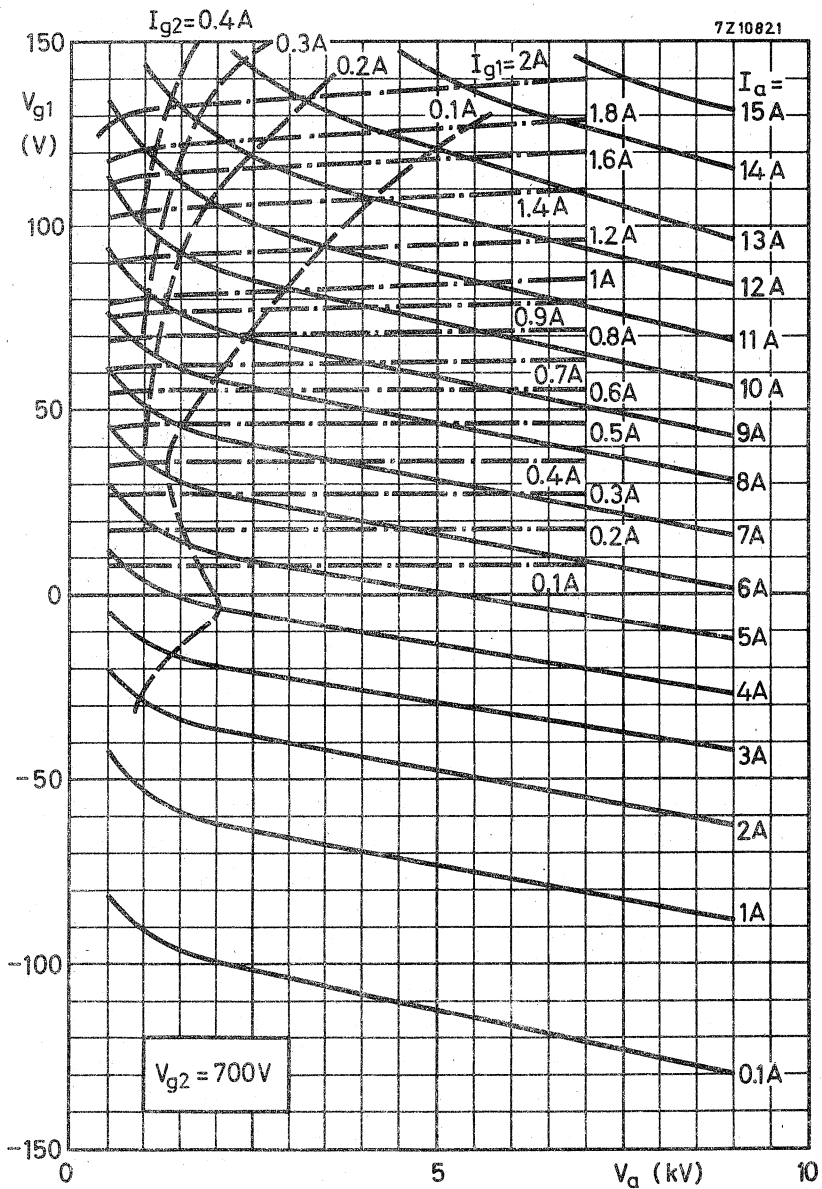

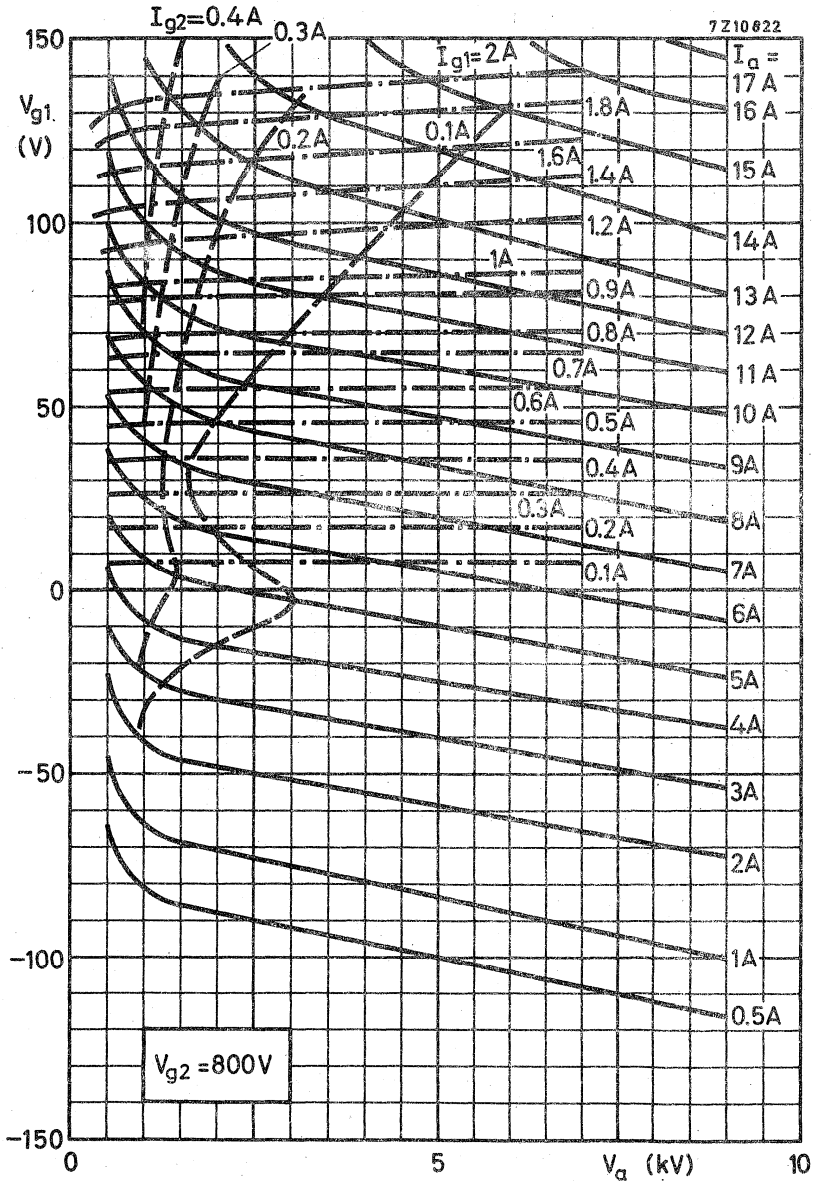



## AIR COOLED V.H.F. POWER TETRODE

Forced air cooled coaxial power tetrode in metal-ceramic construction primarily intended for use as a linear broad-band amplifier in T V transmitters in the bands I and III. This type is also very suitable for A. M. and F. M. broadcast, A. F. modulator applications, and in T V transposer service.

QUICK REFERENCE DATA			
Class AB linear amplifier (vision)			
Frequency	f	175, 25	MHz
Anode voltage	$V_a$	3	kV
Output power in load	$W_l$	1, 55	kW
Power gain	G	26	
Class B amplifier			
Frequency	f	260	MHz
Anode voltage	$V_a$	3, 5	kV
Output power in load	$W_l$	2, 4	kW
Power gain	G	26	
TV transposer service			
Frequency	f	175 to 225	MHz
Anode voltage	$V_a$	2, 5	kV
Output power in load	$W_l$	0, 55	kW
Power gain	G	30	

**HEATING:** direct; filament thoriated tungsten, mesh type.

Filament voltage	$V_f$	4, 2	V $\pm$ 5%
Filament current	$I_f$	53	A
Filament peak starting current	$I_{fp}$ max.	300	A
Cold filament resistance	$R_{f0}$	8, 5	m $\Omega$
Waiting time	$T_w$ min.	1	s

### TYPICAL CHARACTERISTICS

Anode voltage	$V_a$	4	kV
Grid no. 2 voltage	$V_{g2}$	500	V
Anode current	$I_a$	0, 4	A
Transconductance	S	25	mA/V
Amplification factor	$\mu_{g2g1}$	16	

**CAPACITANCES**

	grounded cathode		grounded grid		
Input	$C_{g1(a)}$	47	$C_{f(a)}$	24	pF
Output	$C_{a(g1)}$	9	$C_{a(f)}$	9	pF
Anode to grid no. 1	$C_{ag1}$	0, 1			pF
Anode to filament			$C_{af}$	< 0, 1	pF

**TEMPERATURE LIMITS**

Absolute max. envelope temperature	$t_{env}$	max.	240	°C
Recommended max. seal temperature	$t$	max.	200	°C

**COOLING**

See curves

Direction of air flow: see drawing.

**ACCESSORIES**


Band I amplifier circuit assembly (vision)	type 40755
Band I amplifier circuit assembly (sound)	type 40756
Band III amplifier circuit assembly (vision)	type 40743
Band III amplifier circuit assembly (sound)	type 40744

MECHANICAL DATA

Dimensions in mm

Net weight: approx. 0,55 kg

Mounting position: vertical with anode up or down.

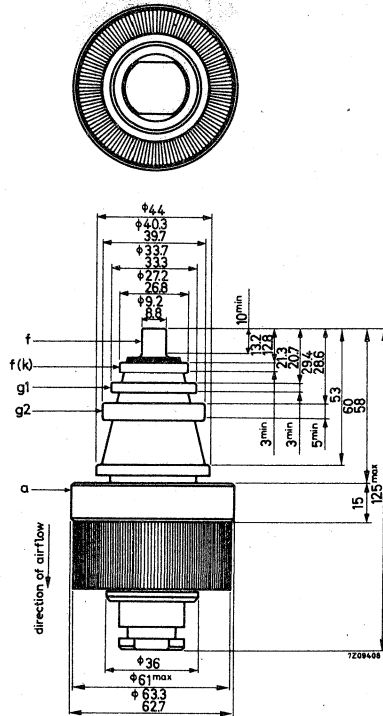

**R.F. CLASS B SERVICE**

Unless otherwise specified the voltages are given with respect to the cathode.

**LIMITING VALUES** (Absolute max. rating system)

Frequency	f	up to	260	MHz
Anode voltage	$V_a$	max.	4	kV
Grid no. 2 voltage	$V_{g2}$	max.	700	V
Grid no. 1 voltage	$-V_{g1}$	max.	100	V
Anode current	$I_a$	max.	1, 2	A
Anode input power	$W_{i_a}$	max.	4	kW
Anode dissipation	$W_a$	max.	1, 5	kW
Grid no. 2 dissipation	$W_{g2}$	max.	50	W
Grid no. 1 dissipation	$W_{g1}$	max.	30	W
Cathode current	$I_k$	max.	1, 5	A
Grid no. 1 circuit resistance	$R_{g1}$	max.	10	k $\Omega$

**OPERATING CONDITIONS** grounded grid

Frequency	f	up to	260	MHz
Anode voltage	$V_a$		3, 5	kV
Grid no. 2 voltage	$V_{g2}$		600	V
Grid no. 1 voltage	$V_{g1}$		-30	V <sup>2)</sup>
Anode current, no signal condition	$I_a$		100	mA
Anode current	$I_a$		980	mA
Grid no. 2 current	$I_{g2}$		70	mA
Grid no. 1 current	$I_{g1}$		120	mA
Anode input power	$W_{i_a}$		3, 43	kW
Anode dissipation	$W_a$		0, 9	kW
Output power in load	$W_l$		2, 4	kW
Efficiency, total	$\eta$		70	%
Driving power	$W_{dr}$		90	W
Power gain	$\frac{W_l}{W_{dr}}$		$\approx 26$	

<sup>2)</sup> See page 8







## R.F. CLASS AB AMPLIFIER FOR TELEVISION TRANSPOSER SERVICE , grounded grid

## LIMITING VALUES

See page 5

## OPERATING CONDITIONS , grounded grid


Negative modulation, positive synchronization, combined sound and vision  
(CCIR standard G)





Frequency	f	175 to 225	MHz
Bandwidth (-1 dB)	B	8	MHz
Anode voltage	$V_a$	2,5	kV
Grid no. 2 voltage	$V_{g2}$	600	V
Grid no. 1 voltage <sup>2)</sup>	$V_{g1}$	-13,5	V
Anode current, no signal condition	$I_a$	550	mA
Anode current <sup>6)</sup>	$I_a$	730	mA
Grid no. 2 current <sup>6)</sup>	$I_{g2}$	50	mA
Grid no. 1 current <sup>6)</sup>	$I_{g1}$	35	mA
Driving power, sync	$W_{dr}$	18	W
Output power in load, sync	$W_l$	0,55	kW
Power gain	G	30	-
Intermodulation products <sup>7)</sup>	d	-52	dB


Notes: see page 8


NOTES

- 1) With double tuned circuit.
- 2) To be adjusted for the stated no signal anode current.
- 3) Black signal including line sync pulses.
- 4) A picture/sync ratio of 75/25 for the outgoing signal requires a ratio of max. 70/30 for the incoming signal in which case the sync compression sync in/out = 30/25.
- 5) Measured with a saw tooth amplitude, running from 17% to 75% of the peak sync value, with superimposed a 4,43 MHz sine wave with a 10 % peak to peak value.
- 6) At c. w. output power = 550 W
- 7) Three-tone test method (vision carrier -8 dB, sound carrier -7 dB, sideband signal -17 dB with respect to peak sync = 0 dB).

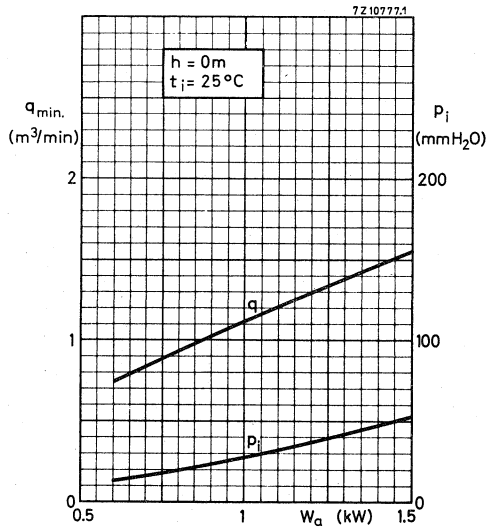


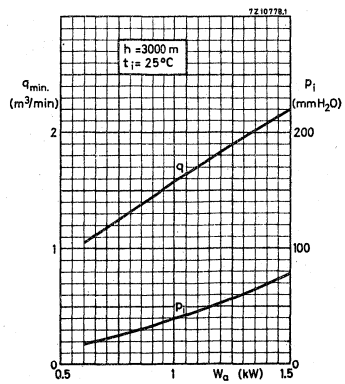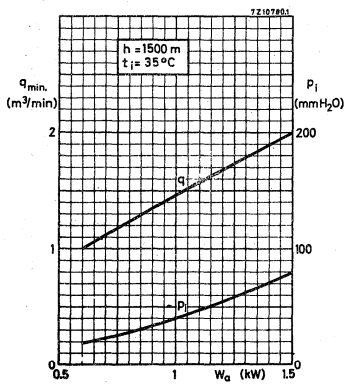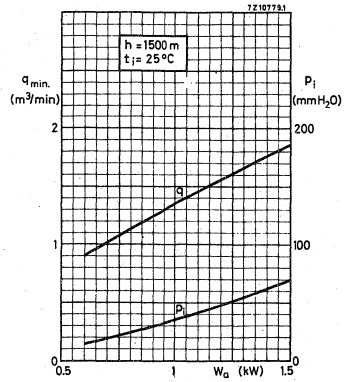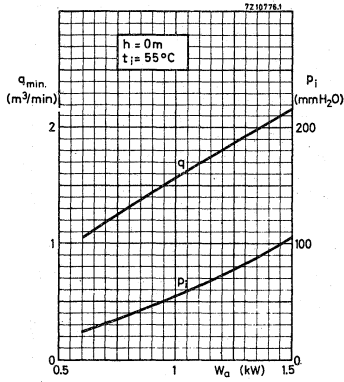

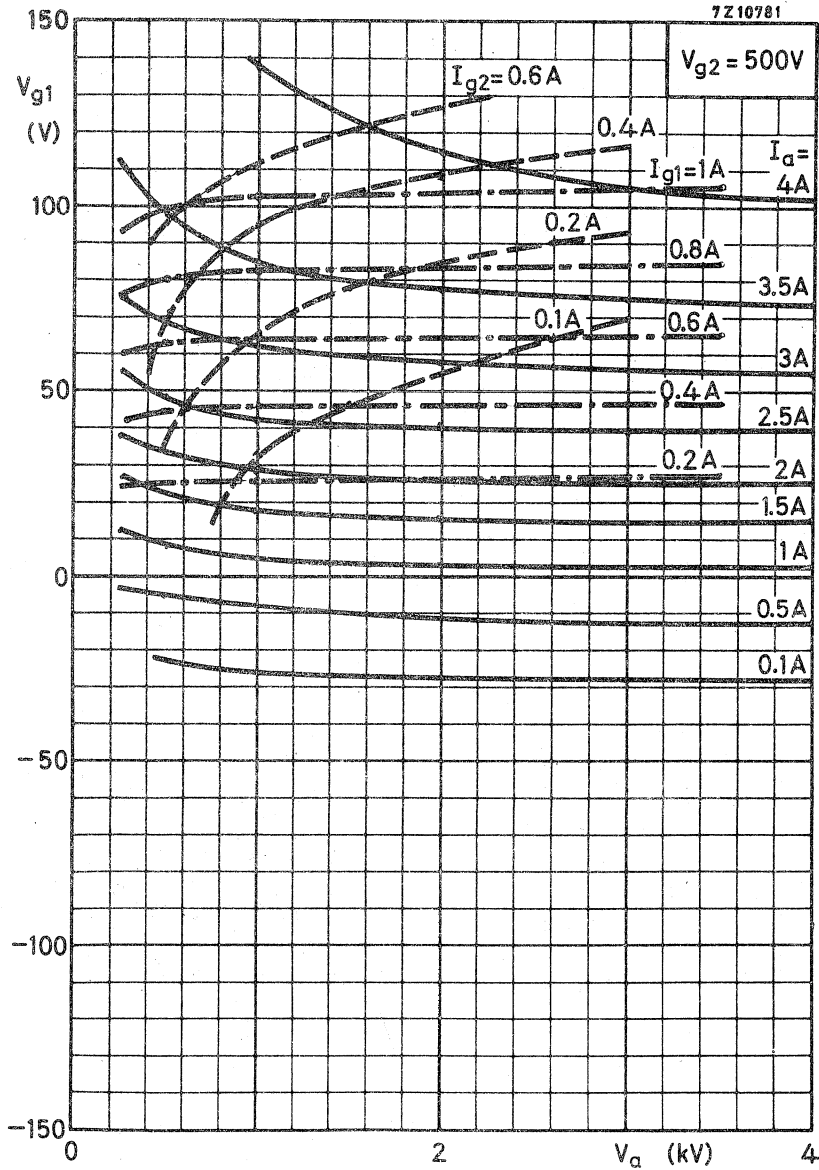

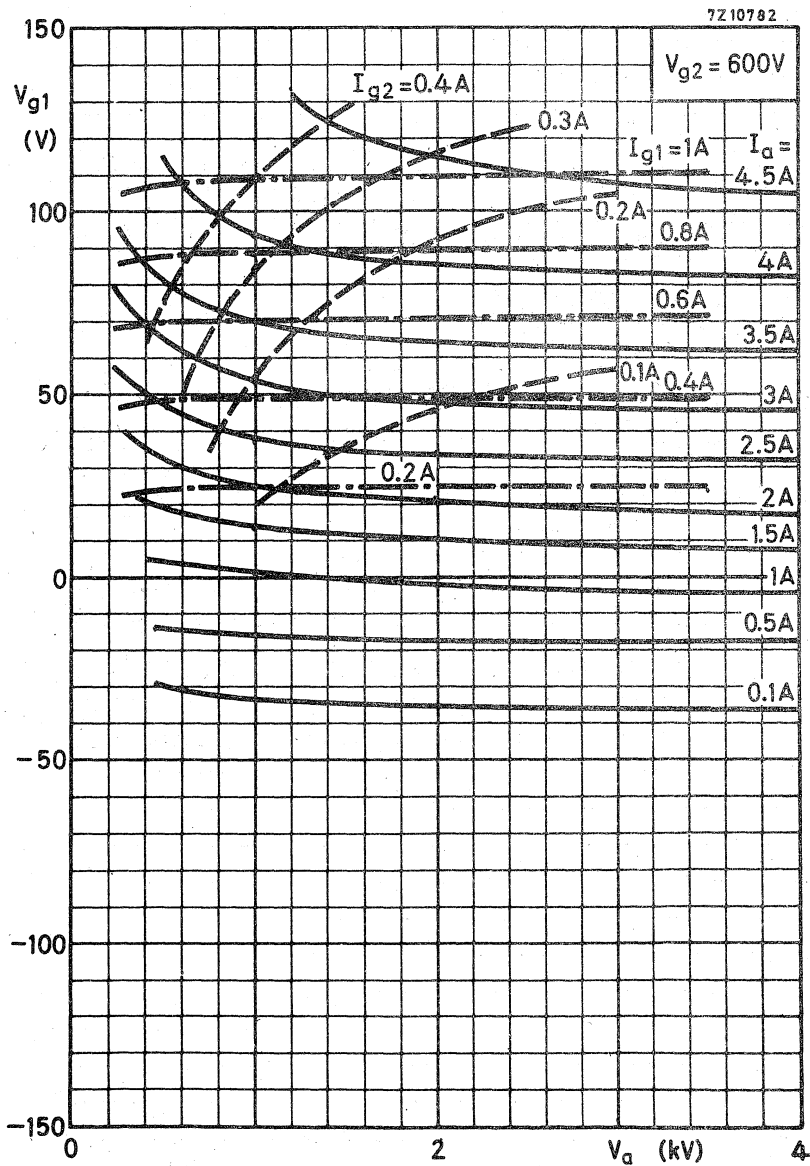

7Z10783

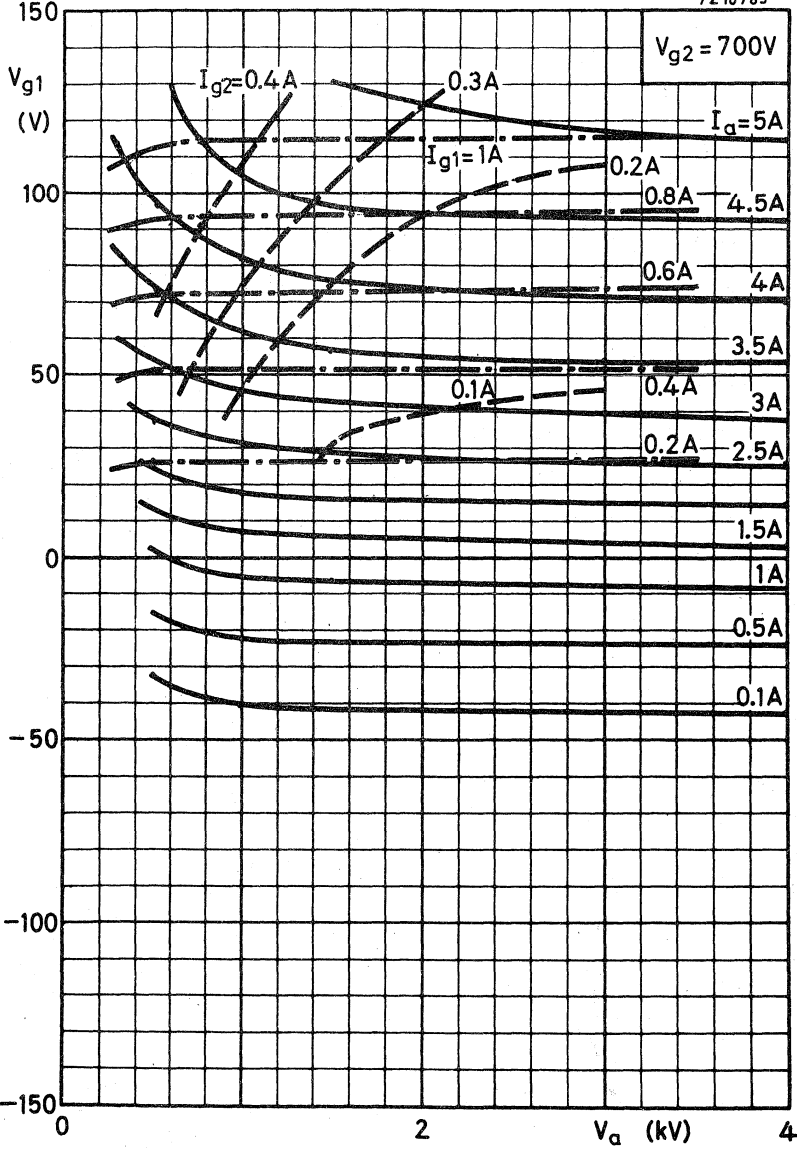



**R.F. POWER TETRODE**

Mesh-type cathode version of QB4/1100.

With this tube in centre-tapped filament transformer arrangement the hum level is reduced to better than -60 dB.

---

For data and curves of this type please refer to type QB4/1100.

---

## R.F. POWER TETRODE

Mesh-type cathode version of QB4/1100GA.

With this tube in centre-tapped filament transformer arrangement the hum level is reduced to better than -60 dB.

For data and curves of this type please refer to type QB4/1100GA.

## AIR COOLED V.H.F. POWER TETRODE

Forced air cooled coaxial power tetrode in metal-ceramic construction primarily intended for use as final amplifier in F.M. transmitters in band II in grounded cathode circuits.

QUICK REFERENCE DATA			
Frequency (MHz)	H.F. Class B amplifier		
	$V_a$ (kV)	$W_\ell$ (kW)	Power gain
110	6	6,6	200
	7	11	220

**HEATING** : Direct; filament thoriated tungsten, mesh type

Filament voltage	$V_f$	6,3	V	5 %
Filament current	$I_f$	120	A	
Filament peak starting current	$I_{fp}$ max.	750	A	
Cold filament resistance	$R_{f0}$	6	$m\Omega$	
Waiting time	$T_w$ min.	1	s	

### CAPACITANCES

Input	$C_{g1(a)}$	87	pF
Output	$C_{a(g1)}$	20	pF
Anode to grid no.1	$C_{ag1}$	0,5	pF

### TYPICAL CHARACTERISTICS

Anode voltage	$V_a$	5	kV
Grid no.2 voltage	$V_{g2}$	600	V
Anode current	$I_a$	1,2	A
Transconductance	S	30	mA/V
Amplification factor	$\mu_{g2g1}$	7,2	-

### TEMPERATURE LIMITS

Absolute max. envelope temperature	$t_{env}$ max.	240	$^{\circ}C$
Recommended max. seal temperature	t max.	200	$^{\circ}C$

**COOLING**

In order to keep the temperature of the seals below the maximum permissible value, it may be necessary to direct an air flow to the seals.

Anode cooling: see cooling curves.


Direction of air flow: see outline drawing.

**MECHANICAL DATA**

Dimensions in mm

Net weight : approx. 3,1 kg

Mounting position: vertical with anode up or down.

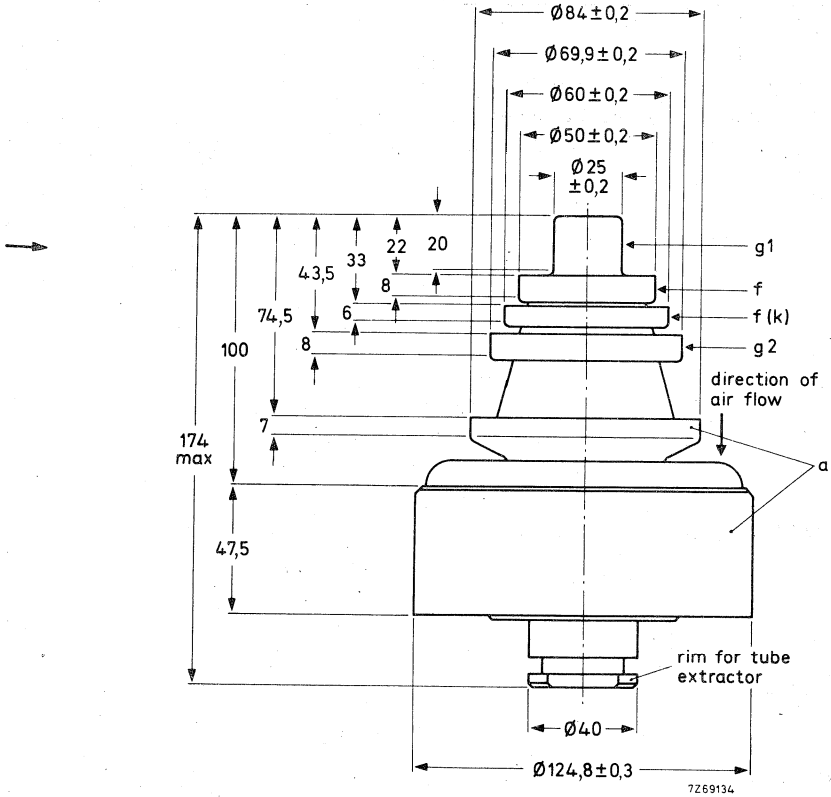

**ACCESSORIES**

Insulating pedestal

type

40630





**R.F. CLASS B AMPLIFIER****LIMITING VALUES** (Absolute max. rating system)


Frequency	f	up to	110	MHz
Anode voltage	$V_a$	max.	8,5	kV
Grid no.2 voltage	$V_{g2}$	max.	1	kV
Grid no.1 voltage	$-V_{g1}$	max.	500	V
Anode current	$I_a$	max.	4	A
Anode input power	$W_{ia}$	max.	18,5	kW
Anode dissipation	$W_a$	max.	8	kW
Grid no.2 dissipation	$W_{g2}$	max.	80	W
Grid no.1 dissipation	$W_{g1}$	max.	40	W
Cathode current	$I_k$	max.	4,5	A

**OPERATING CONDITIONS** grounded cathode


Frequency	f	110	110	MHz
Anode voltage	$V_a$	7	6	kV
Grid no.2 voltage	$V_{g2}$	600	500	V
Grid no.1 voltage	$V_{g1}$	-120	-90	V <sup>1)</sup>
Anode current, no signal condition	$I_a$	200	200	mA
Anode current	$I_a$	2,3	1,5	A
Grid no.2 current	$I_{g2}$	80	85	mA
Grid no.1 current	$I_{g1}$	150	90	mA
Anode input power	$W_{ia}$	16,1	9	kW
Anode dissipation	$W_a$	5	2,1	kW
Output power in load	$W_l$	11	6,6	kW
Efficiency, total	$\eta$	68	78	%
Driving power	$W_{dr}$	50	22	W
Power gain	$\frac{W_l}{W_{dr}}$	220	300	

<sup>1)</sup> To be adjusted for the stated no signal anode current.

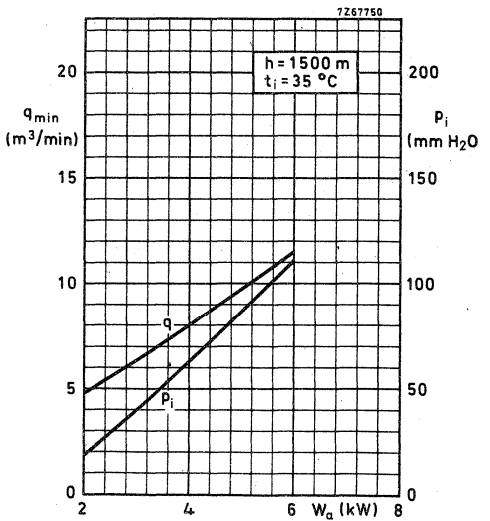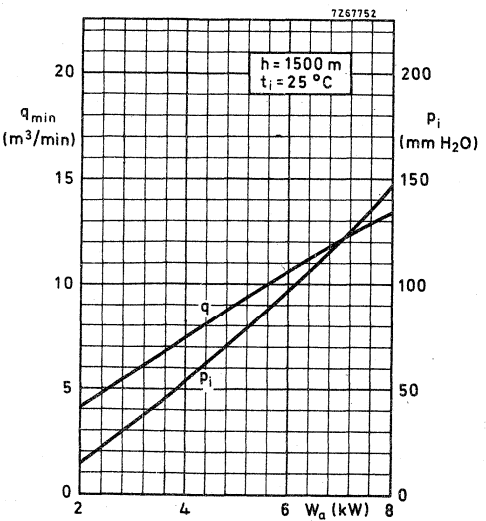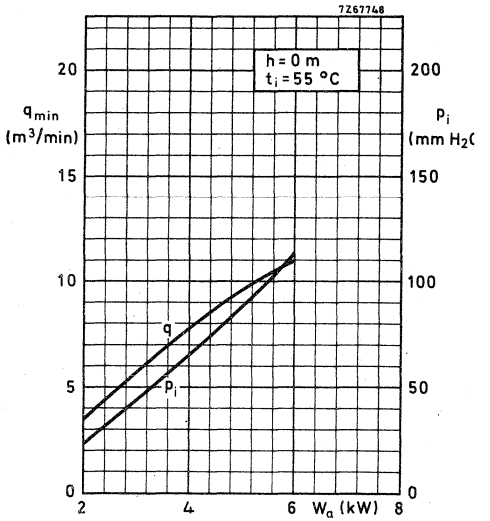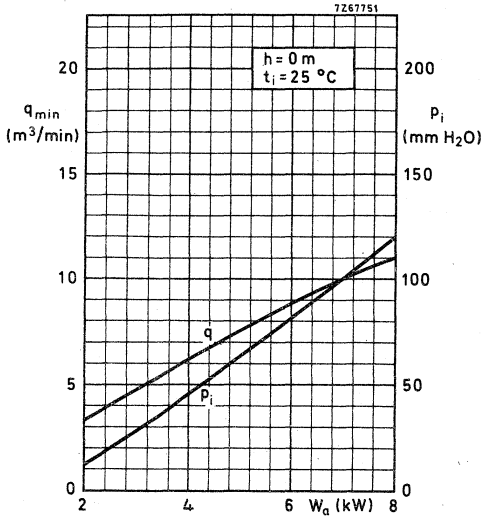


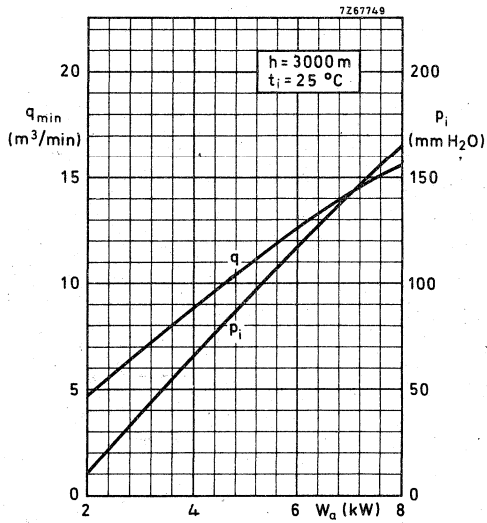



7Z10809.1

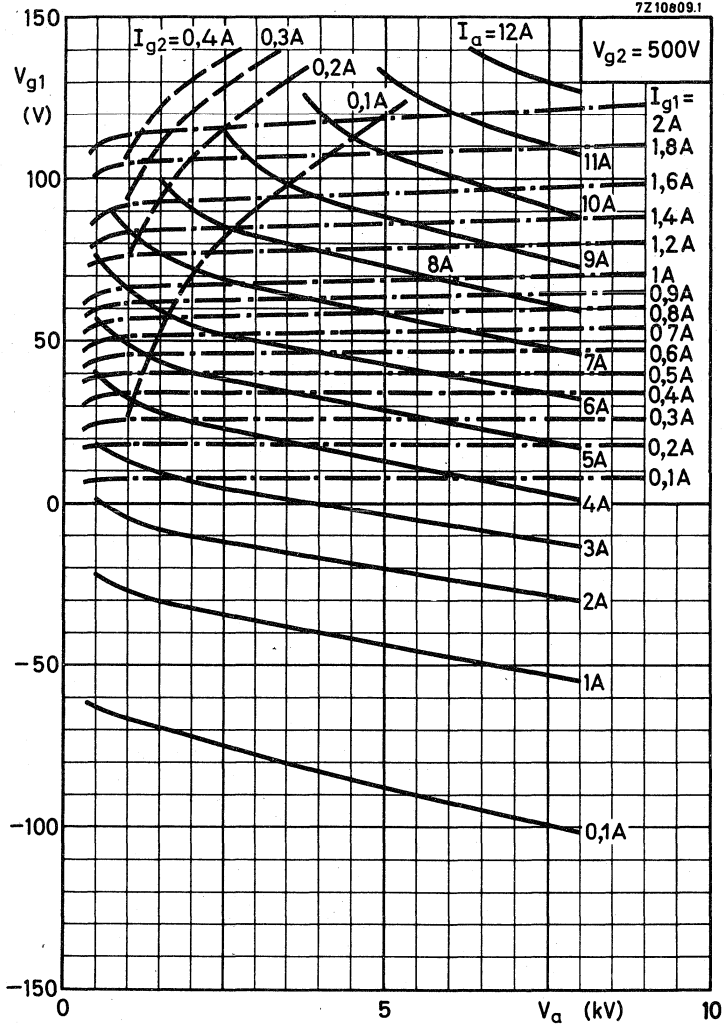



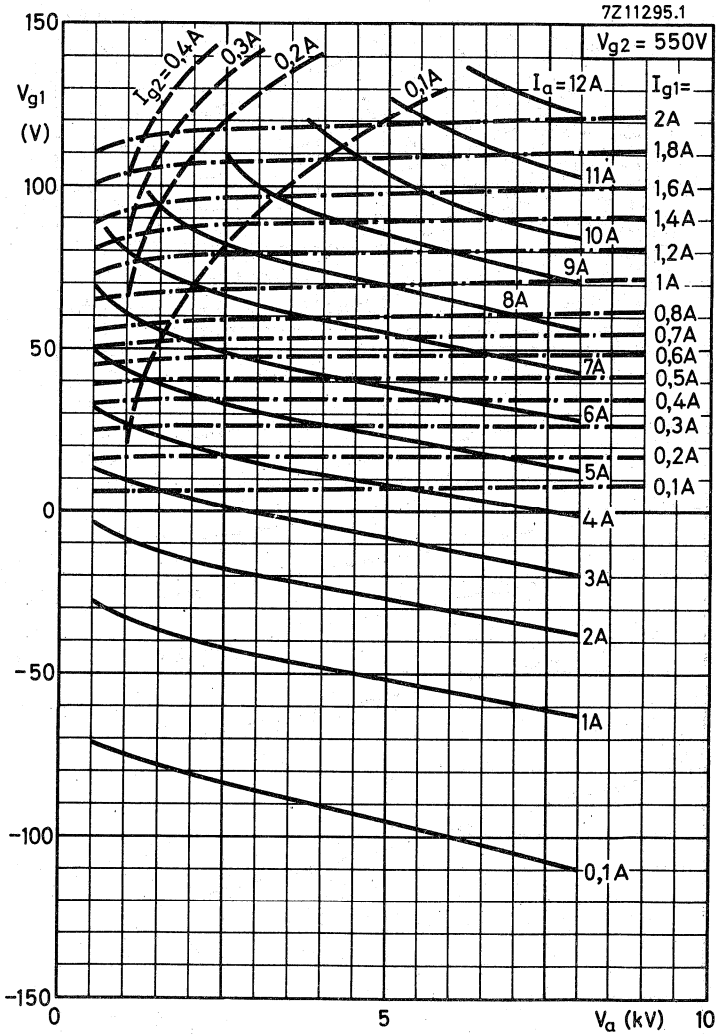

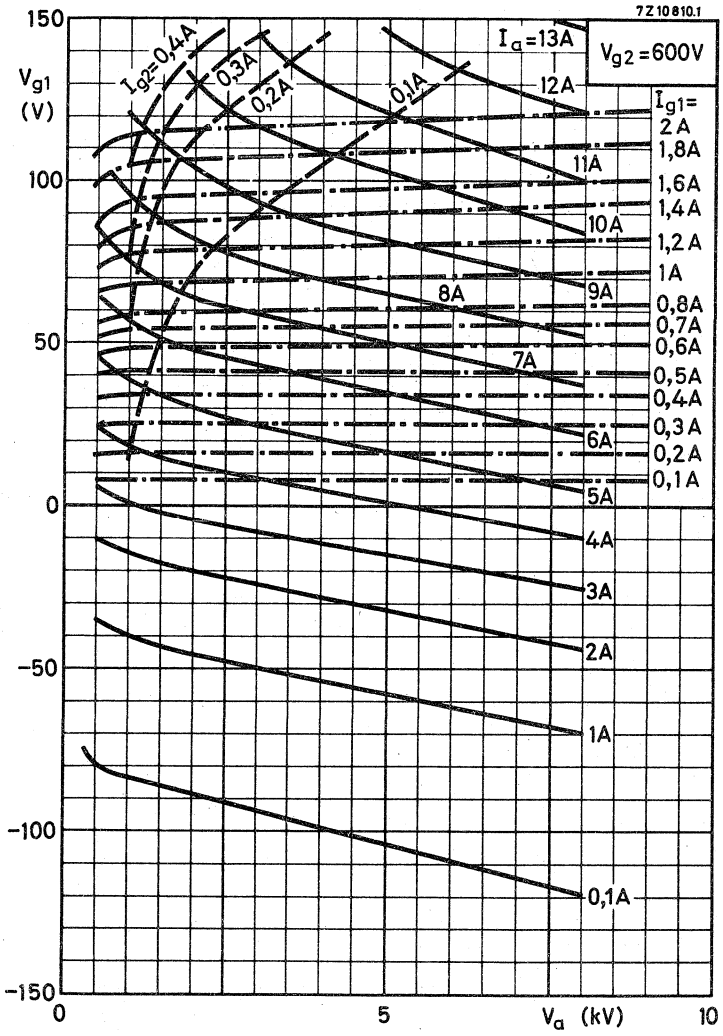

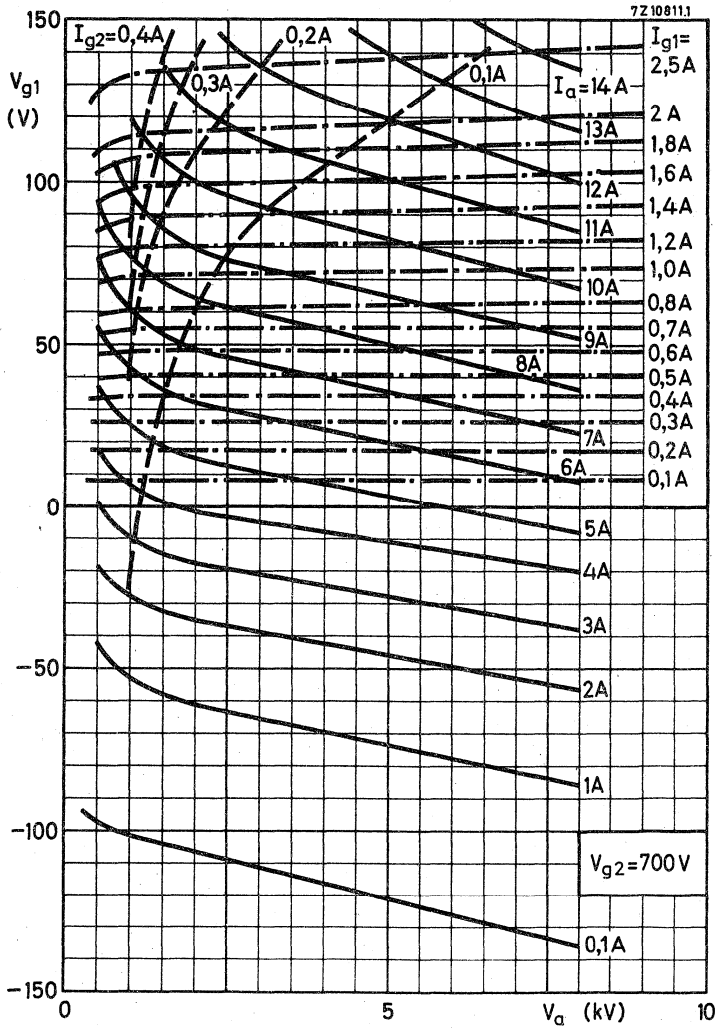



## AIR COOLED V.H.F. POWER TETRODE

Forced air cooled coaxial power tetrode in metal-ceramic construction primarily intended for use as a linear broad-band amplifier in T V transmitters in the bands I and III. This type is also very suitable for A. M. and F. M. broadcast and A. F. modulator applications, and in T V transposer service.

QUICK REFERENCE DATA			
Class AB linear amplifier (vision)			
Frequency	f	175, 25	MHz
Anode voltage	$V_a$	8	kV
Output power in load	$W_l$	27, 5	kW
Power gain	G	28, 5	
Class C telegraphy or F. M. telephony			
Frequency	f	260	MHz
Anode voltage	$V_a$	8, 5	kV
Output power in load	$W_l$	25	kW
Power gain	G	31	
Television transposer service			
Frequency	f	175 to 225	MHz
Anode voltage	$V_a$	8	kV
Output power in load	W	10, 5	kW
Power gain	G	42	

**HEATING** : direct; filament thoriated tungsten, mesh type.

Filament voltage	$V_f$	11, 5	V $\pm$ 5 %
Filament current	$I_f$	120	A
Filament peak starting current	$I_{fp}$ max.	750	A
Cold filament resistance	$R_{f0}$	10, 5	m $\Omega$
Waiting time	$T_w$ min.	1	s

**TYPICAL CHARACTERISTICS**

Anode voltage	$V_a$	8	kV
Grid no. 2 voltage	$V_{g2}$	700	V
Anode current	$I_a$	2,4	A
Transconductance	S	60	mA/V
Amplification factor	$\mu$	8,5	

**CAPACITANCES**

	grounded cathode	grounded grid
Input	$C_{g1(a)}$ 135	$C_{f(a)}$ 69 pF
Output	$C_{a(g1)}$ 23	$C_{a(f)}$ 23 pF
Anode to grid no. 1	$C_{ag1}$ 0,85	pF
Anode to filament		$C_{af}$ 0,25 pF

**TEMPERATURE LIMITS**

Absolute max. envelope temperature	$t_{env}$ max.	240	$^{\circ}C$
Recommended max. seal temperature	t max.	200	$^{\circ}C$

**COOLING**

See cooling curves.

Direction of airflow: see outline drawing.

**→ ACCESSORIES**


Band I amplifier circuit assembly (vision)	type 40759
Band I amplifier circuit assembly (sound)	type 40760
Band III amplifier circuit assembly (vision)	type 40768
Band III amplifier circuit assembly (sound)	type 40769

MECHANICAL DATA

Dimensions in mm

Net weight : approx. 11 kg

Mounting position : vertical with anode up or down

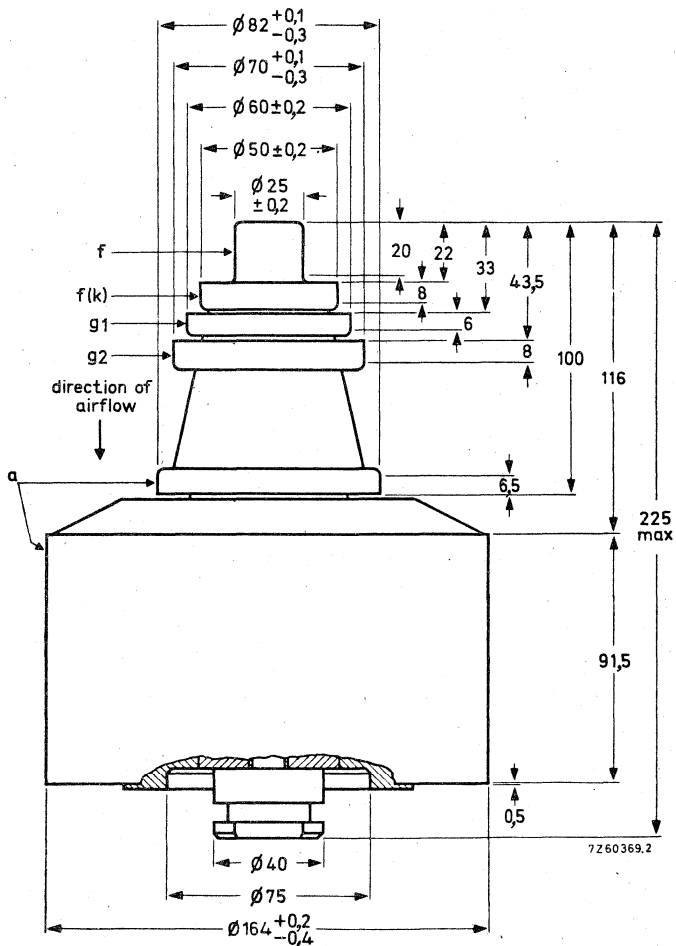







R.F. CLASS AB AMPLIFIER FOR TELEVISION TRANSPOSER SERVICE , grounded grid

LIMITING VALUES

See page 4

OPERATING CONDITIONS , grounded grid

Negative modulation, positive synchronization, combined sound and vision (CCIR standard G)

Frequency		f	175 to 225	MHz
Bandwidth (-1 dB)		B	8	MHz
Anode voltage		$V_a$	8	kV
Grid no. 2 voltage		$V_{g2}$	900	V
Grid no. 1 voltage	1)	$V_{g1}$	-95	V
Anode current, no signal condition		$I_a$	1, 8	A
Anode current	6)	$I_a$	3, 3	A
Grid no. 2 current	6)	$I_{g2}$	35	mA
Grid no. 1 current	6)	$I_{g1}$	20	mA
Driving power, sync		$W_{dr}$	250	W
Output power in load, sync		$W_l$	10, 5	kW
Power gain		G	42	-
Intermodulation products	7)	d	-55	dB

Notes : See page 5.

## R.F. CLASS C TELEGRAPHY or F.M. TELEPHONY




**LIMITING VALUES** (Absolute max. rating system)


Frequency	$f$	up to	260 MHz
Anode voltage	$V_a$	max.	9,5 kV
Grid no. 2 voltage	$V_{g2}$	max.	1 kV
Grid no. 1 voltage	$-V_{g1}$	max.	500 V
Anode current	$I_a$	max.	7 A
Anode input power	$W_{ia}$	max.	42 kW
Anode dissipation	$W_a$	max.	18 kW
Grid no. 2 dissipation	$W_{g2}$	max.	100 W
Grid no. 1 dissipation	$W_{g1}$	max.	50 W
Cathode current	$I_k$	max.	9 A


**OPERATING CONDITIONS**

Frequency	$f$	260 MHz
Anode voltage	$V_a$	8,5 kV
Grid no. 2 voltage	$V_{g2}$	700 V
Grid no. 1 voltage	$V_{g1}$	-106 V <sup>1)</sup>
Anode current, no signal condition	$I_a$	300 mA
Anode current	$I_a$	4,6 A
Grid no. 2 current	$I_{g2}$	100 mA
Grid no. 1 current	$I_{g1}$	325 mA
Anode input power	$W_{ia}$	39,1 kW
Anode dissipation	$W_a$	14 kW
Output power in load	$W_l$	25 kW
Efficiency, total		64 %
Driving power	$W_{dr}$	800 W
Power gain	$\frac{W_l}{W_{dr}}$	31

Note : See page 5

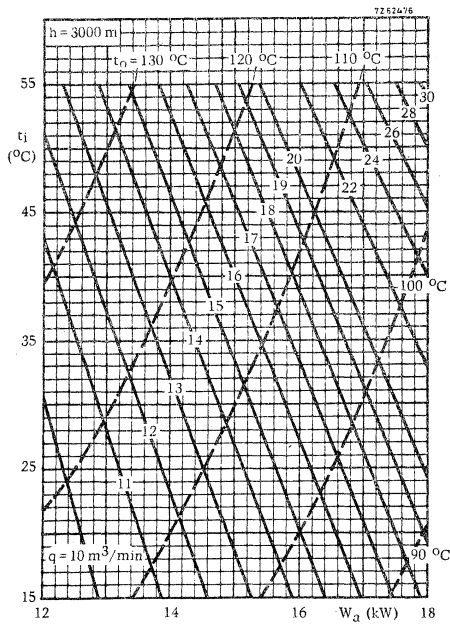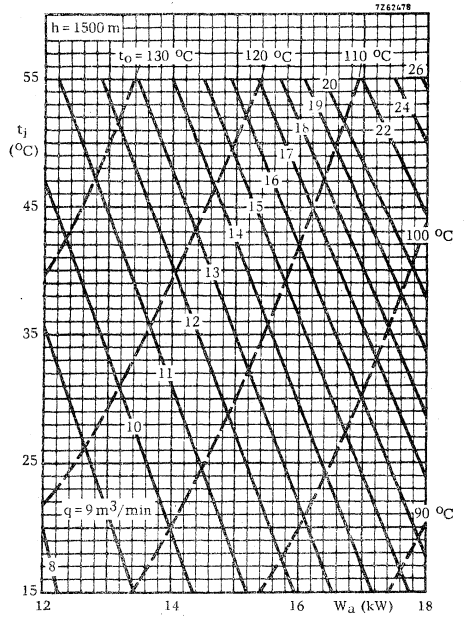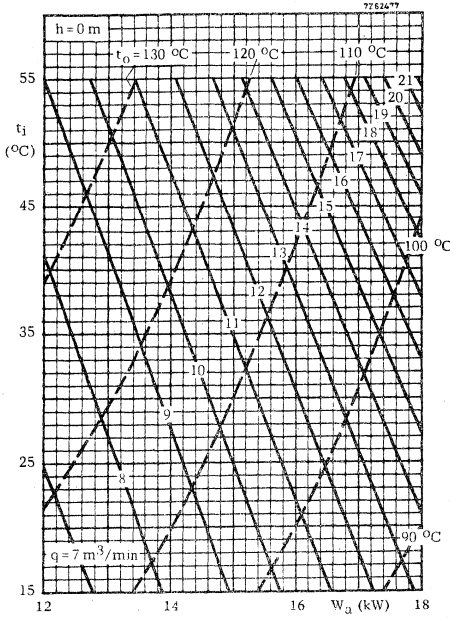

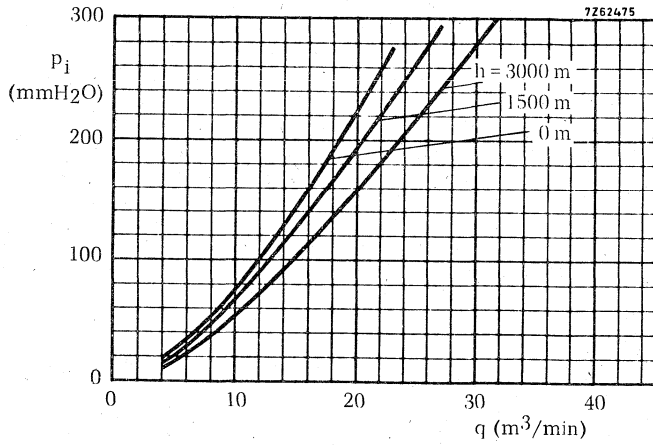

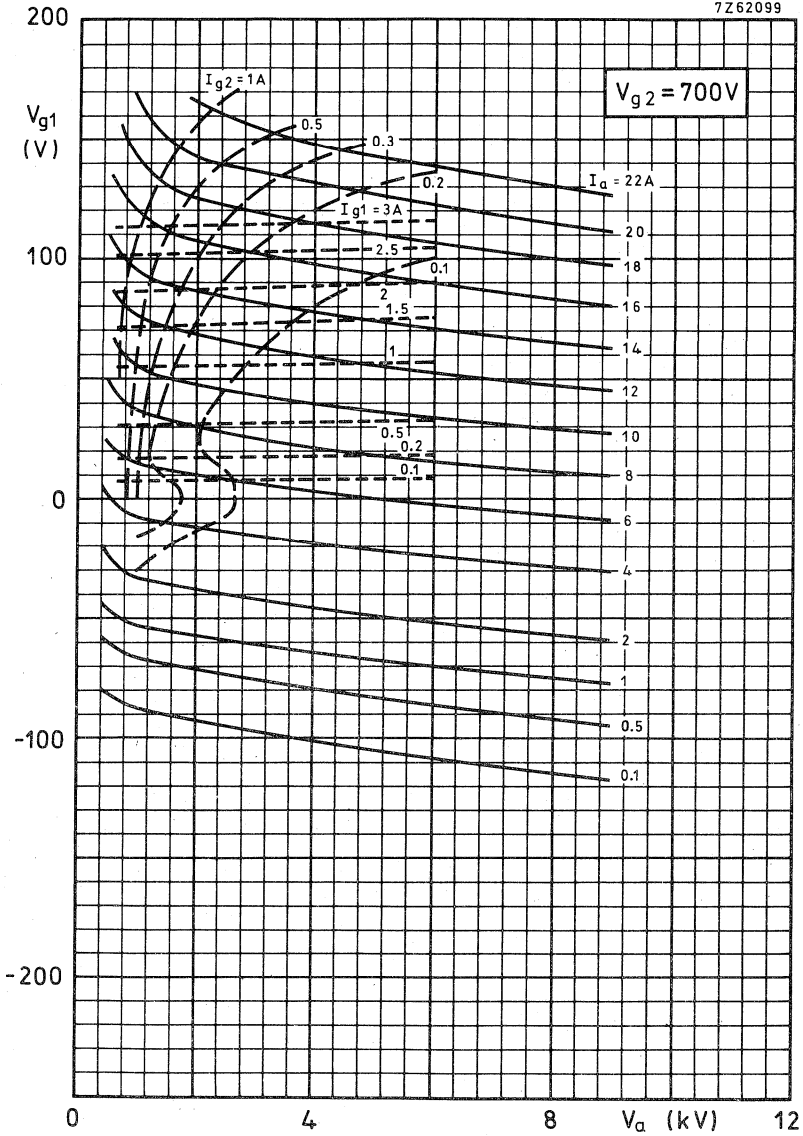

## BEAM POWER TETRODE

Beam power amplifier tube intended for use as a pulse modulator tube in both fixed and mobile equipment.

### QUICK REFERENCE DATA

Rectangular pulse modulator

Anode supply voltage	$V_{ba}$	3000 V
Grid No. 1 voltage, positive peak	$V_{g1p}$	65 V
Load resistance	$R_L$	1500 $\Omega$
Anode current, peak	$I_{ap}$	1.5 A

**HEATING:** Indirect by A. C. or D. C.; parallel supply.

Heater voltage	$V_f$	6.3 V $\pm$ 10%
Heater current	$I_f$	1.25 A

### CAPACITANCES

Grid No. 1 to all except anode	$C_{g1(a)}$	13.0 pF
Anode to all except grid No. 1	$C_{a(g1)}$	8.5 pF
Anode to grid No. 1	$C_{ag1}$	max. 0.24 pF

### TYPICAL CHARACTERISTICS

Anode voltage	$V_a$	200 V
Grid No. 2 voltage	$V_{g2}$	200 V
Anode current	$I_a$	100 mA
Transconductance	$S$	7 mA/V
Amplification factor	$\mu_{g2g1}$	4.5 -


### MECHANICAL DATA

Base: Octal 8 pin, IEC 67-1-5a


Cap: JEDEC C1-1, IEC 67-III-1b

Net weight: approx. 65 g

Mounting position: any



Dimensions in mm







## CHARACTERISTIC RANGE VALUES FOR EQUIPMENT DESIGN

		min.	max.	
Heater current at $V_f = 6.3$ V	$I_f$	1.175	1.325	A
Capacitances				
Grid No. 1 to all except anode	$C_{g_1(a)}$	12.0	15.0	pF
Anode to all except grid No. 1	$C_{a(g_1)}$	7.3	9.5	pF
Anode to grid No. 1	$C_{ag_1}$		0.24	pF
Anode current 4)	$I_a$	46	94	mA
, peak 5)	$I_{ap}$	2.4		A
Grid No. 2 current 4)	$I_{g_2}$	0	5.5	mA

- 1) Duty factor for the 6293 is defined as the "on" time in  $\mu s$  divided by 10 000  $\mu s$ . "On" time is defined as the sum of the durations of all the individual pulses which occur during any 10 000  $\mu s$  interval. "Pulse duration" is defined as the time interval between the two points of the pulse at which the instantaneous value is 70% of the peak value. The peak value is defined as the maximum value attained by a smooth curve representing the average fluctuation over the top portion of the pulse.
- 2) For tube protection it is essential that sufficient resistance be used in the anode supply circuit, the grid No. 2 supply circuit, and the grid No. 1 supply circuit so that the short-circuit current is limited to 0.5 A in each circuit.
- 3) Averaged over any interval not exceeding 10 000  $\mu s$ . Care should be used in determining the anode dissipation. A calculated value based on rectangular pulses can be considerably in error when the actual pulses have a finite rise and fall time. Anode dissipation should preferably be determined by measuring the bulb temperature under actual operating conditions; then, with the tube in the same socket and under the same ambient-temperature conditions, apply to the tube sufficient d.c. input to obtain the same bulb temperature. This value of d.c. input is a measure of the anode dissipation.
- 4)  $V_f = 6.3$  V,  $V_a = V_{g_2} = 300$  V,  $V_{g_1} = -33$  V
- 5) With the tube in the test circuit on page 4, and under the following conditions:

Rectangular-wave modulation applied to grid No. 1

pulse duration approx.

pulse repetition frequency approx.

Anode supply voltage

Grid No. 2 supply voltage


Grid No. 1 supply voltage

Grid No. 1 swing, peak positive


Load resistance, 50 W

Heater voltage


$T_{imp}$	1	$\mu s$
$f_{imp}$	3000	p.p.s
$V_{ba}$	2000	V
$V_{bg_2}$	500	V
$V_{bg_1}$	-300	V
$V_{g_1P}$	100	V
$R_l$	375	$\Omega$
$V_f$	6.3	V


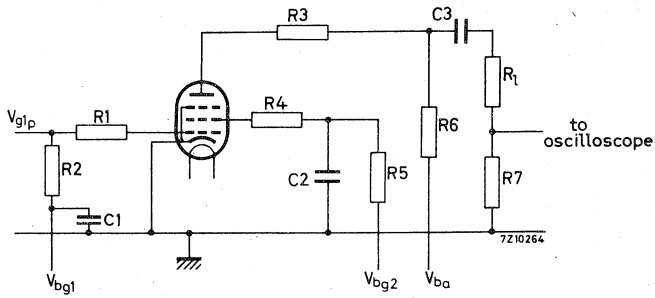


C1	0.1 $\mu\text{F}$ , 600 V <sub>d.c.</sub>	R4	25 $\Omega$ , 1 W
C2	2 $\mu\text{F}$ , 600 V <sub>d.c.</sub>	R5	1000 $\Omega$ , 1 W
C3	0.25 $\mu\text{F}$ , 5000 V <sub>d.c.</sub>	R6	10 000 $\Omega$ , 1 W
R1	20 $\Omega$ , 1 W	R7	30 $\Omega$ , $\pm 1\%$
R2	3000 $\Omega$ , 1 W	R <sub>l</sub>	see page 3, note 5
R3	10 $\Omega$ , 5 W		

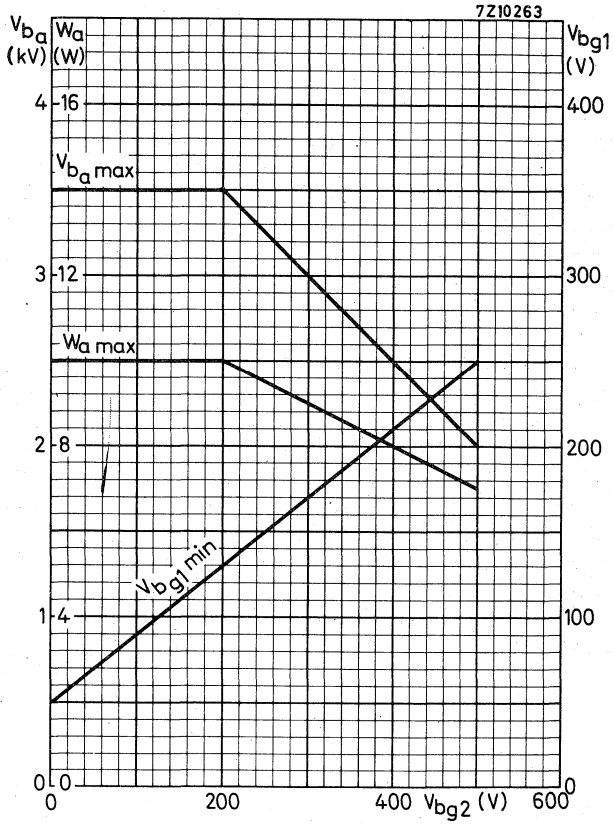


7Z10262

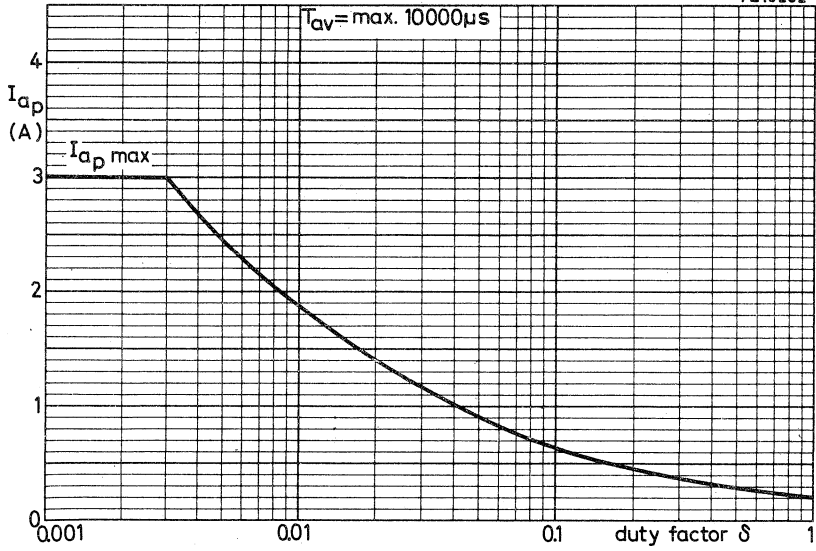


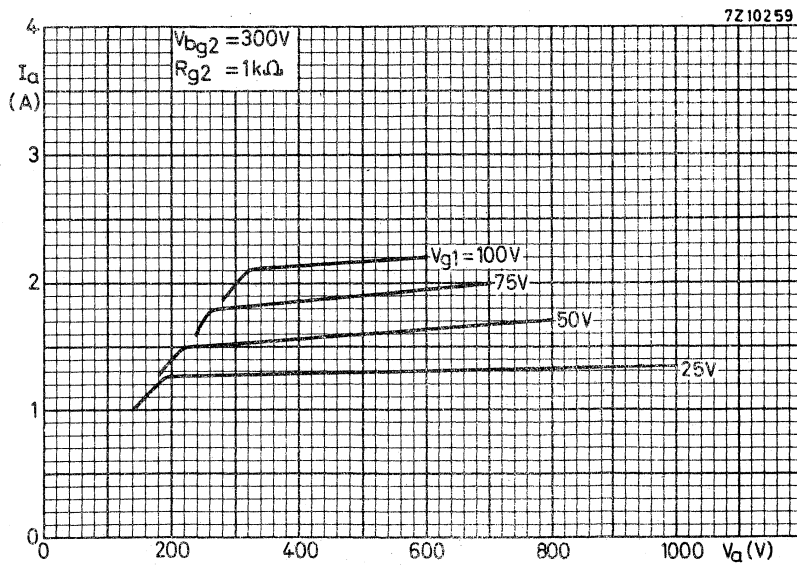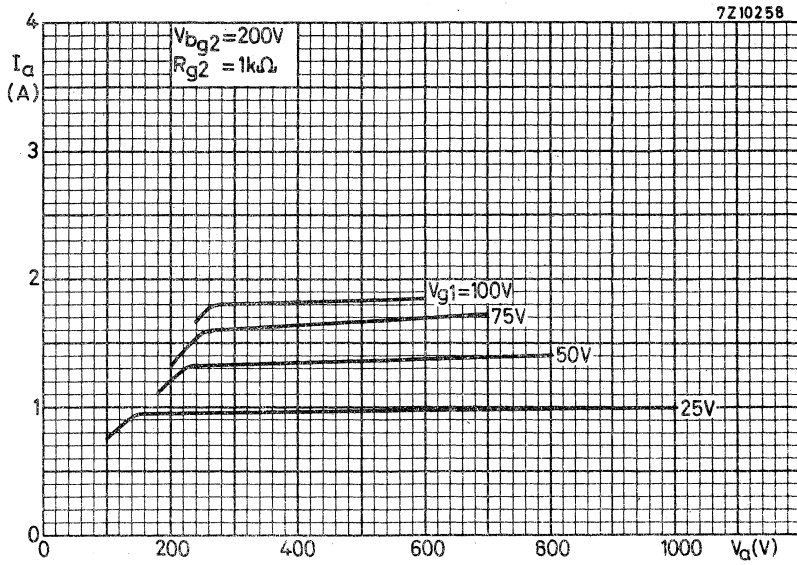

7Z10261

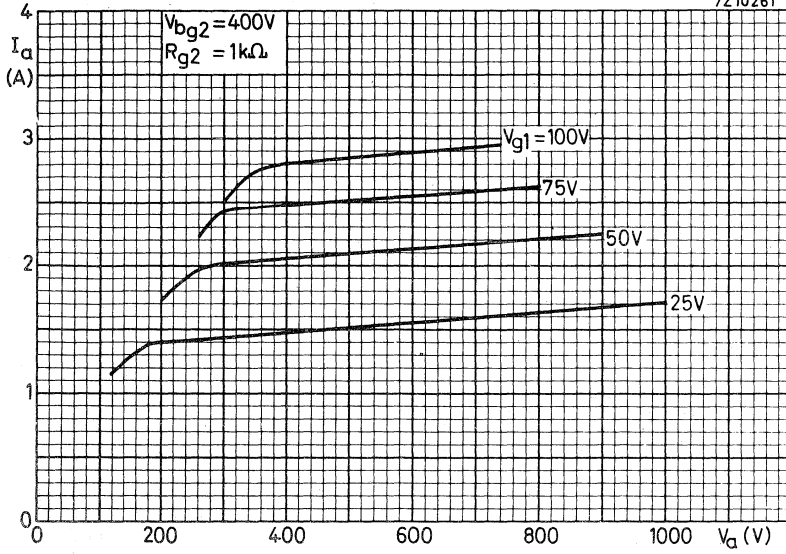

7Z10260

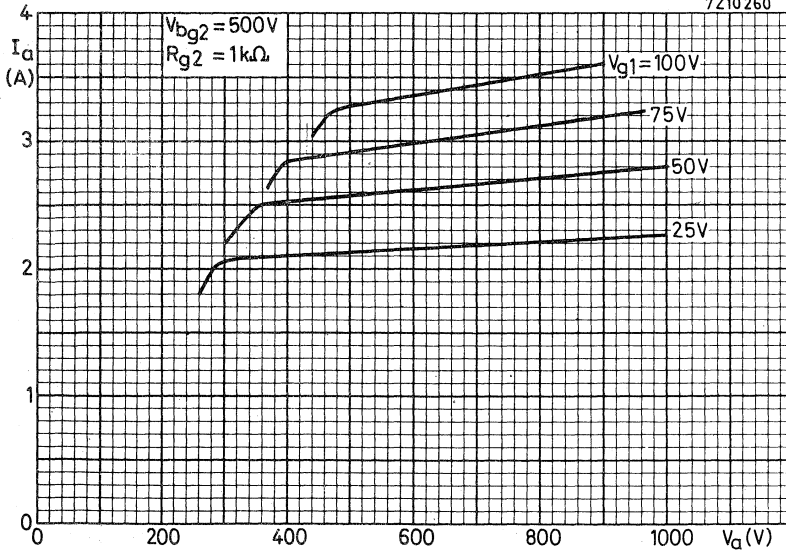

## R.F. POWER TETRODE

Forced-air cooled tetrode intended for use as R.F. power amplifier and oscillator. The 7609 is shock and vibration resistant.

QUICK REFERENCE DATA							
Freq. (MHz)	C telegr.		Cag <sub>2</sub> mod.		AB mod.		
	V <sub>a</sub> (V)	W <sub>o</sub> (W)	V <sub>a</sub> (V)	W <sub>o</sub> (W)	V <sub>a</sub> (V)	W <sub>o</sub> (W) <sup>1</sup>	W <sub>o</sub> (W) <sup>2</sup>
< 150	2000	370	1600	230	2000	580	630
	1500	260	1200	160	1500	400	440
165	1250	195	1000	140	1000	230	270
	1000	150	800	100	800	170	215
	750	110	600	80	Freq. (MHz)	B television	
600	85	400	55	V <sub>a</sub> (V)		W <sub>o</sub> sync (W)	
500	1250	140				216	250
	1000	120				1000	200
	800	95			750	135	
600	50						

**HEATING:** Indirect by A.C. or D.C.; cathode oxide coated

Heater voltage	V <sub>f</sub>	26.5 V
Heater current	I <sub>f</sub>	570 mA
Waiting time	T <sub>w</sub>	min. 30 s

### CAPACITANCES

Grid No. 1 to all except anode	C <sub>g1(a)</sub>	15.5 pF
Anode to all except grid No. 1	C <sub>a(g1)</sub>	4.0 pF
Anode to grid No. 1	C <sub>ag1</sub>	0.03 pF

<sup>1</sup>) Without grid current, two tubes.

<sup>2</sup>) With grid current, two tubes.

## TYPICAL CHARACTERISTICS

Anode voltage	$V_a$	500 V
Grid No.2 voltage	$V_{g2}$	250 V
Anode current	$I_a$	200 mA
Transconductance	S	12 mA/V
Amplification factor	$\mu_{g2g1}$	5 -

## TEMPERATURE LIMITS (Absolute max. rating system)

Anode temperature measured on base end of anode surface at junction with fins	$t_a$	max. 250 °C
Anode seal temperature	$t_s$	max. 200 °C
Base seals and grid No.2 seal temperature	$t_s$	max. 175 °C

COOLING air inlet temperature  $t_i = 20$  °C, altitude  $h = 0$  m<sup>1)</sup>)

With an air system socket

Air flow	q	0.16 m <sup>3</sup> /min
Pressure drop	$P_i$	7 mm H <sub>2</sub> O

Without an air system socket

Air flow	q	0.15 m <sup>3</sup> /min
Pressure drop	$P_i$	7 mm H <sub>2</sub> O

<sup>1)</sup> At higher altitudes and ambient temperatures, an increase in air flow is necessary to maintain the respective seal temperatures and the anode temperature within the maximum ratings.

With an air system socket

The air is directed over the base seals, past the grid No.2 seal, glass envelope and anode seal, and through the radiator to provide effective cooling with minimum air flow.

Without air system socket

Adequate cooling air must be directed over the base seals, past the envelope, and through the radiator.



**ACCESSORIES**

Socket Johnson 124-110-1  
 Chimney Johnson 124-111-1 or equivalent

**SHOCK AND VIBRATION RESISTANCE**

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.



Vibration

The tube is subjected to vibration frequencies from 25 Hz to 2000 Hz with an acceleration of 10 g.

**MECHANICAL DATA**

Dimensions in mm

Net weight : approx. 140 g  
 Mounting position: any

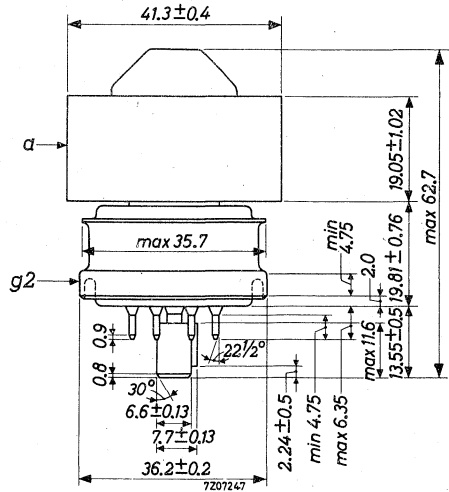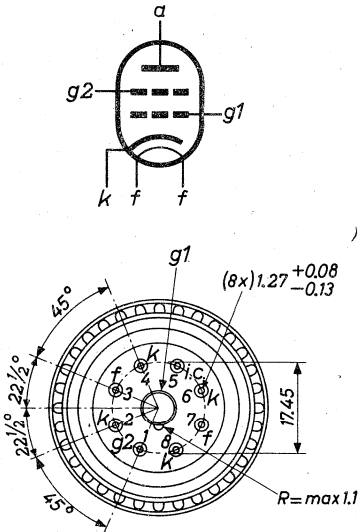

## R.F. CLASS C TELEGRAPHY OR F.M. TELEPHONY

## LIMITING VALUES (Absolute max. rating system)

Frequency	f	up to 150	150 to 500	MHz
Anode voltage	$V_a$	max. 2000	1250	V
Anode current	$I_a$	max. 250	250	mA
Anode dissipation	$W_a$	max. 250	250	W
Grid No. 2 voltage	$V_{g2}$	max. 300	300	V
Grid No. 2 dissipation	$W_{g2}$	max. 12	12	W
Grid No. 1 voltage, negative	$-V_{g1}$	max. 250	250	V
Grid No. 1 dissipation	$W_{g1}$	max. 2	2	W
Grid No. 1 circuit resistance	$R_{g1}$	max. 25	25	$k\Omega$
Cathode to heater voltage, peak	$V_{kfp}$	max. 150	150	V

## OPERATING CONDITIONS

Frequency	f	up to 150	150	MHz
Anode voltage	$V_a$	2000	1500	V
Grid No. 2 voltage	$V_{g2}$	250	250	V
Grid No. 1 voltage	$V_{g1}$	-88	-88	V
Grid No. 1 driving voltage	$V_{g1p}$	110	110	V
Anode current	$I_a$	250	250	mA
Grid No. 2 current	$I_{g2}$	24	24	mA
Grid No. 1 current	$I_{g1}$	8	8	mA
Driving power	$W_{dr}$	2.5	1.5	W
Anode input power	$W_{i_a}$	500	375	W
Output power	$W_o$	370	260	W

**OPERATING CONDITIONS** (continued)

Frequency	f	165	165	165	165	MHz
Anode voltage	$V_a$	1250	1000	750	600	V
Grid No. 2 voltage	$V_{g_2}$	250	250	250	250	V
Grid No. 1 voltage	$V_{g_1}$	-90	-80	-80	-75	V
Grid No. 1 driving voltage	$V_{g_{1p}}$	106	95	96	91	V
Anode current	$I_a$	200	200	200	200	mA
Grid No. 2 current	$I_{g_2}$	20	31	37	37	mA
Grid No. 1 current	$I_{g_1}$	11	10	11	11	mA
Driving power	$W_{dr}$	1.2	1	1	1	W
Anode input power	$W_{i_a}$	250	200	150	120	W
Output power	$W_o$	195	150	110	85	W

**OPERATING CONDITIONS** with coaxial cavity

Frequency	f	500	500	500	500	MHz
Anode voltage	$V_a$	1250	1000	800	600	V
Grid No. 2 voltage	$V_{g_2}$	280	250	250	250	V
Grid No. 1 voltage	$V_{g_1}$	-115	-110	-110	-110	V
Anode current	$I_a$	200	200	200	170	mA
Grid No. 2 current	$I_{g_2}$	5	7	7	6	mA
Grid No. 1 current	$I_{g_1}$	10	10	10	6	mA
Driving power	$W_{dr}$	30	25	20	15	W
Anode input power	$W_{i_a}$	250	200	160	100	W
Output power	$W_o$	140	120	95	50	W

## R.F. CLASS C ANODE AND SCREEN GRID MODULATION

## LIMITING VALUES (Absolute max. rating system)

Frequency	f	up to 150	150 to 500	MHz
Anode voltage	$V_a$	max. 1600	1000	V
Anode current	$I_a$	max. 200	200	mA
Anode dissipation	$W_a$	max. 165	165	W
Grid No. 2 voltage	$V_{g2}$	max. 300	300	V
Grid No. 2 dissipation	$W_{g2}$	max. 10	10	W
Grid No. 1 voltage, negative	$-V_{g1}$	max. 250	250	V
Grid No. 1 dissipation	$W_{g1}$	max. 2	2	W
Grid No. 1 circuit resistance	$R_{g1}$	max. 25	25	k $\Omega$
Cathode to heater voltage, peak	$V_{kf_p}$	max. 150	150	V

## OPERATING CONDITIONS

Frequency	f	up to 150	150	MHz
Anode voltage	$V_a$	1600	1200	V
Grid No. 2 voltage	$V_{g2}$	250	250	V
Grid No. 1 voltage	$V_{g1}$	-118	-118	V <sup>1)</sup>
Anode current	$I_a$	200	200	mA
Grid No. 2 current	$I_{g2}$	23	23	mA
Grid No. 1 current	$I_{g1}$	5	5	mA
Driving power	$W_{dr}$	3	2	W
Anode input power	$W_{i_a}$	320	240	W
Output power	$W_o$	230	160	W
Modulation depth	m	100	100	%
Modulator output power	$W_{o\ mod}$	115	80	W
Grid No. 2 mod. voltage, peak	$V_{g2p\ mod}$	200	180	V

1) Obtained from a grid resistor or from a combination of grid resistor with either fixed supply or cathode resistor.

**OPERATING CONDITIONS**(continued)

Frequency	f	165	165	165	165	MHz
Anode voltage	$V_a$	1000	800	600	400	V
Grid No.2 voltage	$V_{g_2}$	250	250	250	250	V
Grid No.1 voltage	$V_{g_1}$	-105	-100	-95	-90	V
Anode current	$I_a$	200	200	200	200	mA
Grid No.2 current	$I_{g_2}$	20	25	35	40	mA
Grid No.1 current	$I_{g_1}$	15	10	8	7	mA
Driving power	$W_{dr}$	2	1.5	1	1	W
Anode input power	$W_{i_a}$	200	160	120	80	W
Output power	$W_o$	140	100	80	55	W
Modulation depth	m	100	100	100	100	%
Modulator output power	$W_{o\ mod}$	70	50	40	27.5	W
Grid No.2 mod.voltage, peak	$V_{g_{2p}\ mod}$	170	160	150	140	V

**A.F. CLASS AB AMPLIFIER AND MODULATOR****LIMITING VALUES** (Absolute max. rating system)

Anode voltage	$V_a$	max.	2000	V
Anode current	$I_a$	max.	250	mA
Anode dissipation	$W_a$	max.	250	W
Grid No.2 voltage	$V_{g_2}$	max.	400	V
Grid No.2 dissipation	$W_{g_2}$	max.	12	W
Grid No.1 dissipation	$W_{g_1}$	max.	2	W
Grid No.1 circuit resistance	$R_{g_1}$	max.	100	$k\Omega$
Cathode to heater voltage, peak	$V_{kf_p}$	max.	150	V

## OPERATING CONDITIONS two tubes in push-pull

Anode voltage	$V_a$	1000		800	V
Grid No. 2 voltage	$V_{g2}$	300		300	V
Grid No. 1 voltage	$V_{g1}$	-43		-40	V
Load resistance	$R_{aa\sim}$	4250		4400	$\Omega$
Driving voltage	$V_{ggp}$	0	86	0	80 V
Anode current	$I_a$	2x82.5	2x225	2x105	2x218 mA
Grid No. 2 current	$I_{g2}$	-	2x26	-	2x38 mA
Grid No. 1 current	$I_{g1}$	0	0	0	0 mA
Anode input power	$W_{i_a}$	2x82.5	2x225	2x84	2x175 W
Anode dissipation	$W_a$	2x82.5	2x110	2x84	2x90 W
Output power	$W_o$	0	230	0	170 W
Anode voltage	$V_a$	2000		1500	V
Grid No. 2 voltage	$V_{g2}$	300		300	V
Grid No. 1 voltage	$V_{g1}$	-50		-50	V
Load resistance	$R_{aa\sim}$	8760		6570	$\Omega$
Driving voltage	$V_{ggp}$	0	100	0	100 V
Anode current	$I_a$	2x50	2x235	2x50	2x228 mA
Grid No. 2 current	$I_{g2}$	-	2x18	-	2x21 mA
Grid No. 1 current	$I_{g1}$	0	0	0	0 mA
Anode input power	$W_{i_a}$	2x100	2x470	2x75	2x340 W
Anode dissipation	$W_a$	2x100	2x180	2x75	2x140 W
Output power	$W_o$	0	580	0	400 W

## OPERATING CONDITIONS (continued)

Anode voltage	$V_a$	1000	800	V
Grid No. 2 voltage	$V_{g2}$	300	300	V
Grid No. 1 voltage	$V_{g1}$	-45	-40	V
Load resistance	$R_{aa\sim}$	3950	3140	$\Omega$
Driving voltage	$V_{ggp}$	0 98	0 90	V
Driving power	$W_{dr}$	- 0.15	- 0.15	W
Anode current	$I_a$	2x83 2x247	2x105 2x250	mA
Grid No. 2 current	$I_{g2}$	- 2x29	- 2x40	mA
Anode input power	$W_{i_a}$	2x83 2x247	2x84 2x200	W
Anode dissipation	$W_a$	2x83 2x112	2x84 2x93	W
Output power	$W_o$	0 270	0 215	W
Anode voltage	$V_a$	2000	1500	V
Grid No. 2 voltage	$V_{g2}$	300	300	V
Grid No. 1 voltage	$V_{g1}$	-50	-50	V
Load resistance	$R_{aa\sim}$	8100	5970	$\Omega$
Driving voltage	$V_{ggp}$	0 106	0 106	V
Driving power	$W_{dr}$	- 0.2	- 0.2	W
Anode current	$I_a$	2x50 2x250	2x50 2x250	mA
Grid No. 2 current	$I_{g2}$	- 2x18	- 2x18	mA
Anode input power	$W_{i_a}$	2x100 2x500	2x75 2x375	W
Anode dissipation	$W_a$	2x100 2x185	2x75 2x155	W
Output power	$W_o$	0 630	0 440	W

**R.F. CLASS B AMPLIFIER FOR TELEVISION SERVICE** , negative modulation,  
positive synchronisation

**LIMITING VALUES** (Absolute max. rating system)

Frequency	f	54 to 216	MHz
Anode voltage	$V_a$	max. 1250	V
Anode current	$I_a$	max. 250	mA
Anode dissipation	$W_a$	max. 250	W
Grid No.2 voltage	$V_{g2}$	max. 250	V
Grid No.2 dissipation	$W_{g2}$	max. 12	W
Grid No.1 voltage, negative	$-V_{g1}$	max. 400	V
Grid No.1 dissipation	$W_{g1}$	max. 2	W
Grid No.1 circuit resistance	$R_{g1}$	max. 25	$k\Omega$ <sup>1)</sup>
Cathode to heater voltage, peak	$V_{kf_p}$	max. 150	V


**OPERATING CONDITIONS**

Bandwidth	B (-1.5 dB)	5	5	5	MHz
Anode voltage	$V_a$	1250	1000	750	V
Grid No.2 voltage	$V_{g2}$	300	300	300	V
Grid No.1 voltage	$V_{g1}$	-70	-65	-60	V
Driving voltage, peak to peak	$V_{g1pp}$ sync	100	95	85	V
	black	75	70	65	V
Anode current	$I_a$ sync	305	330	335	mA
	black	230	240	245	mA
Grid No.2 current	$I_{g2}$ sync	45	45	50	mA
	black	10	15	20	mA
Grid No.1 current	$I_{g1}$ sync	25	20	15	mA
	black	4	4	4	mA
Driving power	$W_{dr}$ sync	9	8	7	W
	black	5.5	4.7	4.25	W
Output power in load	$W_\ell$ sync	250	200	135	W
	black	140	110	75	W


<sup>1)</sup> Cathode bias is not recommended.




7Z07255

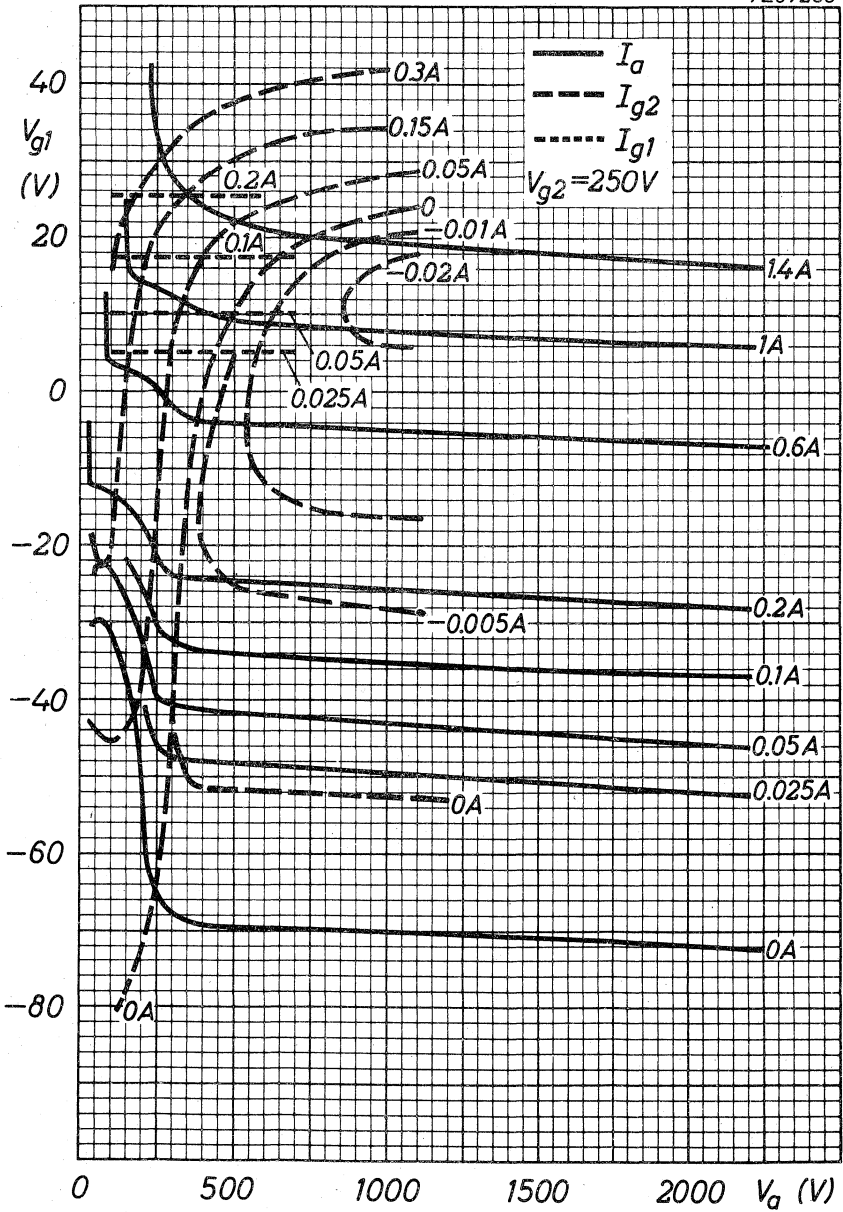


7207248

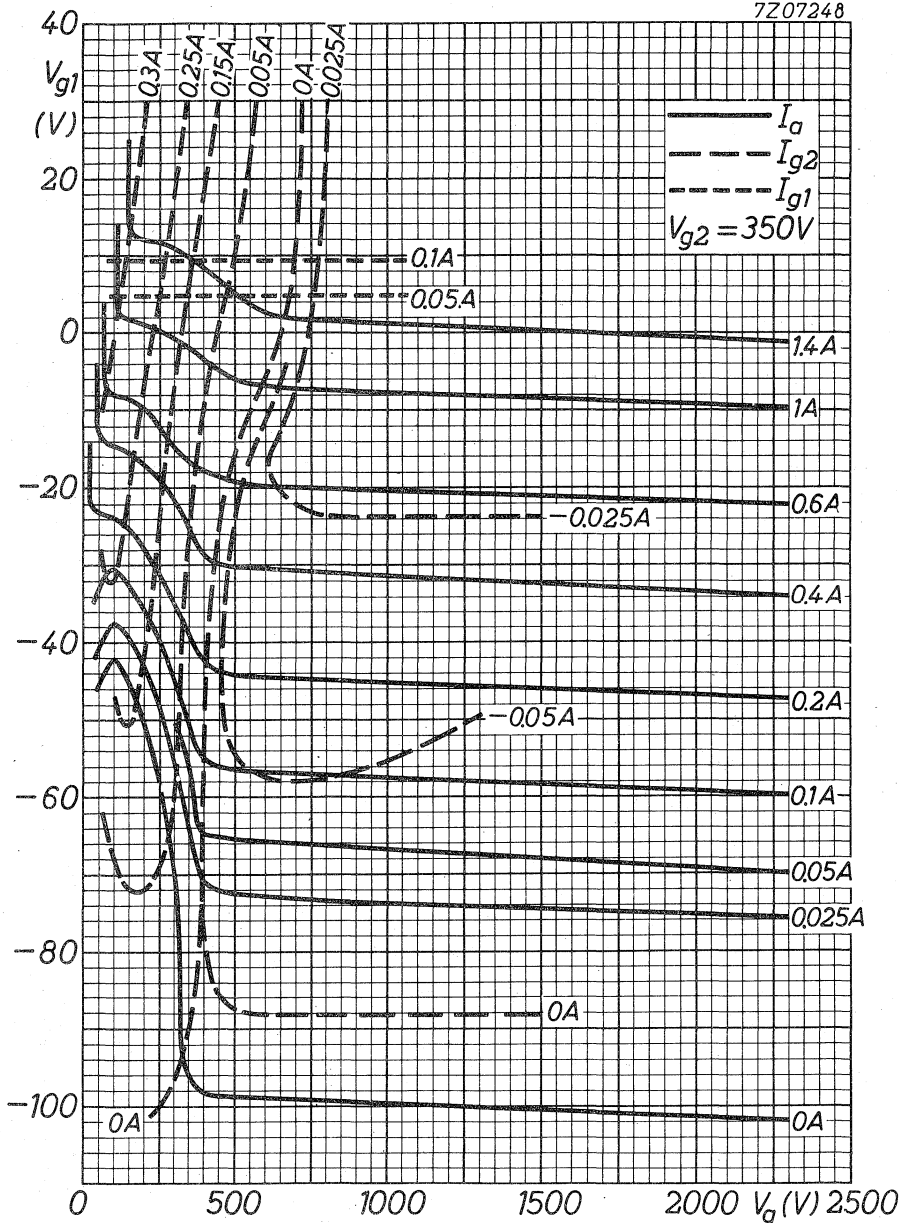

7Z03085-17.5.12.a/aej

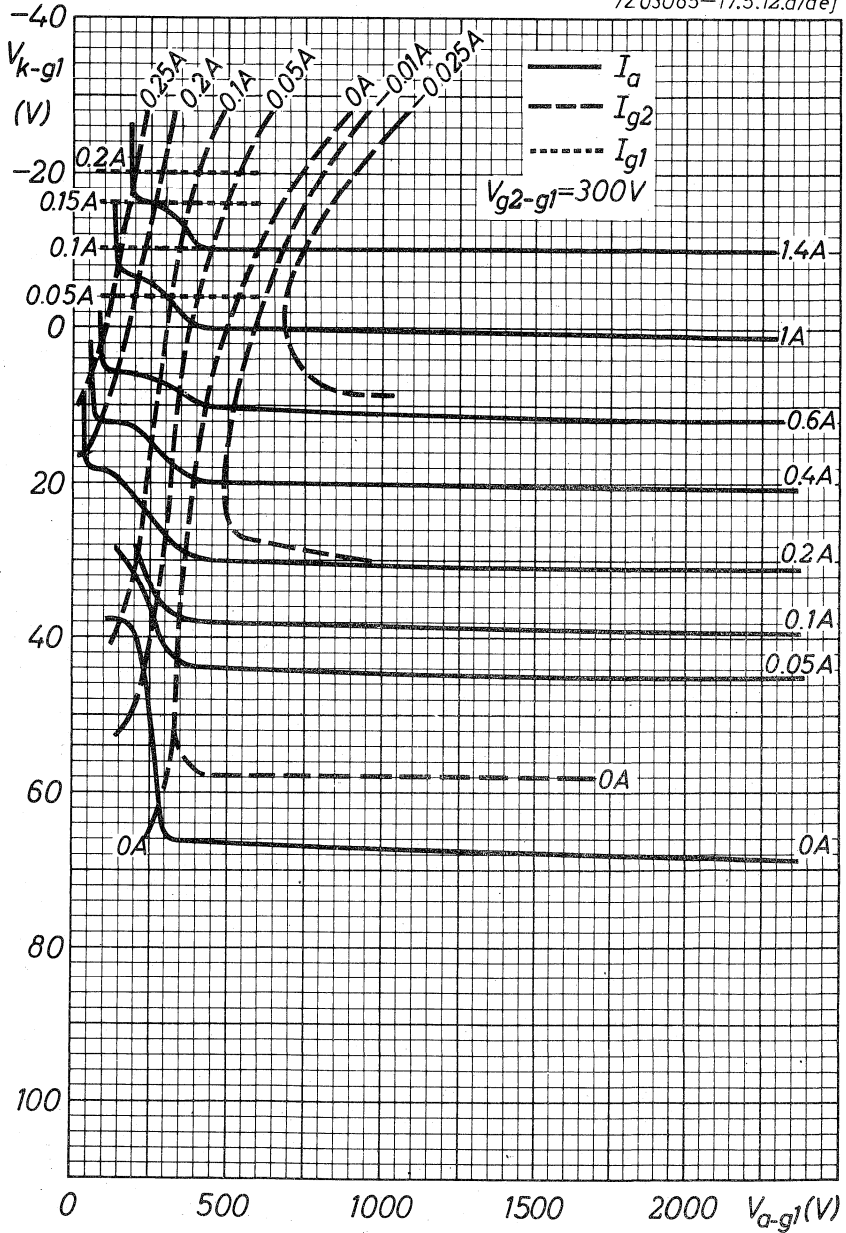

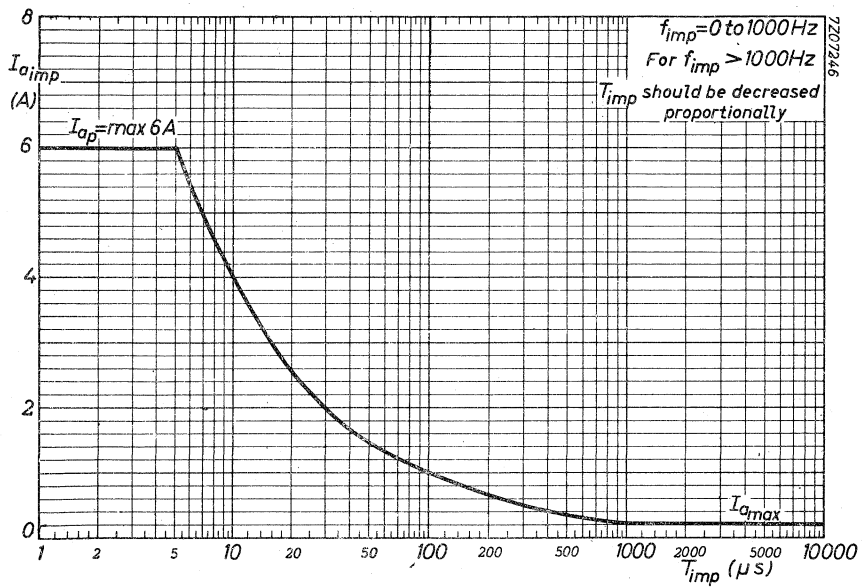

## R.F. POWER TETRODE

Forced-air cooled tetrode in ceramic-metal construction intended for use in S.S.B. transmitters.

Freq. (MHz)	QUICK REFERENCE DATA		
	S.S.B.		
	$V_a$ (V)	$W_l$ (W) PEP	$d_3$ (dB)
7	2000	271	-26
7	2000	436	-23

**HEATING:** indirect; oxide coated cathode

Heater voltage	$V_f$	25.6	$V \pm 5\%$ 1)
Heater current	$I_f$	560	mA
Waiting time	$T_w$	min. 30	s

### CAPACITANCES

Grid No. 1 to all except anode	$C_{g_1(a)}$	17.0	pF
Anode to all except grid No. 1	$C_{a(g_1)}$	4.7	pF
Anode to grid No. 1	$C_{ag_1}$	0.06	pF

### TYPICAL CHARACTERISTICS

Anode voltage	$V_a$	500	V
Grid No. 2 voltage	$V_{g_2}$	250	300 V
Anode current	$I_a$	200	mA
Grid No. 2 current	$I_{g_2}$	-	50 mA
Transconductance	$S$	12	- mA/V
Amplification factor	$\mu_{g_2g_1}$	5.2	

### TEMPERATURE LIMITS (Absolute max. rating system)

Temperature of all seals	$t_s$	max. 250	$^{\circ}C$
Temperature of anode core	$t_a$	max. 250	$^{\circ}C$

1) Short term variations of  $\pm 10\%$  will not damage the tube, but variations in performance must be expected.

**COOLING:** Forced air

Anode dissipation	Height above sea level	Inlet temperature	Min. required air flow	Pressure drop
$W_a$	$h$	$t_i$	$q$ min	$P_i$
250 W	0 m	50 °C	0.15 m <sup>3</sup> /min	15 mm H <sub>2</sub> O
250 W	3000 m	50 °C	0.19 m <sup>3</sup> /min	22 mm H <sub>2</sub> O

**ACCESSORIES**

Socket

Johnson 124-110-1


Chimney

Johnson 124-111-1 or equivalent

**MECHANICAL DATA**

Net weight: 120 g

Mounting position: any

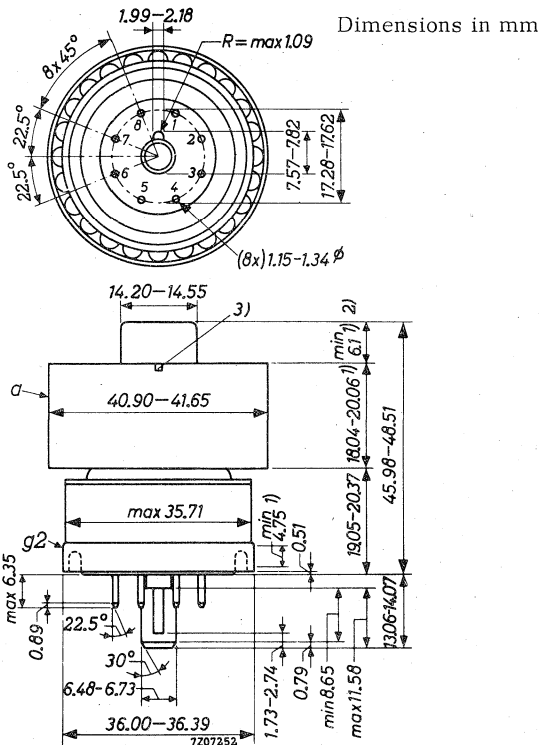

1) Contact surface

2) Use this contact surface for frequencies up to 30 MHz only

3) Index aligned with grid No.1 guide lug

## R.F. SINGLE SIDE BAND AMPLIFIER

## LIMITING VALUES (Absolute max. rating system)

Frequency	f	up to	500	MHz
Anode voltage	$V_a$	max.	2000	V
Anode current	$I_a$	max.	250	mA
Anode dissipation	$W_a$	max.	250	W
Grid No.2 voltage	$V_{g2}$	max.	400	V
Grid No.2 dissipation	$W_{g2}$	max.	12	W
Grid No.1 voltage, negative	$-V_{g1}$	max.	150	V
Cathode to heater voltage, peak	$V_{kfp}$	max.	150	V

## OPERATING CONDITIONS



Frequency	f	7	MHz	
Anode voltage	$V_a$	2000	V	
Grid No.2 voltage	$V_{g2}$	350	V	
Grid No.1 voltage	$V_{g1}$	-57.5	V	
Load resistance	$R_{a\sim}$	4000	$\Omega$	
		zero signal	single tone	double tone
Driving voltage, peak	$V_{g1p}$	0	45.3	45.3 V
Anode current	$I_a$	100	250	174 mA
Grid No.2 current	$I_{g2}$	-1.22	-4.1	-31.5 mA
Anode input power	$W_{i_a}$	200	500	348 W
Output power in the load	$W_l$ (PEP)	-	271	271 W
Third order intermodulation distortion	$d_3$	-	-	-26 dB
Fifth order intermodulation distortion	$d_5$	-	-	-54 dB

## OPERATING CONDITIONS (continued)

Frequency	f	7			MHz
Anode voltage	V <sub>a</sub>	2000			V
Grid No. 2 voltage	V <sub>g2</sub>	350			V
Grid No. 1 voltage	V <sub>g1</sub>	-72			V
Load resistance	R <sub>a~</sub>	3570			Ω
			zero signal	single tone <sup>1)</sup>	double tone
Driving voltage, peak	V <sub>g1p</sub>	0	62	62	V
Anode current	I <sub>a</sub>	75	310	204	mA
Grid No. 2 current	I <sub>g2</sub>	-0.85	14	2.4	mA
Anode input power	W <sub>i<sub>a</sub></sub>	150	620	407	W
Output power in the load	W <sub>ℓ</sub> (PEP)	-	436	436	W
Third order intermodulation distortion	d <sub>3</sub>	-	-	-23	dB
Fifth order intermodulation distortion	d <sub>5</sub>	-	-	-37	dB

<sup>1)</sup> Conditions in this column are permissible only for a signal having a peak to average power ratio which equals or exceeds 2 to 1 (e.g. two tone conditions) and for tune up during maximum 2 min.



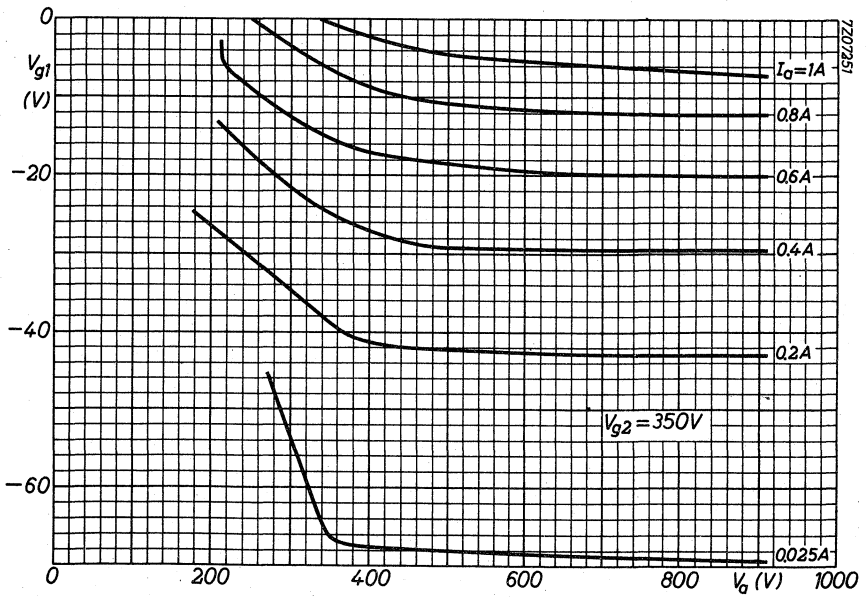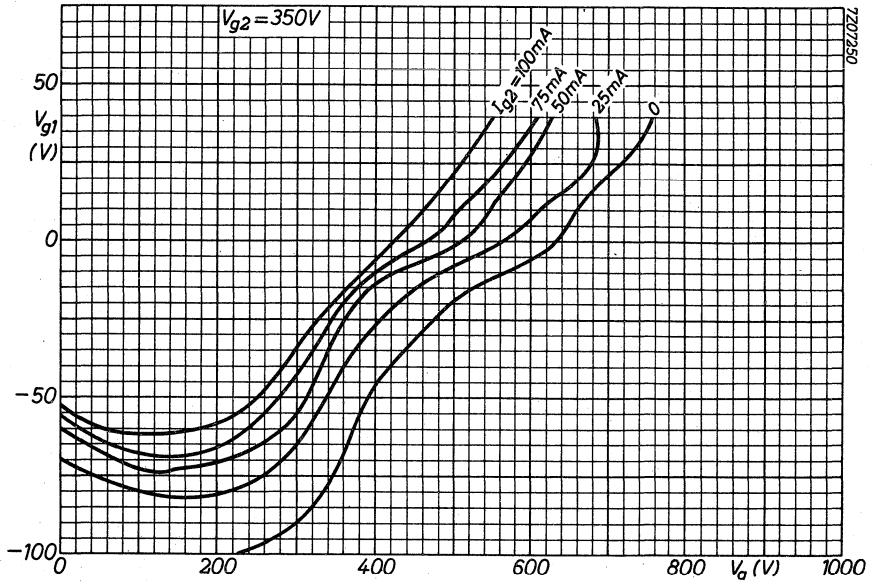



## Amplifier circuit assemblies





## BAND III AMPLIFIER CIRCUIT ASSEMBLY FOR YL1440 VISION AND COMBINED SOUND AND VISION



Continuously tunable cavity-type circuit assembly to be used with YL1440 to form a broad-band grounded-grid linear amplifier for television signals in Band III.

The unit thus obtained can be put to good use in any of the principal monochrome and colour television systems.

QUICK REFERENCE DATA			
Class AB linear amplifier (vision)			
Frequency	170	to 260	MHz
Anode voltage		3	kV
Output power in load , sync		1,55	kW
Power gain		26	
Frequency	170	to 260	MHz
Anode voltage		2,5	kV
Output power in load , sync		0,7	kW
Power gain		23	
Class AB amplifier for television transposer service			
Frequency	175	to 225	MHz
Anode voltage		2,5	kV
Output power in load , sync		0,55	kW
Power gain		30	



### FREQUENCY RANGE

170 to 247 MHz continuously tunable. Up to 260 MHz with minor, channel dependent, modifications.



### OPERATING CONDITIONS (For YL1440)


For detailed operating conditions reference is made to the data sheets for tube type YL1440.

MECHANICAL DATA

Dimensions in mm

Dimensions : approx. 673 x 333 x 323 mm<sup>3</sup>

Net weight : approx. 38 kg

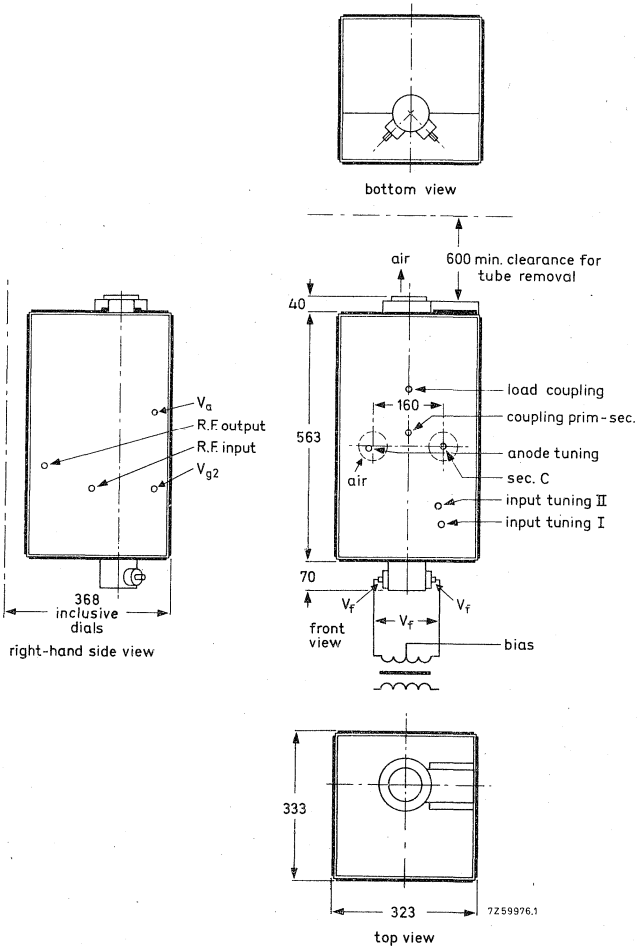

**COOLING**

See cooling curves.

Direction of airflow: see drawing page 6.

Either sucking and blowing is possible via connections on the top panel and the rear panel.

**IMPEDANCES**

Input : 50  $\Omega$  (coaxial female connector type N)

Output : 50  $\Omega$  (coaxial female connector type HN)

**ENVIRONMENTAL DATA**

Ambient temperature : 0 °C to +55 °C

Altitude : max. 3000 m

Relative humidity : up to 90 %

**VOLTAGE STANDING-WAVE RATIO**

Input : max. permissible 1.3 for acceptable performance

Output : max. permissible 1.3 for acceptable performance


**ADDITIONAL COMPONENTS**a) Delivered with the assembly

Tube extractor	7322 120 02140
Mating male input connector	Radiall type N
Mating male output connector	Radiall type R7050
Mating connector for anode voltage	Radiall type R13060
Mating connector for screen grid voltage	Radiall type R9510

b) Recommended




The use of circulator 2722 162 01191 (170 to 200 MHz) or 2722 162 1201 (200 to 230 MHz) is recommended.



CIRCUIT DIAGRAM

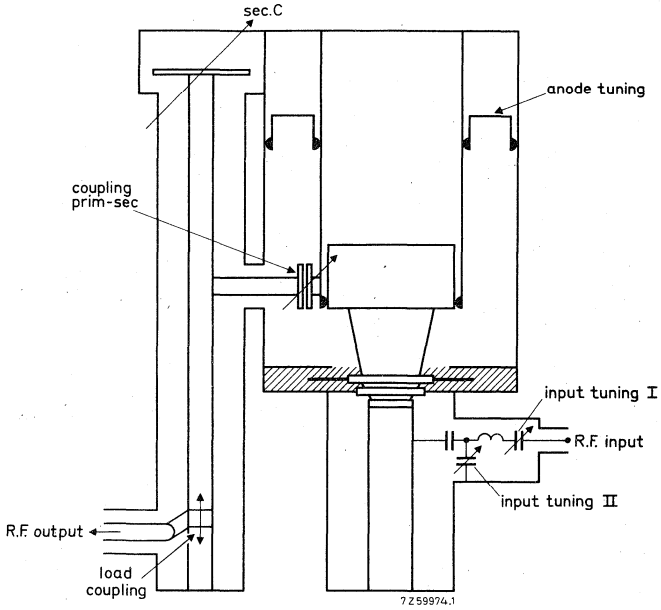



Cooling curves

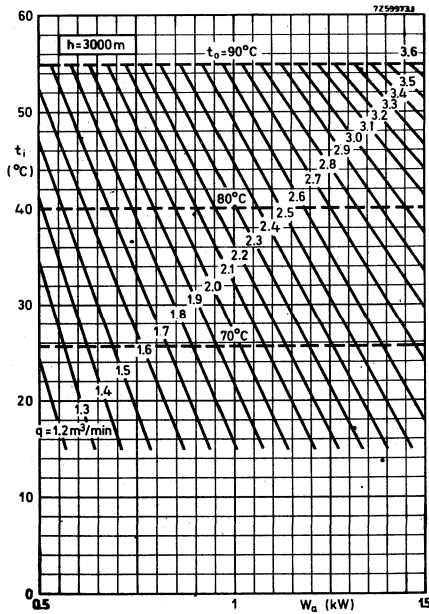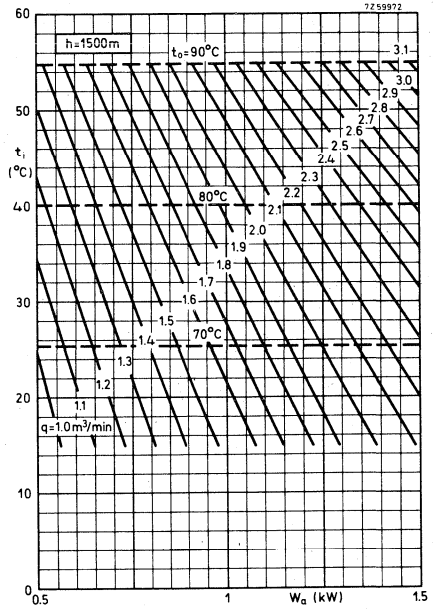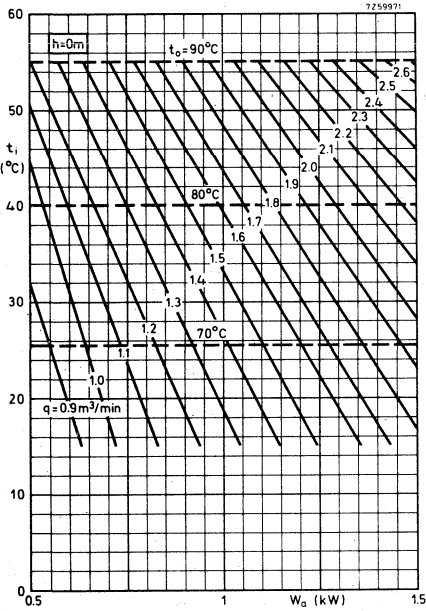

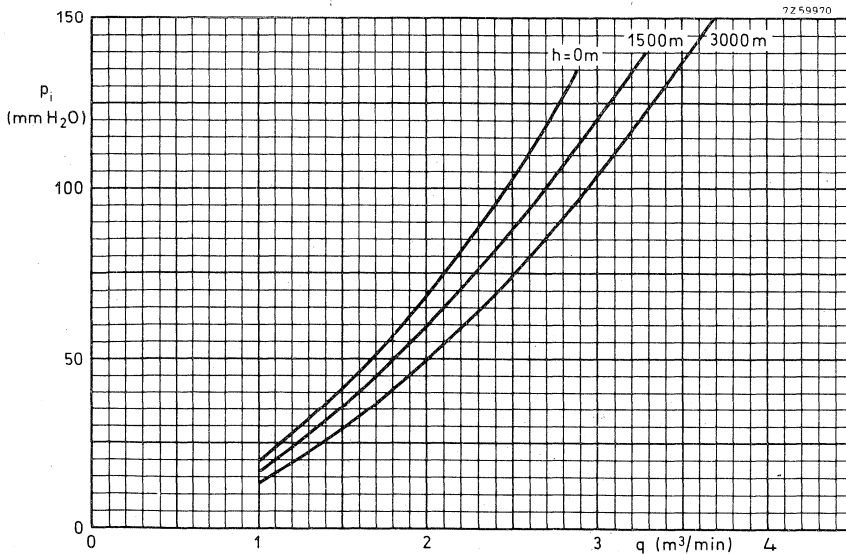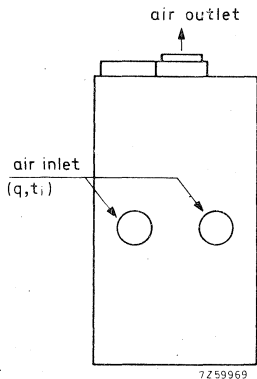

## BAND III AMPLIFIER CIRCUIT ASSEMBLY FOR YL1440 SOUND

Continuously tunable cavity-type circuit assembly to be used with YL1440 to form a grounded-grid amplifier of frequency-modulated signals in Band III.

QUICK REFERENCE DATA			
Frequency (MHz)	Class B amplifier ( sound )		
	$V_a$ (kV)	$W_\ell$ (kW) CCIR system	Power gain
70 to 260	3.5	2.4	26

### FREQUENCY RANGE

170 to 260 MHz, continuously tunable.

### OPERATING CONDITIONS (For tube YL1440)


For detailed operating conditions reference is made to the data sheets for tube type YL1440.

MECHANICAL DATA

Dimensions in mm

Dimensions : approx. 673 x 333 x 323 mm<sup>3</sup>

Net weight : approx. 33 kg

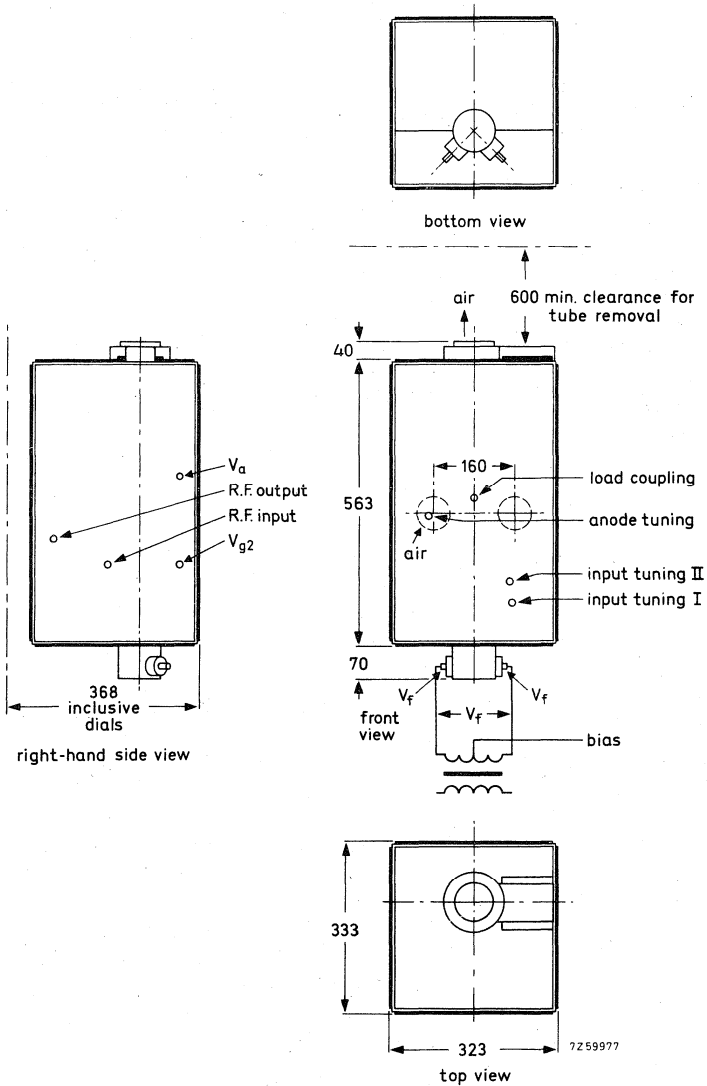

**COOLING**

See cooling curves.

Direction of airflow: see drawing page 6.

Either sucking and blowing is possible via connections on the top panel and the rear panel.

**IMPEDANCES**

Input : 50  $\Omega$  (coaxial female connector type N)

Output : 50  $\Omega$  (coaxial female connector type HN)

**ENVIRONMENTAL DATA**

Ambient temperature : 0  $^{\circ}\text{C}$  to +55  $^{\circ}\text{C}$

Altitude : max. 3000 m

Relative humidity : up to 90 %

**VOLTAGE STANDING-WAVE RATIO**

Input : max. permissible 1.3 for acceptable performance

Output : max. permissible 1.3 for acceptable performance

**ADDITIONAL COMPONENTS**a) Delivered with the assembly


Tube extractor	7322 120 02140
Mating male input connector	Radiall type N
Mating male output connector	Radiall type R7050
Mating connector for anode voltage	Radiall type R13060
Mating connector for screen grid voltage	Radiall type R9510

b) Recommended




The use of circulator 2722 162 01191 (170 to 200 MHz) or 2722 162 01201 (200 to 230 MHz) is recommended.





CIRCUIT DIAGRAM

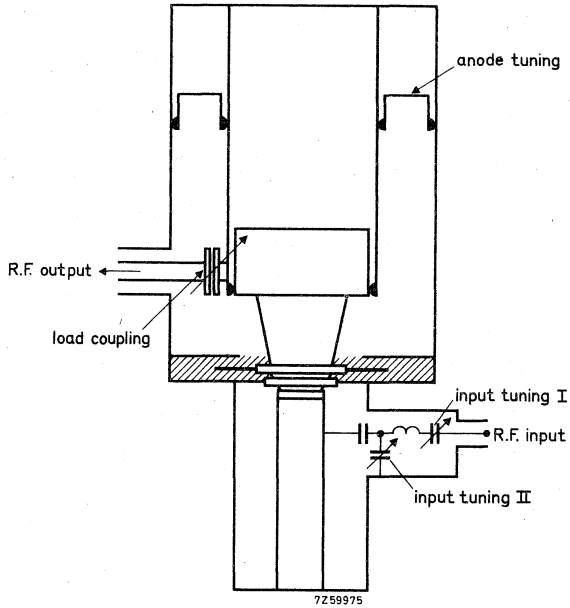

Cooling curves

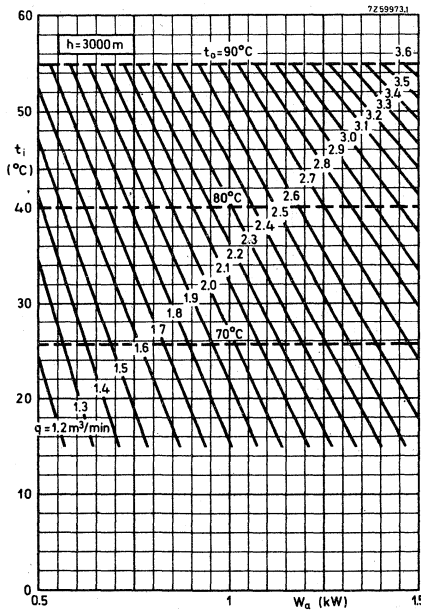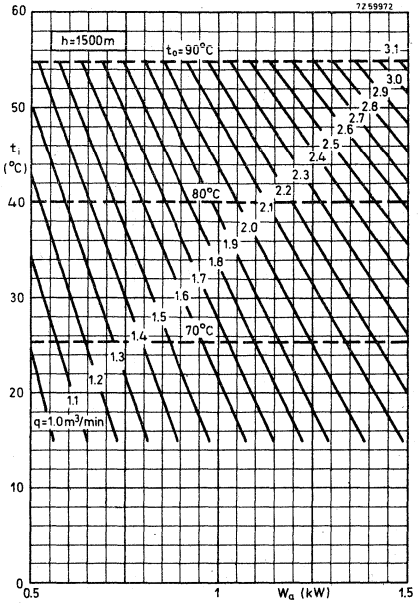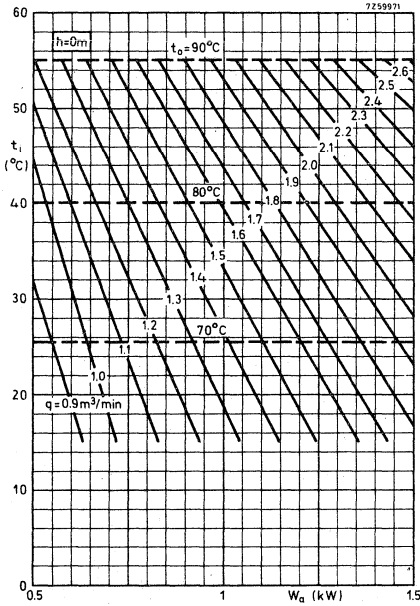

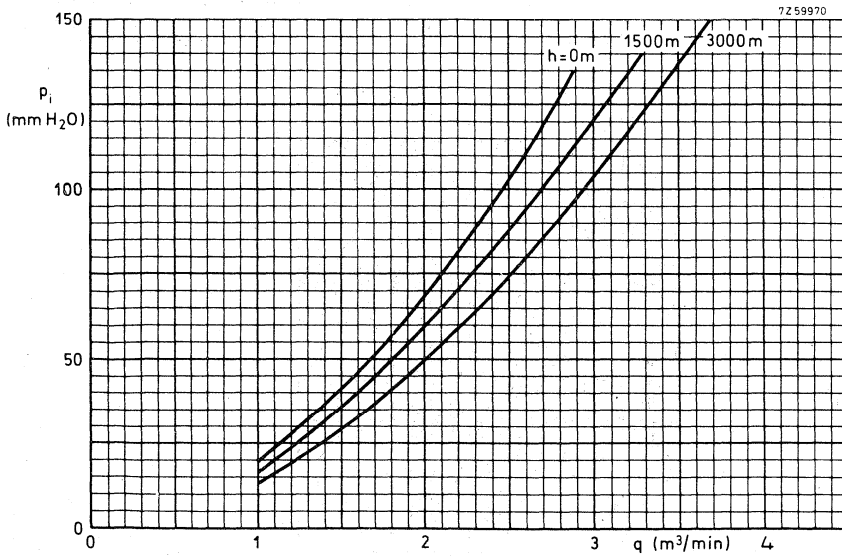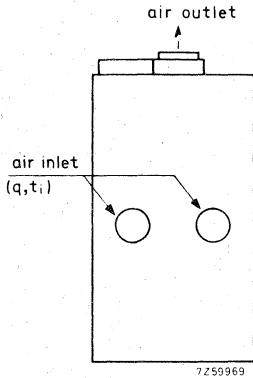



## BAND III AMPLIFIER CIRCUIT ASSEMBLY FOR YL1420 VISION AND COMBINED SOUND AND VISION

Continuously tunable cavity-type circuit assembly to be used with YL1420 to form a broad-band grounded-grid linear amplifier for television signals in Band III. The unit thus obtained can be put to good use in any of the principal monochrome and colour television systems.

QUICK REFERENCE DATA			
Class AB linear amplifier (vision)			
Frequency	170	to 230	MHz
Anode voltage		5	kV
Output power in load, sync		8, 6	kW
Power gain		24	
Frequency	170	to 230	MHz
Anode voltage		4	kV
Output power in load, sync		6, 25	kW
Power gain		24	
Class AB amplifier for television transposer service			
Frequency	175	to 225	MHz
Anode voltage		4	kV
Output power in load, sync		2, 5	kW
Power gain		30	

### FREQUENCY RANGE

170 to 230 MHz continuously tunable.

### OPERATING CONDITIONS (For YL1420)





For detailed operating conditions reference is made to the data sheets for tube type YL1420.

MECHANICAL DATA

Dimensions in mm

Dimensions : approx. 600 x 620 x 370 mm<sup>3</sup>





Net weight : approx. 67 kg

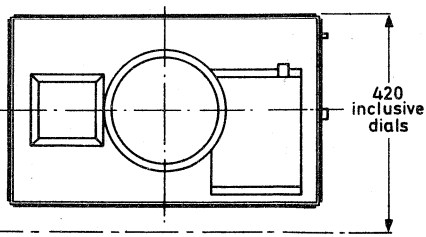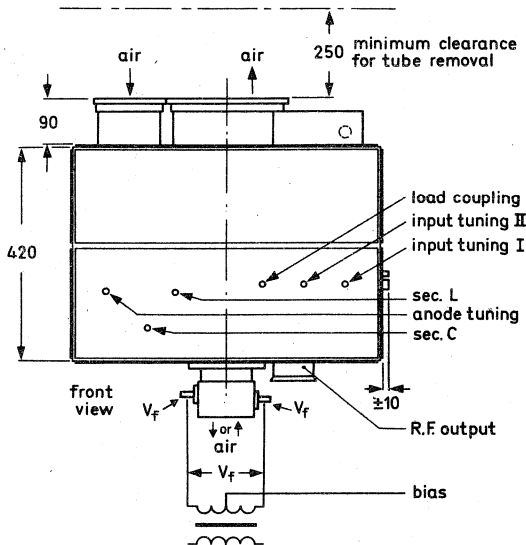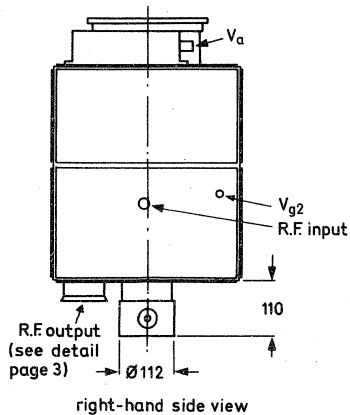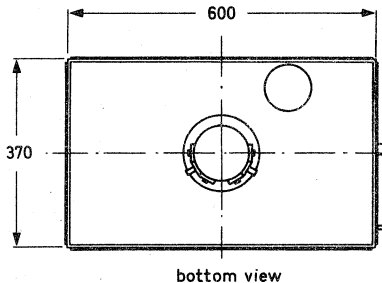


top view

7259585

R. F. output connector

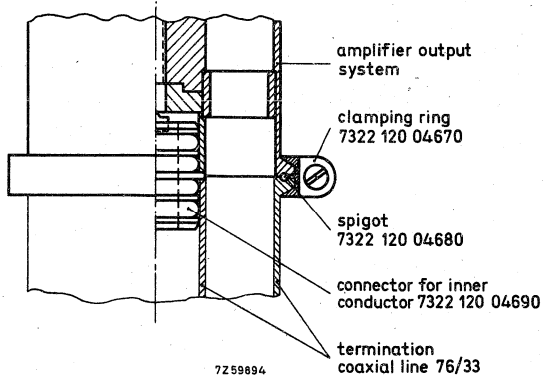

connector for inner conductor 7322 120 04690

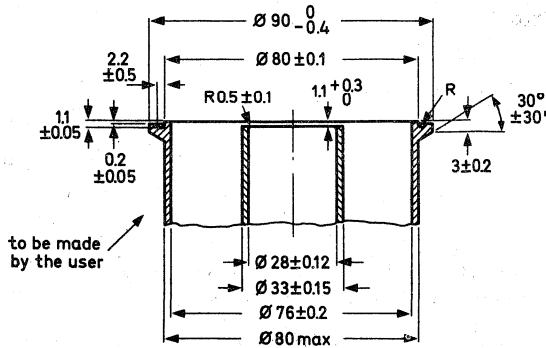

termination coaxial line 76/33

**COOLING**

See cooling curves.

Direction of airflow: see drawing page 7.

Either sucking and blowing is possible via connections on the top panel.

**IMPEDANCES**

Input : 50  $\Omega$  (coaxial female connector, type N)

Output : 50  $\Omega$  (coaxial connector: see drawing page 3)

**ENVIRONMENTAL DATA**

Ambient temperature : 0  $^{\circ}\text{C}$  to +55  $^{\circ}\text{C}$

Altitude : max. 3000 m

Relative humidity : up to 90 %

**VOLTAGE STANDING-WAVE RATIO**

Input : max. permissible 1.3 for acceptable performance

Output : max. permissible 1.3 for acceptable performance

**ADDITIONAL COMPONENTS**a) Delivered with the assembly



Tube extractor	7322 120 07850
Mating male input connector	Radiall type N
Output connector	
connector for inner conductor	7322 120 04690
spigot for outer conductor	7322 120 04680
clamping ring for outer conductor	7322 120 04670
Mating connector for anode voltage	Radiall type R13060
Mating connector for screen grid voltage	Radiall type R9510
Coupling loop for 175.25 MHz	7322 120 04730
Coupling loop for remaining frequencies except 223.25 MHz <sup>1)</sup>	7322 120 04760
Insulating protection cap	7322 120 04750
Spanner for fitting	

b) Recommended




The use of circulator 2722 162 01191 (170 to 200 MHz) or 2722 162 01201 (200 to 230 MHz) is recommended.




<sup>1)</sup> For 223.25 MHz a different coupling loop is needed, which can be delivered on request.

CIRCUIT DIAGRAM

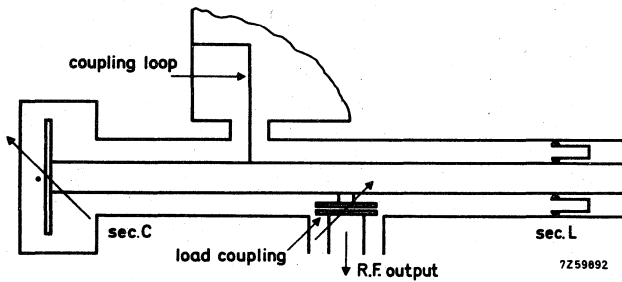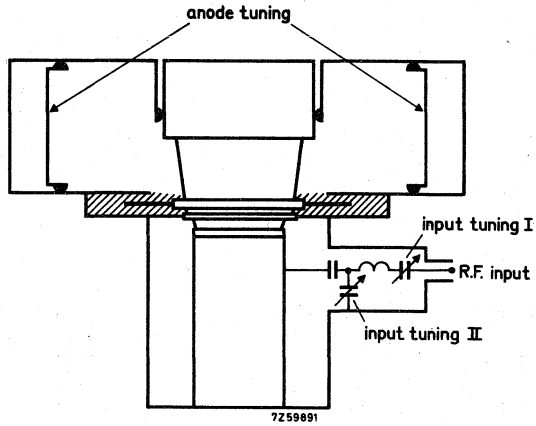

Cooling curves

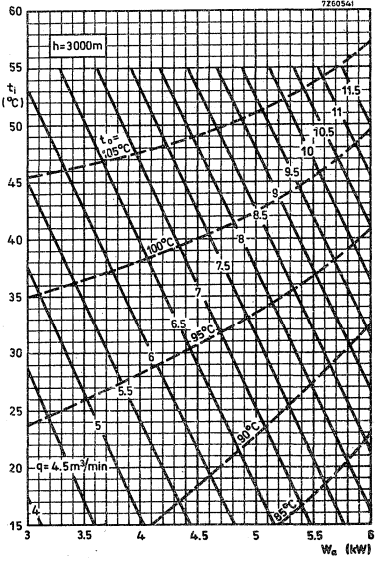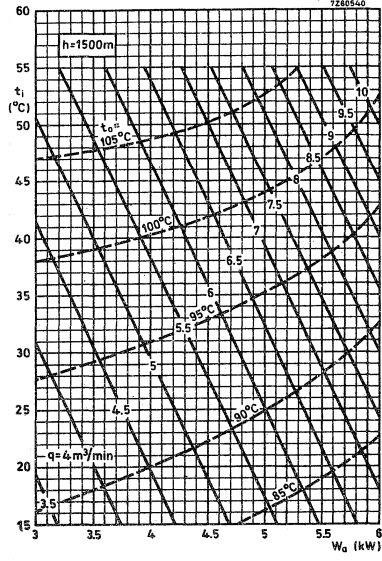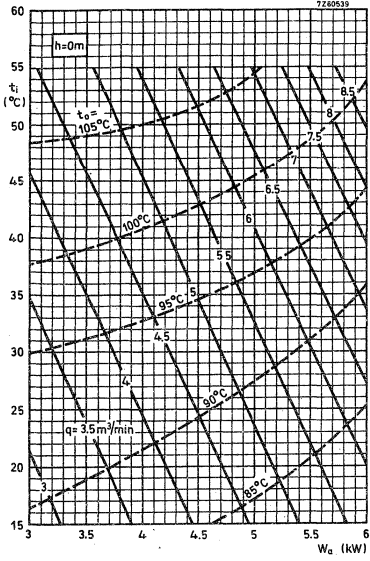

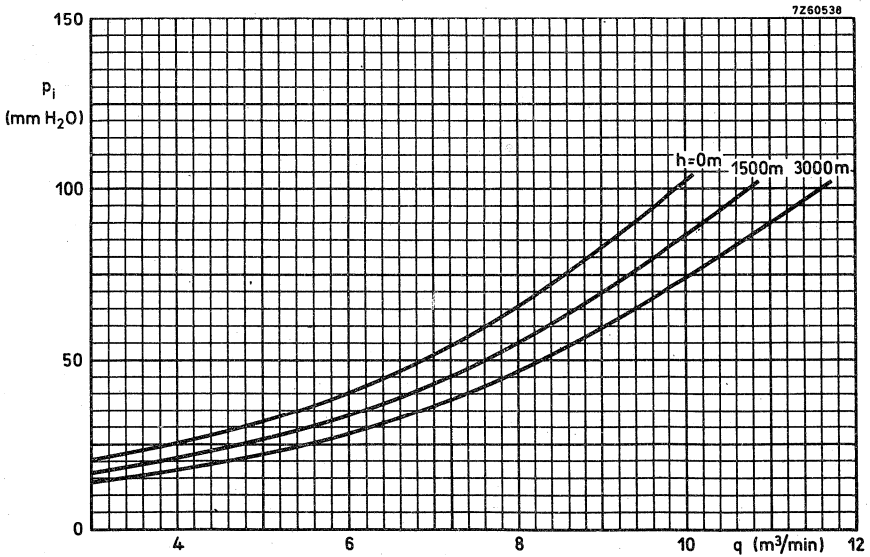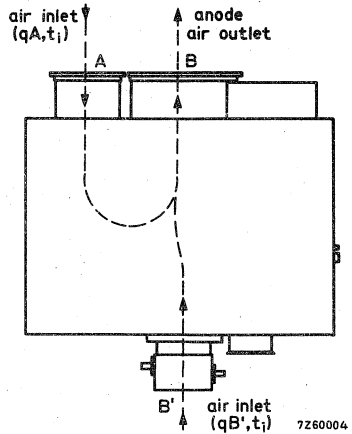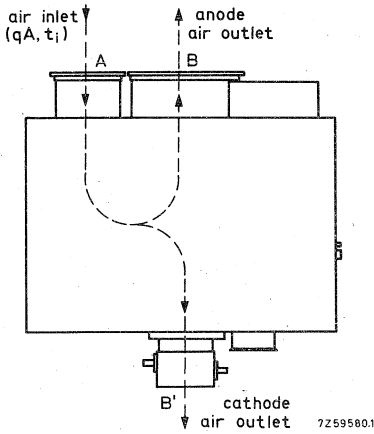

Pressure drop  $p_i$  across cavity with YL1420 as a function of airflow  $q$ .

$p_i$  = pressure drop from plane A to plane B or B'

For blowing  $q = q_A$

For sucking  $q = q_A + q_{B'}$





## BAND III AMPLIFIER CIRCUIT ASSEMBLY FOR YL1420 SOUND

Continuously tunable cavity-type circuit assembly to be used with YL1420 to form a grounded-grid amplifier of frequency-modulated signal in Band III.

QUICK REFERENCE DATA			
Frequency (MHz)	Class B amplifier (sound)		
	$V_a$ (kV)	$W_l$ (kW) CCIR system	Power gain
170 to 230	7	10.5	32

### FREQUENCY RANGE

170 to 230 MHz, continuously tunable.

### OPERATING CONDITIONS (For YL1420)





For detailed operating conditions reference is made to the data sheets for tube type YL1420.

MECHANICAL DATA


Dimensions in mm

Dimensions : approx. 600 x 620 x 370 mm<sup>3</sup>




Net weight : approx. 54 kg

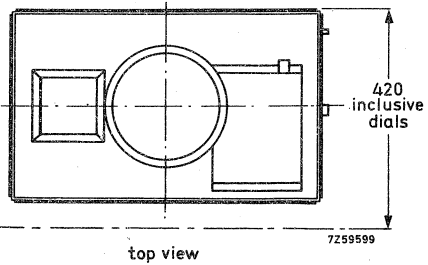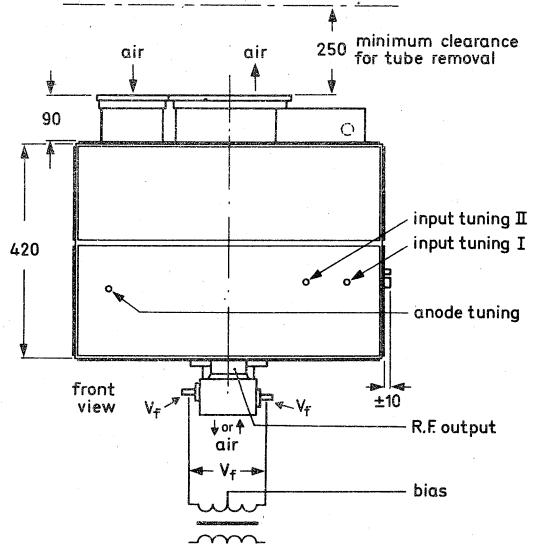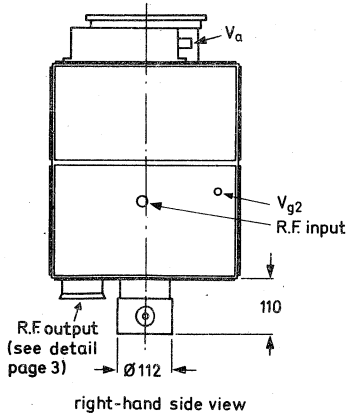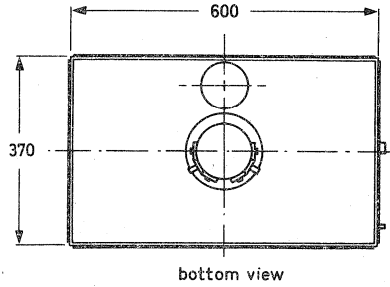


R. F. output connector

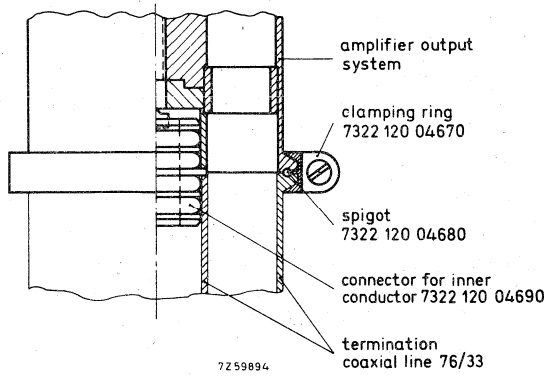

↑ to amplifier output system



connector for inner conductor 7322 120 04690

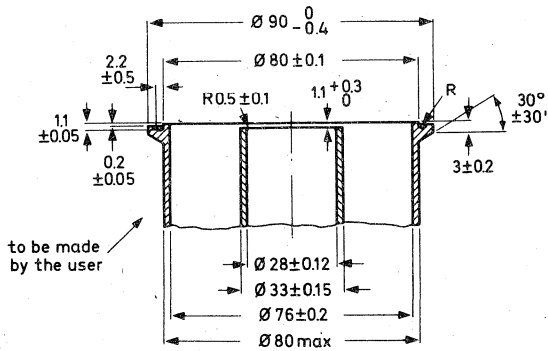

termination coaxial line 76/33

**COOLING**

See cooling curves.

Direction of airflow: see drawing page 7.

Both sucking and blowing is possible via connection on the top panel.

**IMPEDANCES**

Input : 50  $\Omega$  (coaxial female connector, type N)

Output : 50  $\Omega$  (coaxial connector: see drawing page 3)

**ENVIRONMENTAL DATA**

Ambient temperature : 0 °C to +55 °C

Altitude : max. 3000 m

Relative humidity : up to 90 %

**VOLTAGE STANDING-WAVE RATIO**

Input : max. permissible 1.3 for acceptable performance

Output : max. permissible 1.3 for acceptable performance



**ADDITIONAL COMPONENTS**a) Delivered with the assembly

Tube extractor input connector	7322 120 07850
Mating male input connector	Radiall type N
Output connector	
connector for inner conductor	7322 120 04690
spigot for outer conductor	7322 120 04680
clamping ring for outer conductor	7322 120 04670
Mating connector for anode voltage	Radiall type R13060
Mating connector for screen grid voltage	Radiall type R9510




Recommended




The use of circulator 2722 162 01191 (170 to 200 MHz) or 2722 162 01201 (200 to 230 MHz) is recommended.

CIRCUIT DIAGRAM

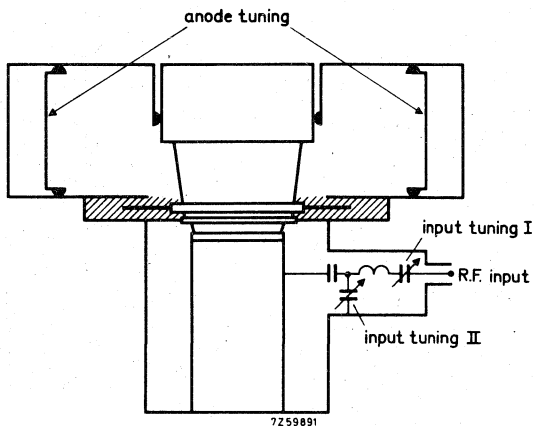

Cooling curves

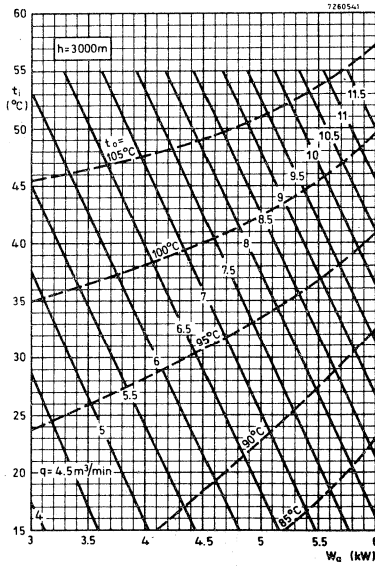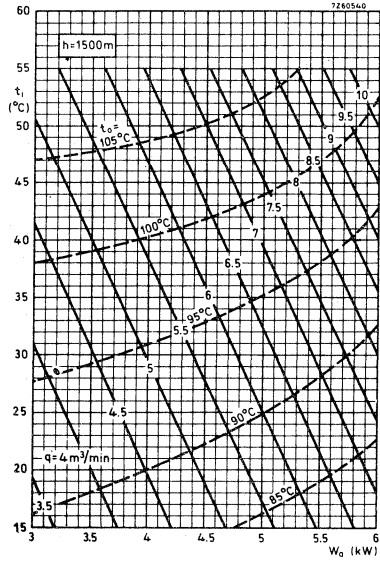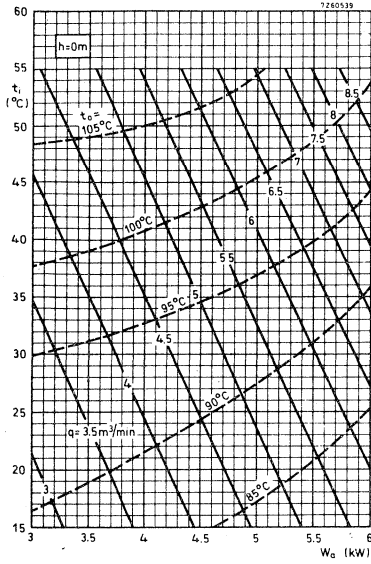

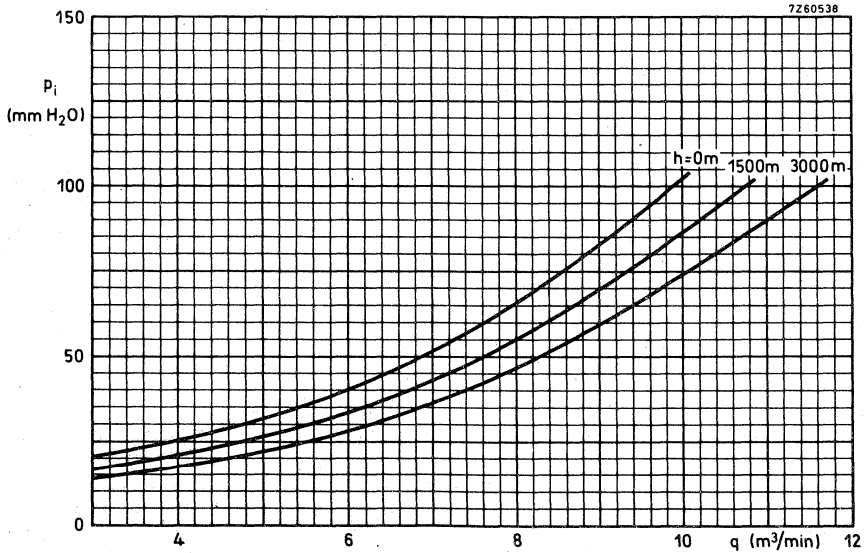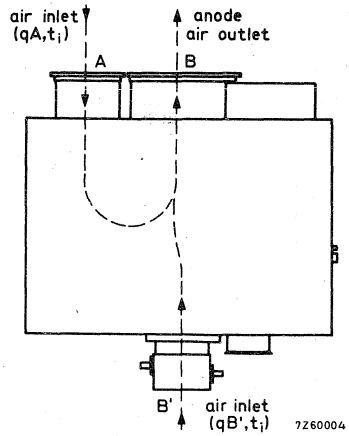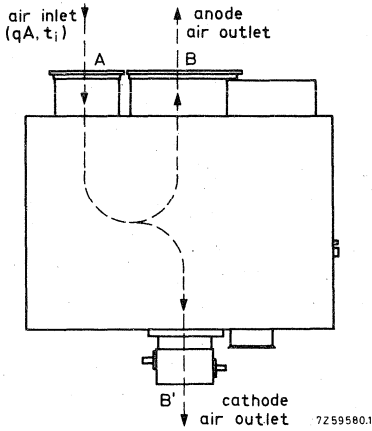

Pressure drop  $p_i$  across cavity with YL1420 as a function of airflow  $q$ .  
 $p_i$  = pressure from plane A to plane B or B'  
 For blowing  $q = q_A$   
 For sucking  $q = q_A + q_{B'}$





## BAND III AMPLIFIER CIRCUIT ASSEMBLY FOR YL1430 VISION AND COMBINED SOUND AND VISION

Continuously tunable cavity-type circuit assembly to be used with YL1430 to form a broad-band grounded-grid linear amplifier for television signals in Band III. The unit thus obtained can be put to good use in any of the principal monochrome and colour television systems.

QUICK REFERENCE DATA			
Class AB linear amplifier (vision)			
Frequency	170	to	230 MHz
Anode voltage			7 kV
Output power in load , sync			18,4 kW
Power gain			25
Frequency	170	to	230 MHz
Anode voltage			6 kV
Output power in load , sync			12,5 kW
Power gain			30
Class AB amplifier for television transposer service			
Frequency	175	to	225 MHz
Anode voltage			6 kV
Output power in load , sync			7 kW
Power gain			32

### FREQUENCY RANGE

170 to 230 MHz continuously tunable.

### OPERATING CONDITIONS (For YL1430)





For detailed operating conditions reference is made to the data sheets for tube type YL1430.

MECHANICAL DATA

Dimensions in mm





Dimensions : approx. 600 x 620 x 370 mm<sup>3</sup>

Net weight : approx. 67 kg

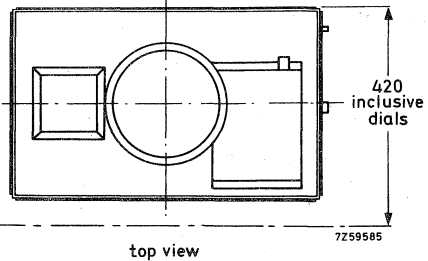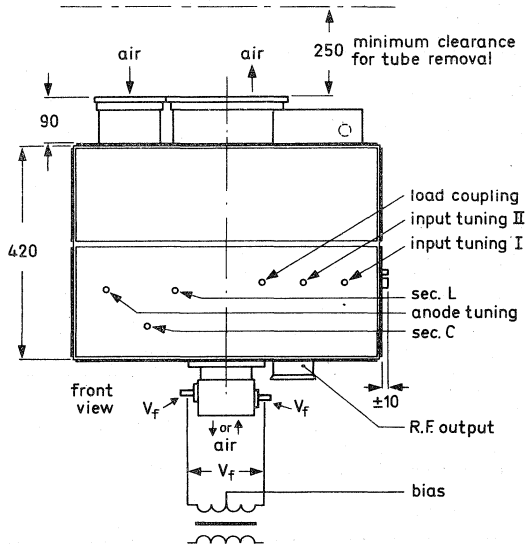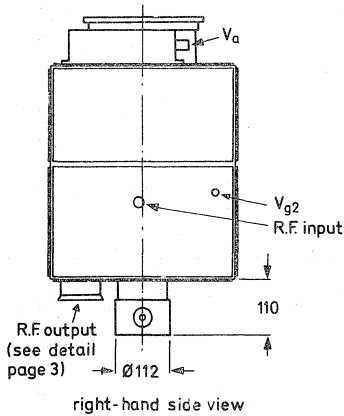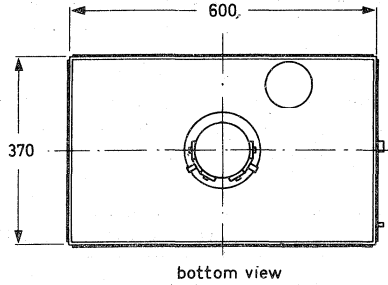


7259585

Output connector

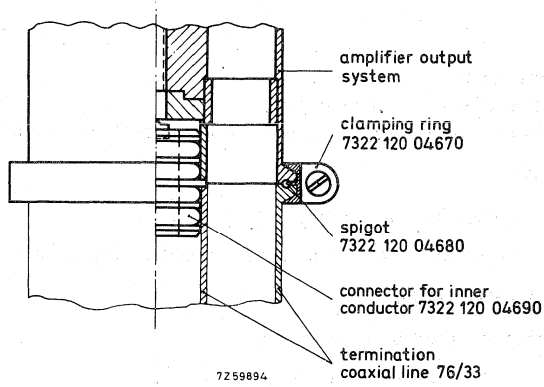

connector for inner conductor 7322 120 04690

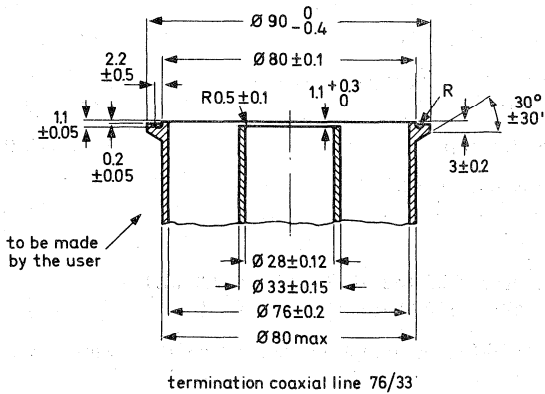

**COOLING**

See cooling curves.

Direction of airflow: see drawing page 7.

Either sucking and blowing is possible via connections on the top panel.

**IMPEDANCES**

Input : 50  $\Omega$  (coaxial female connector, type N)

Output : 50  $\Omega$  (coaxial female connector: see drawing page 3)

**ENVIRONMENTAL DATA**

Ambient temperature : 0  $^{\circ}\text{C}$  to +55  $^{\circ}\text{C}$

Altitude : max. 3000 m

Relative humidity : up to 90 %

**VOLTAGE STANDING-WAVE RATIO**

Input : max. permissible 1.3 for acceptable performance

Output : max. permissible 1.3 for acceptable performance

**ADDITIONAL COMPONENTS**a) Delivered with the assembly



Tube extractor	7322 120 07850
Mating male input connector	Radiall type N
Output connector	
connector for inner conductor	7322 120 04690
spigot for outer conductor	7322 120 04680
clamping ring for outer conductor	7322 120 04670
Mating connector for anode voltage	Radiall type R13060
Mating connector for screen grid voltage	Radiall type R9510
Coupling loop for 175.25 MHz	7322 120 04730
Coupling loop for remaining frequencies except 224.25 MHz	7322 120 04769 1)
Insulating protection cap	7322 120 04750
Spanner for fitting the coupling loops	

b) Recommended




The use of circulator 2722 162 01191 (170 to 200 MHz) or 2722 162 01201 (200 to 230 MHz) is recommended.




1) For 224.25 MHz a different coupling loop is needed, which can be delivered on request.

CIRCUIT DIAGRAM

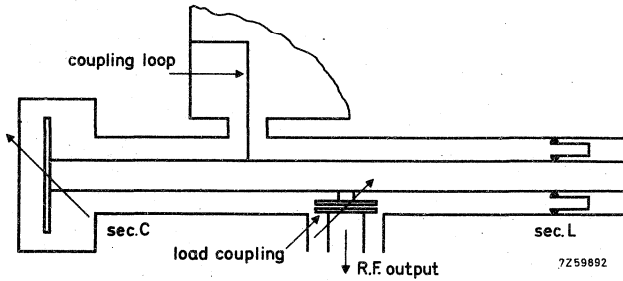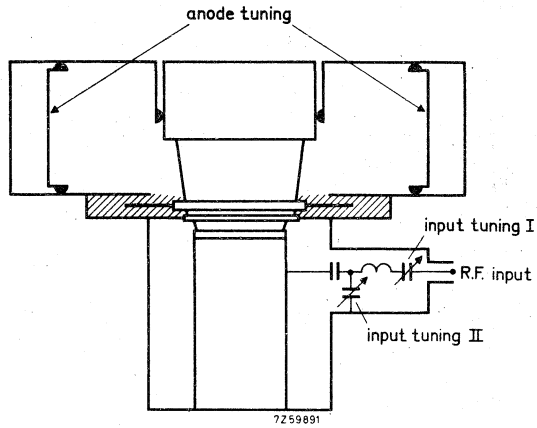

Cooling curves

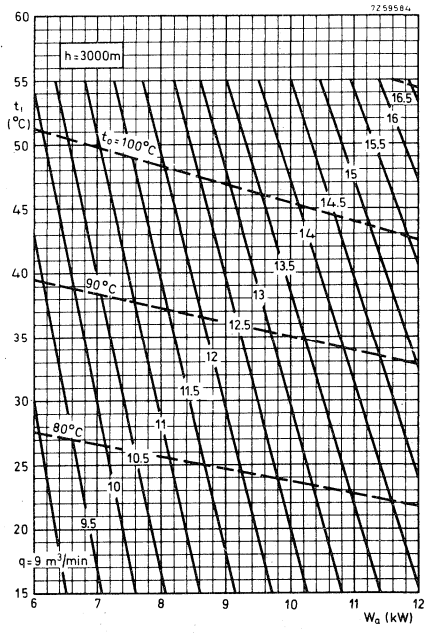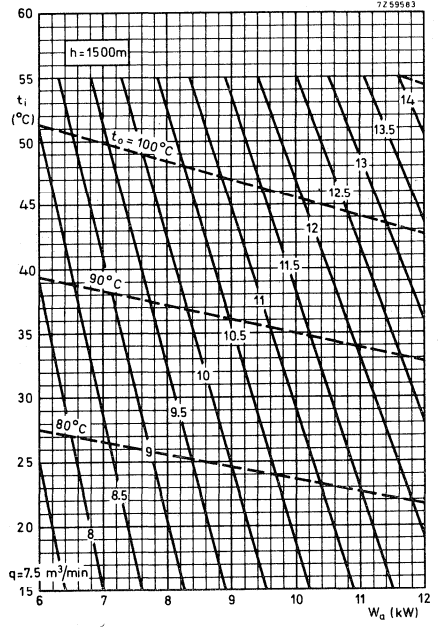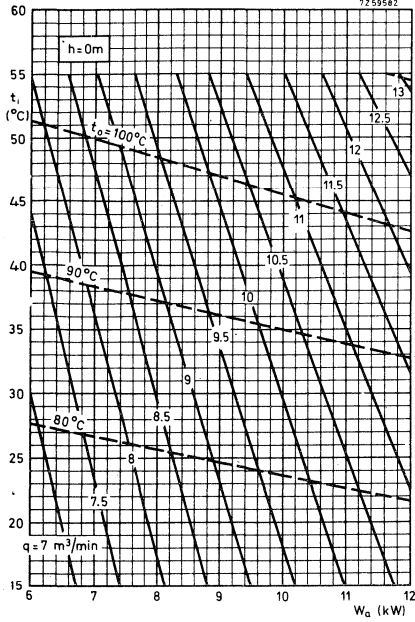

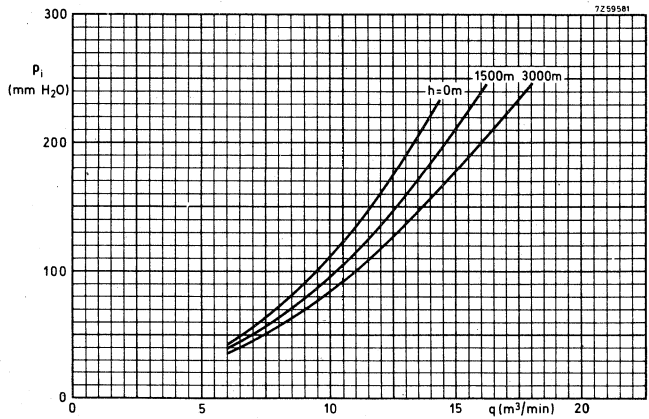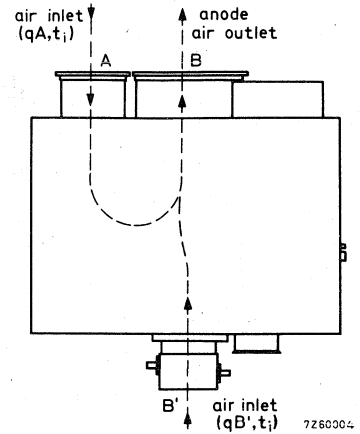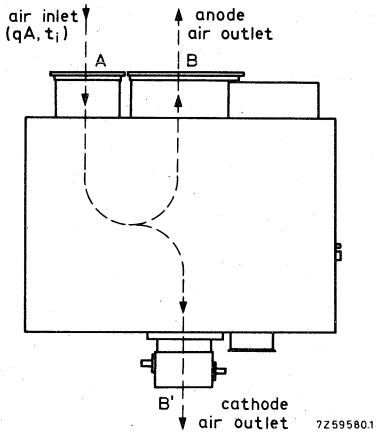

Pressure drop  $q_i$  across cavity with YL1430 as a function of airflow  $q$ .  
 $p_i$  = pressure drop from plane A to plane B or B'  
 For blowing  $q = q_A$   
 For sucking  $q = q_A + q_{B'}$






## BAND III AMPLIFIER CIRCUIT ASSEMBLY FOR YL1430 SOUND

Continuously tunable cavity-type circuit assembly to be used with YL1430 to form a grounded-grid amplifier of frequency modulated signals in band III.

RZ 29115-9

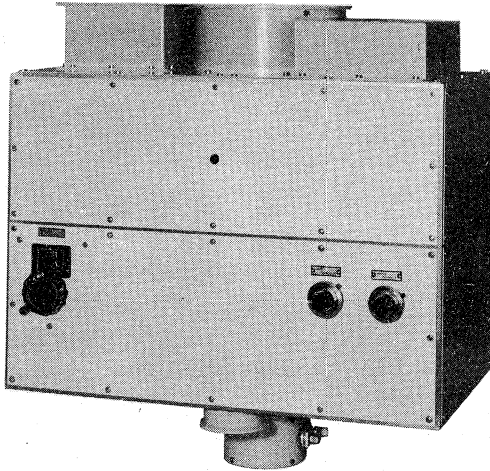

### QUICK REFERENCE DATA

Frequency (MHz)	Class B amplifier (sound)		
	$V_a$ (kV)	$W_l$ (kW) CCIR system	Power gain
170 to 230	7.5	13	33

### FREQUENCY RANGE

170 to 230 MHz, continuously tunable.

### OPERATING CONDITIONS (For YL1430)





For detailed operating conditions reference is made to the data sheets for tube type YL1430.

MECHANICAL DATA


Dimensions in mm

Dimensions : approx. 600 x 620 x 370 mm<sup>3</sup>


Net weight : approx. 54 kg

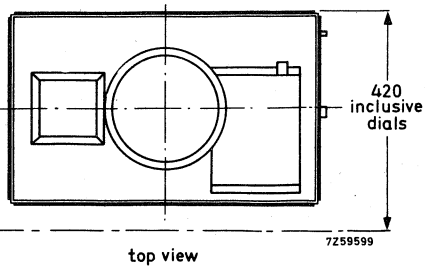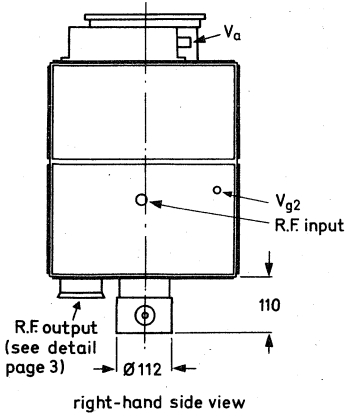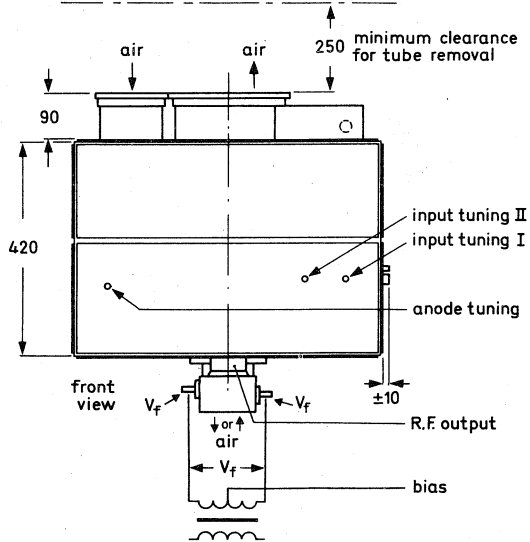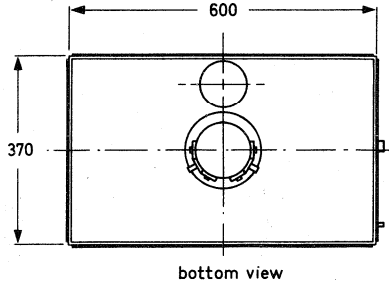


R. F. output connector

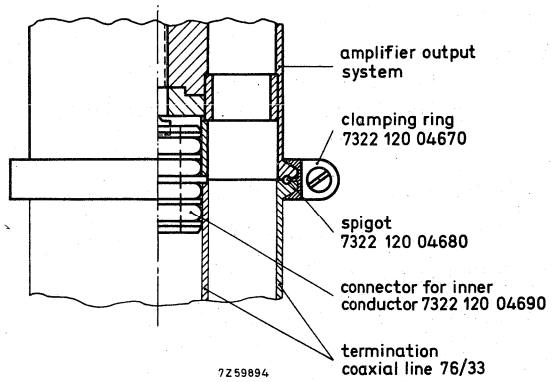


to amplifier output system




clamping ring 7322 120 04670



spigot 7322 120 04680



connector for inner conductor 7322 120 04690

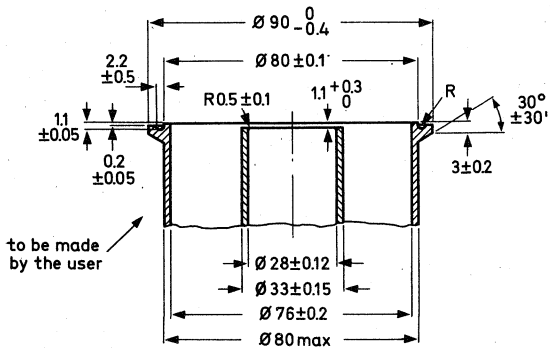

termination coaxial line 76/33



**COOLING**

See cooling curves.

Direction of airflow: see drawing page 7.

Either sucking and blowing is possible via connections on the top panel.

**IMPEDANCES**

Input : 50  $\Omega$  (coaxial female connector, type N)

Output : 50  $\Omega$  (coaxial connector : see drawing page 3).

**ENVIRONMENTAL DATA**

Ambient temperature : 0  $^{\circ}\text{C}$  to +55  $^{\circ}\text{C}$

Altitude : max. 3000 m

Relative humidity : up to 90 %

**VOLTAGE STANDING-WAVE RATIO**

Input : max. permissible 1.3 for acceptable performance

Output : max. permissible 1.3 for acceptable performance



**ADDITIONAL COMPONENTS**a) Delivered with the assembly

Tube extractor	7322 120 07850
Mating male input connector	Radiall type N
Output connector	
connector for inner conductor	7322 120 04690
spigot for outer conductor	7322 120 04680
clamping ring for outer conductor	7322 120 04670
Mating connector for anode voltage	Radiall type R13060
Mating connector for screen grid voltage	Radiall type R9510




b) Recommended




The use of circulator 2722 162 01191 (170 to 200 MHz) or 2722 162 01201 (200 to 230 MHz) is recommended.

CIRCUIT DIAGRAM

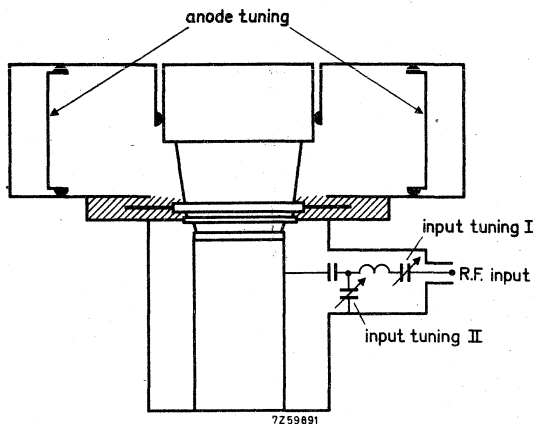

Cooling curves

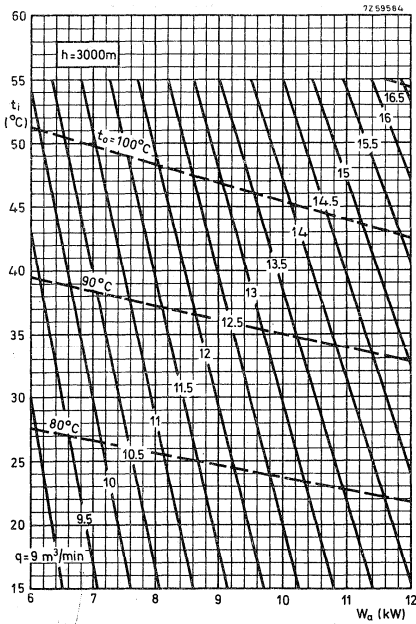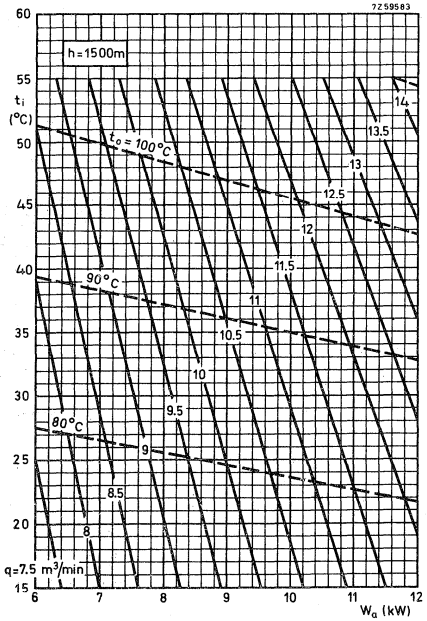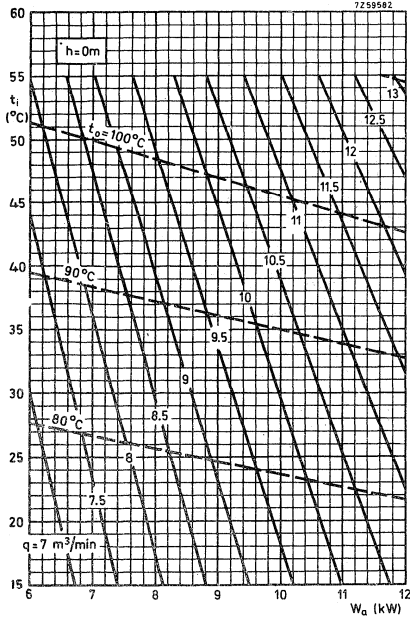

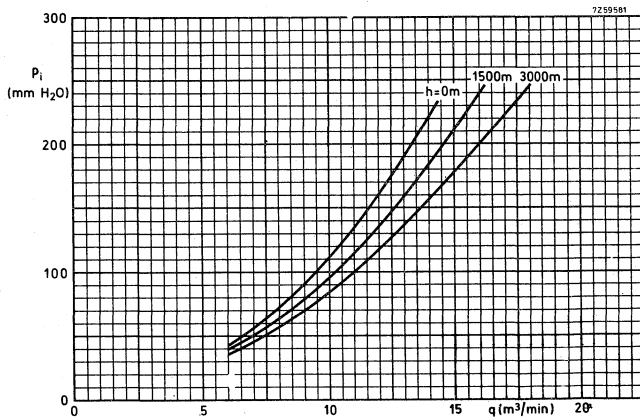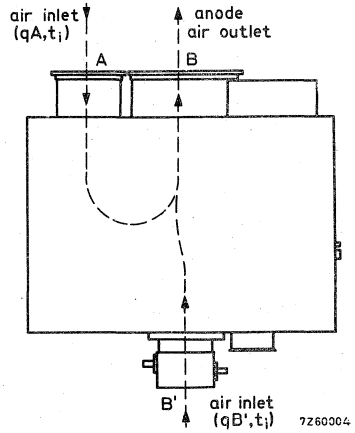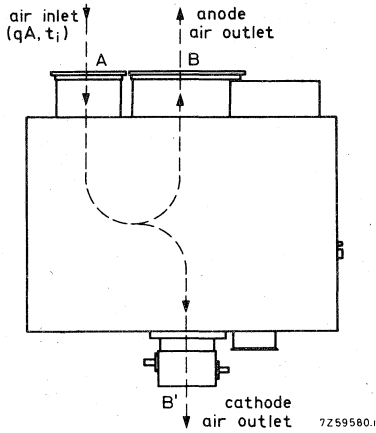

Pressure drop  $P_i$  across cavity with YL1430 as a function of air flow  $q$ .

$P_i$  = pressure drop from plane A to plane B or B'.

For blowing  $q = q_A$

For sucking  $q = q_A + q_{B'}$





## BAND I AMPLIFIER CIRCUIT ASSEMBLY FOR YL1440 VISION

Channel tuned cavity-type circuit assembly to be used with YL1440 to form a broad-band grounded-grid linear amplifier for television signals in Band I. The unit thus obtained can be put to good use in any of the principal monochrome and colour television systems.

QUICK REFERENCE DATA			
Class AB linear amplifier (vision)			
Frequency	48	to	83 MHz
Anode voltage			2,5 kV
Output power in load , sync			1,17 kW
Power gain			14
Frequency	48	to	83 MHz
Anode voltage			2 kV
Output power in load , sync			0,67 kW
Power gain			16

### FREQUENCY RANGE

48,25 to 69,25 MHz and      channel tuned  
77,25 to 83,25 MHz

### OPERATING CONDITIONS (For YL1440)


For detailed operating conditions reference is made to the data sheets for tube type YL1440.

MECHANICAL DATA


Dimensions in mm

Dimensions: approx. 516 x 323 x 323 mm<sup>3</sup>


Net weight : approx. 23 kg




top view

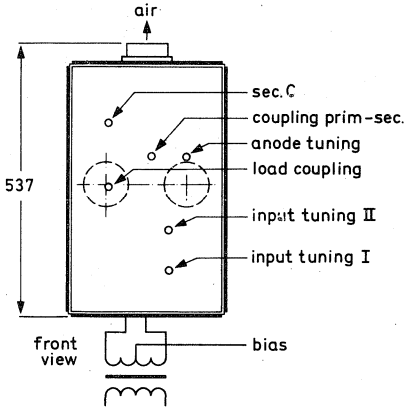

front view



right hand side view



bottom view

7Z 60316

**COOLING**

See cooling curves.

Direction of airflow: see drawing page 6.

Either sucking and blowing is possible via connections on the top panel and the rear panel.

**IMPEDANCES**

Input : 50  $\Omega$  (coaxial female connector type N)

Output : 50  $\Omega$  (coaxial female connector type HN)

**ENVIRONMENTAL DATA**

Ambient temperature : 0 °C to +55 °C

Altitude : max. 3000 m

Relative humidity : up to 90 %

**VOLTAGE STANDING-WAVE RATIO**

Input : max. permissible 1.3 for acceptable performance


Output : max. permissible 1.3 for acceptable performance

**ADDITIONAL COMPONENTS**Delivered with the assembly




Tube extractor	7322 120 02140
Mating male input connector	Radiall type N
Mating male output connector	Radiall type R7050
Mating connector for anode voltage	Radiall type R13060
Mating connector for screen grid voltage	Radiall type R9510
5 coils for vision carries	
5 coils for vision carrier frequencies	
55.25; 61.25 to 62.25; 67.25;	
77.25; 83.25 MHz	1)
Spanner for fitting the coils	



1) Coils covering vision carrier frequencies other than specified can be delivered on request.

CIRCUIT DIAGRAM

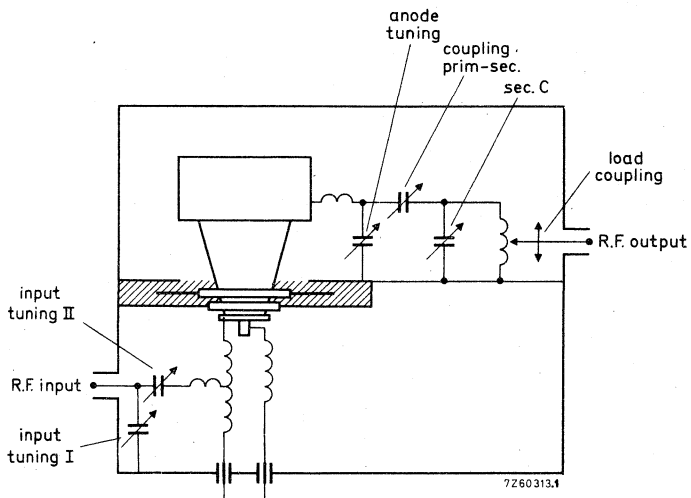

Cooling curves

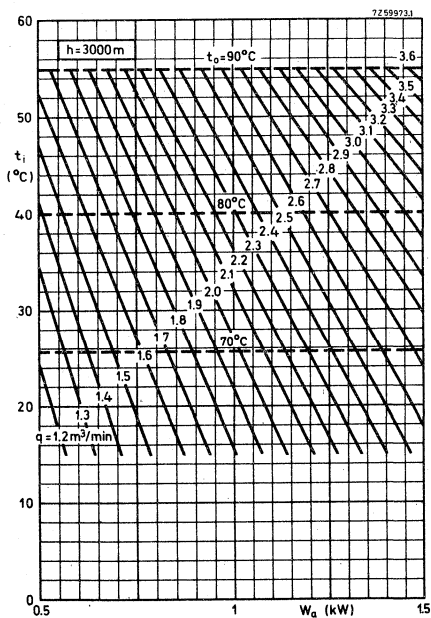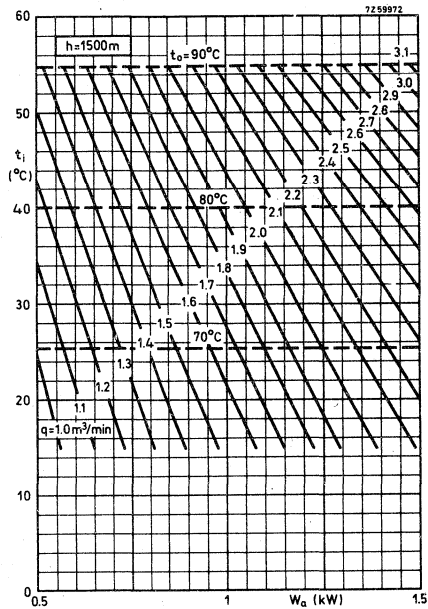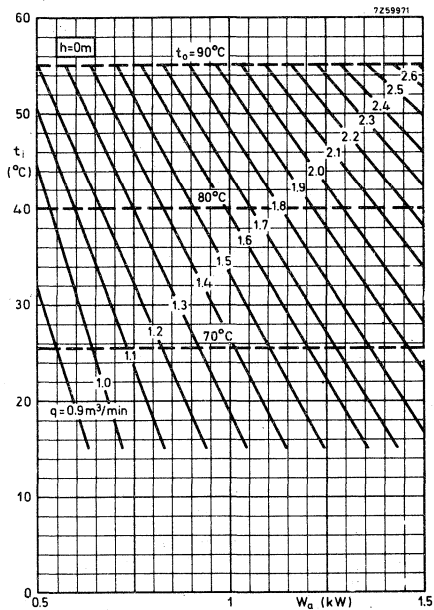

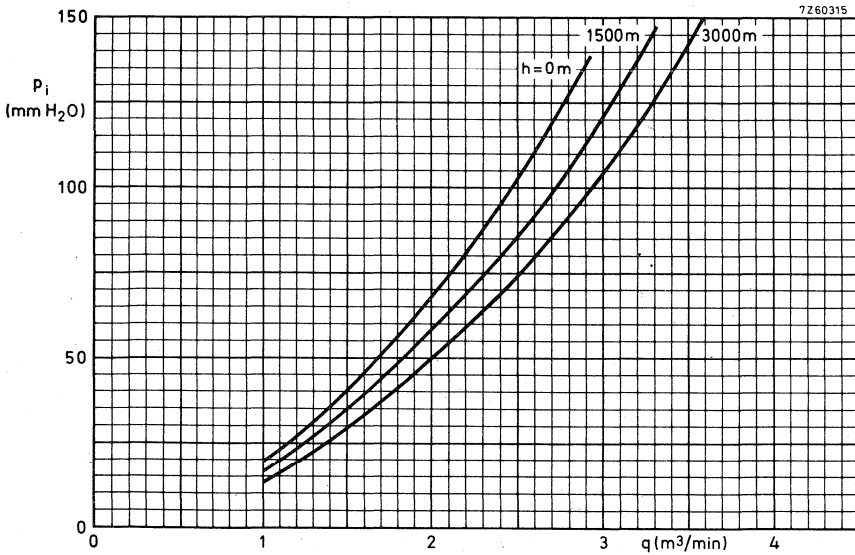

## BAND I AMPLIFIER CIRCUIT ASSEMBLY FOR YL1440 SOUND

Channel tuned amplifier circuit assembly to be used with YL1440 to form a grounded-grid amplifier of frequency-modulated signals in Band I.

QUICK REFERENCE DATA			
Frequency (MHz)	Class B amplifier ( sound )		
	$V_a$ (kV)	$W_l$ (kW) CCIR system	Power gain
up to 88	3.5	2.4	26

### FREQUENCY RANGE

53 to 72 MHz and  
82 to 88 MHz } channel tuned


### OPERATING CONDITIONS (For YL1440)

For detailed operating conditions reference is made to the data sheets for tube type YL1440.


MECHANICAL DATA

Dimensions in mm.


Dimensions: approx. 516 x 323 x 323 mm<sup>3</sup>  
 Net weight : approx. 22.5 kg




top view

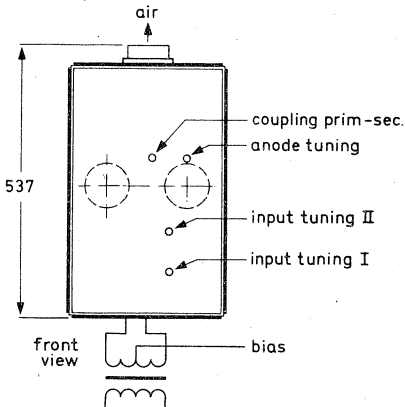

front view



right hand side view



bottom view

7260317



**COOLING**

See cooling curves.

Direction of airflow: see drawing page 6.

Either sucking and blowing is possible via connections on the top panel and the rear panel.

**IMPEDANCES**

Input : 50  $\Omega$  (coaxial female connector type N)

Output : 50  $\Omega$  (coaxial female connector type HN)

**ENVIRONMENTAL DATA**

Ambient temperature : 0  $^{\circ}\text{C}$  to +55  $^{\circ}\text{C}$

Altitude : max. 3000 m

Relative humidity : up to 90 %

**VOLTAGE STANDING-WAVE RATIO**

Input : max. permissible 1.3 for acceptable performance


Output : max. permissible 1.3 for acceptable performance

**ADDITIONAL COMPONENTS**Delivered with the assembly




Tube extractor	7322 120 02140
Mating male input connector	Radiall type N
Mating male output connector	Radiall type R7050
Mating connector for anode voltage	Radiall type R13060
Mating connector for screen grid voltage	Radiall type R9510
5 coils for sound carrier frequencies 59.75 to 60.75; 65.75 to 67.75; 71.75 81.75; 87.75 MHz	1)
Spanner for fitting the coils	



<sup>1)</sup> Coils covering sound carrier frequencies other than specified can be delivered on request.

CIRCUIT DIAGRAM

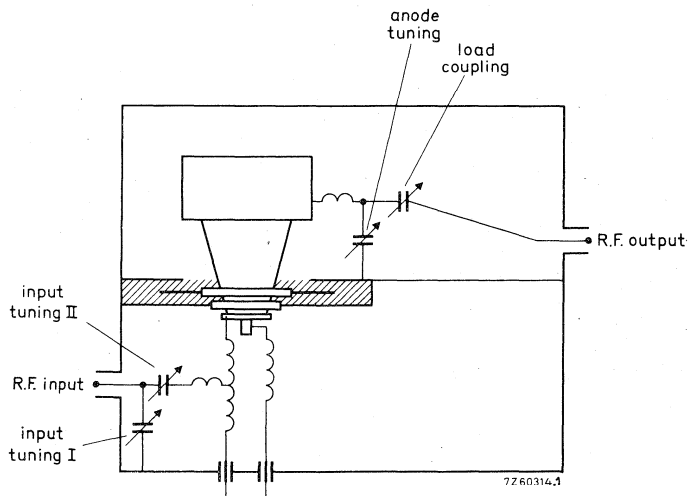

Cooling curves

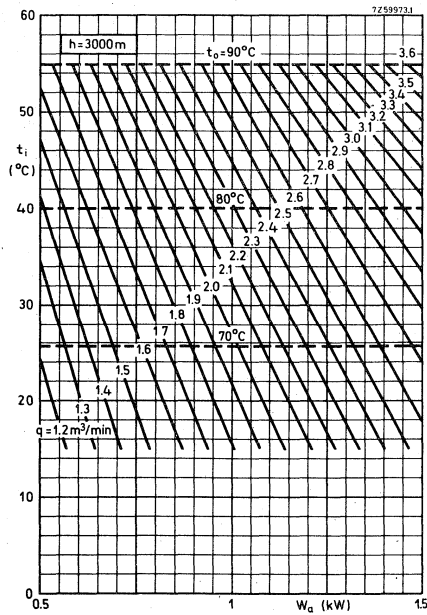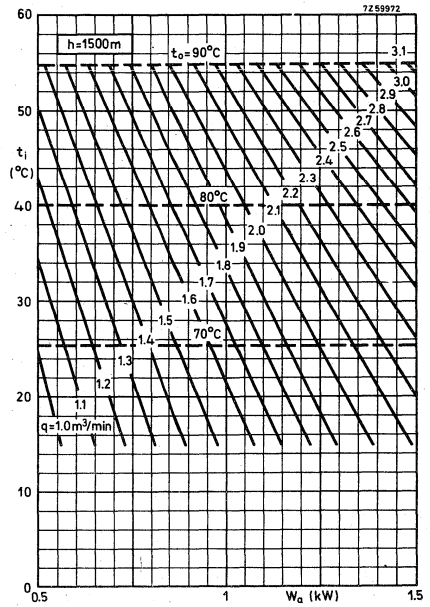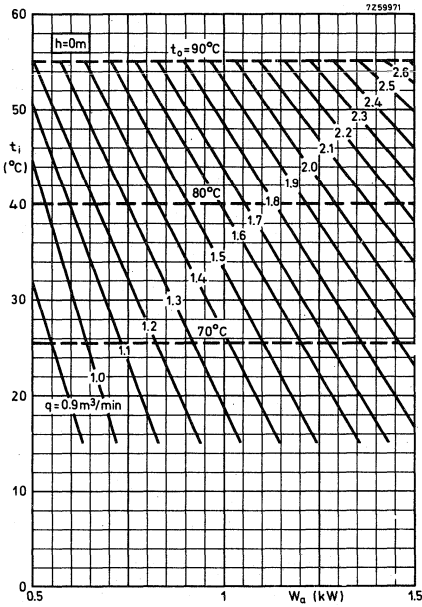


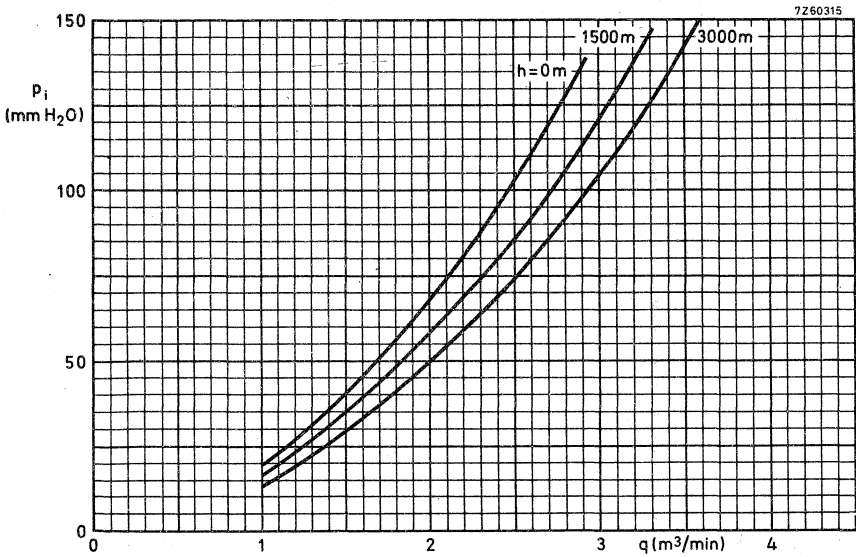

# BAND I AMPLIFIER CIRCUIT ASSEMBLY FOR YL1420

## VISION

Amplifier circuit assembly to be used with YL1420 to form a broad-band grounded-grid linear amplifier for television signals in Band I.

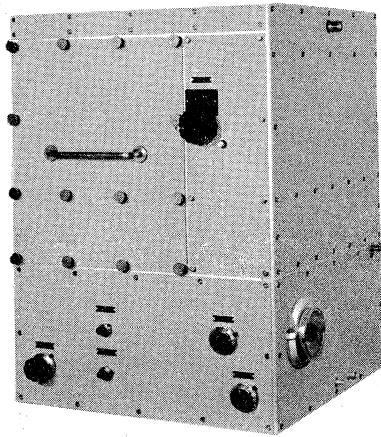

RZ 29794-2

QUICK REFERENCE DATA			
Frequency (MHz)	Class AB linear amplifier (vision)		
	$V_a$ (kV)	$W_{l\text{sync}}$ (kW)(CCIR system)	Power gain
83.25	4	6.25	18.5
55.25	4	6.25	16

### FREQUENCY RANGE

55.25 to 67.25 MHz and  
77.25 to 83.25 MHz } channel tuned

### OPERATING CONDITIONS (For YL1420)


For detailed operating conditions reference is made to the data sheets for tube type YL1420.

MECHANICAL DATA


Dimensions in mm

Dimensions: approx. 700 x 500 x 500 mm<sup>3</sup>


Net weight: approx. 70 kg




bottom view

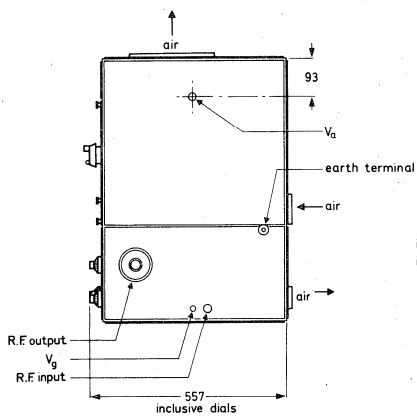

right hand side view





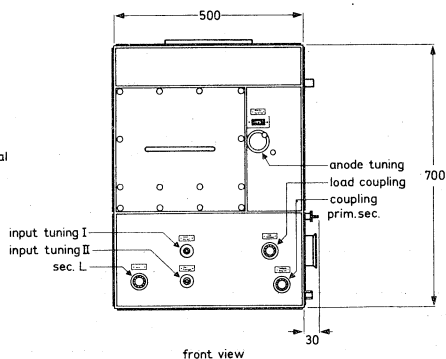


front view



top view

Output connector

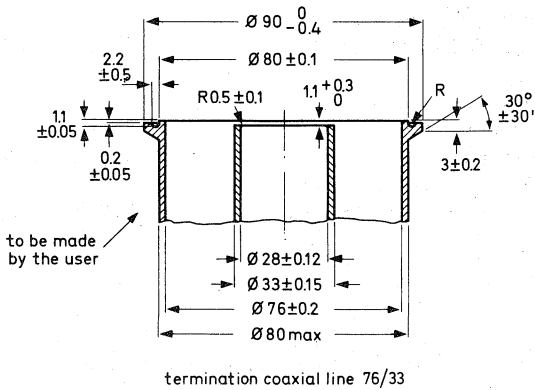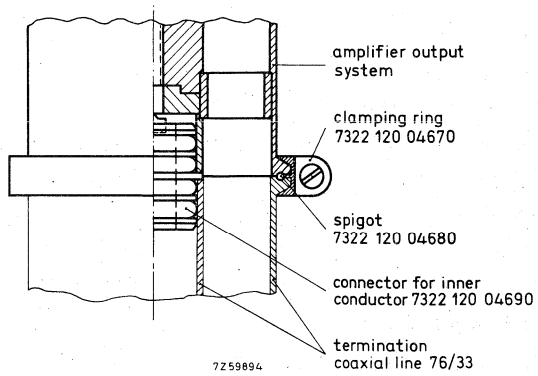

**COOLING**

See cooling curves.

Direction of air flow: see page 7.

The cooling air, supplied by an external source, is admitted through an inlet in the rear panel.

**IMPEDANCES**

Input : 50  $\Omega$  (coaxial femal connector, type N)

Output: 50  $\Omega$  (coaxial female connector, see drawing page 3)

**ENVIRONMENTAL DATA**

Ambient temperature : 0 °C to +55 °C

Altitude : max. 3000 m

Relative humidity : up to 90%

**VOLTAGE STANDING-WAVE RATIO**

Input : max. permissible 1,3 for acceptable performance

Output : max. permissible 1,3 for acceptable performance

**ADDITIONAL COMPONENTS**a) Delivered with assembly

Tube extractor	7322 120 07850	
Mating male input connector	Radiall type N	
Output connector		
connector for inner conductor	7322 120 04690	
spigot for outer conductor	7322 120 04680	
clamping ring for outer conductor	7322 120 04670	
Mating connector for anode voltage	Radiall type R13060	
Mating connector for screen grid voltage	Radiall type R9510	
Anode coil covering frequency range		
55.25 to 67.25 MHz	-----	1)
Elbow for secondary circuit covering		
frequency range 55.25 to 67.25 MHz	-----	


b) Not delivered with assembly

Anode coil covering frequency range		
77.25 to 83.25 MHz	8222 032 11860	1)
Elbow for secondary circuit covering		
frequency range 77.25 to 83.25 MHz	8222 032 11790	




1) For use on carrier frequencies other than specified please contact the manufacturer.





## CIRCUIT DIAGRAM

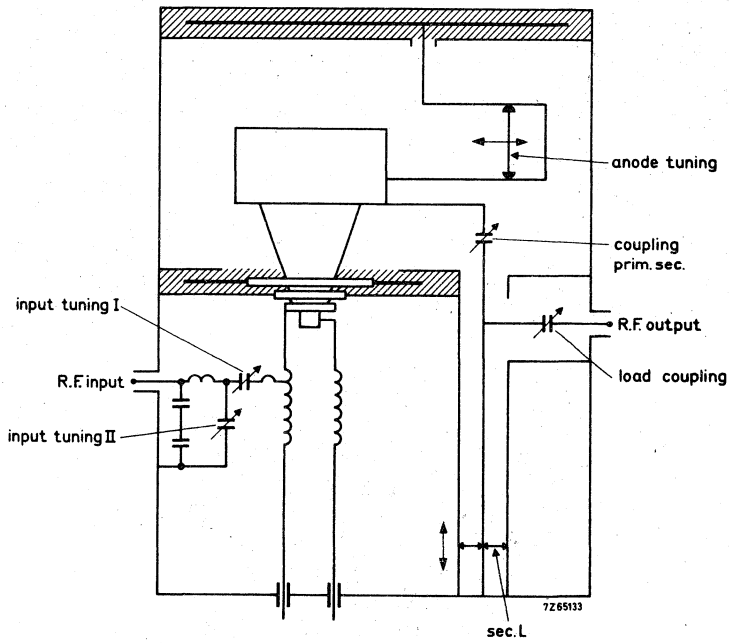

Cooling curves

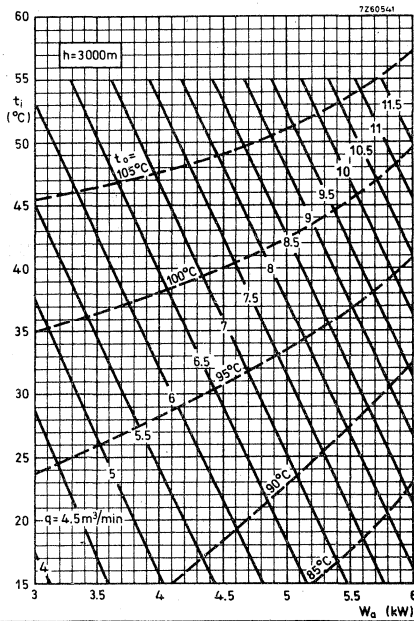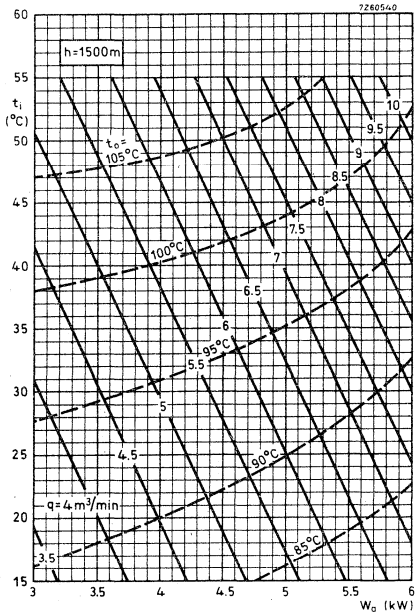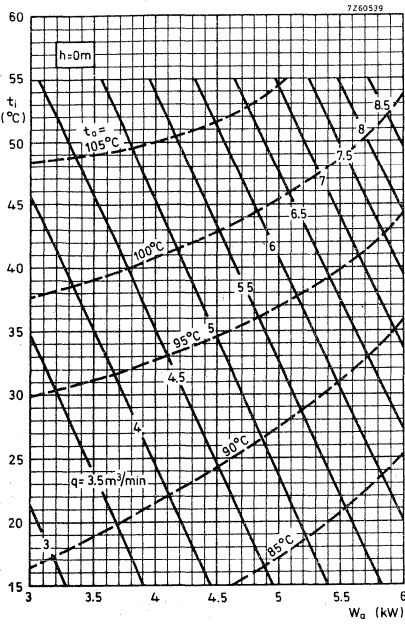

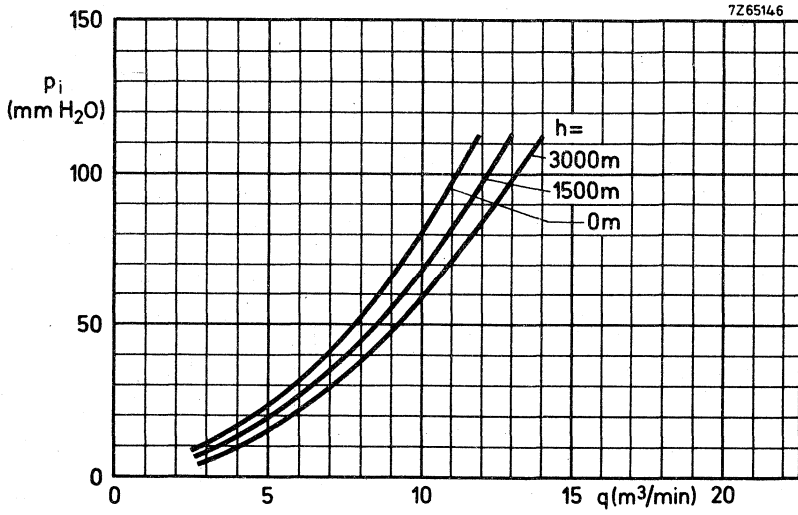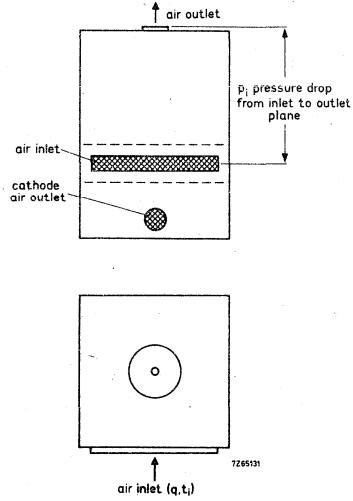



## BAND I AMPLIFIER CIRCUIT ASSEMBLY FOR YL1420 SOUND

Channel tuned amplifier circuit assembly to be used with YL1420 to form a grounded-grid amplifier of frequency-modulated signals in Band I.

QUICK REFERENCE DATA			
Frequency (MHz)	Class B amplifier (sound)		
	$V_a$ (kV)	$W_\ell$ (kW) CCIR system	Power gain
up to 88	7	10.5	32

### FREQUENCY RANGE

53 to 72 MHz and  
82 to 88 MHz } channel tuned

### OPERATING CONDITIONS (For YL1420)


For detailed operating conditions reference is made to the data sheets for tube type YL1420.

MECHANICAL DATA


Dimensions in mm

Dimensions : approx. 700 x 500 x 500 mm<sup>3</sup>


Net weight : approx. 58 kg




bottom view

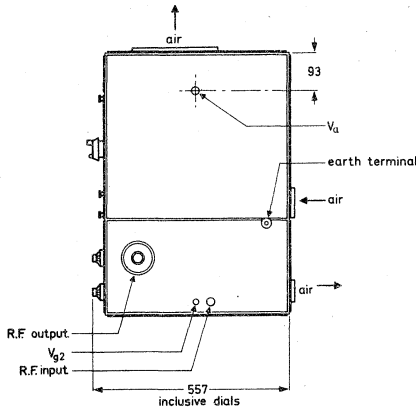

right hand side view

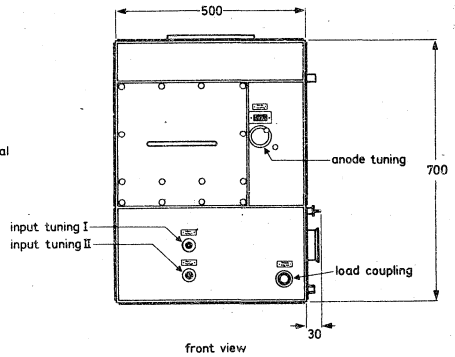

front view



top view



**COOLING**

See cooling curves.

Direction of air flow : see page 7.

The cooling air, supplied by an external source, is admitted through an inlet in the rear panel.

**IMPEDANCES**

Input : 50  $\Omega$  (coaxial female connector, type N)

Output : 50  $\Omega$  (coaxial female connector, see drawing page 3)

**ENVIRONMENTAL DATA**

Ambient temperature : 0  $^{\circ}\text{C}$  to +55  $^{\circ}\text{C}$

Altitude : max. 3000 m

Relative humidity : up to 90%

**VOLTAGE STANDING-WAVE RATIO**

Input : max. permissible 1.3 for acceptable performance

Output : max. permissible 1.3 for acceptable performance

**ADDITIONAL COMPONENTS****a) Delivered with assembly**


Tube extractor	7322 120 07850
Mating male input connector	Radial type N
Output connector	
connector for inner conductor	7322 120 04690
spigot for outer conductor	7322 120 04680
clamping ring for outer conductor	7322 120 04670
Mating connector for anode voltage	Radial type R13060
Mating connector for screen grid voltage	Radial type R9510
Anode coil covering frequency range	
53 to 72 MHz	----

**b) Not delivered with assembly**




Anode coil covering frequency range	
82 to 88 MHz	8222 032 11860





## CIRCUIT DIAGRAM

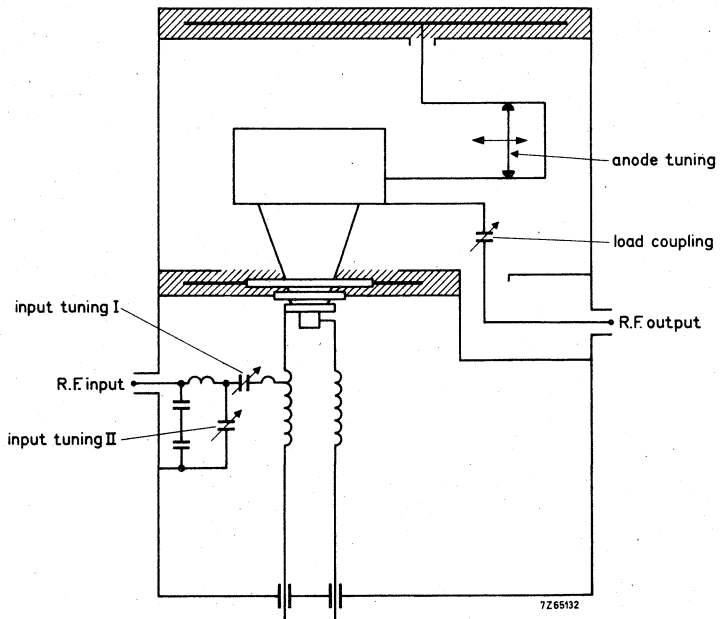

Cooling curves

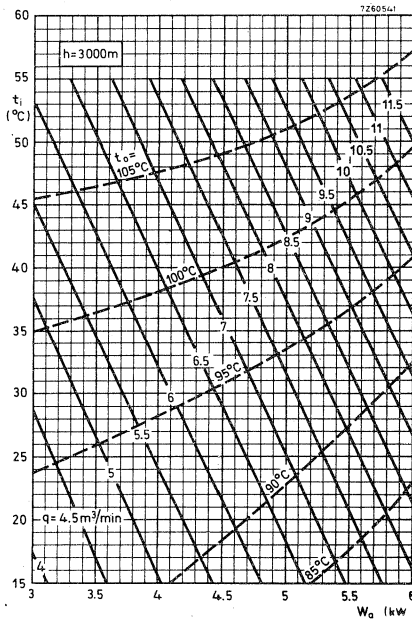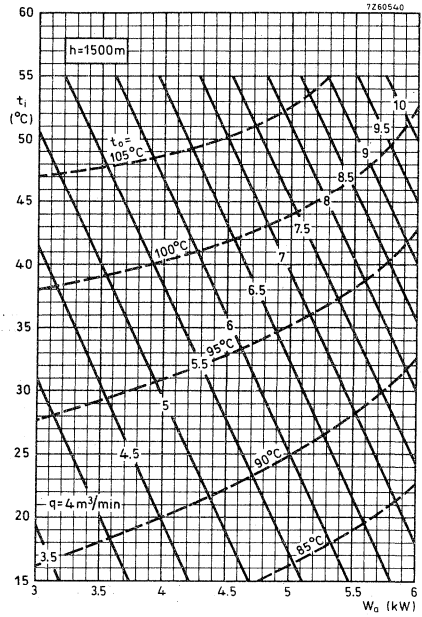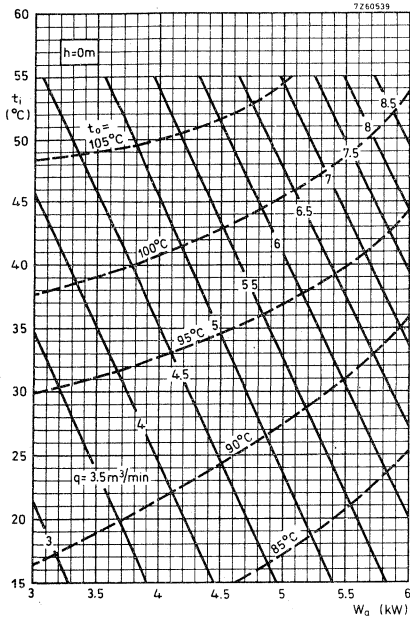

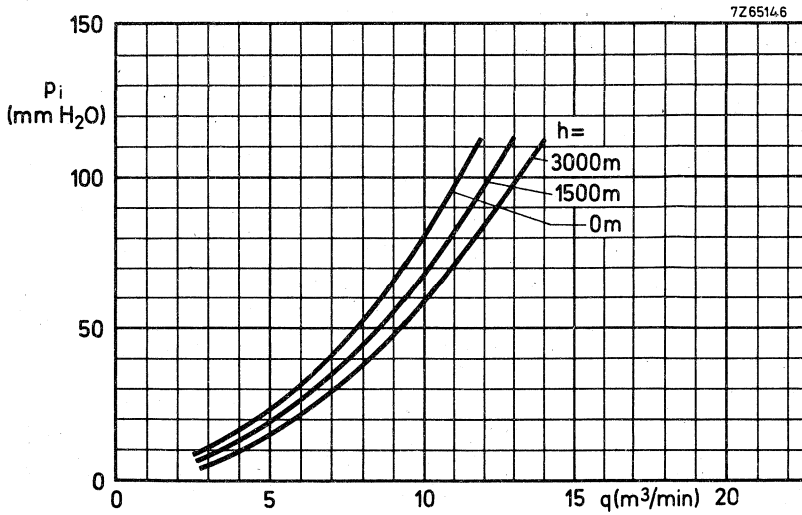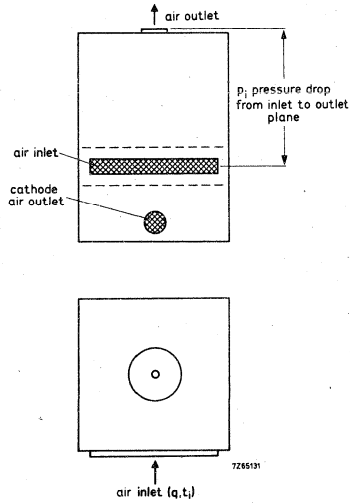




# BAND I AMPLIFIER CIRCUIT ASSEMBLY FOR YL1430 OR YL1520

## VISION

Amplifier circuit to be used with YL1430 or YL1520 to form a broad-bandgrounded grid linear amplifier for television signals in Band I.

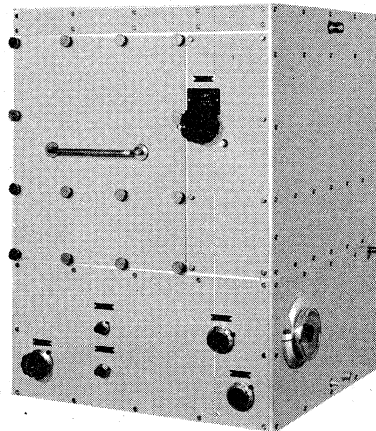

RZ 29794-2

### QUICK REFERENCE DATA

Frequency (MHz)	Type	Class AB linear amplifier (vision)		
		$V_a$ (kV)	$W_l$ sync (kW)(CCIR) system	Power gain
83.25	YL1430	5.5	13.2	20
55.25		5.5	13.2	18
55.25		4.0	6.4	18
83.25	YL1520	6.5	20	24
55.25			20	22

### FREQUENCY RANGE

55.25 to 69.25 MHz and } channel tuned  
77.25 to 83.25 MHz

### OPERATING CONDITIONS (For YL1430 or YL1520)


For detailed operating conditions reference is made to the data sheets for tube type YL1430 or YL1520.

MECHANICAL DATA


Dimensions in mm

Dimensions: approx. 700 x 500 x 500 mm<sup>3</sup>


Net weight : approx. 70 kg




bottom view

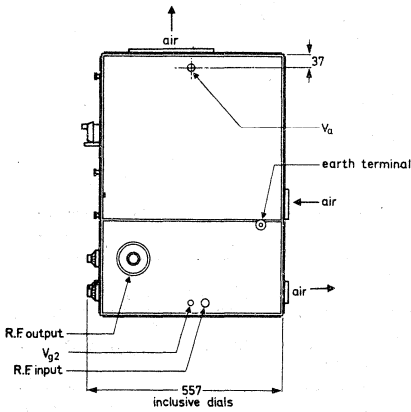

right hand side view

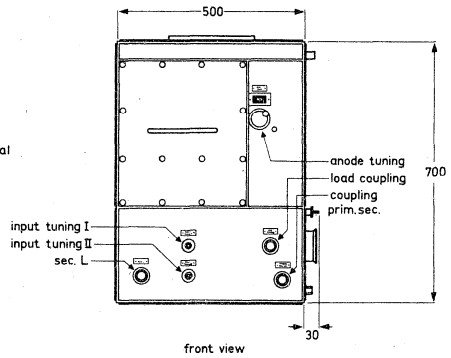


front view






top view


Output connector

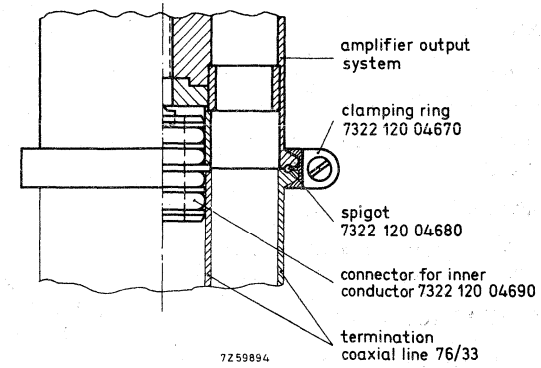

↑ to amplifier output system



connector for inner conductor 7322 120 04690

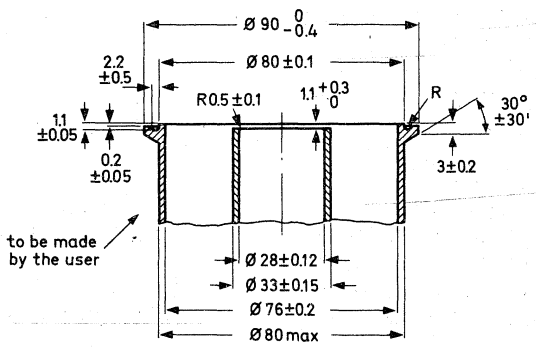

termination coaxial line 76/33

**COOLING**

See cooling curve.

Direction of air flow: see page 8.

The cooling air, supplied by an external source, is admitted through an inlet in the rear panel.

**IMPEDANCES**

Input : 50  $\Omega$  (coaxial female connector, type N)

Output : 50  $\Omega$  (coaxial female connector, see drawing page 3)

**ENVIRONMENTAL DATA**

Ambient temperature : 0 °C to +55 °C

Altitude : max. 3000 m

Relative humidity : up to 90%

**VOLTAGE STANDING-WAVE RATIO**

Input : max. permissible 1.3 for acceptable performance

Output : max. permissible 1.3 for acceptable performance

**ADDITIONAL COMPONENTS**a) Delivered with assembly

Tube extractor	7322 120 07850	
Mating male input connector	Radiall type N	
Output connector		
connector for inner conductor	7322 120 04690	
spigot for outer conductor	7322 120 04680	
clamping ring for outer conductor	7322 120 04670	
Mating connector for anode voltage	Radiall type R13060	
Mating connector for screen grid voltage	Radiall type R9510	
Anode coil covering frequency range		
55.25 to 67.25 MHz for YL1430 and	----	1)
55.25 to 61.25 MHz for YL1520		
Elbow for secondary circuit covering		
frequency range 55.25 to 67.25 MHz	----	
for both types		


b) Not delivered with assembly

Anode coil covering frequency range		
77.25 to 83.25 MHz for YL1430 and	8222 032 11860	1)
67.25 to 83.25 MHz for YL1520		
Elbow for secondary circuit covering		
frequency range 77.25 to 83.25 MHz	8222 032 11790	
for both types		




1) For use on carrier frequencies other than specified please contact the manufacturer.






CIRCUIT DIAGRAM


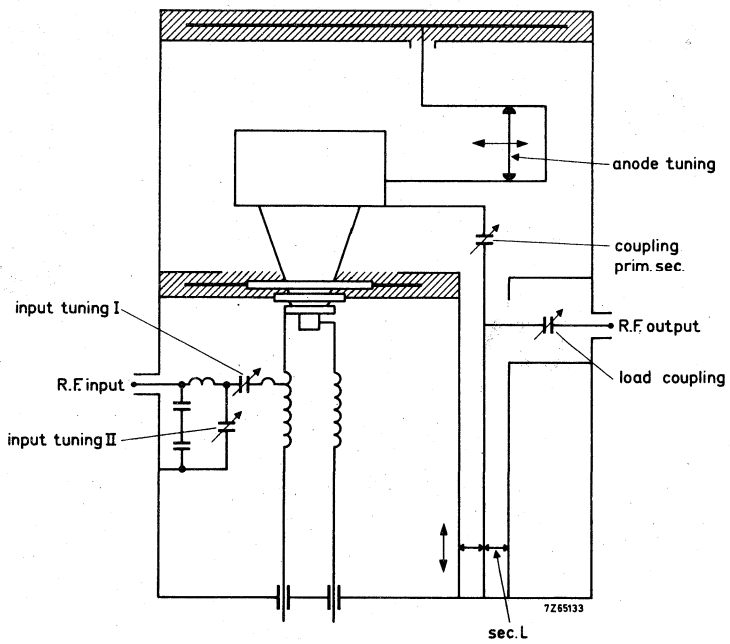


Cooling curves for amplifier 40759 fitted with tube YL1430

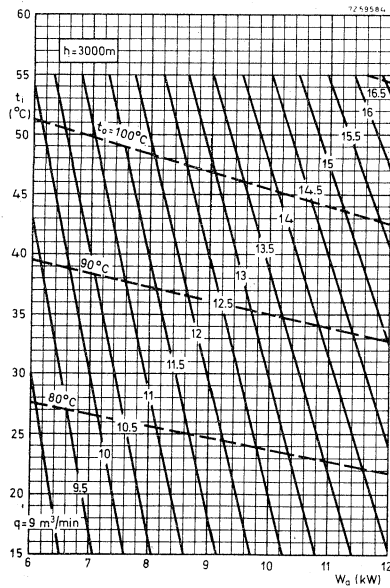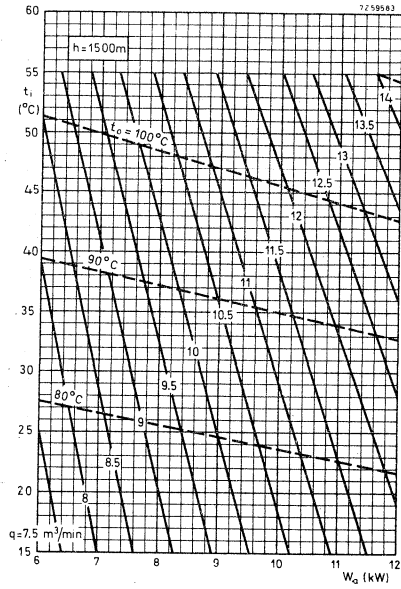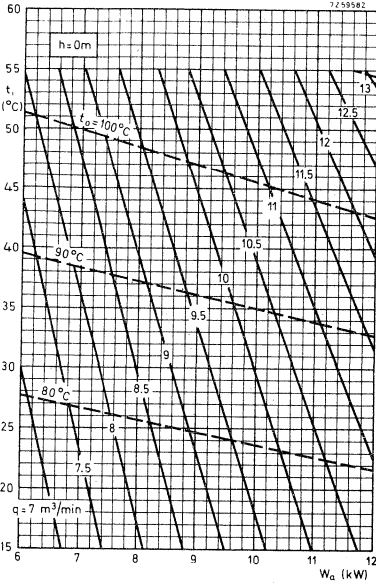


Cooling curves for amplifier 40759 fitted with tube YL1520

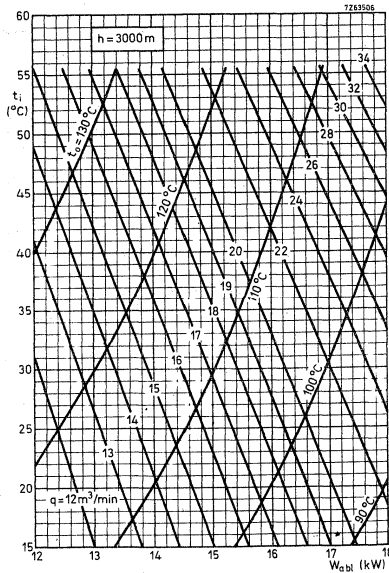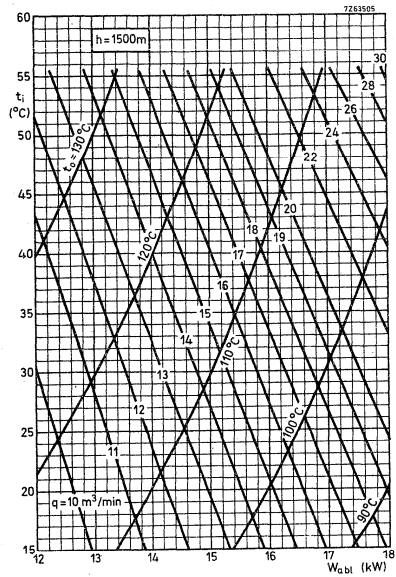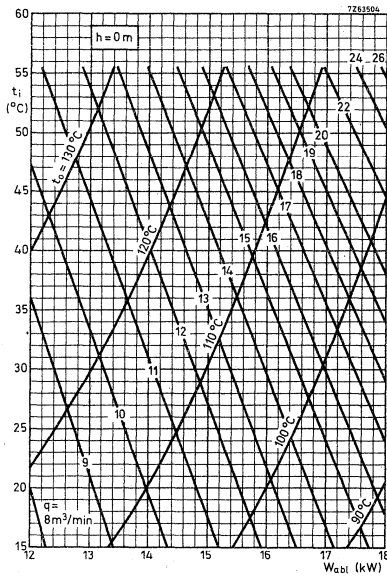

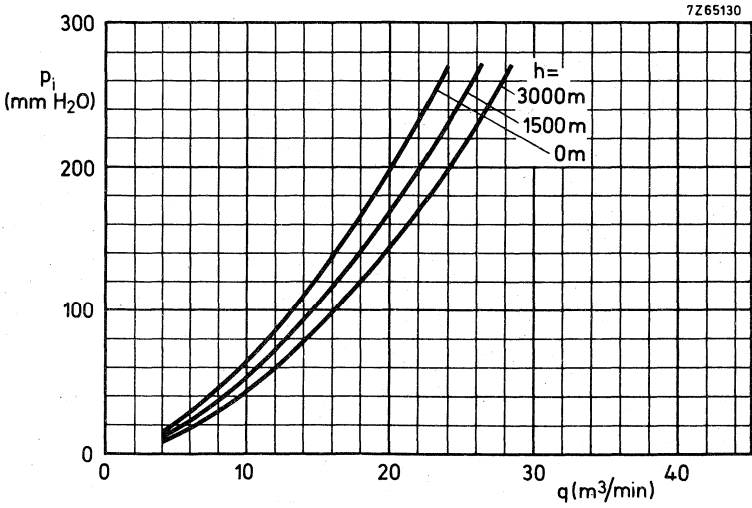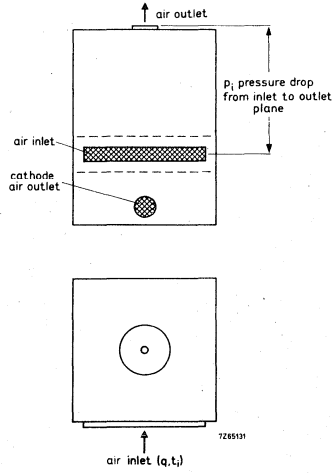

## BAND I AMPLIFIER CIRCUIT ASSEMBLY FOR YL1430 OR YL1520 SOUND

Amplifier circuit assembly to be used with YL1430 or YL1520 to form a grounded-grid amplifier of frequency modulated signals in Band I.

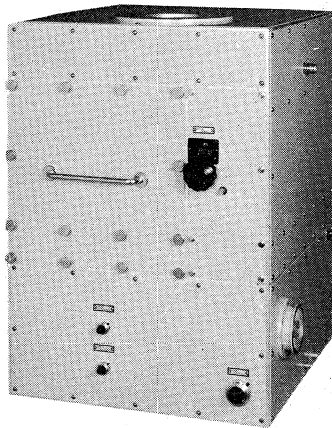

RZ 30263-3

QUICK REFERENCE DATA				
	Class AB linear amplifier (sound)			
Frequency (MHz)	Type	$V_a$ (kV)	$W_f$ (kW)	Power gain
up to 88	YL1430	7.5	13	32.5

### FREQUENCY RANGE

53 to 72 MHz and  
82 to 88 MHz } channel tuned

### OPERATING CONDITIONS (For YL1430 and YL1520)


For detailed operating conditions reference is made to the data sheets for tube type YL1430 and YL1520.

MECHANICAL DATA


Dimensions in mm

Dimensions in : approx. 700 x 500 x 500 mm<sup>3</sup>


Net weight : approx. 58 kg




bottom view

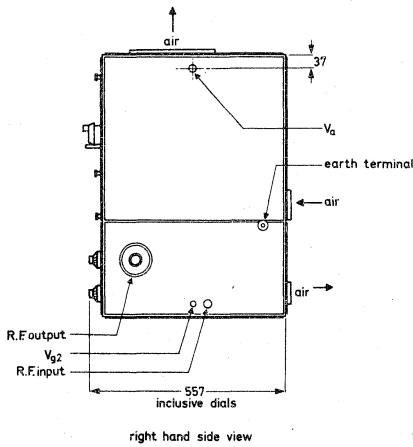

right hand side view

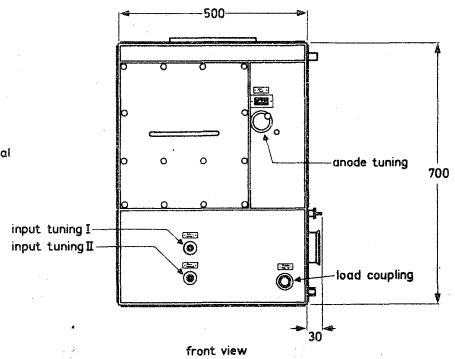

front view



top view



**COOLING**

See cooling curves.

Direction of air flow: see page 8.

The cooling air, supplied by an external source, is admitted through an inlet in the rear panel.

**IMPEDANCES**

Input : 50  $\Omega$  (coaxial female connector, type N)

Output : 50  $\Omega$  (coaxial female connector, see drawing page 3)

**ENVIRONMENTAL DATA**

Ambient temperature : 0  $^{\circ}\text{C}$  to +55  $^{\circ}\text{C}$

Altitude : max. 3000 m

Relative humidity : up to 90%

**VOLTAGE STANDING-WAVE RATIO**

Input : max. permissible 1.3 for acceptable performance

Output : max. permissible 1.3 for acceptable performance

**ADDITIONAL COMPONENTS**a) Delivered with assembly


Tube extractor	7322 120 07850
Mating male input connector	Radiall type N
Output connector	
connector for inner conductor	7322 120 04690
spigot for outer conductor	7322 120 04680
clamping ring for outer conductor	7322 120 04670
Mating connector for anode voltage	Radiall type R13060
Mating connector for screen grid voltage	Radiall type R9510
Anode coil covering frequency range	
53 to 72 MHz for YL1430 and	---
53 to 66 MHz for YL1520	

b) Not delivered with assembly




Anode coil covering frequency range	
82 to 88 MHz for YL1430 and	8222 032 11860
70 to 88 MHz for YL1520	
Shorting bar to use in addition with coils,	
for highest channel for YL1520	8222 032 57110






CIRCUIT DIAGRAM


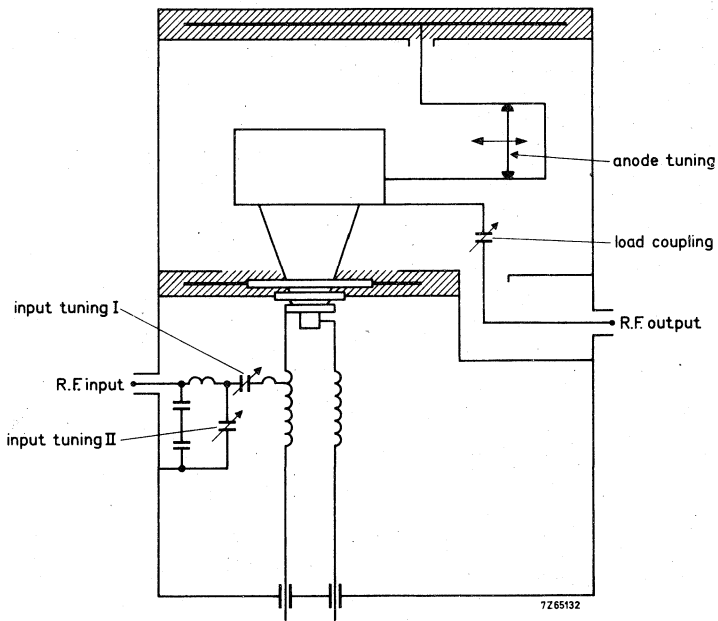


Cooling curves for amplifier 40760 fitted with tube YL1430

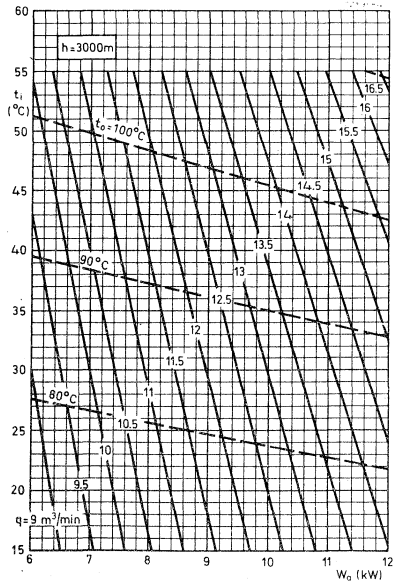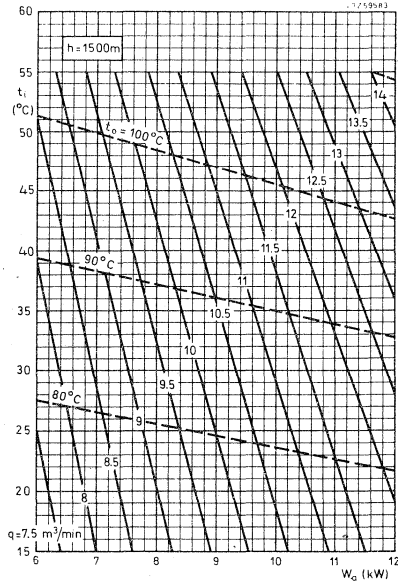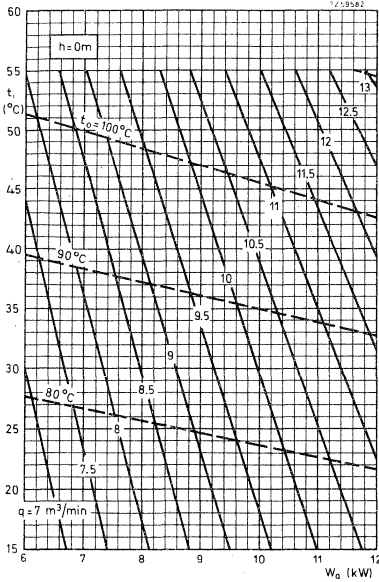

Cooling curves for amplifier 40760 fitted with tube YL1520

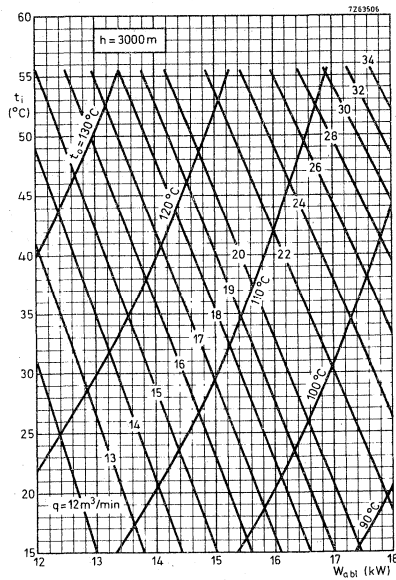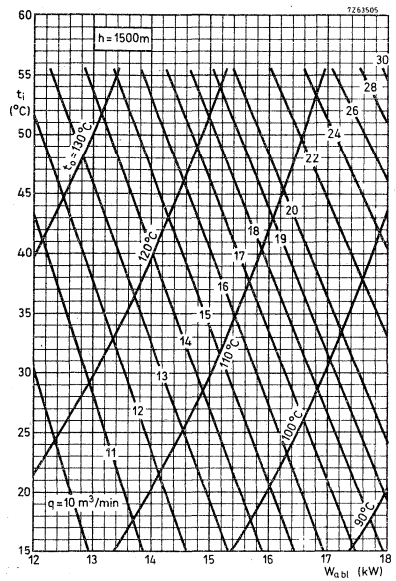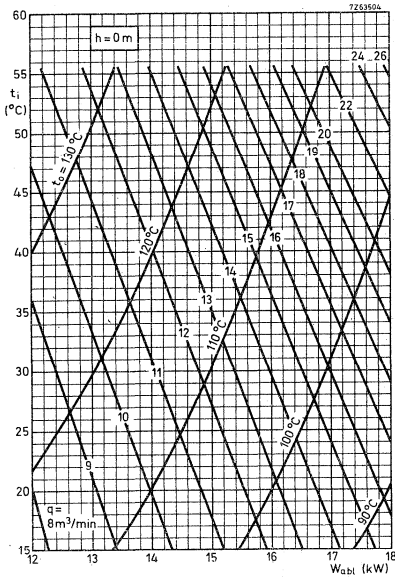

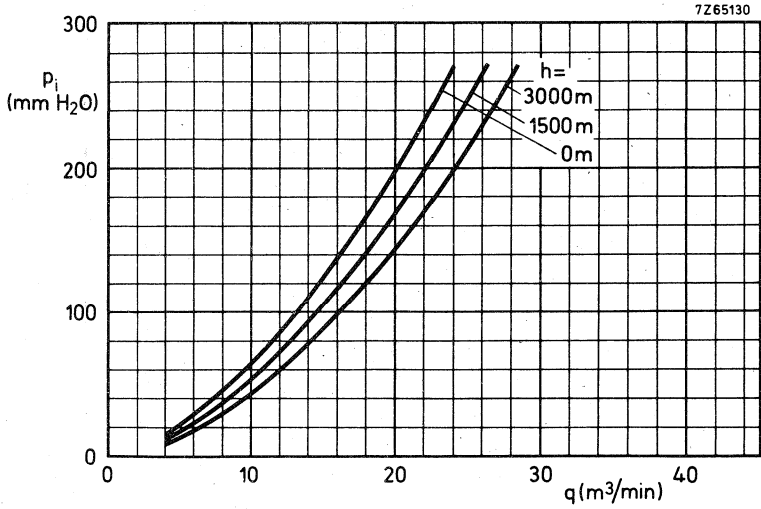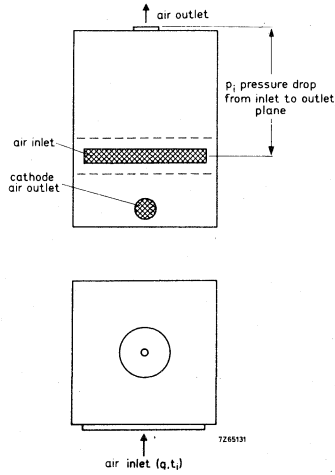

## BAND III AMPLIFIER CIRCUIT ASSEMBLY FOR YL1520\*)

### VISION AND COMBINED SOUND AND VISION ←

Continuously tunable cavity-type circuit assembly to be used with YL1520 to form a broad-band grounded-grid linear amplifier for television signals in Band III. The unit thus obtained can be put to good use in any of the principal monochrome and colour television systems.

QUICK REFERENCE DATA			
Class AB linear amplifier (vision)			
Frequency	170	to	230 MHz
Anode voltage			8 kV
Output power in load , sync			27,5 kW
Power gain			28,5
Class AB amplifier for television transposer service			
Frequency	175	to	225 MHz
Anode voltage			8 kV
Output power in load , sync			10,5 kW
Power gain			42

#### FREQUENCY RANGE

170 to 230 MHz continuously tunable.

#### OPERATING CONDITIONS (For YL1520)

For detailed operating conditions reference is made to the data sheets for tube type YL1520.





\* Slight modifications make this cavity usable for YL1430 in the range 205 to 260 MHz.

MECHANICAL DATA






Dimensions in mm

Dimensions: approx. 685 x 415 mm<sup>3</sup>

Net weight: approx. 85 kg

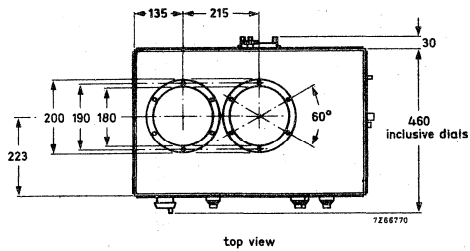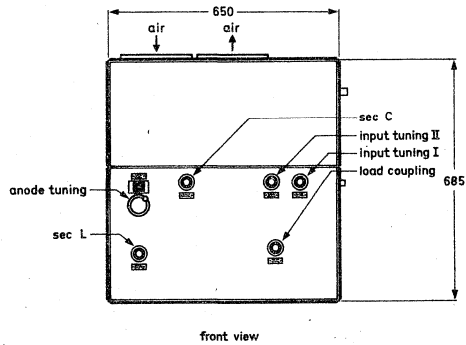

Output connector

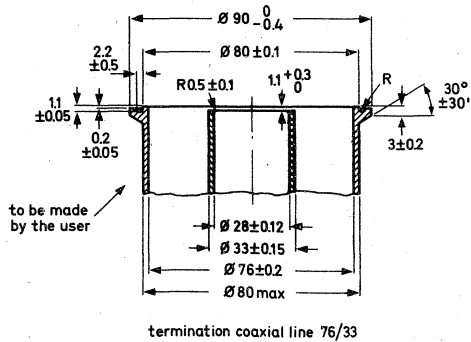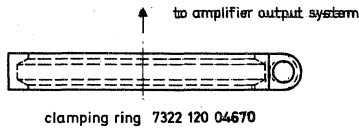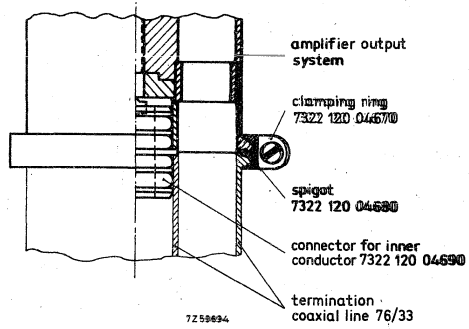

**COOLING**

See cooling curves.

Direction of airflow: see drawing page 7.

**IMPEDANCES**

Input : 50  $\Omega$  (coaxial female connector, type HN)

Output: 50  $\Omega$  (coaxial female connector: see drawing page 3)

**ENVIRONMENTAL DATA**

Ambient temperature: 0  $^{\circ}\text{C}$  to +55  $^{\circ}\text{C}$

Altitude : max. 3000 m

Relative humidity : up to 90%

**VOLTAGE STANDING-WAVE RATIO**

Input : max. permissible 1, 3 for acceptable performance

Output: max. permissible 1, 3 for acceptable performance

**ADDITIONAL COMPONENTS**a) Delivered with the assembly



Tube extractor	7322 120 07850
Mating male input connector	Radial type HN R7050
Output connector	
connector for inner conductor	7322 120 04690
spigot for outer conductor	7322 120 04680
clamping ring for outer conductor	7322 120 04670
Mating connector for anode voltage	Radial type R13060
Mating connector for screen grid voltage	Radial type R9510
Coupling loop for 175, 25 MHz	7322 120 04730

b) Recommended



The use of circulator 2722 162 01191 (170 to 200 MHz) or 2722 162 01201 (200 to 230 MHz) is recommended.




CIRCUIT DIAGRAM

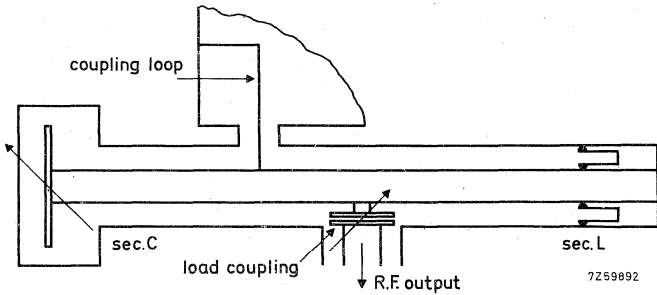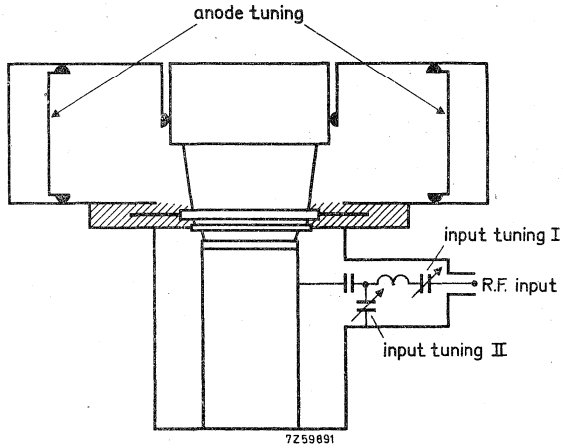


Cooling curves

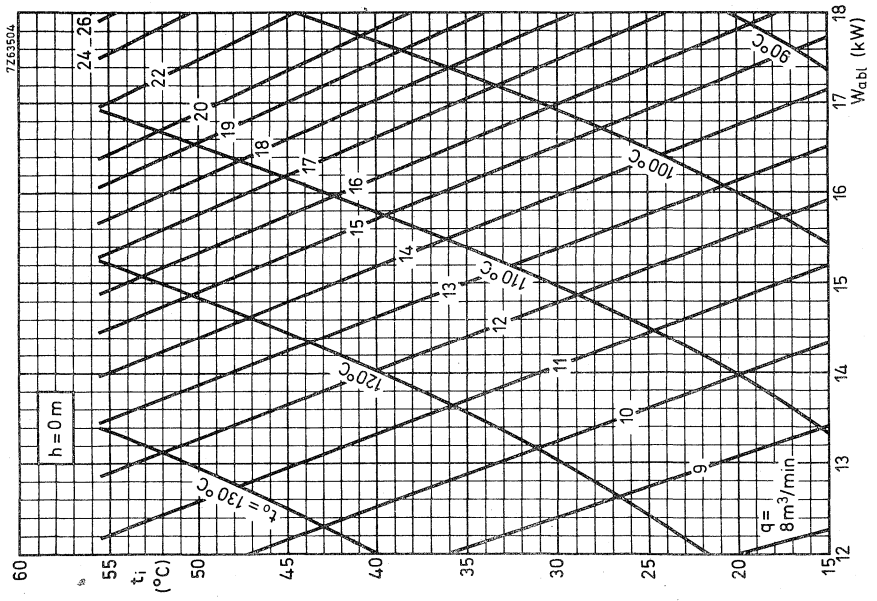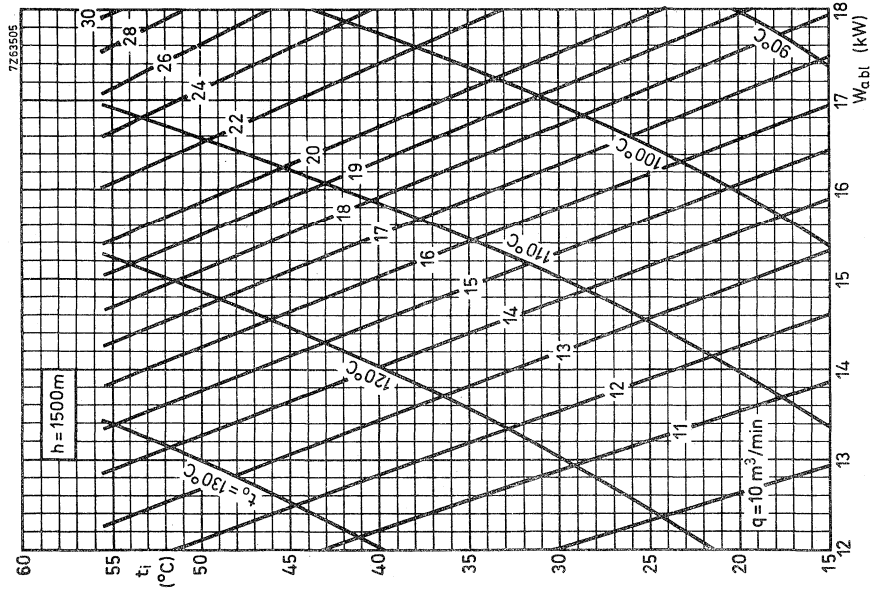


Cooling curves

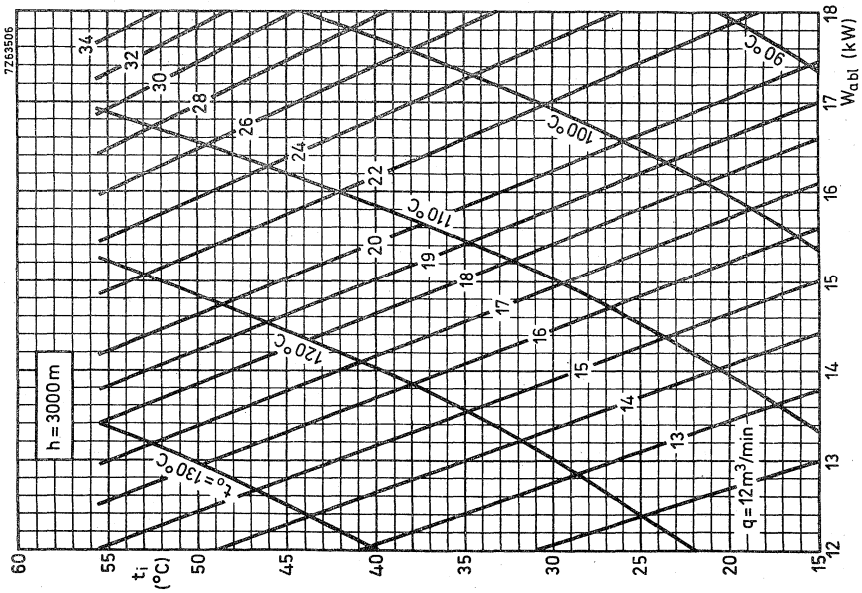

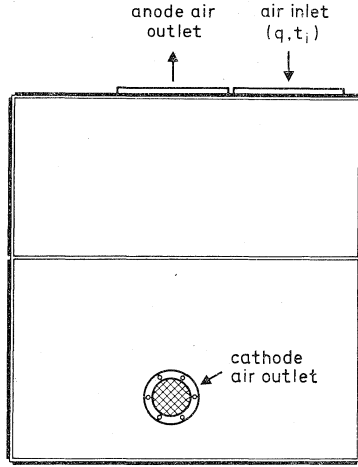

7266769

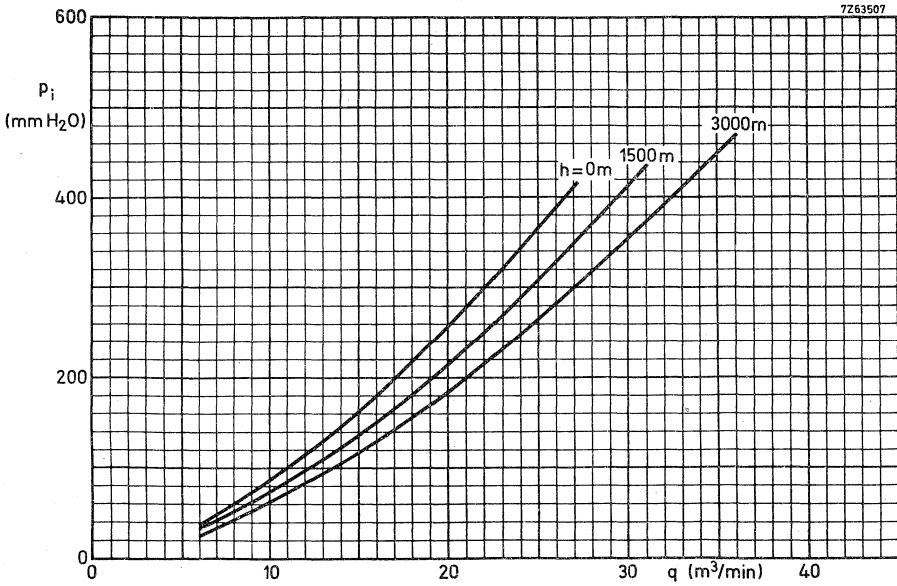


## Associated accessories






COOLER HOUSING FOR AIR COOLING

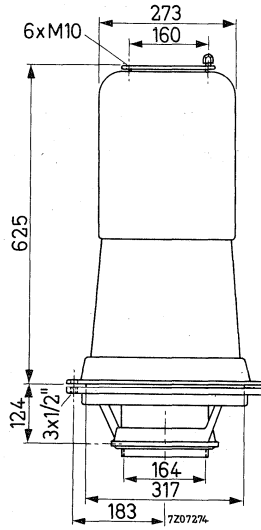


# COOLER HOUSING FOR AIR COOLING

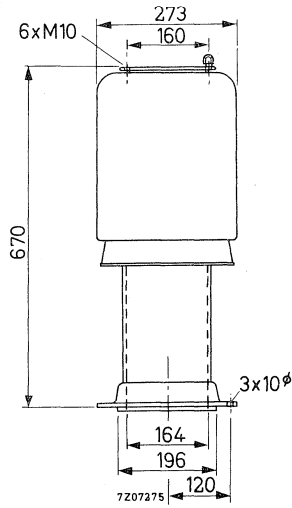




### COOLER HOUSING FOR AIR COOLING

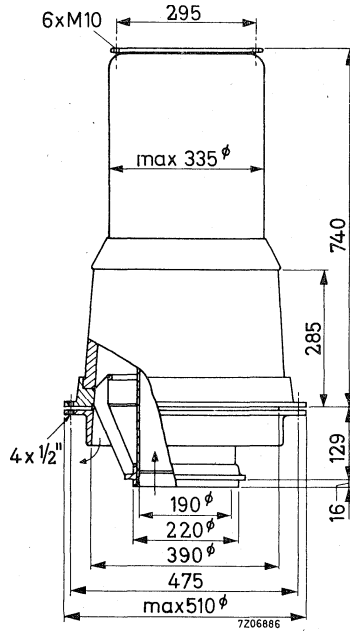


Net weight 72 kg

### COOLER HOUSING FOR AIR COOLING

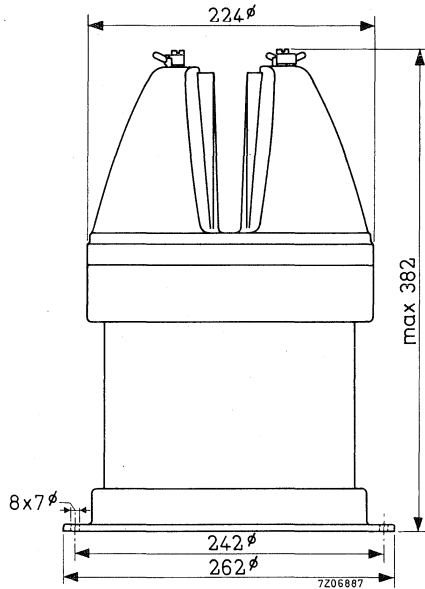


Net weight 7.4 kg

### AIR DISTRIBUTOR UPPER PART OF K508

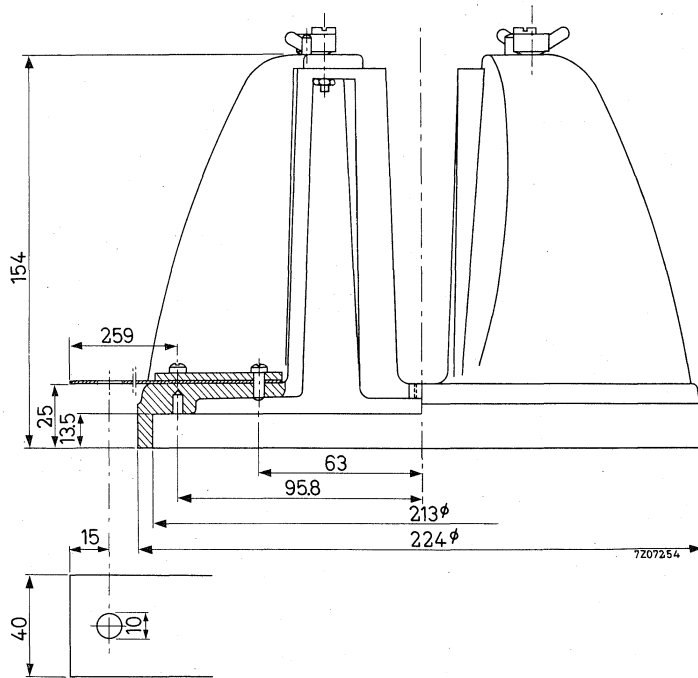

## WATER JACKET

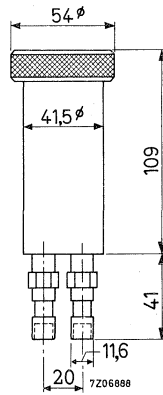


Net weight

0,25 kg

Absolute max. water pressure

 $6 \times 10^5 \text{ Pa} = 6 \text{ atm abs}$

## WATER JACKET

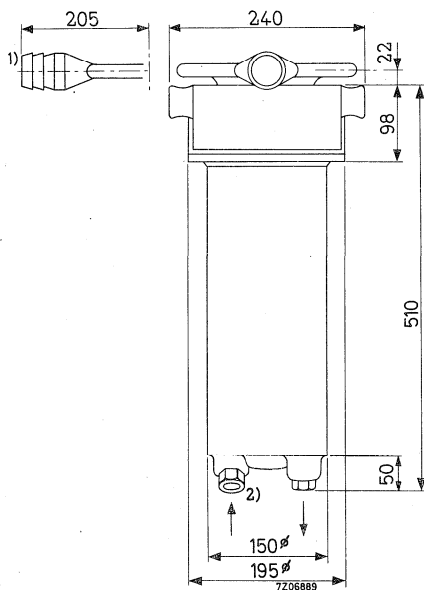


- 1) Use connecting hose with an inner diameter of  $1\frac{3}{4}$ "
- 2) Coupling for metal tubing with an outer diameter of 28mm

Net weight 20,5 kg

Absolute max. water pressure  $6 \times 10^5$  Pa = 6 atm abs


## WATER JACKET

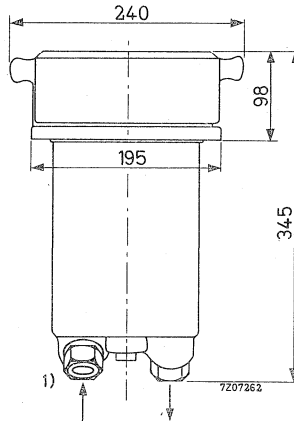

1) coupling for metal tubing with an outer diameter of 28mm.


Net weight 16,7 kg  
Absolute max. water pressure  $6 \times 10^5$  Pa = 6 atm abs

## WATER JACKET

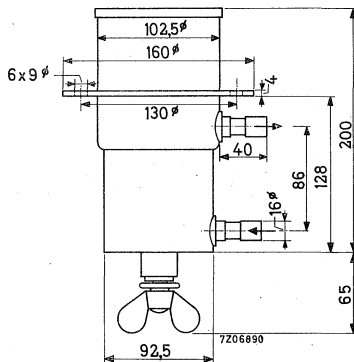

Net weight	2,1	kg
Absolute max. water pressure	$6 \times 10^5 \text{ Pa} = 6 \text{ atm abs}$	


WATER JACKET

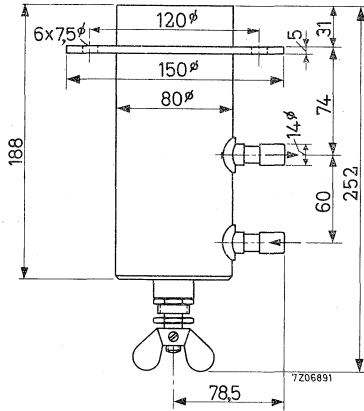

Net weight 2,2 kg  
 Absolute max. water pressure  $6 \times 10^5 \text{ Pa} = 6 \text{ atm abs}$




## WATER JACKET

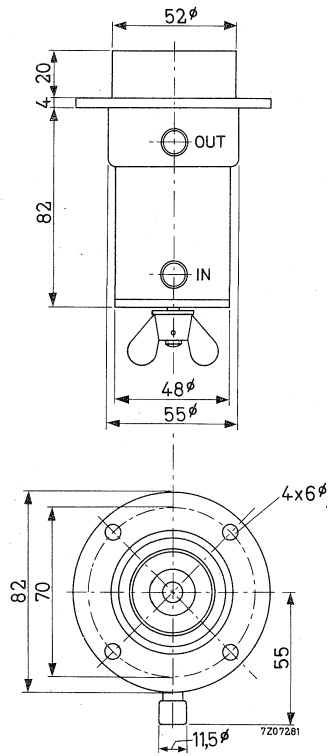

Net weight 0,76 kg  
Absolute max. water pressure  $6 \times 10^5 \text{ Pa} = 6 \text{ atm abs}$

## WATER JACKET

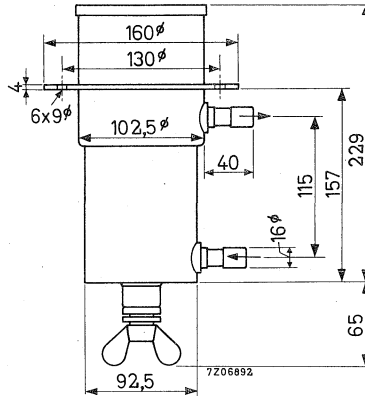


Net weight 2,7 kg

Absolute max. water pressure  $6 \times 10^5$  Pa = 6 atm abs




# WATER JACKET

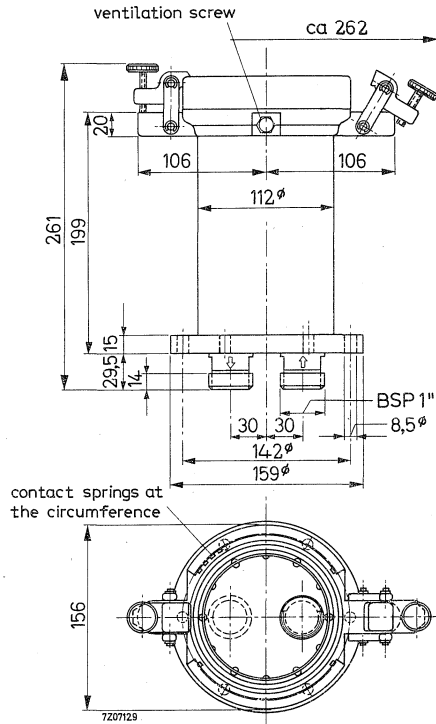

Net weight	5	kg
Absolute max. water pressure	$6 \times 10^5$ Pa = 6 atm abs	



## WATER JACKET

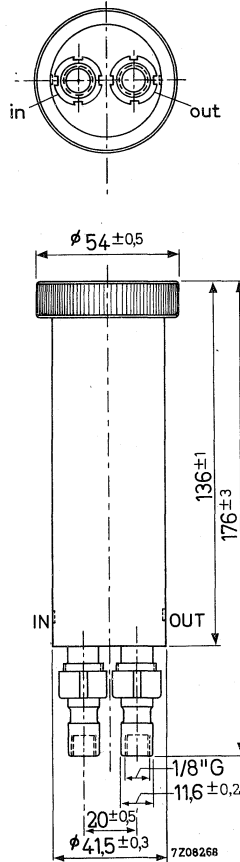

Net weight kg


Absolute max. water pressure  $6 \times 10^5$  Pa = 6 atm abs

WATER JACKET

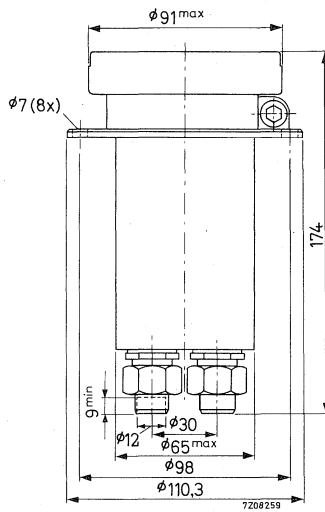


Net weight 2 kg  
 Absolute max. water pressure  $6 \times 10^5$  Pa = 6 atm abs

VAPOUR JACKET

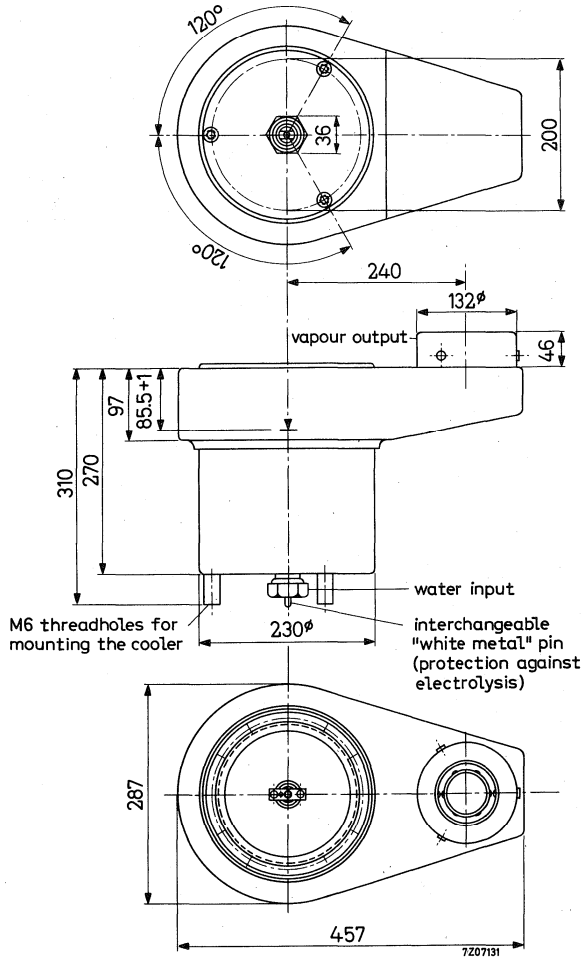

Net weight 8 kg



# VAPOUR JACKET

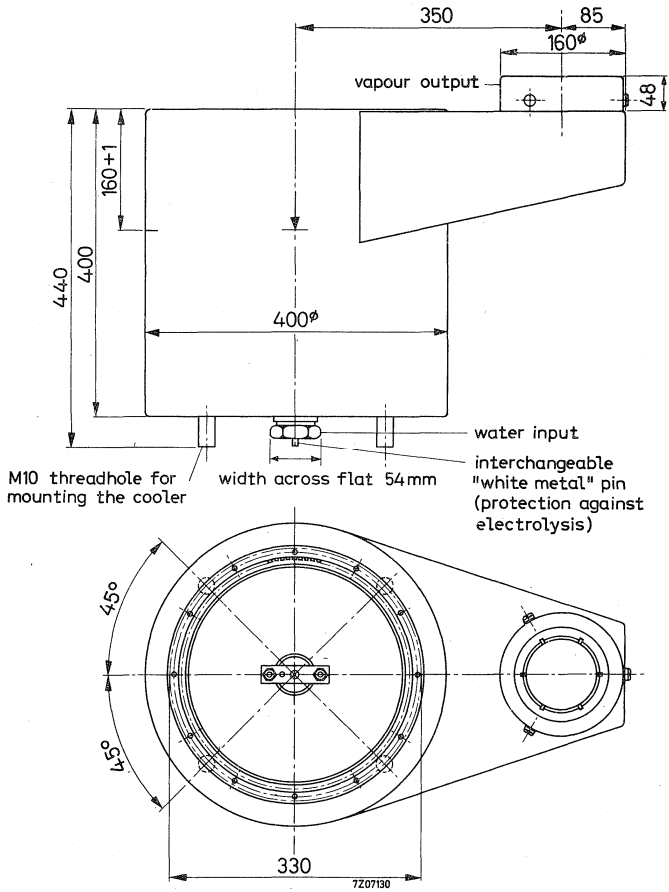

Net weight 22 kg




WATER JACKET

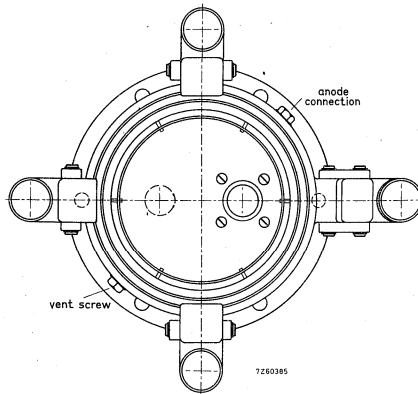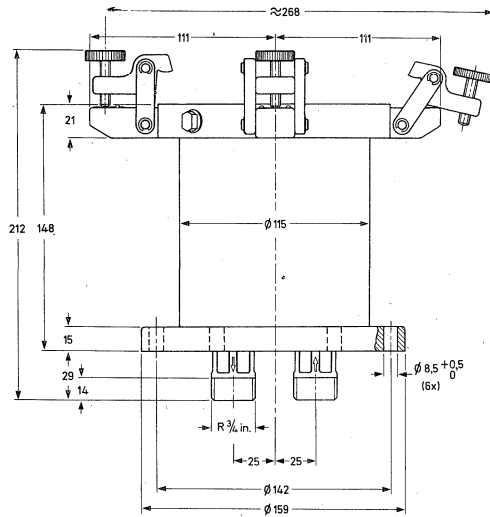


Net weight 6 kg  
 Absolute max. water pressure  $1,1 \times 10^6 \text{ Pa} = 10 \text{ atm abs}$

K733  
K735

# BOILER-CONDENSOR

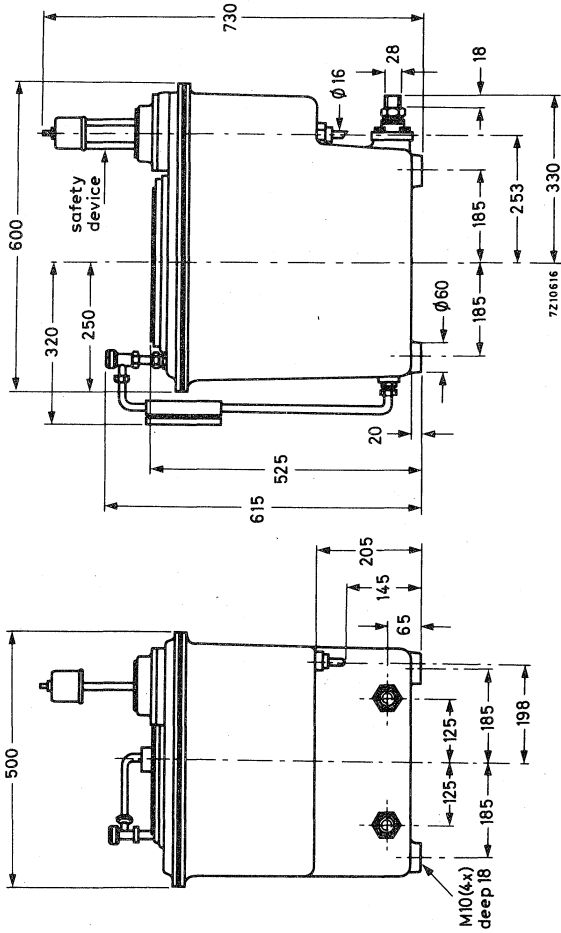

# WATER JACKET

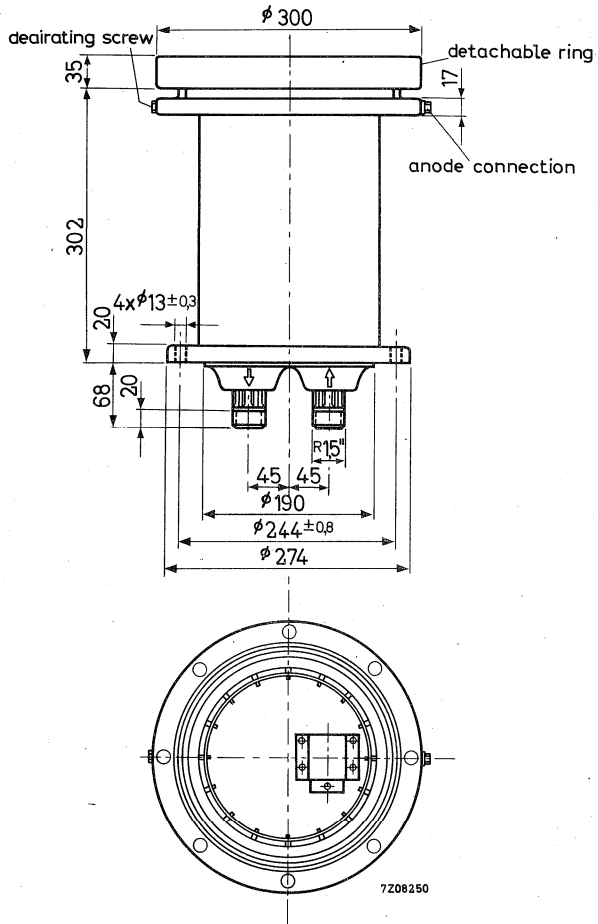

Net weight


kg

Absolute max. water pressure

$6 \times 10^5 \text{ Pa} = 6 \text{ atm abs}$

### TUBE SOCKET


WITH 8 SPRING CONTACTS AND CENTRAL LOCATING AND LOCKING DEVICE

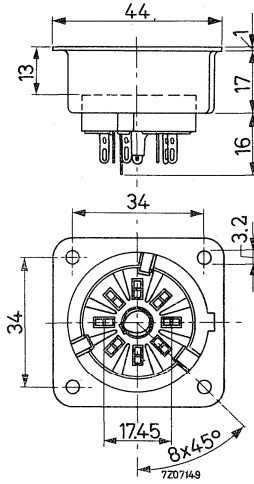

Chassis hole      42 mm


**ANODE CONNECTOR**

FOR 1,5 mm Ø TERMINALS



Material: brass, silver plated

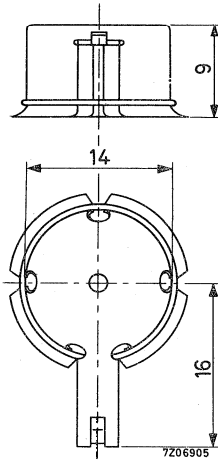


**TOP CAP CONNECTOR**FOR TOP CAPS WITH 14.38 mm  $\phi$  (IEC 67-III-1b, type 3).

Material: brass, nickel plated



## GRID CONNECTOR

FOR 70 mm  $\varnothing$  TERMINALS

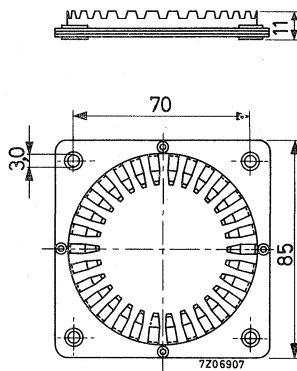


Material: brass, silver plated



**ANODE CONNECTOR**FOR 2 mm  $\varnothing$  TERMINALS


Material: brass, silver plated




**ANODE CONNECTOR**FOR 9 mm  $\phi$  TERMINALS

Material: brass, nickel plated

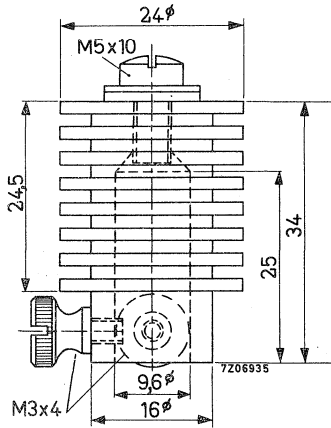


**ANODE CONNECTOR**FOR 9,5 mm  $\phi$  TERMINALS

Material: brass, nickel plated

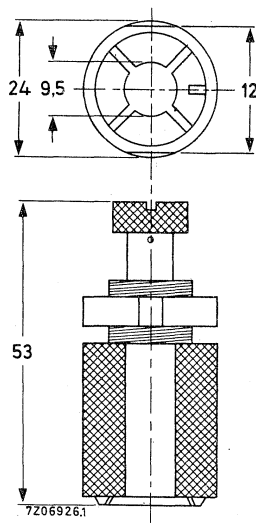
**FILAMENT CONNECTOR**FOR 9,5 mm  $\varnothing$  TERMINALS

Material: brass, silver plated

## INSULATING PEDESTAL

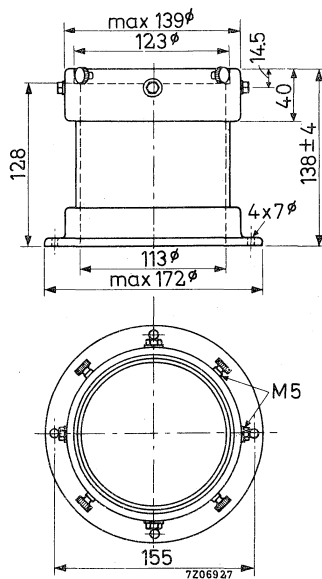


Material: ceramic  
Net weight: 2.1 kg

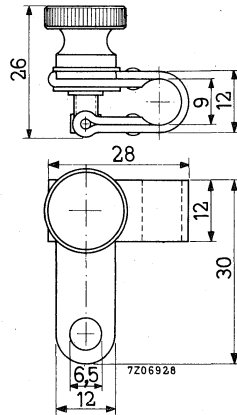**FILAMENT CONNECTOR**FOR 9,1 mm  $\varnothing$  TERMINALS

Material: Brass, nickel plated




# INSULATING PEDESTAL

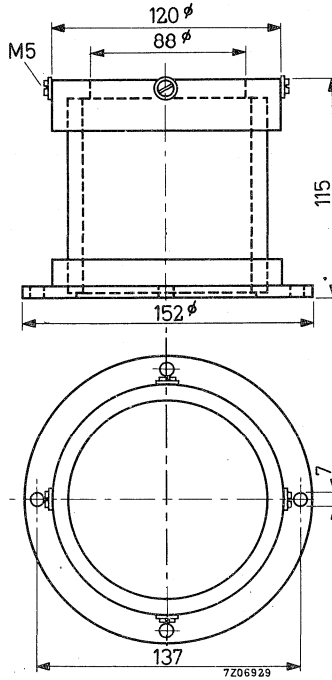

Material: ceramic  
Net weight: 1.6 kg


INSULATING PEDESTAL

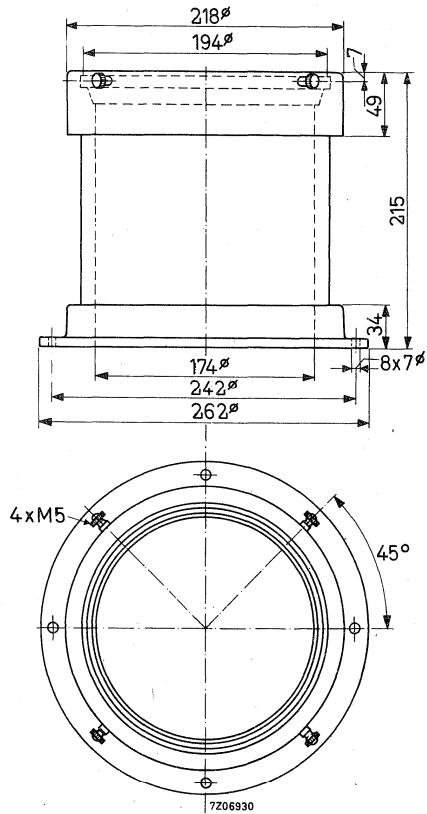

Material: ceramic

# FILAMENT CONNECTOR


FOR 10,5 mm  $\phi$  TERMINALS

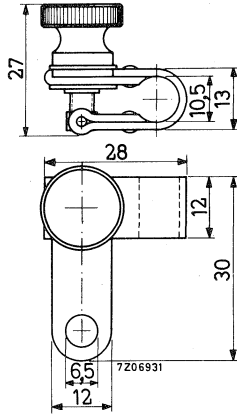

Material: brass, nickel plated



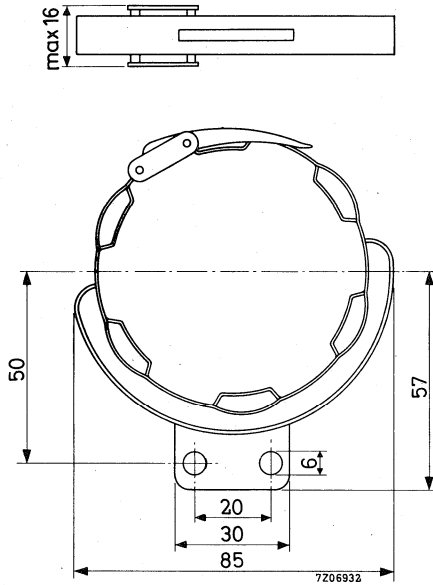


**GRID CONNECTOR**FOR 70 mm  $\phi$  TERMINALS


Material: brass, nickel plated

# GRID AND ANODE CONNECTOR

FOR 127 mm  $\varnothing$  TERMINALS

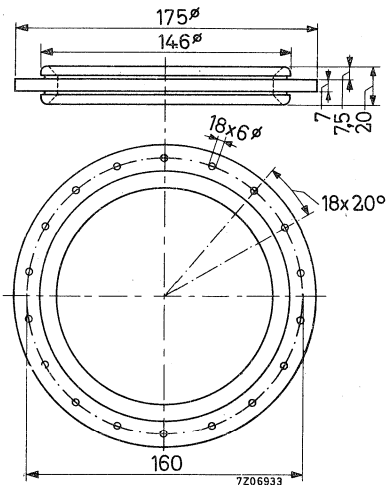


Material: brass, silver plated

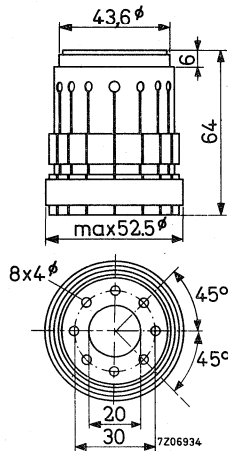**FILAMENT CONNECTOR**FOR 40,5 mm  $\varnothing$  TERMINALS

Material: brass, silver plated


# FILAMENT CONNECTOR

FOR 82 mm  $\phi$  TERMINALS

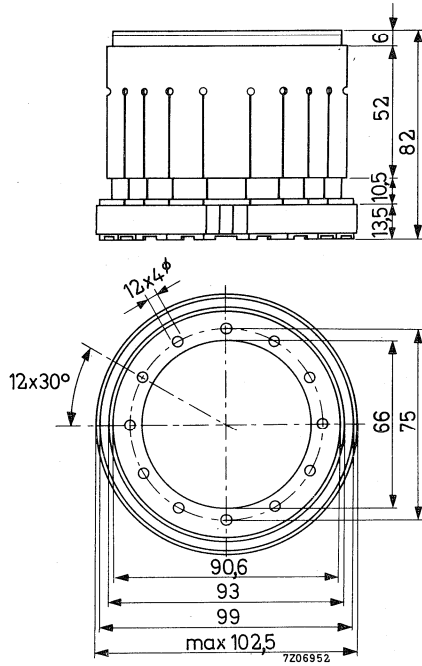


Material: brass, silver plated

## INSULATING PEDESTAL

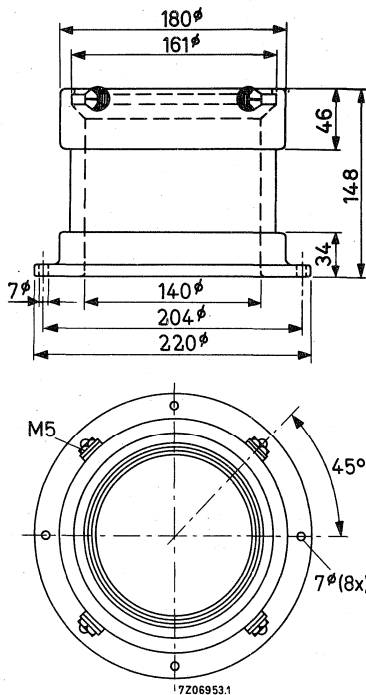


Material: ceramic  
Net weight: 4.25 kg


FILAMENT CONNECTOR WITH CABLE

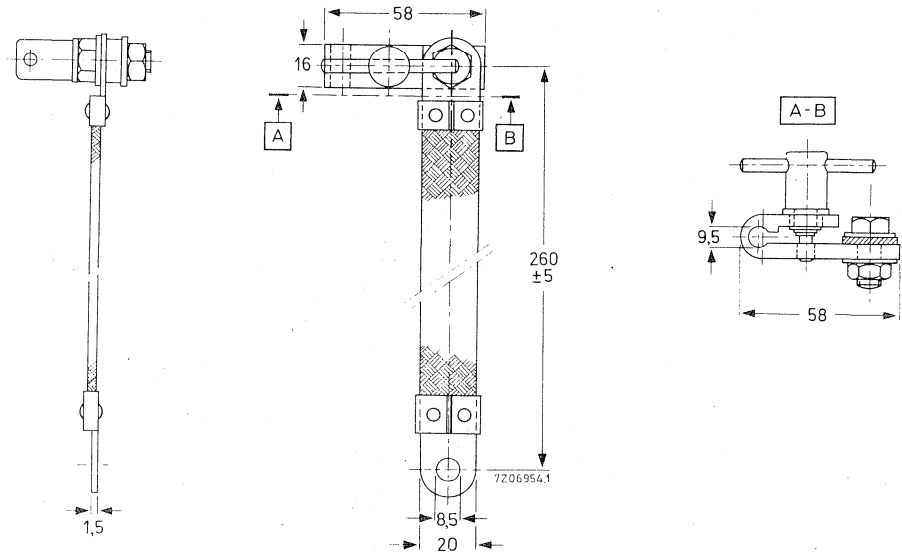

Material: cable - braided copper  
connector - brass, nickel plated

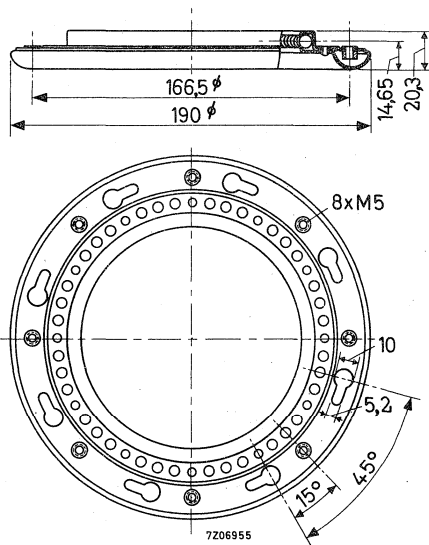
**GRID CONNECTOR**FOR 114 mm  $\varnothing$  TERMINALS

Material: brass, silver plated

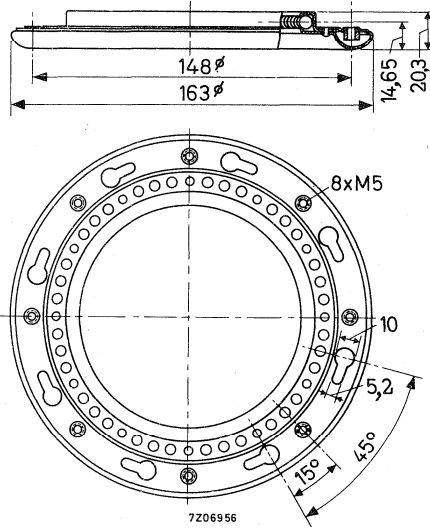**GRID CONNECTOR**FOR 96 mm  $\varnothing$  TERMINALS


Material: brass, silver plated

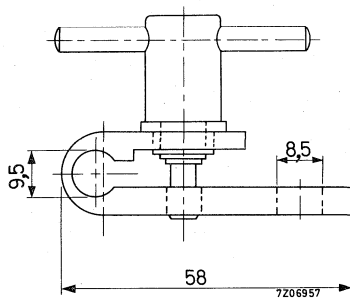

**ANODE CONNECTOR**FOR 9,5 mm  $\varnothing$  TERMINALS


Material: brass, nickel plated

# CHIMNEY

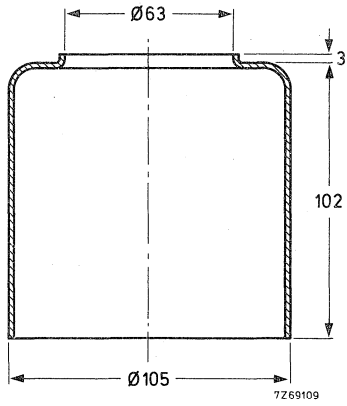


Material : glass


## FILAMENT CONNECTOR WITH CABLE

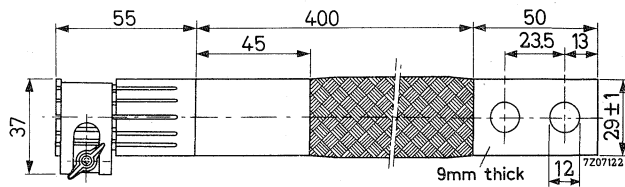



## FILAMENT CONNECTOR WITH CABLE

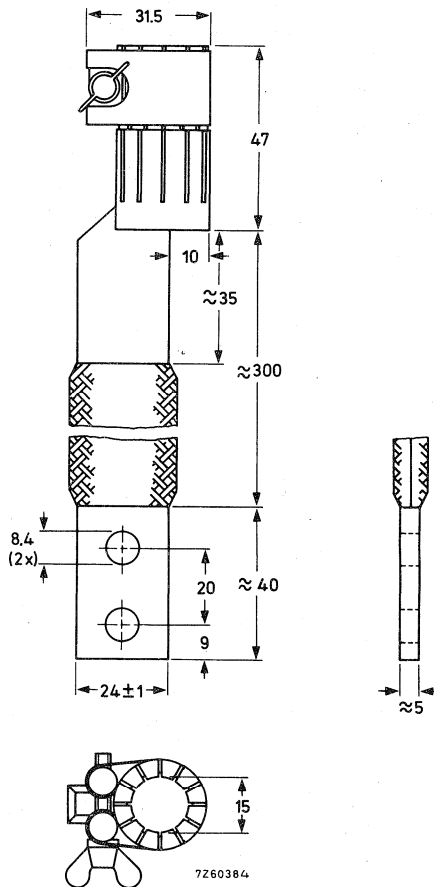

# GRID CONNECTOR

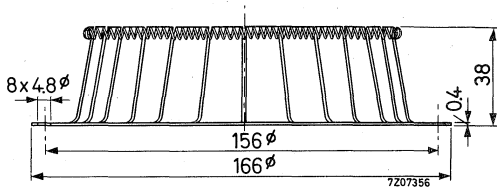


# INSULATING PEDESTAL

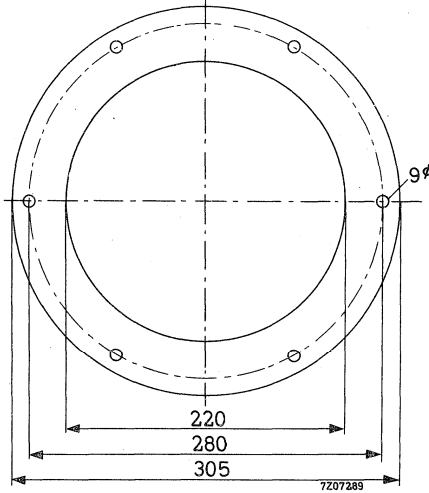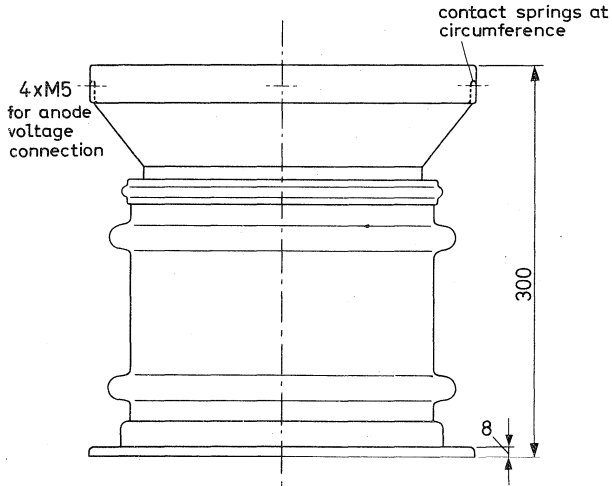


Net weight 9.2 kg


# FUSE

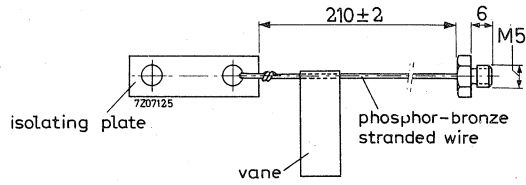

### PULL SWITCH FOR TUBE CUT-OUT

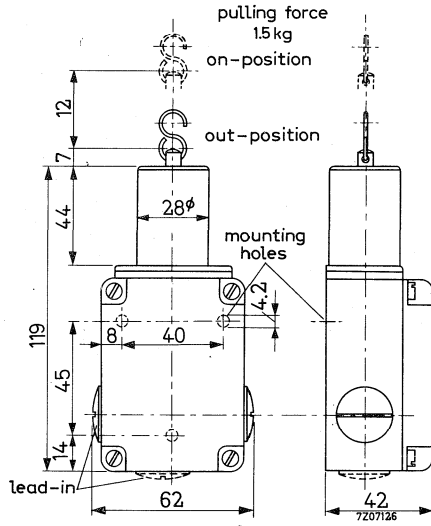


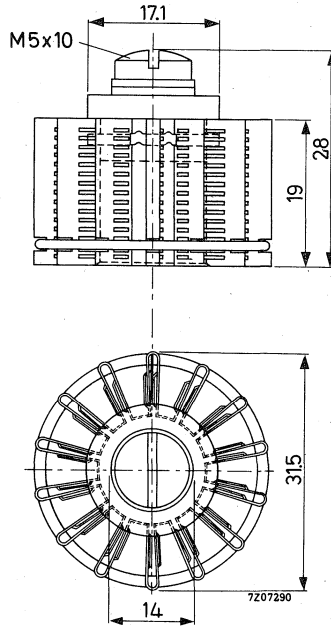

**ANODE CONNECTOR**FOR TOP CAPS WITH 14.38 mm  $\phi$  (IEC67-III-1b, type 3)

Material: brass, nickel plated

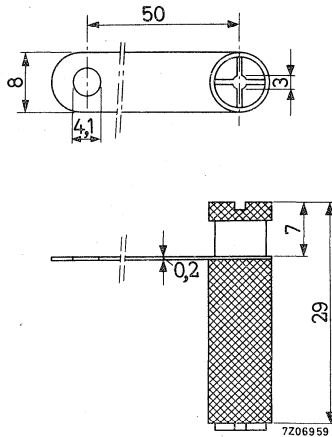


**ANODE CONNECTOR**FOR 3 mm  $\phi$  TERMINALS

Material; brass, silver plated


**TUBE SOCKET**


FOR 82 mm, 50 mm, 25,5 mm and 6 mm CONCENTRIC TERMINALS

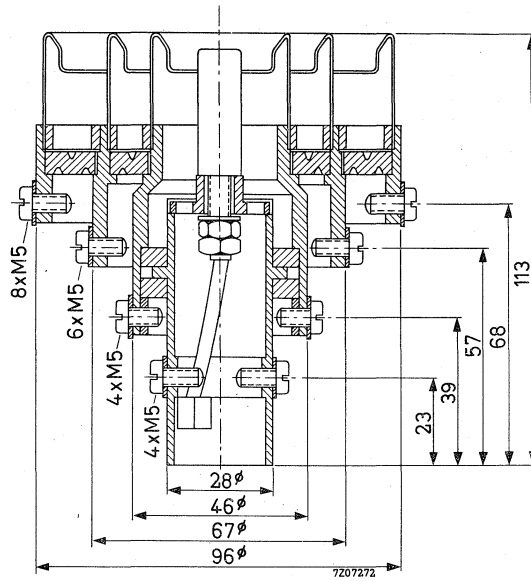

Material: synthetic resin insulating material  
nickel plated contacts

# CHIMNEY

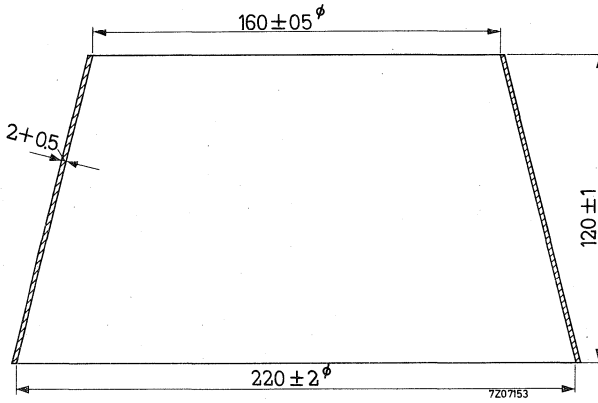


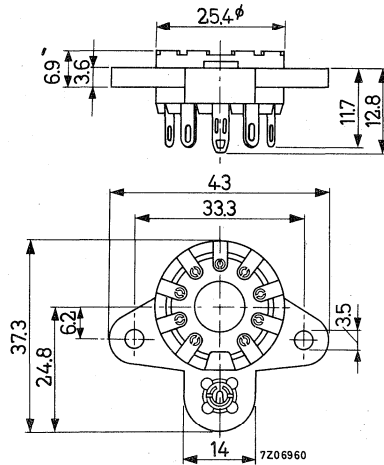**TUBE SOCKET FOR MAGNOVAL BASES**

Material: synthetic resin insulating material  
9 silver plated cup-shaped contacts


# GRID CONNECTOR

FOR 48 mm  $\phi$  TERMINALS

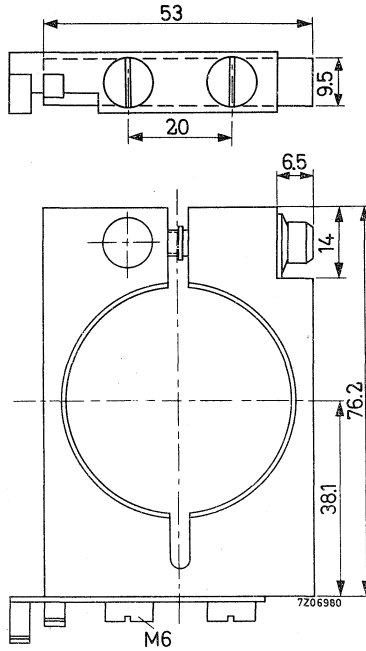


Material: brass, silver plated

## GRID CONNECTOR

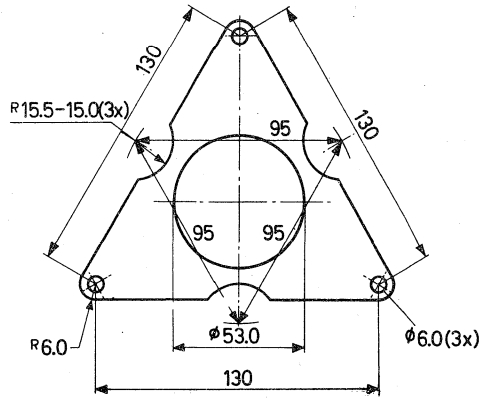


Material: Brass

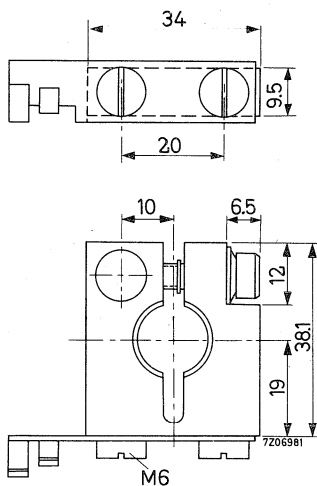
**FILAMENT CONNECTOR**FOR 14.4 mm  $\phi$  TERMINALS

Material: brass, nickel plated

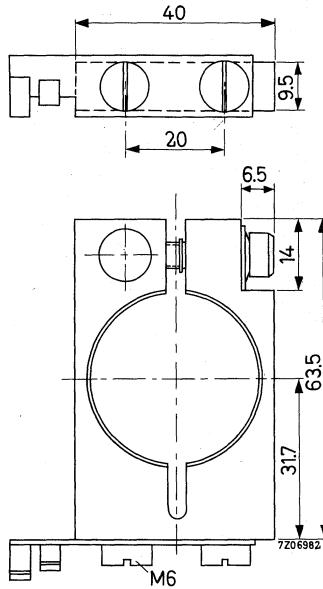


**FILAMENT CONNECTOR**FOR 36 mm  $\phi$  TERMINALS

Material: brass, nickel plated

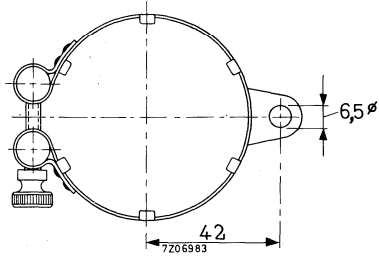**GRID CONNECTOR**FOR 66 mm  $\phi$  TERMINALS

Material: brass, nickel plated

Net weight: 55 g


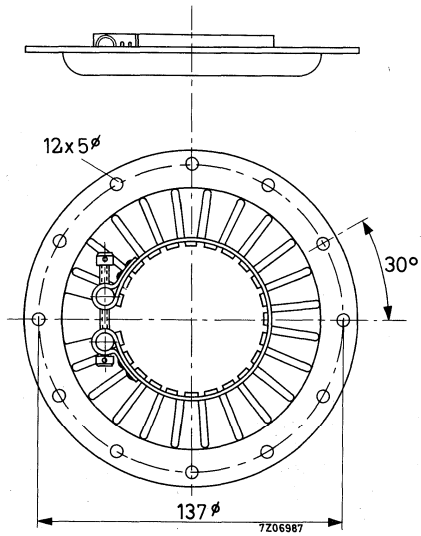
**GRID CONNECTOR**FOR 66 mm  $\phi$  TERMINALS

Material: brass, silver plated  
Net weight: 240 g

**FILAMENT CONNECTOR**

FOR 25 mm dia TERMINALS




Net weight approx. 450 gr

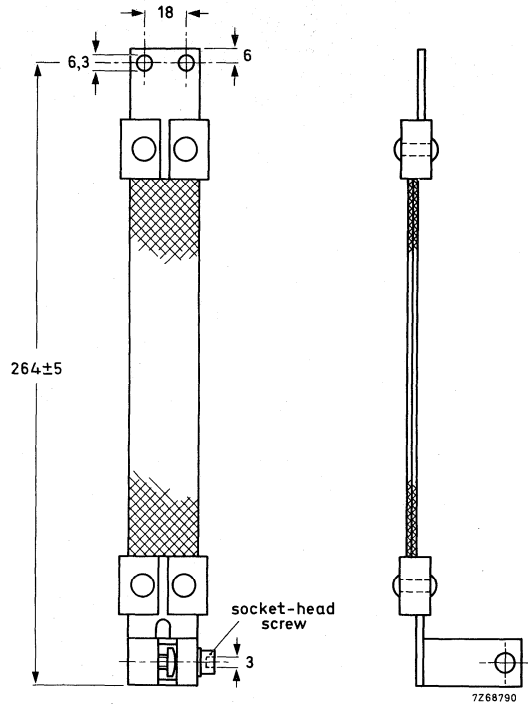

**FILAMENT CONNECTOR**


FOR 50 mm dia TERMINALS

Net weight approx. 480 gr

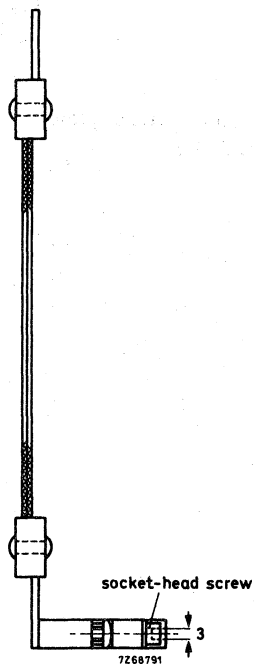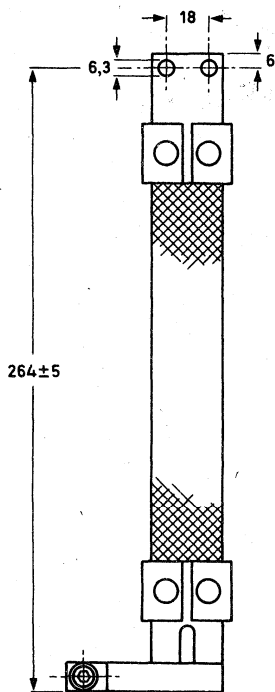

# GRID CONNECTOR

FOR 112 mm  $\phi$  TERMINALS

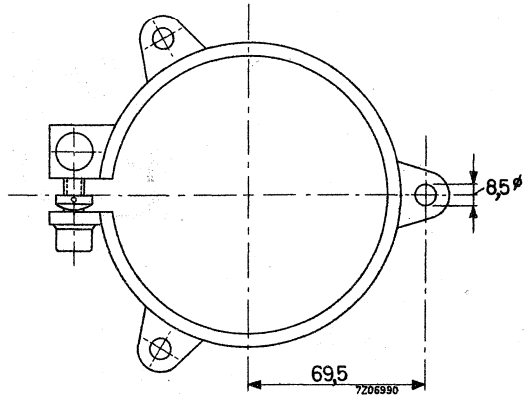




Material: brass, nickel plated  
Net weight: 270 g



**WATER COOLED FILAMENT CONNECTOR**

FOR 54 mm dia TERMINALS




Net weight approx. 1380 gr

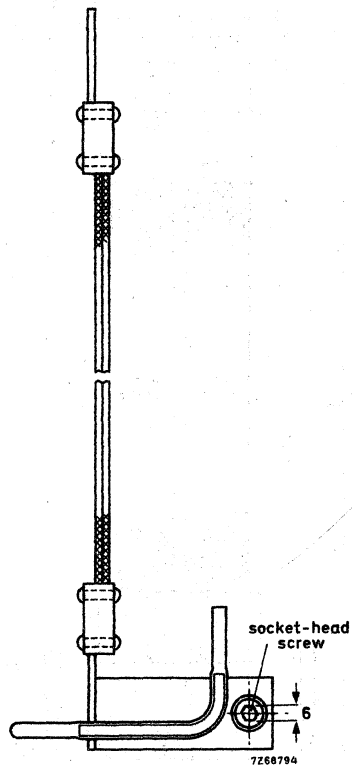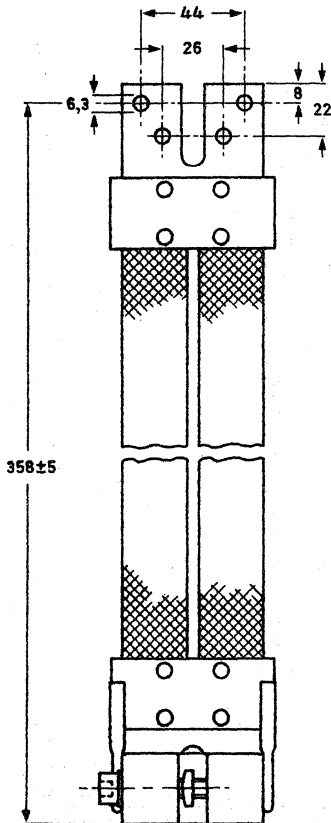

**WATER COOLED FILAMENT CONNECTOR**


FOR 96 mm dia TERMINALS

Net weight approx. 1550 gr

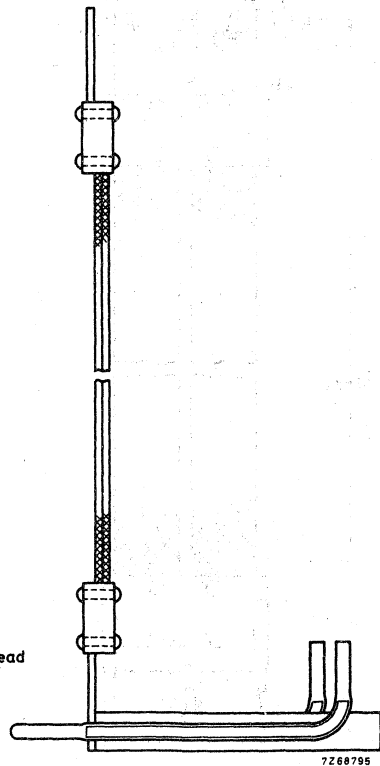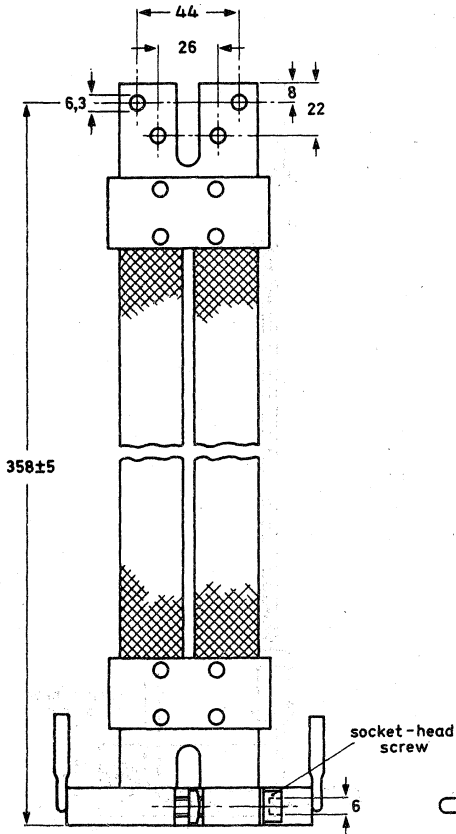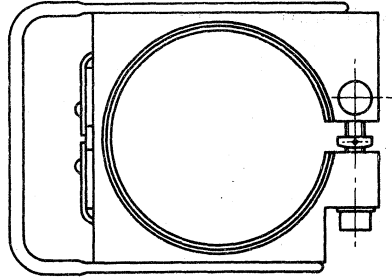




## TUBE SOCKET FOR COAXIAL TUBES

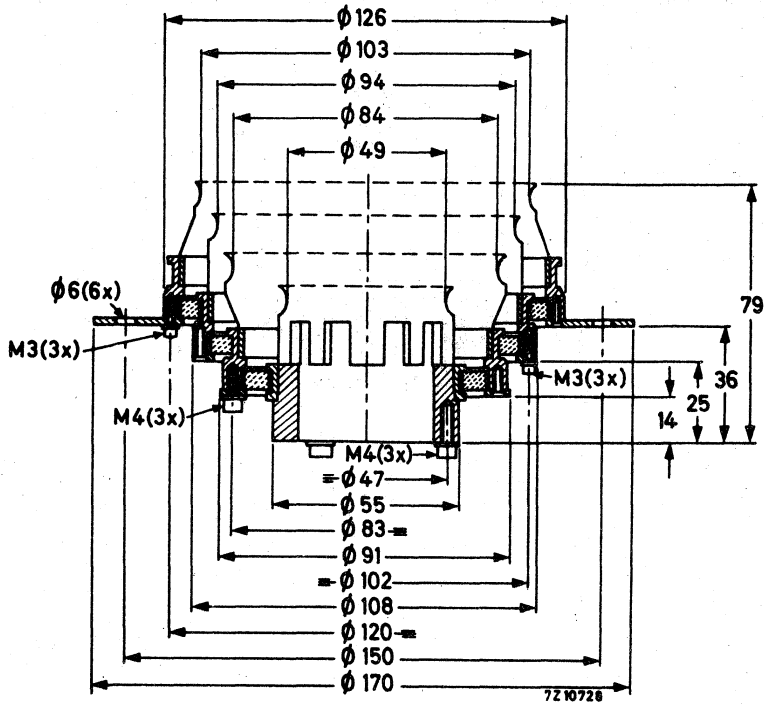

Material: teflon insulating material  
 silver plated contact springs

### TUBE SOCKET FOR COAXIAL TETRODES



FOR 76,5 mm, 58,6 mm, 43,4 mm and 18,4 mm CONCENTRIC TERMINALS

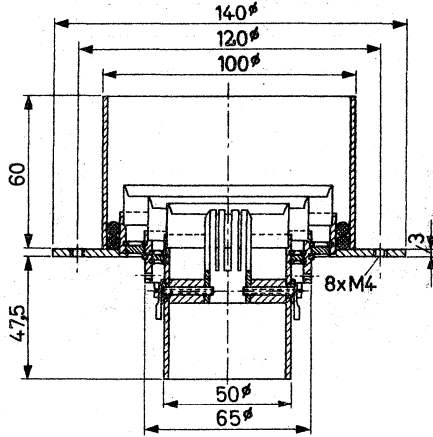

**FILAMENT CONNECTOR**

FOR 42 mm dia TERMINALS




Net weight approx. 700 gr

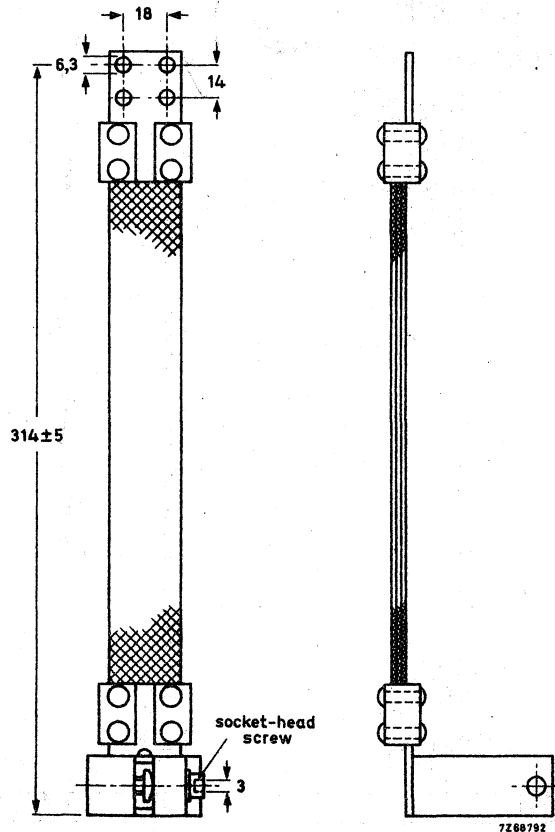


# FILAMENT CONNECTOR

FOR 86 mm dia TERMINALS

Net weight approx. 830 gr

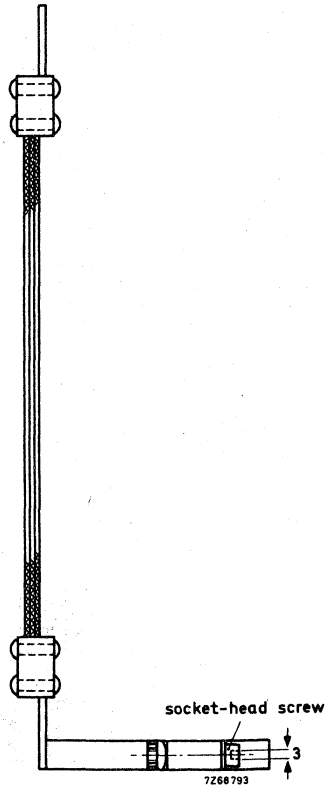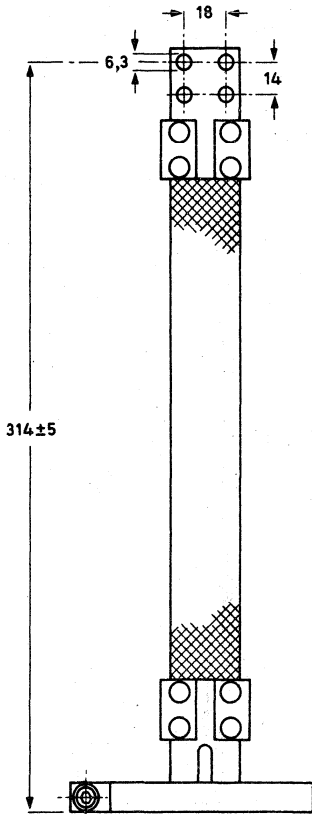

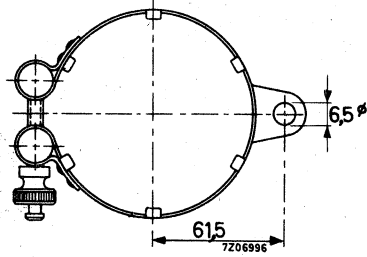**GRID CONNECTOR**FOR 105 mm  $\phi$  TERMINALS



Material: brass, nickel plated



# FILAMENT CONNECTOR

FOR 32 mm dia TERMINALS




Net weight approx. 600 gr

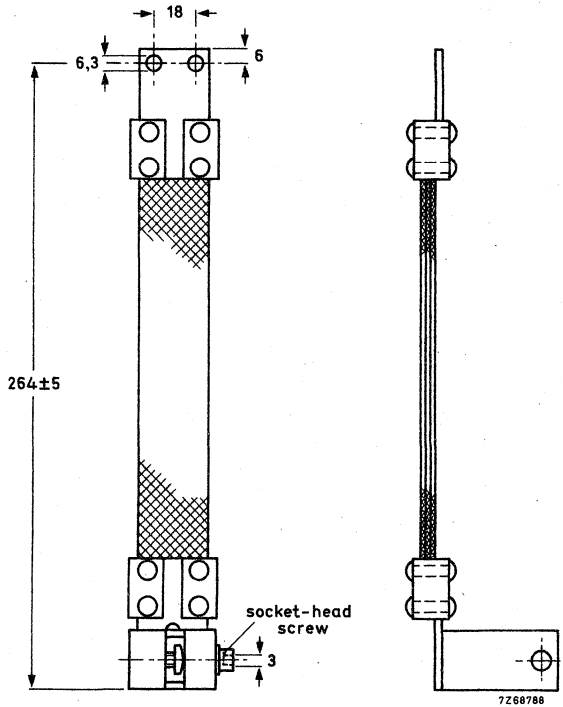


**FILAMENT CONNECTOR**

FOR 66 mm dia TERMINALS


Net weight approx. 640 gr

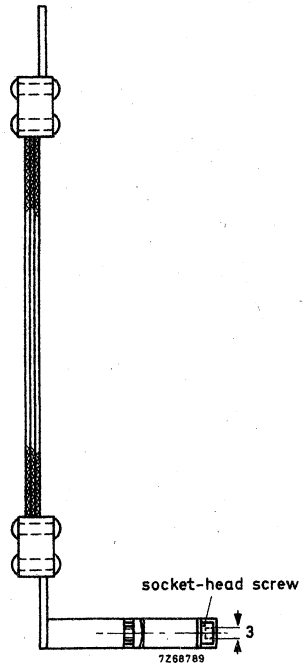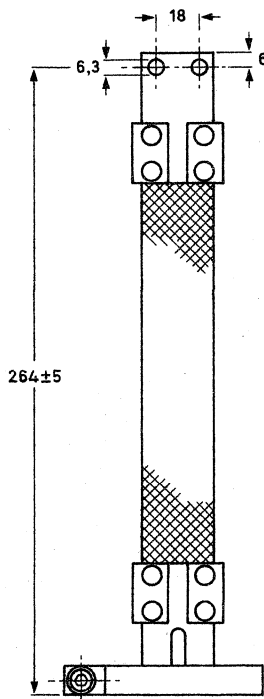

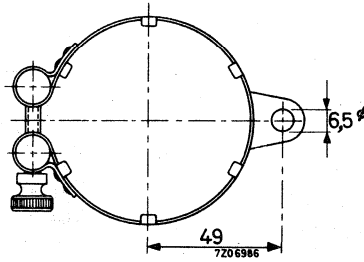
**GRID CONNECTOR**FOR 80 mm  $\phi$  TERMINALS

Material: brass, nickel plated  
Net weight: 60 g

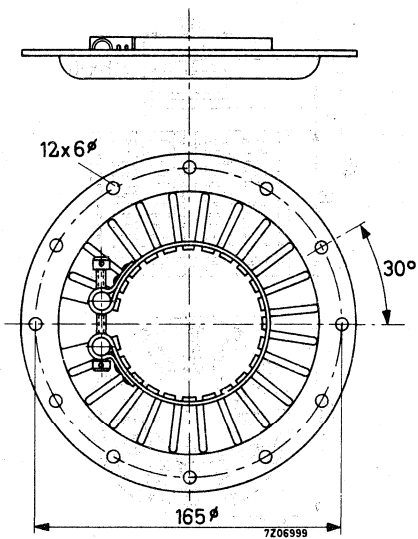

**GRID CONNECTOR**FOR 80 mm  $\phi$  TERMINALS



Material: brass, silver plated  
Net weight: 310 g

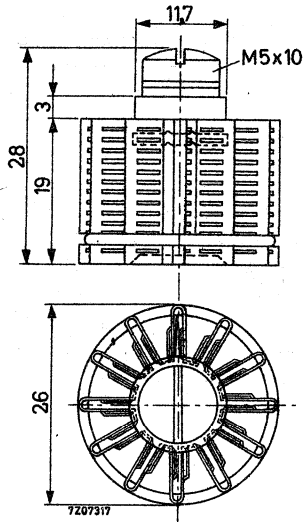**ANODE CONNECTOR**FOR TOP CAPS WITH 9,14 mm  $\phi$  (IEC67-III-1b, type 2)

Material: copper, nickel plated

## FILAMENT CONNECTOR



FOR 27 mm and 17 mm CONCENTRIC TERMINALS

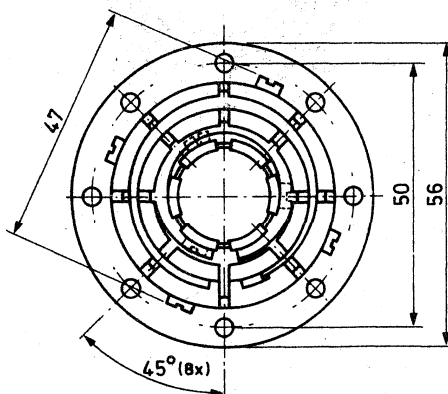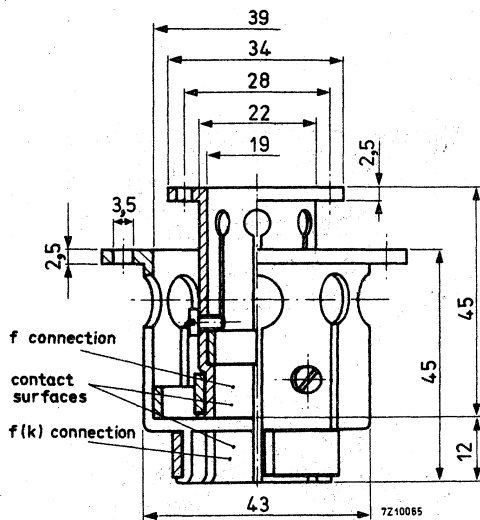

Net weight: approx. 0,2 kg

# GRID CONNECTOR


FOR 37 mm Ø TERMINALS

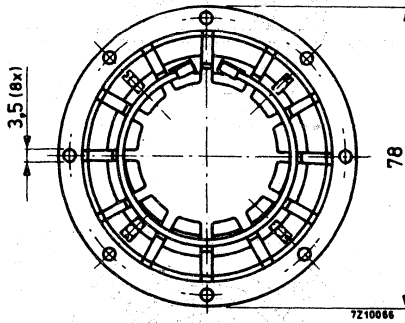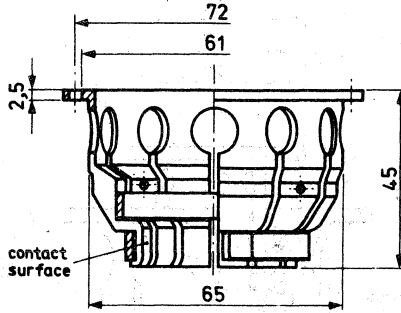

Net weight: approx. 0,2 kg

## SCREEN GRID CONNECTOR

FOR 79 mm  $\varnothing$  TERMINALS

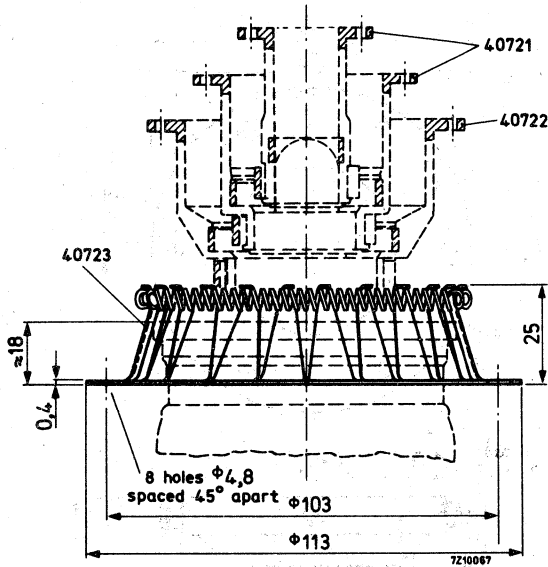


Net weight: approx. 0,1 kg


### Caution

The tube must never be pulled through the spring ring. So, if it has to be inserted from above, this should be done first, before the screen grid connection is made. Similarly, the tube can only be taken out after the screen grid connector has been removed.

## INSULATING PEDESTAL

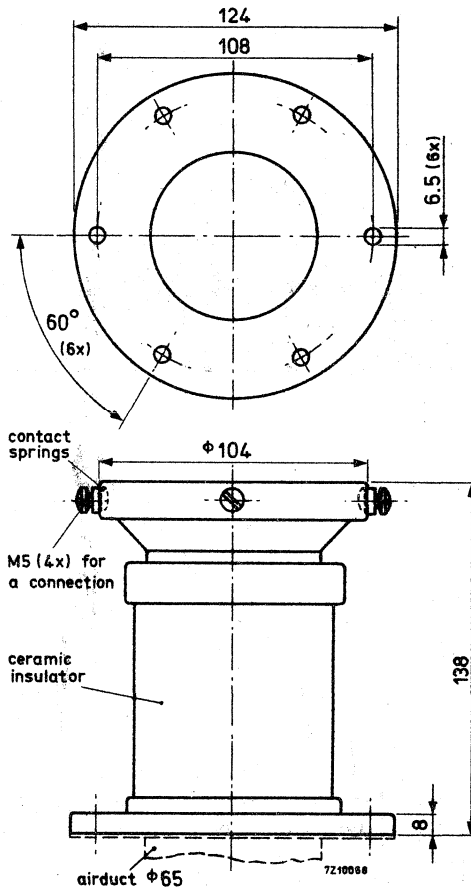


Net weight: approx. 1.3 kg

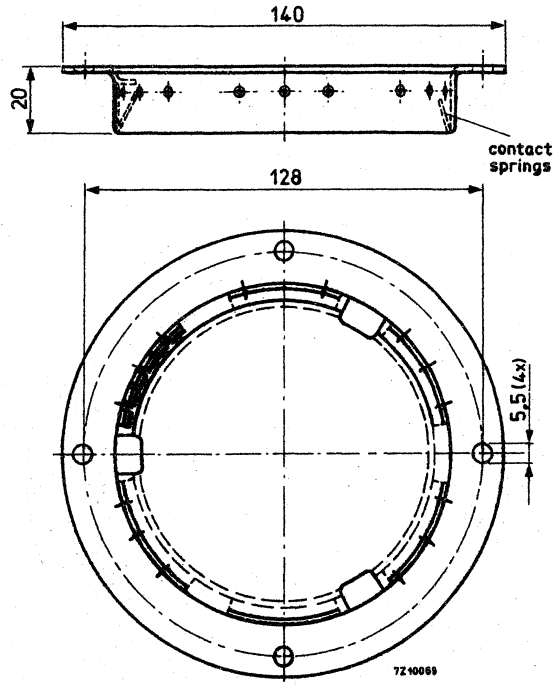**GRID CONNECTOR**FOR 100 mm  $\varnothing$  TERMINALS

Net weight: approx. 0,14 kg

# SCREEN GRID CONNECTOR


FOR 134 mm  $\phi$  TERMINALS

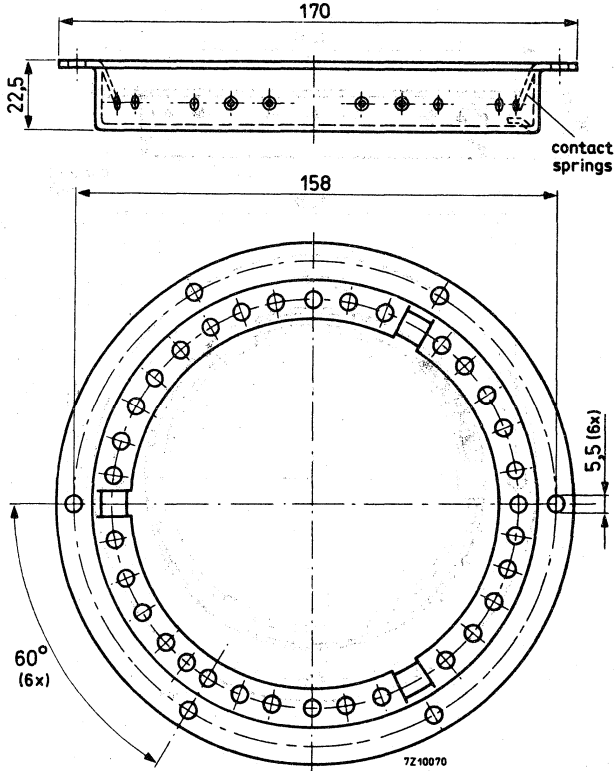

Net weight: approx. 0,2 kg





## INSULATING PEDESTAL

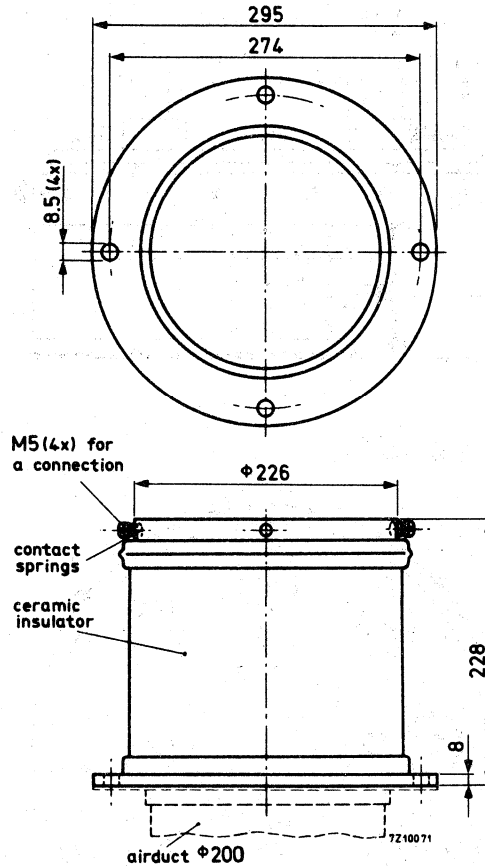


Net weight: approx. 8.2 kg

# FILAMENT CONNECTOR

FOR 96 mm AND 40 mm CONCENTRIC TERMINALS

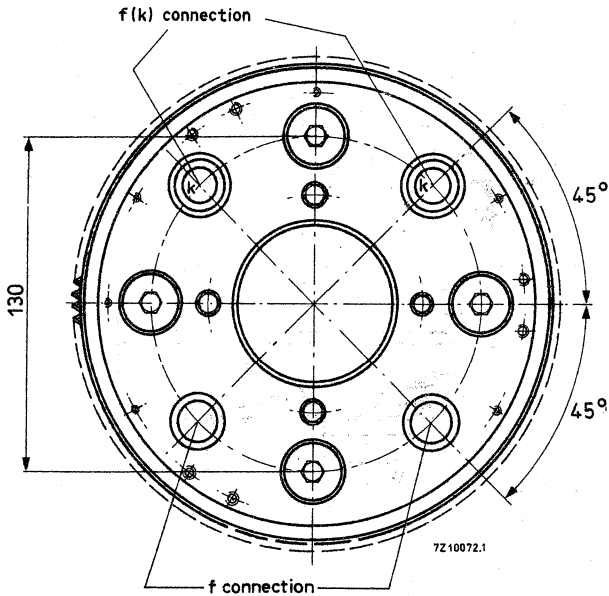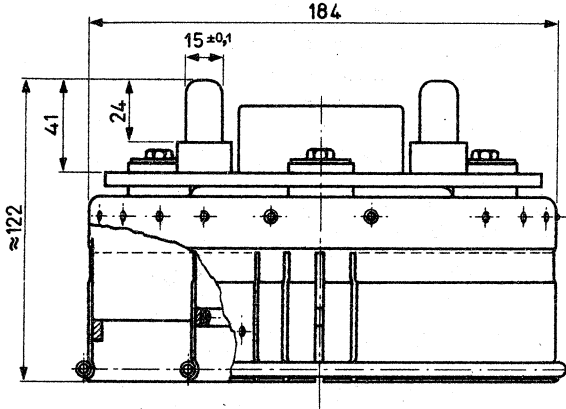


Net weight: approx. 2,5 kg

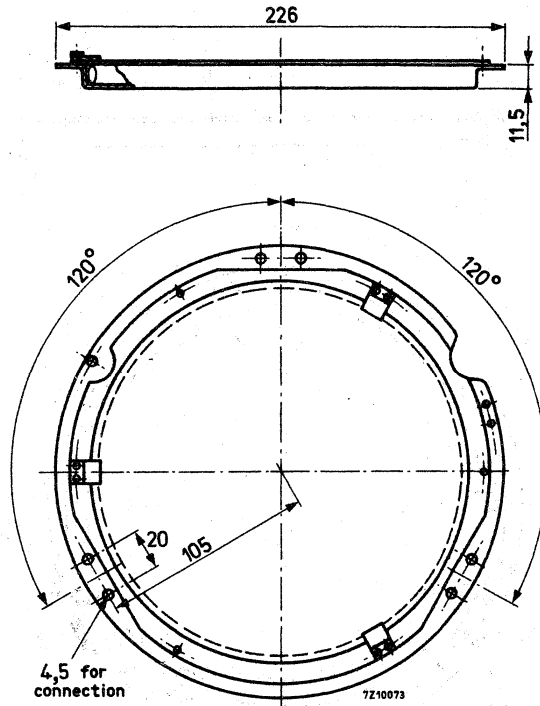**GRID CONNECTOR**FOR 185 mm  $\varnothing$  TERMINALS

Net weight: approx. 0,35 kg


# SCREEN GRID CONNECTOR

FOR 193, 2 mm  $\varnothing$  TERMINALS

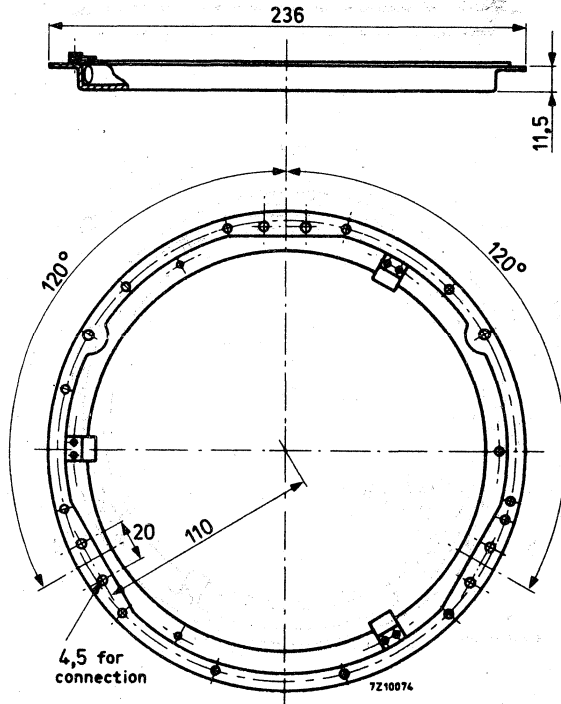



Net weight: approx. 0,4 kg

# WATER LEVEL CONTROL

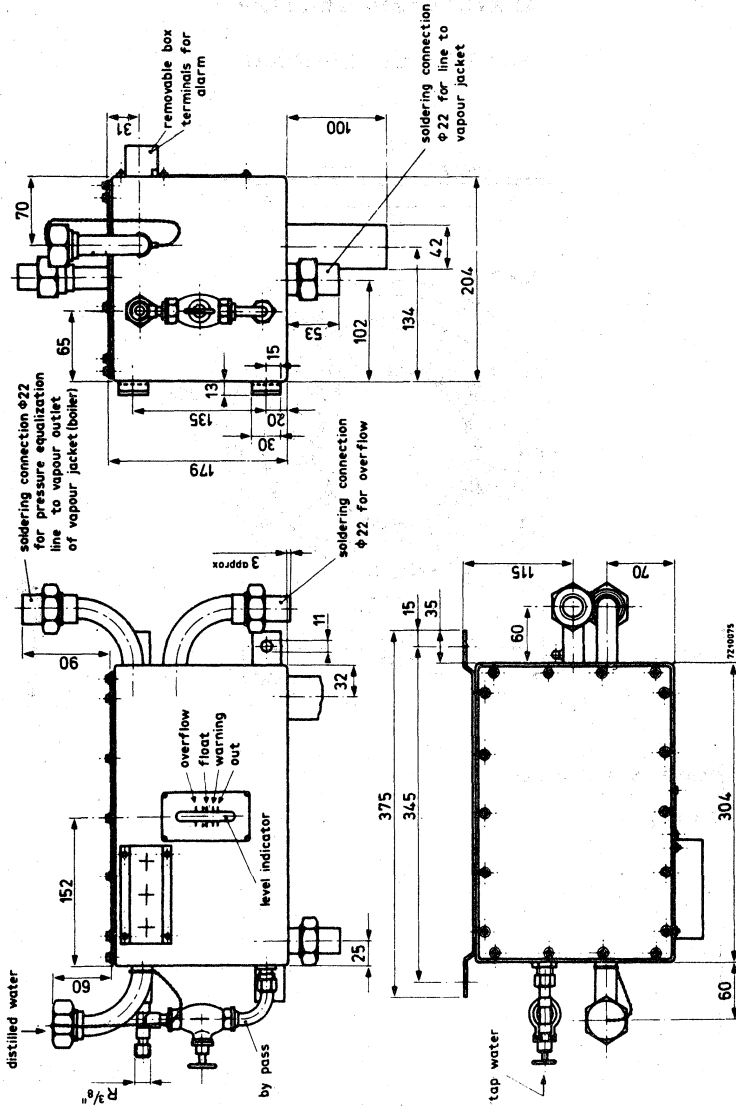

Material: Copper  
 Net weight: approx. 8.5 kg

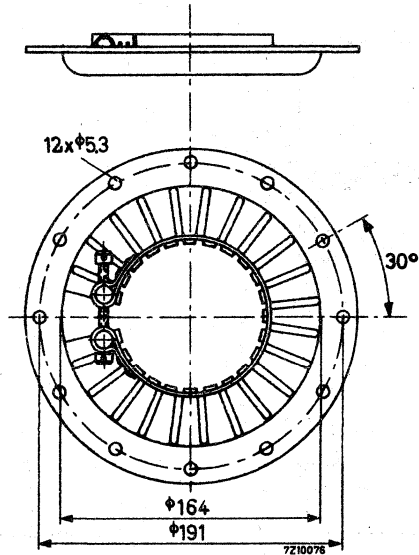**GRID CONNECTOR**FOR 105 mm  $\phi$  TERMINALS**Material: brass, silver plated****Net weight: 450 g**

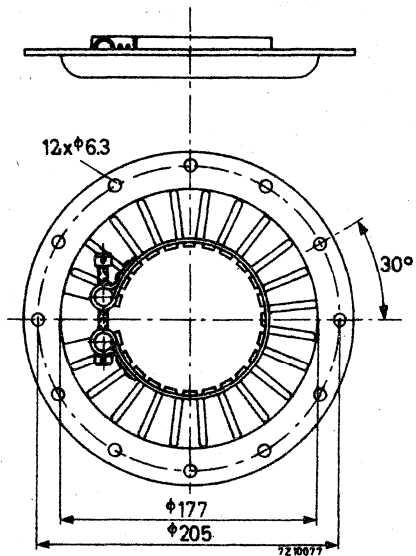**GRID CONNECTOR**FOR 112 mm  $\phi$  TERMINALS

Material: brass, silver plated  
Net weight: 525 g





## INDEX OF TYPENUMBERS

Type No.	Section	Type No.	Section	Type No.	Section
K503	Acc	YD1141	Tran	YD1331	Tran
K504	Acc	YD1150	Tran	YD1332	Tran
K506	Acc	YD1151	Tran	YD1333	Tran
K508	Acc	YD1152	Tran	YD1334	Tran
K509	Acc	YD1160	Tran	YD1335	Tran
K713	Acc	YD1161	Tran	YD1336	Tran
K714	Acc	YD1162	Tran	YD1342	Tran
K715	Acc	YD1170	Tran	YD1343	Tran
K717	Acc	YD1171	Tran	YD1352S	Tran
K720	Acc	YD1172	Tran	YL1000	Tran
K721	Acc	YD1173	Tran	YL1010	Tran
K722	Acc	YD1175	Tran	YL1011	Tran
K723	Acc	YD1177	Tran	YL1012	Tran
K724	Acc	YD1180	Tran	YL1020	Tran
K726	Acc	YD1182	Tran	YL1030	Tran
K727	Acc	YD1185	Tran	YL1060	Tran
K728	Acc	YD1187	Tran	YL1070	Tran
K729	Acc	YD1192	Tran	YL1071	Tran
K732	Acc	YD1193	Tran	YL1080	Tran
K733	Acc	YD1195	Tran	YL1091	Tran
K734	Acc	YD1197	Tran	YL1100	Tran
K735	Acc	YD1202	Tran	YL1101	Tran
YD1000	Tran	YD1203	Tran	YL1110	Tran
YD1001	Tran	YD1204	Tran	YL1120	Tran
YD1002	Tran	YD1212	Tran	YL1121	Tran
YD1010	Tran	YD1213	Tran	YL1130	Tran
YD1012	Tran	YD1240	Tran	YL1150	Tran
YD1120	Tran	YD1300	Tran	YL1181	Tran
YD1130	Tran	YD1302	Tran	YL1182	Tran
YD1140	Tran	YD1330	Tran	YL1190	Tran

Acc = Accessories

Tran = Transmitting tubes for communication; tubes for r.f. heating.

# INDEX

Type No.	Section	Type No.	Section	Type No.	Section
YL1200	Tran	8438	See YL1461	8935	See YD1185
YL1210	Tran	8438A	See YL1461	8936	See YD1187
YL1220	Tran	8457	See YL1210	8936	See YD1197
YL1231	Tran	8458	See YL1420	8952	See YD1175
YL1240	Tran	8463	See YL1000	8958	See YD1177
YL1250	Tran	8505	See YL1250	40210/01	Acc
YL1290	Tran	8552	See YL1371	40615	Acc
YL1320	Tran	8560	See YL1320	40619	Acc
YL1340	Tran	8577	See YL1220	40622	Acc
YL1341	Tran	8579	See YL1150	40623	Acc
YL1360	Tran	8589	See YL1190	40624	Acc
YL1370	Tran	8621	Tran	40626	Acc
YL1371	Tran	8637	See YL1300	40628	Acc
YL1372	Tran	8654	See YL1230	40630	Acc
YL1420	Tran	8666	See YD1170	40634	Acc
YL1430	Tran	8667	See YD1171	40635	Acc
YL1440	Tran	8668	See YD1172	40648	Acc
YL1460	Tran	8679	See YL1121	40649	Acc
YL1461	Tran	8680	See YD1212	40650	Acc
YL1470	Tran	8683	See YL1360	40651	Acc
YL1520	Tran	8728	See YD1150	40652	Acc
6146B	See YL1370	8729	See YD1151	40653	Acc
6159B	See YL1372	8730	See YD1152	40654	Acc
6293	Tran	8731	See YD1160	40662	Acc
6816	See YL1101	8732	See YD1161	40663	Acc
6883B	See YL1371	8733	See YD1162	40664	Acc
7609	Tran	8734	See YD1173	40665	Acc
7650	See YL1110	8735	See YD1182	40666	Acc
7854	See YL1060	8736	See YD1192	40667	Acc
8032A	See YL1371	8744	See YL1330	40670	Acc
8116	See YL1071	8752	See YD1202	40671	Acc
8117	See YL1071	8801	See YD1180	40672	Acc
8118	See YL1020	8812	See YL1420	40675	Acc
8163	See YD1130	8813	See YL1430	40679	Acc
8298A	See YL1370	8814	See YL1440	40680	Acc
8321	See YL1340	8867	See YD3152S	40681	Acc
8322	See YL1322	8888	See YL1470	40682	Acc
8348	See YL1080	8913	See YD1195	40683	Acc
8408	See YL1130	8915	See YL1520	40685	Acc
8429	See YL1120	8918	See YD1342	40686	Acc

Acc = Accessories

Tran = Transmitting tubes for communication; tubes for r.f. heating

Type No.	Section	Type No.	Section	Type No.	Section
40687	Acc	40735	Acc		
40688	Acc	40736	Acc		
40689	Acc	40737	Acc		
40690	Acc	40743	Amp		
40691	Acc	40744	Amp		
40692	Acc	40745	Amp		
40693	Acc	40746	Amp		
40694	Acc	40747	Amp		
40695	Acc	40748	Amp		
40696	Acc	40755	Amp		
40699	Acc	40756	Amp		
40704	Acc	40757	Amp		
40705	Acc	40758	Amp		
40706	Acc	40759	Amp		
40707	Acc	40760	Amp		
40708	Acc	40768	Amp		
40709	Acc				
40710	Acc				
40711	Acc				
40712	Acc				
40721	Acc				
40722	Acc				
40723	Acc				
40724	Acc				
40727	Acc				
40728	Acc				
40729	Acc				
40732	Acc				
40733	Acc				
40734	Acc				

Acc = Accessories

Amp = Amplifier circuit assemblies



---

General section

---

Transmitting tubes for communication  
Tubes for r.f. heating

---

Amplifier circuit assemblies

---

Associated accessories

---

Index

---



