

**PHILIPS**

Data handbook



Electronic  
components  
and materials

# Electron tubes

Part 3 March 1972

Special Quality tubes

Miscellaneous devices



# ELECTRON TUBES

Part 3

March 1972

---

Special Quality tubes

---

Miscellaneous devices

---



## DATA HANDBOOK SYSTEM

To provide you with a comprehensive source of information on electronic components, subassemblies and materials, our Data Handbook System is made up of three series of handbooks, each comprising several parts.

The three series, identified by the colours noted, are:

**ELECTRON TUBES** (9 parts) BLUE

**SEMICONDUCTORS AND INTEGRATED CIRCUITS** (6 parts) RED

**COMPONENTS AND MATERIALS** (7 parts) GREEN

The several parts contain all pertinent data available at the time of publication, and each is revised and reissued annually; the contents of each series are summarized on the following pages.

We have made every effort to ensure that each series is as accurate, comprehensive and up-to-date as possible, and we hope you will find it to be a valuable source of reference. Where ratings or specifications quoted differ from those published in the preceding edition they will be pointed out by arrows. You will understand that we can not guarantee that all products listed in any one edition of the handbook will remain available, or that their specifications will not be changed, before the next edition is published. If you need confirmation that the published data about any of our products are the latest available, may we ask that you contact our representative. He is at your service and will be glad to answer your inquiries.

## ELECTRON TUBES (BLUE SERIES)

This series consists of the following parts, issued on the dates indicated.

<b>Part 1</b>	<b>January 1972</b>
Transmitting tubes (Tetrodes, Pentodes)	Amplifier circuit assemblies
<b>Part 2</b>	<b>February 1972</b>
Tubes for microwave equipment	
<b>Part 3</b>	<b>March 1972</b>
Special Quality tubes	Miscellaneous devices
<b>Part 4</b>	<b>April 1971</b>
Receiving tubes	
<b>Part 5</b>	<b>May 1971</b>
Cathode-ray tubes	
Photo tubes	Associated accessories
Camera tubes	
<b>Part 6</b>	<b>June 1971</b>
Photomultiplier tubes	Radiation counter tubes
Channel electron multipliers	Semiconductor radiation detectors
Scintillators	Neutron generator tubes
Photoscintillators	Photo diodes
	Associated accessories
<b>Part 7</b>	<b>July 1971</b>
Voltage stabilizing and reference tubes	Thyratrons
Counter, selector, and indicator tubes	Ignitrons
Trigger tubes	Industrial rectifying tubes
Switching diodes	High-voltage rectifying tubes
<b>Part 8</b>	<b>August 1971</b>
T. V. Picture tubes	
<b>Part 9</b>	<b>December 1971</b>
Transmitting tubes (Triodes)	Associated accessories
Tubes for R. F. heating (Triodes)	

March 1972

# SEMICONDUCTORS AND INTEGRATED CIRCUITS (RED SERIES)

This series consists of the following parts, issued on the dates indicated.

<b>Part 1</b>	<b>Diodes and Thyristors</b>	<b>September 1971</b>
General	Thyristors, diacs, triacs	
Signal diodes	Rectifier stacks	
Variable capacitance diodes	Accessories	
Voltage regulator diodes	Heatsinks	
Rectifier diodes		
<b>Part 2</b>	<b>Low frequency; Deflection</b>	<b>October 1971</b>
General	Deflection transistors	
Low frequency transistors (low power)	Accessories	
Low frequency power transistors		
<b>Part 3</b>	<b>High frequency; Switching</b>	<b>November 1971</b>
General	Switching transistors	
High frequency transistors	Accessories	
<b>Part 4</b>	<b>Special types</b>	<b>December 1971</b>
General	Photoconductive devices	
Transmitting transistors	Photodiodes	
Microwave devices	Phototransistors	
Field effect transistors	Light emitting diodes	
Dual transistors	Infra-red sensitive devices	
Microminiature devices for thick- and thin-film circuits	Accessories	
<b>Part 5</b>	<b>Linear Integrated Circuits</b>	<b>February 1972</b>
General	Linear integrated circuits	
<b>Part 6</b>	<b>Digital integrated circuits</b>	<b>March 1972</b>
General	MOS (FD family)	
DTL (FC family)	HNIL (FZ family)	
TTL (FJ family)	CML (GH family)	
TTL (GJ family)		

# COMPONENTS AND MATERIALS (GREEN SERIES)

This series consists of the following parts, issued on the dates indicated.

## **Part 1 Circuit Blocks, Input/Output Devices, Electro-mechanical Components \*), Peripheral Devices** **October 1971**

Circuit blocks 40-Series	Input/output devices
Counter modules 50-Series	Electro-mechanical components *)
Norbits 60-Series, 61-Series	Peripheral devices
Circuit blocks 90-Series	

## **Part 2 Resistors, Capacitors** **December 1971**

Fixed resistors	Paper capacitors and film capacitors
Variable resistors	Electrolytic capacitors
Non-linear resistors	Variable capacitors
Ceramic capacitors	

## **Part 3 Radio, Audio, Television** **February 1972**

FM tuners	Audio and mains transformers
Coil assemblies	Television tuners, aerial input assemblies
Piezoelectric ceramic resonators and filters	Components for black and white television
Loudspeakers	Components for colour television
	Deflection assemblies for camera tubes

## **Part 4 Magnetic Materials, Piezoelectric Ceramics** **April 1971**

Ferrites for radio, audio and television	Ferroxcube potcores and square cores
Small coils, assemblies and assembling parts	Ferroxcube transformer cores
	Piezoxide
	Permanent magnet materials

## **Part 5 Memory Products, Magnetic Heads, Quartz Crystals, Microwave Devices, Variable Transformers** **June 1971**

Ferrite memory cores	Quartz crystal units, crystal filters
Matrix planes, matrix stacks	Isolators, circulators
Complete memories	Variable mains transformers
Magnetic heads	

## **Part 6 Electric Motors and Accessories, Timing and Control Devices** **August 1971**

Stepper motors	Small d. c. motors
Small synchronous motors	Tachogenerators and servomotors
Asynchronous motors	Indicators for built-in test equipment

## **Part 7 Circuit Blocks** **September 1971**

Circuit blocks 100kHz Series	Circuit blocks for ferrite core memory drive
Circuit blocks 1-Series	
Circuit blocks 10-Series	

\*) From October 1971 published in Part 1 instead of Part 5.

February 1972

**Argentina**  
FAPESA I.y.C.  
Melincué 2594  
Tel. 50-9941/8155  
BUENOS AIRES

**Australia**  
Philips Industries Ltd.  
Elcoma Division  
95-99 York Street  
Tel. 20223  
SYDNEY, N.S.W. 2000

**Austria**  
WIVEG  
Zieglergasse 6  
Tel. 93 26 22  
A1072 VIENNA

**Belgium**  
M.B.L.E.  
80, rue des Deux Gares  
Tel. 23 00 00  
1070 BRUSSELS

**Brazil**  
IBRAPE S.A.  
Av. Paulista 2073-S/Loja  
Tel. 278-1111  
SAO PAULO, SP

**Canada**  
Philips Electron Devices  
116, Vanderhoof Ave.  
Tel. 425-5161  
TORONTO 17, Ontario

**Chile**  
Philips Chilena S.A.  
Av. Santa Maria 0760  
Tel. 39-40 01  
SANTIAGO

**Colombia**  
SADAPE S.A.  
Calle 19, No. 5-51  
Tel. 422-175  
BOGOTA D.E. 1

**Denmark**  
Miniwatt A/S  
Emdrupvej 115A  
Tel. (01) 69 16 22  
DK-2400 KØBENHAVN NV

**Finland**  
Oy Philips Ab  
Elcoma Division  
Kaivokatu 8  
Tel. 65 80 33  
SF-00100 HELSINKI 10

**France**  
R.T.C.  
La Radiotechnique-Compelec  
Avenue Ledru Rollin 130  
Tel. 357-69-30  
PARIS 11

**Germany**  
Valvo G.m.b.H.  
Valvo Haus  
Burchardstrasse 19,  
Tel. (0411) 3296-1  
2 HAMBURG 1

**Greece**  
Philips S.A. Hellénique  
Elcoma Division  
52, Av. Syngrou  
Tel. 915 311  
ATHENS

**Hong Kong**  
Philips Hong Kong Ltd.  
Components Dept.  
St. George's Building, 21st Fl.  
Tel. K-42 82 05  
HONG KONG

**India**  
IMBELEC Div. of  
Philips India Ltd.  
Band Box House  
254-D, Dr. Annie Besant Road  
Tel. 475 311 to 15  
Worli, BOMBAY 18 (WB)

**Indonesia**  
P.T. Philips-Ralin Electronics  
Elcoma Division  
Djalan Gadjah Mada 18  
Tel. 44 163  
DJAKARTA

**Ireland**  
Philips Electrical (Ireland) Ltd.  
Newstead, Clonskeagh  
Tel. 69 33 55  
DUBLIN 14

**Italy**  
Philips S.p.A.  
Sezione Elcoma  
Piazza IV Novembre 3  
Tel. 69 94  
MILANO

**Japan**  
NIHON PHILIPS  
32nd Fl. World Trade Center Bldg.  
5, 3-chome, Shiba Hamamatsu-cho  
Minato-ku  
Tel. (435) 5204-5  
TOKYO

**Mexico**  
Electrónica S.A. de C.V.  
Varsovia No. 36  
Tel. 5-33-11-80  
MEXICO 6, D.F.

**Netherlands**  
Philips Nederland N.V.  
Afd. Elonco  
Boschdijk, VB  
Tel. (040) 43 33 33  
EINDHOVEN

**New Zealand**  
EDAC Ltd.  
70-72 Kingsford Smith Street  
Tel. 873 159  
WELLINGTON

**Norway**  
Electronica A/S  
Middelthunsgate 27  
Tel. 46 39 70  
OSLO 3

**Peru**  
CADESA  
Jr. Ilo, No. 216  
Appartado 10132  
Tel. 27 7317  
LIMA

**Portugal**  
Philips Portuguesa S.A.R.L.  
Rua Joaquim Antonio de Aguiar 66  
Tel. 68 31 21/9  
LISBOA

**South Africa**  
EDAC (Pty.) Ltd.  
South Park Lane  
New Doornfontein  
Tel. 24/6701-2  
JOHANNESBURG

**Spain**  
COPRESA S.A.  
Balmes 22  
Tel. 232 66 80  
BARCELONA 7

**Sweden**  
ELCOMA A.B.  
Lidingövägen 50  
Tel. 08/67 97 80  
10250 STOCKHOLM 27

**Switzerland**  
Philips A.G.  
Edenstrasse 20  
Tel. 051/44 22 11  
CH-8027 ZUERICH

**Taiwan**  
Philips Taiwan Ltd.  
San Min Building, 3rd Fl.  
57-1, Chung Shan N. Road  
Section 2  
Tel. 553101-5  
TAIPEI

**Turkey**  
Turk Philips Ticaret A.S.  
EMET Department  
Gümüssuyu Cad. 78-80  
Tel. 45.32.50  
Beyoğlu, ISTANBUL

**United Kingdom**  
Mullard Ltd.  
Mullard House  
Torrington Place  
Tel. 01-580 6633  
LONDON WC1E 7HD

**United States**  
North American Philips  
Electronic Component Corp.  
230, Duffy Avenue  
Tel. (516) 931-6200  
HICKSVILLE, N.Y. 11802

**Uruguay**  
Luzilectron S.A.  
Rondeau 1567, piso 5  
Tel. 9 43 21  
MONTEVIDEO

**Venezuela**  
C.A. Philips Venezolana  
Elcoma Department  
Colinas de Bello Monte  
Tel. 72.01.51  
CARACAS



## Special Quality tubes





---

---

# SPECIAL QUALITY TUBES APPLICATION DIRECTIONS

## CONTENTS

1. General
2. Nominal- and spread values of tube characteristics
3. Spread and variation of operating conditions
4. Limiting values
5. Electrode voltage
6. Electrode current
7. Electrode dissipation
8. Heater voltage
9. Supply voltage
10. Resistance values
11. Heater cathode circuit
12. Suppressor grid circuit
13. Control grid circuit
14. Shock and vibration
15. Life
16. Hum
17. Microphony
18. Environmental conditions
19. Mounting and wiring





---

---

# GENERAL OPERATIONAL RECOMMENDATIONS SPECIAL QUALITY TUBES



## 1. GENERAL

Deviations from these directives will be stated on the individual data sheets. If applications are considered not referred to in the data of the relevant tube type extra care should be taken with circuit design to avoid that the tube is overloaded due to unfavourable operating conditions.

Also in the circuit design use might be made of tube characteristics not controlled by the manufacturer. When at a later date batches of tubes are delivered which show different values for these characteristics this may result in unsatisfactory performance of the equipment.

## 2. NOMINAL AND SPREAD VALUES OF TUBE CHARACTERISTICS

Tube data not stated as maximum or minimum values apply to a nominal tube. Equipment design should be based on the characteristics as stated in the data sheets.

With measurements carried out with a small number of tubes and in particular with new tube types it should be taken into account that average and spread values may differ from those obtained at larger quantities.

## 3. SPREAD AND VARIATION OF OPERATING CONDITIONS

Parameter values which define the operating conditions may be subject to spread and/or variation.

3.1 Spread. Spread of a parameter value will result in individual values permanently deviating from the average value. The nominal value is the average of such a number of individual values taken at random that an increase of the number will have a negligible influence on the average value.

3.2 Variation. Variation of a parameter value is the change of value occurring as a function of time.

The nominal value is the average value calculated over a period such that a prolongation of that period will have a negligible influence on the average value.

---

---

#### 4. LIMITING VALUES

Limiting values should be used in accordance with the applicable rating system as defined by I.E.C. publication 134.

Reference may be made to one of the following 3 rating systems.

- 4.1 Absolute maximum rating system. Absolute maximum ratings are limiting values of operating and environmental conditions applicable to any electronic device of a specified type as defined by its published data, and should not be exceeded under the worst probable conditions.

These values are chosen by the device manufacturer to provide acceptable serviceability of the device, taking no responsibility for equipment variations, environmental variations, and the effects of changes in operating conditions due to variations in the characteristics of the device under consideration and of all other electronic devices in the equipment.

The equipment manufacturer should design so that, initially and throughout life, no absolute-maximum value for the intended service is exceeded with any device under the worst probable operating conditions with respect to supply voltage variation, equipment components variation, equipment control adjustment, load variations, signal variation, environmental conditions, and variations in characteristics of the device under consideration and of all other electronic devices in the equipment.

- 4.2 Design-maximum rating system. Design-maximum ratings are limiting values of operating and environmental conditions applicable to a bogey electronic device of a specified type as defined by its published data, and should not be exceeded under the worst probable conditions.

These values are chosen by the device manufacturer to provide acceptable serviceability of the device, taking responsibility for the effects of changes in operating conditions due to variations in the characteristics of the electronic device under consideration.

The equipment manufacturer should design so that, initially and throughout life, no design-maximum value for the intended service is exceeded with a bogey device under the worst probable operating conditions with respect to supply-voltage variation, equipment component variation, variation in characteristics of all other devices in the equipment, equipment control adjustment, load variation, signal variation and environmental conditions.

- 4.3 Design-centre rating system. Design-centre ratings are limiting values of operating and environmental conditions applicable to a bogey electronic device of a specified type as defined by its published data, and should not be exceeded under normal conditions.

---

---

These values are chosen by the device manufacturer to provide acceptable serviceability of the device in average applications, taking responsibility for normal changes in operating conditions due to rated supply-voltage variation, equipment component variation, equipment control adjustment, load variation, signal variation, environmental conditions, and variations in the characteristics of all electronic devices.

The equipment manufacturer should design so that, initially, no design-centre value for the intended service is exceeded with a bogey electronic device in equipment operating at the stated normal supply-voltage.



4.4 In addition to the limiting values given in the individual data sheets the directives in the following paragraphs should be observed.

## 5. ELECTRODE VOLTAGE

Two limiting values of electrode voltage are given

a)  $V_{a0}$ ,  $V_{g20}$  etc.

These values are continuously permitted at zero anode current and with cold cathode. They are also permitted as peak voltage during operation when a D.C. voltage in combination with a superimposed A.C. voltage are present at the electrode provided that the peak value coincides with approx. zero electrode current.

b)  $V_a$ ,  $V_{g2}$  etc.

These values are D.C. components of the electrode voltages and are continuously permitted.

In circuits with automatic gain control the D.C. component may exceed the published limiting value with 20% provided that the increase of voltage is solely resulting from the gain control and that the maximum voltage coincides with approximately zero electrode current.

## 6. ELECTRODE CURRENT

The limiting values  $I_a$ ,  $I_{g2}$  etc. are the D.C. components of the electrode currents calculated over 20 ms.

If no specific pulse ratings apply a peak value  $2xI_a$ ,  $I_{g2}$  etc. is permitted for 10 ms maximum.

## 7. ELECTRODE DISSIPATION

The limiting values  $W_a$ ,  $W_{g2}$  etc. are the average values at an averaging time of 1 s. If for audio output tubes a limiting value  $W_{g2p}$  is given this value applies to operation with speech and music excitation and should not be exceeded if measured with a sinusoidal signal and at maximum output. If load values vary during operation care should be taken not to exceed the limiting values of  $W_a$  and  $W_{g2}$ .

---

---

## 8. HEATER VOLTAGE

The average heater voltage should be the specified nominal value. Variation of the heater voltage exceeding the range of  $V_f \text{ nom.} \pm 5\%$  will shorten the tube life.

## 9. SUPPLY VOLTAGE

If design centre ratings apply the variation of supply voltage should not exceed the range of the nominal value  $\pm 10\%$ .

## 10. RESISTANCE VALUES

If design centre ratings apply the spread of resistance values should be limited such that with all other conditions nominal no electrode voltages or currents will exceed the range of their nominal values  $\pm 5\%$ .

## 11. HEATER CATHODE CIRCUIT

Limiting values of  $V_{kf}$  apply to the positive and negative D.C. component of the voltage between the cathode and any of the heater terminals.

The limiting peak value is 2 times the rated D.C. value with a maximum of 315 V.

At the published values only the risk of breakdown is considered. No conclusions with respect to hum should be drawn from this figure.

To minimise the influence of variation and spread of the leakage current between heater and cathode the resistance of the external heater to cathode circuit should not exceed 20 k $\Omega$  in R.F. circuits where frequency stability or preservation of wave form is required and in A.F. circuits with low signal level.

However, when the D.C. value of  $V_{kf}$  is at least 3 times the RMS value of the heater voltage an external resistance between heater and cathode of maximum 220 k $\Omega$  can be used provided that the hum voltage which may then occur across the cathode resistor can be accepted for the application considered.

## 12. SUPPRESSOR GRID CIRCUIT

The voltage of the suppressor grid with respect to the cathode should not be positive and should not exceed 35 V.

The external resistance in the suppressor grid circuit should not exceed 5 k $\Omega$ .



---

---

### 13. CONTROL GRID CIRCUIT

In the interest of low hum and noise the resistance in the control grid circuit should be as low as possible.

The limiting value of the grid resistance given in the data sheets is chosen so that the negative grid current which may occur during life will not result in unacceptable tube operation.

If only the limiting value of the resistance for fixed bias operation is given and stabilizing elements are used in the circuit, this limiting value may be multiplied by the D.C. feedback factor obtained by these stabilizing elements to a maximum of 20 M $\Omega$ .

### 14. SHOCK AND VIBRATION

The conditions specified under "shock and vibration resistance" are test conditions applied to assess the mechanical quality of the tube.

These conditions are not intended to be used as normal operating conditions.

### 15. LIFE

In the interest of a satisfactory life performance and especially where long life is required the tube should be operated under the conditions quoted under "operating conditions". Spread and variation of operating conditions should be limited as much as possible. In this respect the operation with high cathode resistor values and positive grid bias is to be preferred.

Variation of heater voltage should not exceed the limits indicated in item 8 or if applicable, the limiting values specified in the individual tube data sheets.

### 16. HUM

A.F. application. If in the data an equivalent hum voltage on the control grid is given this value applies to the following conditions:

1. The frequency of the heater voltage is 50 c/s + 3% harmonics 500 c/s.
2. The hum voltage is measured as the equivalent RMS value with a filter of 45-550 c/s with a straight response curve.
3. The value of the impedance in the control grid circuit ( $Z_{g1}$ ) does not exceed the value published with respect to hum.
4. The impedance in the cathode circuit is as specified with respect to hum. If no value is given the hum voltage across the cathode resistor is considered to be negligible.
5. The heater terminals and supply leads are screened with respect to the other electrode terminals unto the tube bottom.
6. The A.C. voltage between cathode and heater does not exceed the value corresponding with the method of earthing of the heater circuit specified with respect to hum.

---

---

## 17. MICROPHONY

The performance of an equipment with respect to microphony is defined by the following conditions:

1. The microphony performance of the relevant tube type.
2. The acceleration applied to the tube during operation.
3. The A.F. amplification between the input of the tube and the output of the applied circuit.

In many applications a tube is subject to accelerations applied via the tube socket or, however to a less extent, via the surrounding air.

The acceleration may be produced by a loudspeaker or by the operation of a motor or of a switch.

Measurements to reduce the acceleration should be directed to mechanical or acoustical isolation of the tube.

If mechanical isolation is required the application of a flexible tube holder is advised.

## 18. ENVIRONMENTAL CONDITIONS

- 18.1 Atmospheric pressure. Ratings apply to operation at normal atmospheric pressure at altitudes below 3000 m.

In order to avoid the risk of external flashovers it is advised to consult us if tubes have to be operated at lower pressures.

- 18.2 Bulb and base temperature. The bulb and the base temperature are defined as the highest temperature at any place on the bulb or the base.

The base temperature should not exceed 165 °C.

If the maximum permitted base or bulb temperature is exceeded life performance may deteriorate. Adequate cooling should therefore be observed and may be obtained by convection, radiation or conduction.

A tube mounted in free air may be cooled by convection and by radiation. In order to obtain the most efficient cooling a free circulation of air should be assured around the tube and neighbouring bodies should be maintained at low temperature.

These neighbouring bodies should preferably approach the condition of a perfect black body.

With the design of screening- or retaining devices free circulation of cooling air should be permitted and reflection of heat back on to the bulb must be avoided.

Where the forementioned requirements cannot be met due to mechanical limitation or high altitude or where the temperature of the air available for circulation is too high, forced air cooling or conduction can be adopted. In some cases it may be necessary to reduce the electrode dissipation.

If a good thermal contact can be maintained between the glass surface of the tube and the heat conducting mass on which it is mounted and if this mass is at a sufficiently low temperature, cooling by air circulation may not be necessary. This method is particularly suitable for tubes with flying leads when the mechanical arrangements are not likely to allow free air cooling.

- 
- 
- 18.3 Flashover. To avoid insulation breakdown due to ionization or tracking at high electrode voltages adequate ventilation is required.  
High voltage terminals should not have sharp or pointed edges.

## 19. MOUNTING AND WIRING

- 19.1 Mounting position. A tube may be mounted in any position. The vertical position however, is recommended.

- 19.2 Pins and sockets. Subminiature tubes employ semi-rigid pins.

To ensure that these pins are straight before insertion into the tube socket use may be made of a pin straightening tool. It is recommended both in wired and in printed circuits to use sockets with floating contacts. The connections to these floating contacts should be as flexible as possible.

Where the floating contacts are rigidly attached to the contact tags, a wiring jig should be used to ensure that the socket contacts are in the correct position to receive a tube after the socket has been wired. The use of too stiff wiring will destroy the advantage provided by the float of the contacts and may hold the contact so far out of position as to result in damage of the tube base.

No connections should be made to a pin marked i.c.

- 19.3 Flexible leads. Where tubes with flexible leads are employed without plug in sockets and are held in position by means of the envelope, such support should not cause undue stress on the leads.

- 19.4 Soldering. Where the leads are connected by soldering they should not be sharply bent close to the glass. It should also be avoided that the glass to metal seal is overheated.

The leads therefore should not be soldered nearer than 5 mm to the glass and use may be made of a thermal shunt between the glass and the soldering point.

- 19.5 Magnetic and electrostatic fields. To avoid unwanted effects of magnetic or electrostatic fields a tube should be positioned or shielded as to reduce such effects to a minimum.

- 19.6 Retaining devices. If measures are required to prevent a tube being shaken out of the holder a retaining device may be used.

Care should then be taken not to exceed the maximum permitted bulb temperature.

- 19.7 Floating electrodes. All tube electrodes should have a D.C. connection to the cathode. An interruption of the D.C. connection between cathode and earth or heater and earth may introduce heater-cathode breakdown and should be avoided.



## S.Q. TUBE

Special quality pentode designed for use as A.F. and R.F. amplifier, output tube, oscillator a.o.




### QUICK REFERENCE DATA

Life test	10 000 hours	
Base	Loctal	
Heating	Indirect A.C. or D.C. Series or parallel supply	
Heater voltage	$V_f$	20 V
Heater current	$I_f$	125 mA
Anode current	$I_a$	16 mA
Mutual conductance	S	6.5 mA/V
Equivalent noise resistance	$R_{eq}$	1200 $\Omega$
Hum voltage	$V_{g_{eq}}$	10 $\mu V_{RMS}$

### DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Loctal

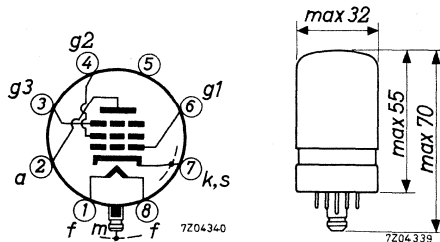

**CHARACTERISTICS**

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage	$V_f$	20			V
Heater current	$I_f$	125	120 - 130		mA
Anode supply voltage	$V_{ba}$	225			V
Grid No.2 supply voltage	$V_{bg2}$	155			V
Grid No.3 voltage	$V_{g3}$	0			V
Cathode resistor	$R_k$	250			$\Omega$
Anode current	$I_a$	16	13.5 - 19	min. 11.5	mA
Grid No.2 current	$I_{g2}$	3	2 - 4		mA
Mutual conductance	S	6.5	5.5 - 7.8	min. 4.5	mA/V
Internal resistance	$R_i$	250	min. 200		k $\Omega$
Amplification factor	$\mu_{g2g1}$	19			
<u>Negative grid current</u>	$-I_g$		max. 0.5	max. 1.0	$\mu A$
<u>Output power</u>	$W_o$	1.5			W
Anode load resistance $R_{a\sim} = 10\text{ k}\Omega$					
Total distortion $d_{tot} = 10\%$					
<u>Cathode heating time</u>		26	19 - 33		sec
Anode current $I_a = 4\text{ mA}$					
<u>Equivalent noise resistance</u>					
R. F.	$R_{eq}$	1200	max.2000		$\Omega$
R. F. connected as triode	$R_{eq}$	650			$\Omega$
A. F. (500 - 3000 Hz)	$R_{eq}$	5000			$\Omega$

**CHARACTERISTICS** (continued)

		II	III	
<u>Insulation between cathode and heater</u>	$I_{kf}$	max. 0.5	max. 1.0	$\mu A$
Voltage between cathode and heater $V_{kf} = 50$ V (cathode positive)				
<u>Insulation between two electrodes</u>	$R_{ins}$	min. 1000	min. 300	$M\Omega$
Voltage between electrodes $V = 50$ V				
<u>Hum voltage</u>	$V_{geq}$	max. 10		$\mu V_{RMS}$
Grid No. 1 resistor $R_{g1} = 500$ k $\Omega$				
Cathode by-pass capacitor $C_k = 100$ $\mu F$				
Heater centre earthed				

**CAPACITANCES**

		I	II	
Grid No. 1 to grid No. 2, grid No. 3, cathode, heater and screen	$C_{g1/g2g3kfs}$	8.5	7.5 - 9.5	pF
Grid No. 1 to grid No. 2, grid No. 3, cathode, heater and screen	$C_{g1/g2g3kfs}$	10.5		pF
Cathode current $I_k = 19$ mA				
Anode to grid No. 2, grid No. 3, cathode, heater and screen	$C_{a/g2g3kfs}$	6.0	4.5 - 7.7	pF
Grid No. 1 and anode to grid No. 3, grid No. 2, cathode, heater and screen	$C_{g1a/g3g2kfs}$		max. 16	pF
Anode to grid No. 1	$C_{ag1}$	14	max. 18	mpF
Grid No. 1 to grid No. 2	$C_{g1g2}$	3		pF
Grid No. 2 to grid No. 3	$C_{g2g3}$	2.2		pF
Grid No. 1 to cathode and screen	$C_{g1/ks}$	4.5		pF
Anode to grid No. 3	$C_{ag3}$	1.2		pF
Grid No. 1 to heater	$C_{g1f}$	20	max. 40	mpF
Anode to heater	$C_{af}$	120		mpF
Cathode and screen to heater	$C_{ks/f}$	7		pF

**CAPACITANCES** (continued)

As triode (Grid No. 2 and grid No. 3 connected to anode)

		I	II	
Grid No. 1 to cathode, heater and screen	$C_{g1}/kfs$	5	max. 6	pF
Anode, grid No. 2 and grid No. 3 to cathode, heater and screen	$C_{ag_2g_3}/kfs$	7.5	max. 9	pF
Anode, grid No. 2 and grid No. 3 to grid No. 1	$C_{ag_2g_3}/g_1$	3.2	max. 4	pF

**LIFE**

Production samples are tested to be within the end of life values (column III) under the following conditions during 10 000 hours.

Heater voltage	$V_f$	20	V
Anode supply voltage	$V_{ba}$	225	V
Grid No. 2 supply voltage	$V_{bg_2}$	155	V
Grid No. 3 voltage	$V_{g_3}$	0	V
Cathode resistor	$R_k$	250	$\Omega$

**LIMITING VALUES** Design centre rating system.



Anode voltage	$V_{a_0}$	max.	550	V
	$V_a$	max.	300	V
Anode dissipation	$W_a$	max.	4	W
Grid No. 3 voltage	$V_{g_3_0}$	max.	550	V
	$V_{g_3}$	max.	300	V
Grid No. 3 dissipation	$W_{g_3}$	max.	1	W
Grid No. 2 voltage	$V_{g_2_0}$	max.	550	V
	$V_{g_2}$	max.	300	V
Grid No. 2 dissipation	$W_{g_2}$	max.	1	W
Dissipation of anode, grid No. 2 and grid No. 3 (triode connected)	$W_{a+g_2+g_3}$	max.	5	W
Grid No. 1 voltage	$-V_{g_1}$	max.	100	V
Grid No. 1 dissipation	$W_{g_1}$	max.	50	mW
Cathode current	$I_k$	max.	30	mA







**LIMITING VALUES** (continued)



Grid No. 1 resistor Anode dissipation > 1.5 W	$R_{g_1}$	max.	0.5 M $\Omega$
Grid No. 1 resistor Anode dissipation < 1.5 W	$R_{g_1}$	max.	3 M $\Omega$
Voltage between cathode and heater	$V_{kf}$	max.	120 V
Bulb temperature (Metal envelope)	$t_{bulb}$	max.	120 °C



Heater voltage: The average heater voltage should be 20 V.  
Variations of the heater voltage exceeding the range of 19 V to 21 V will shorten the tube life.  
The tolerance of heater current (column II) should be taken into account.

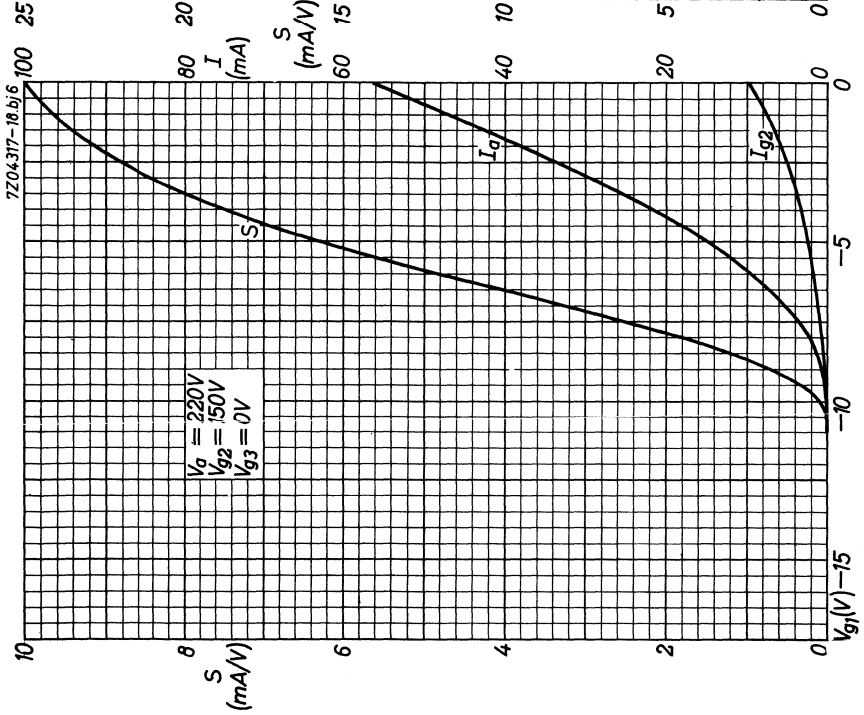
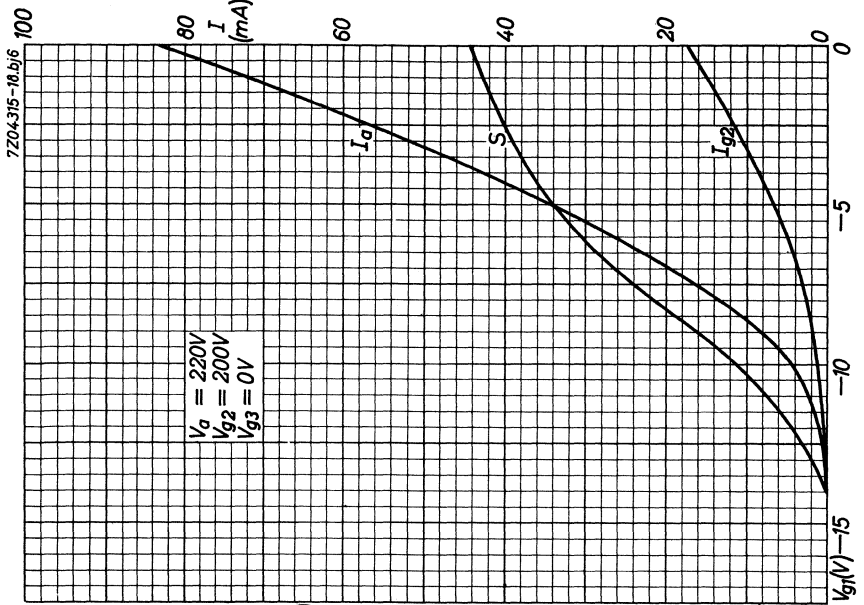


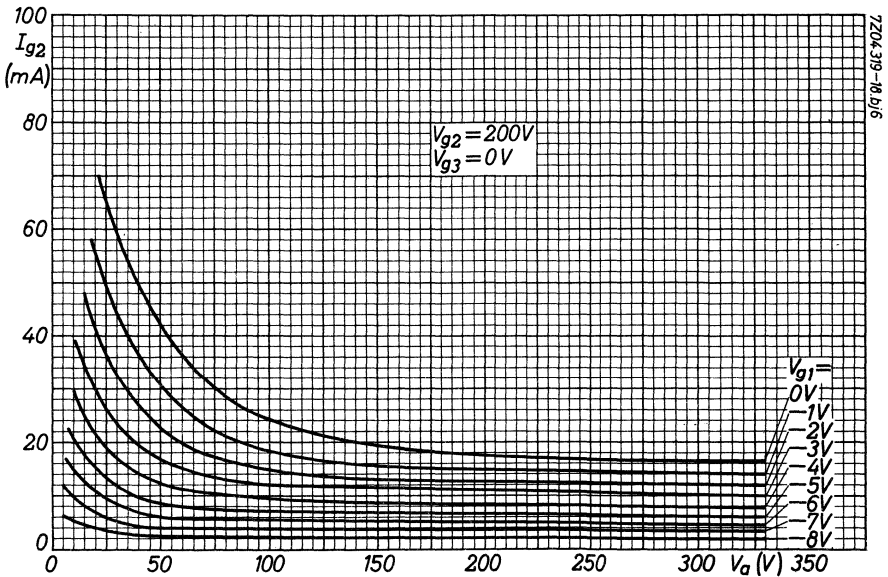
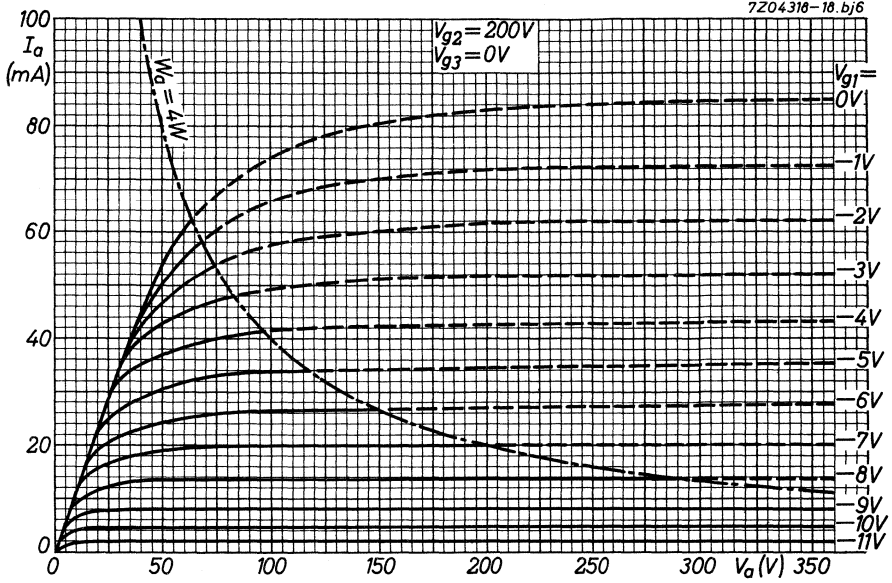


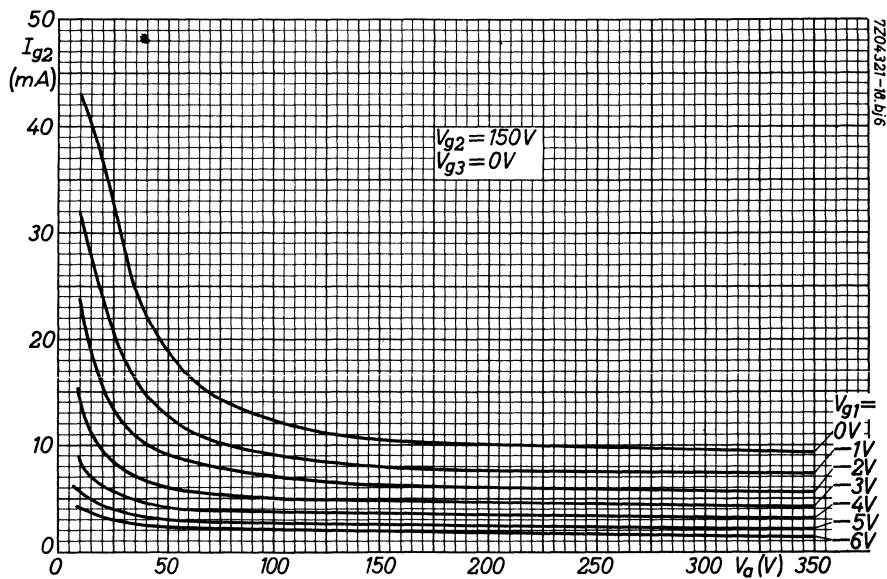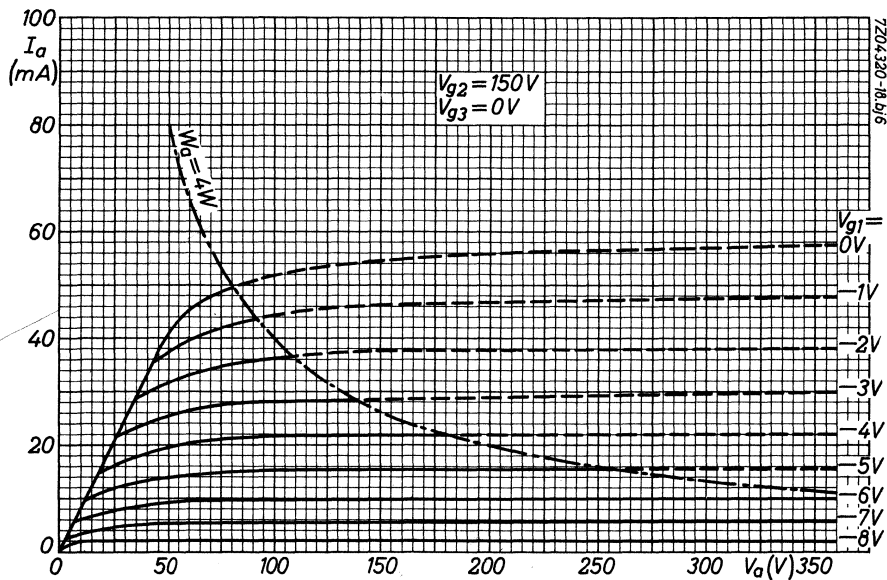

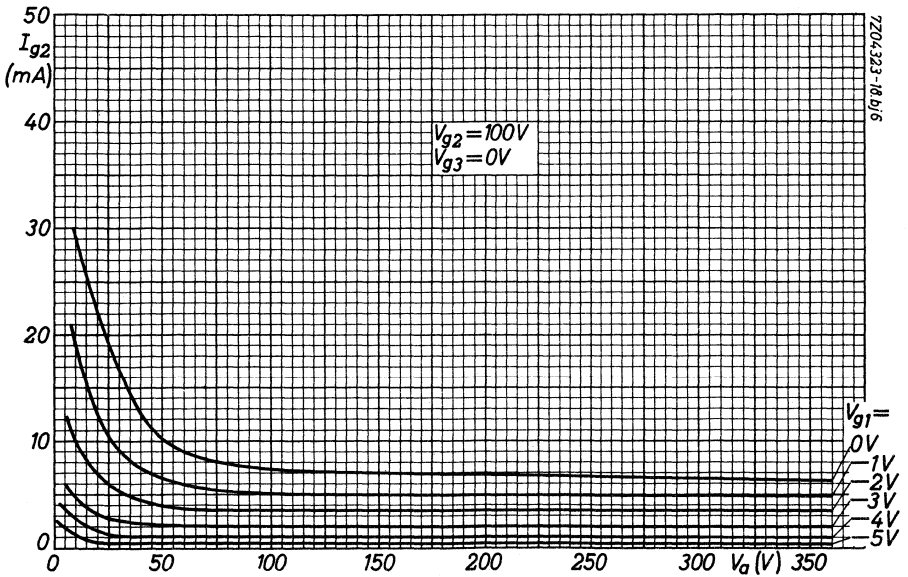
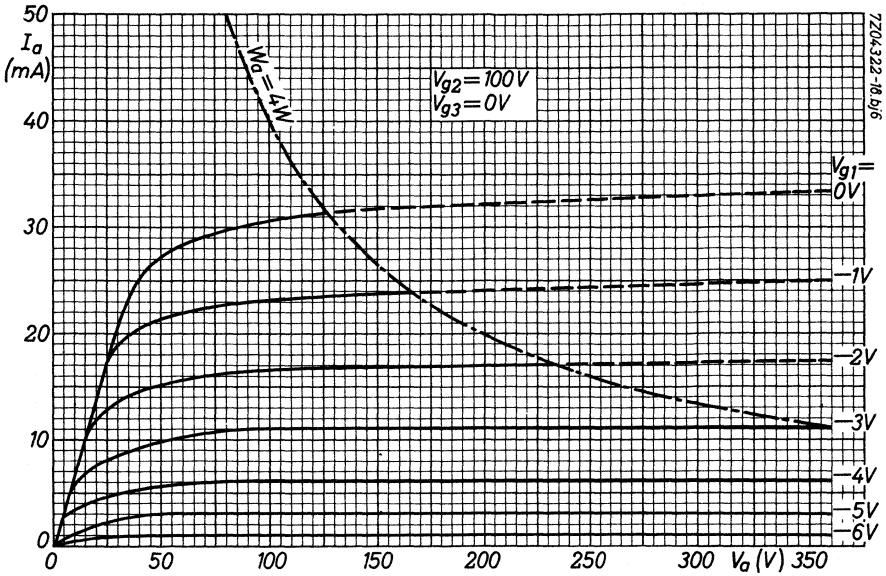


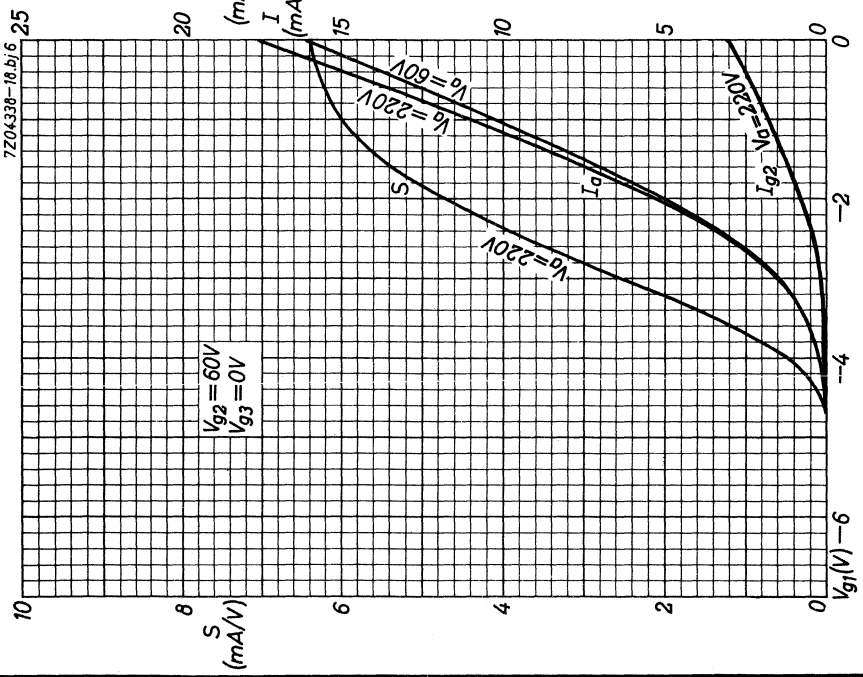
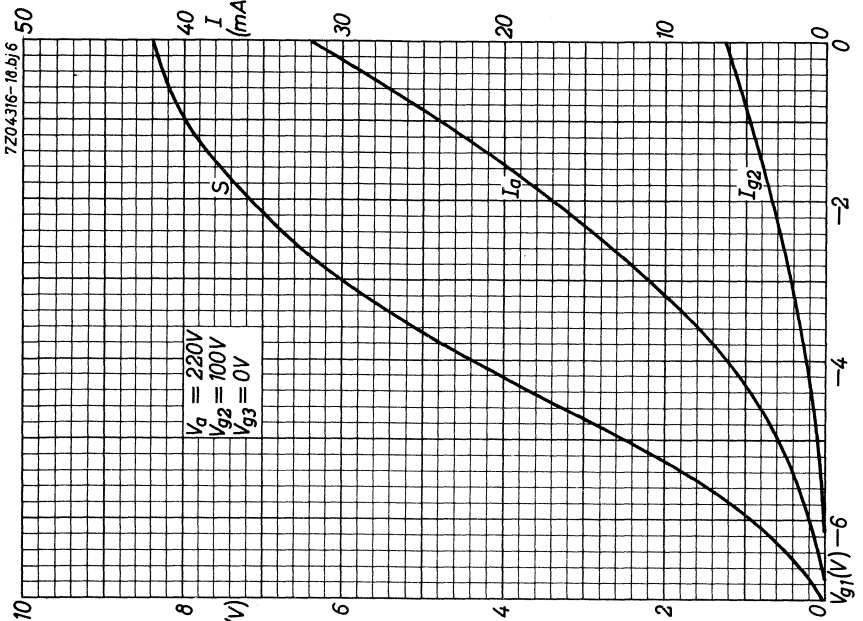


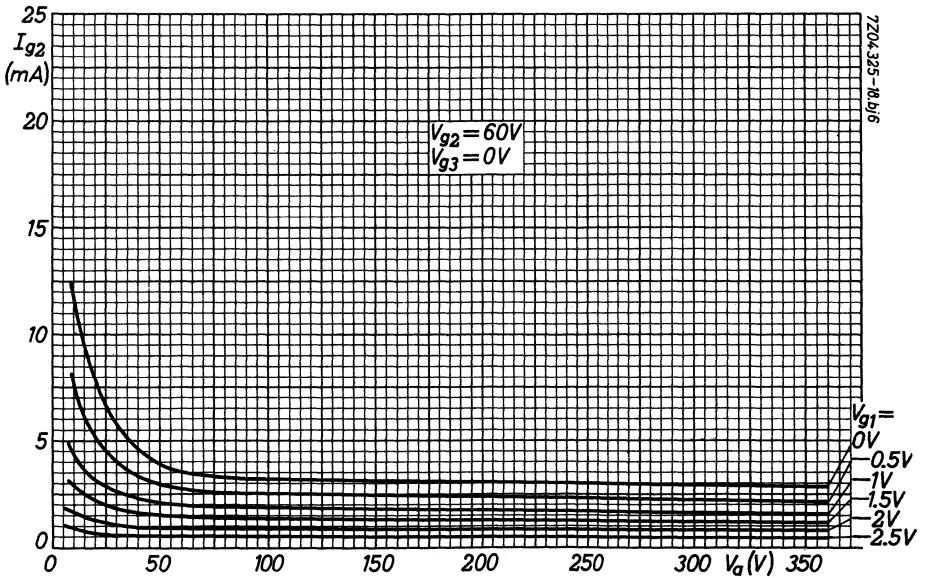
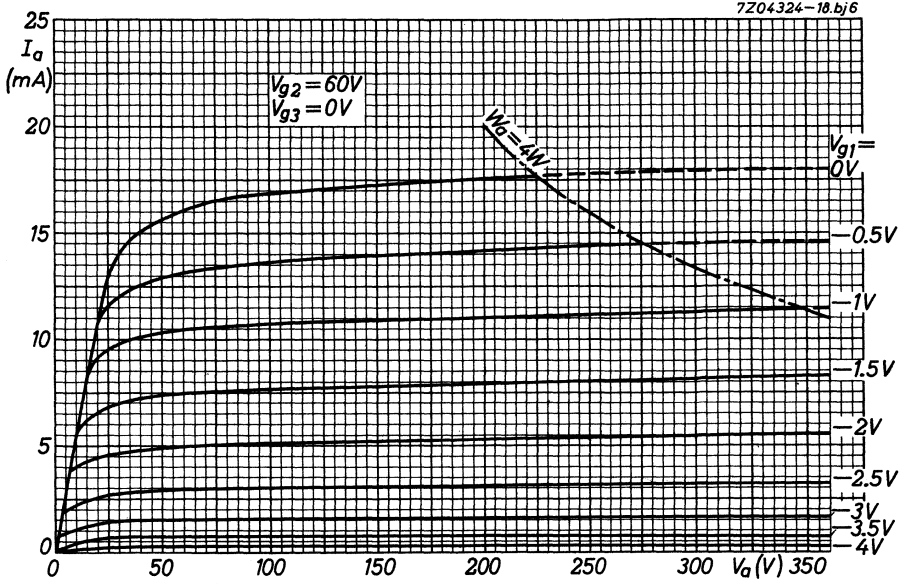


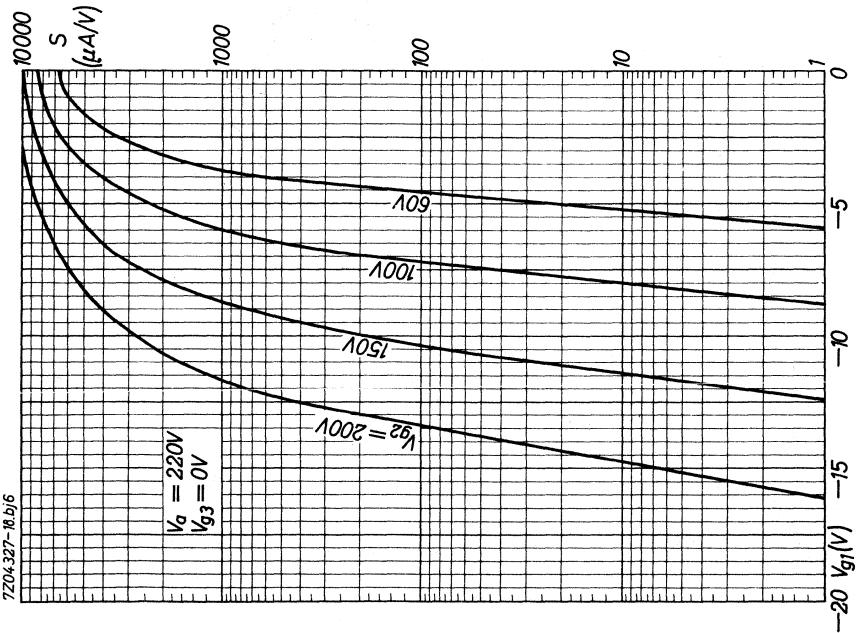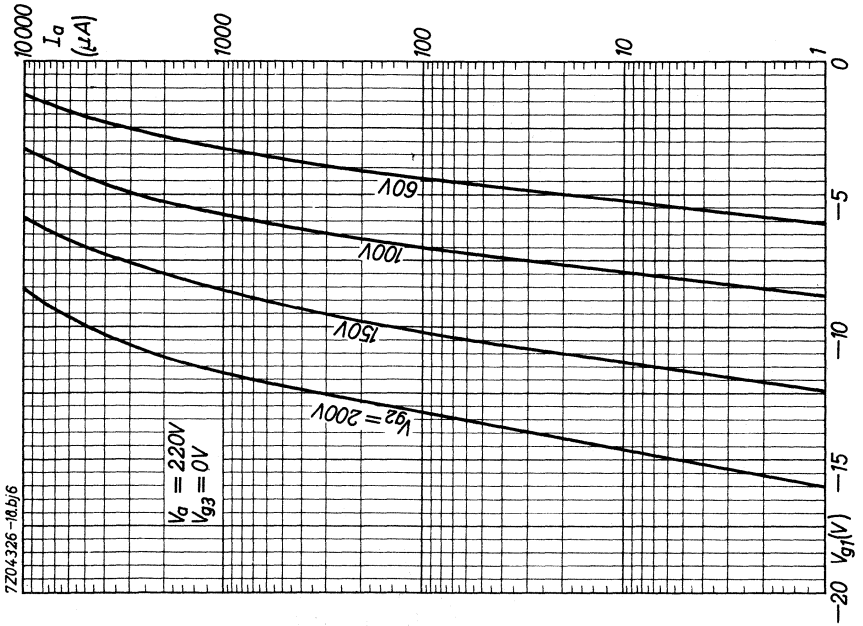




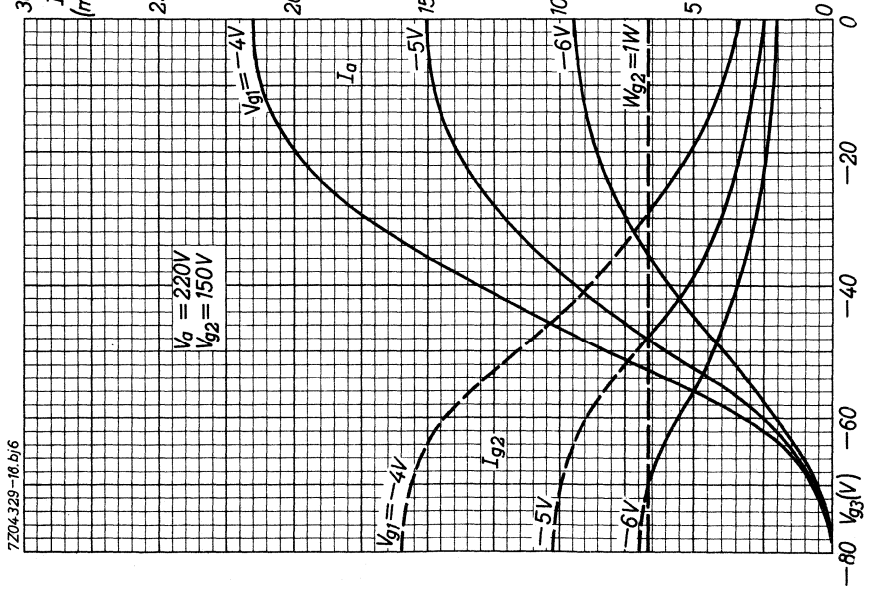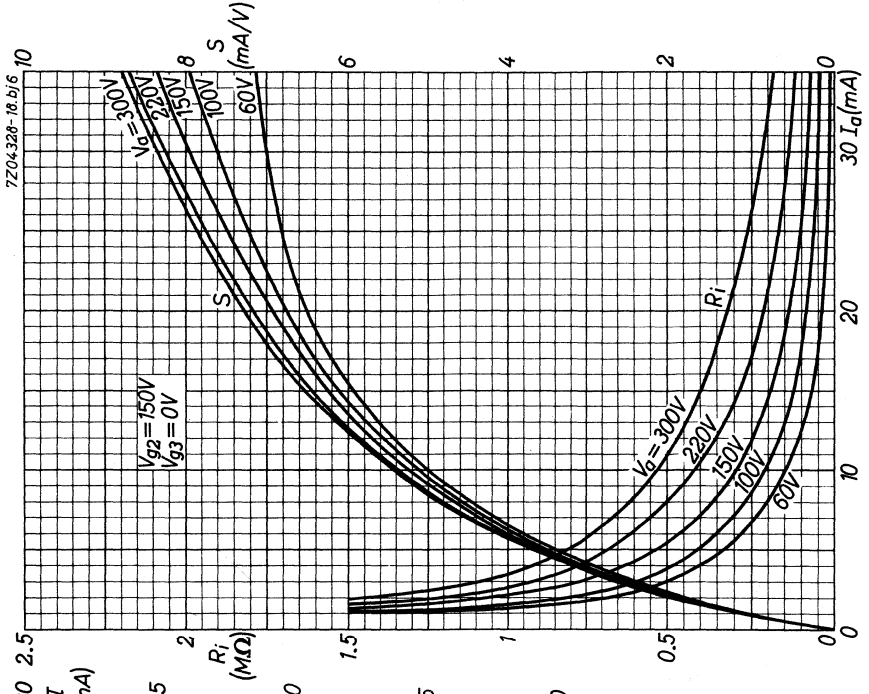

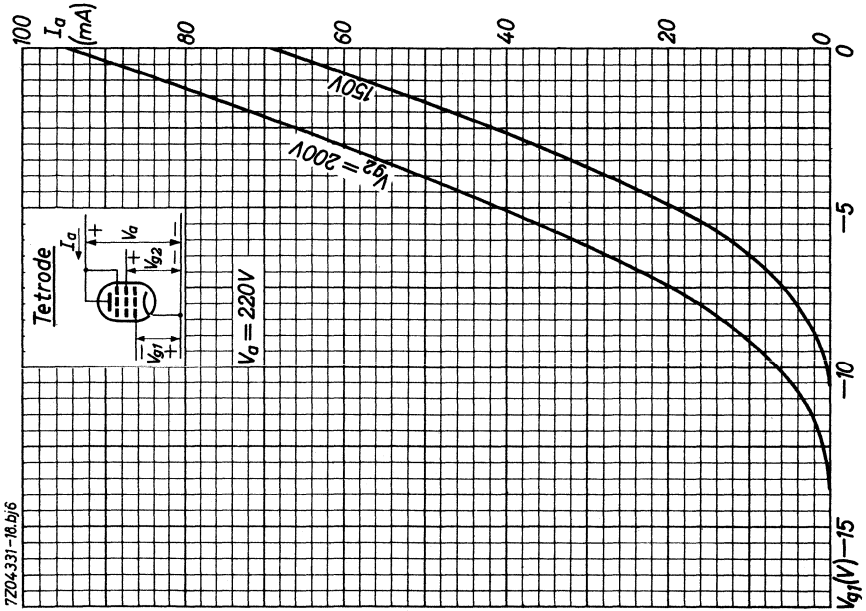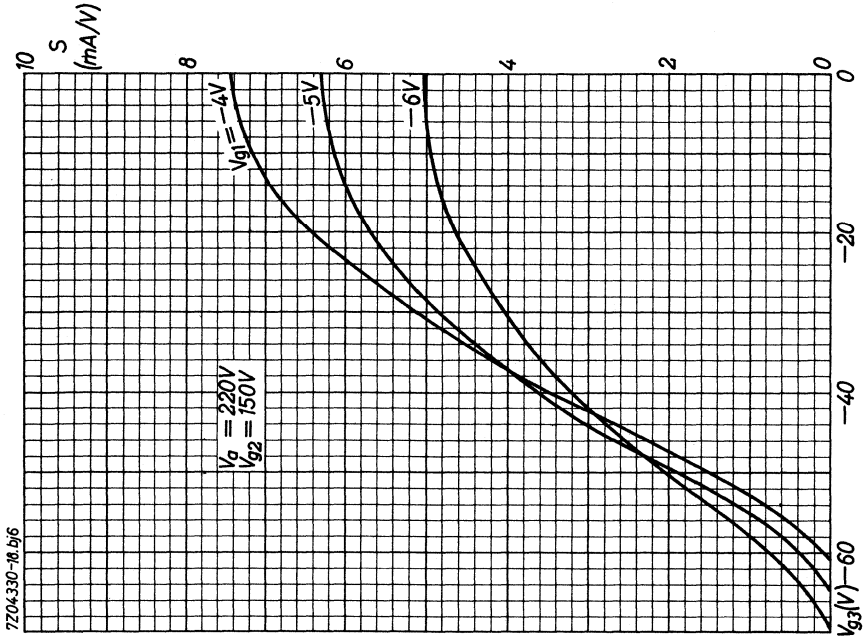


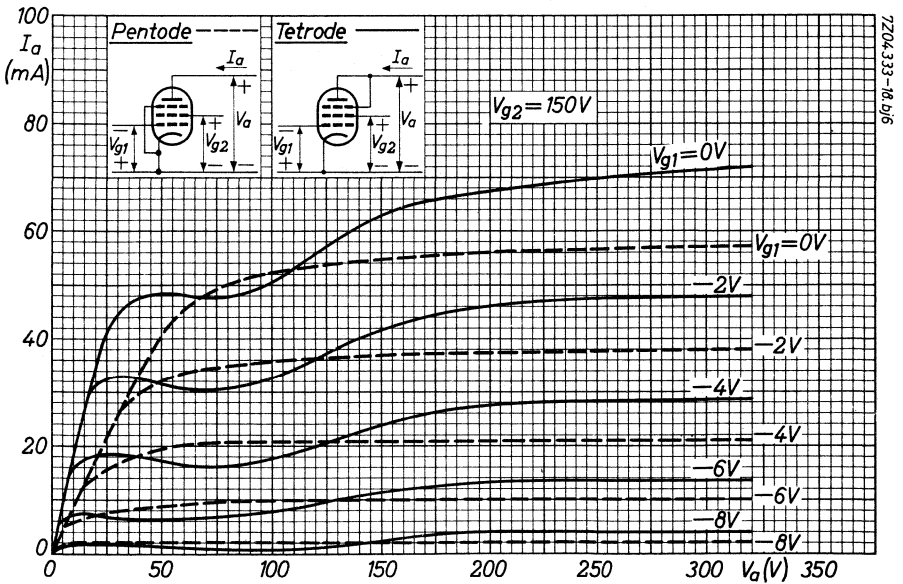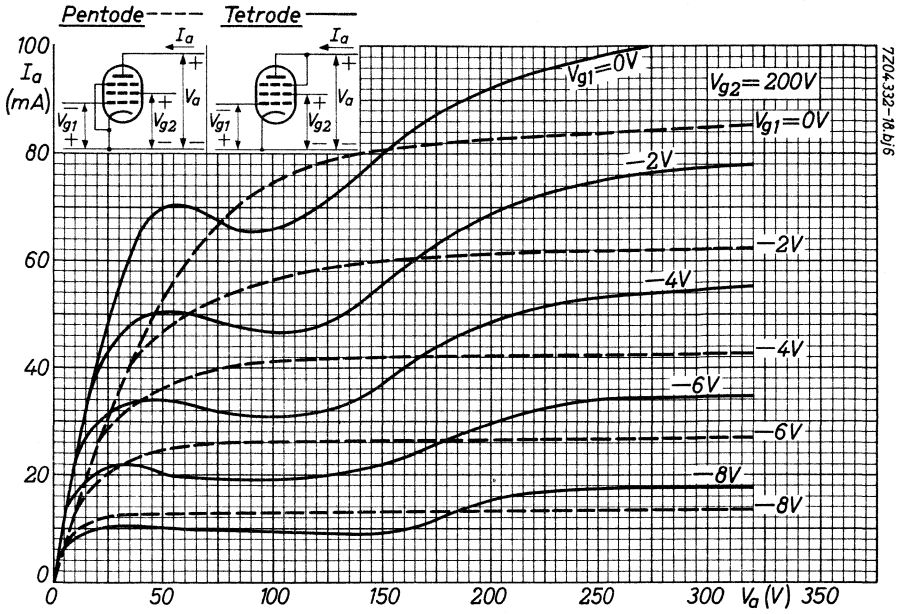


7204.334-18.bj6

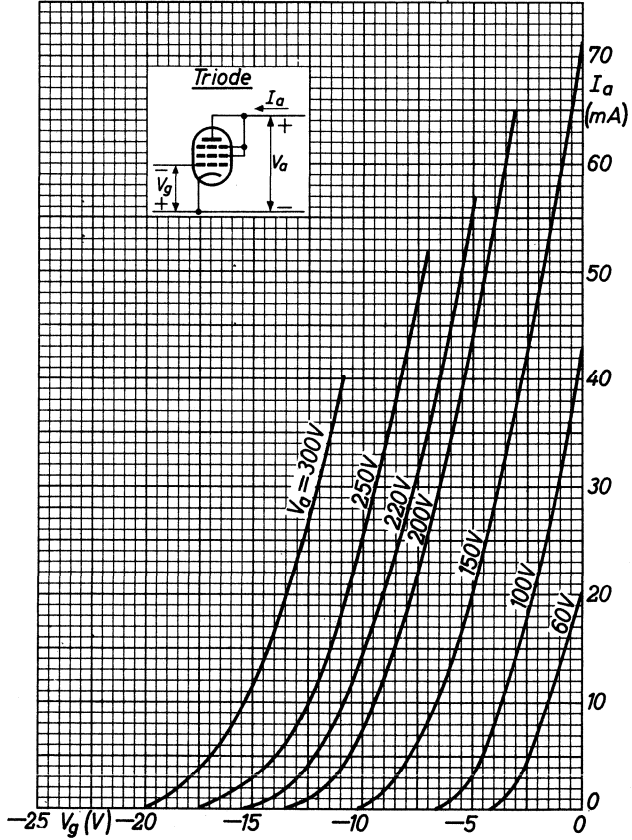


7Z04335-18.bj6

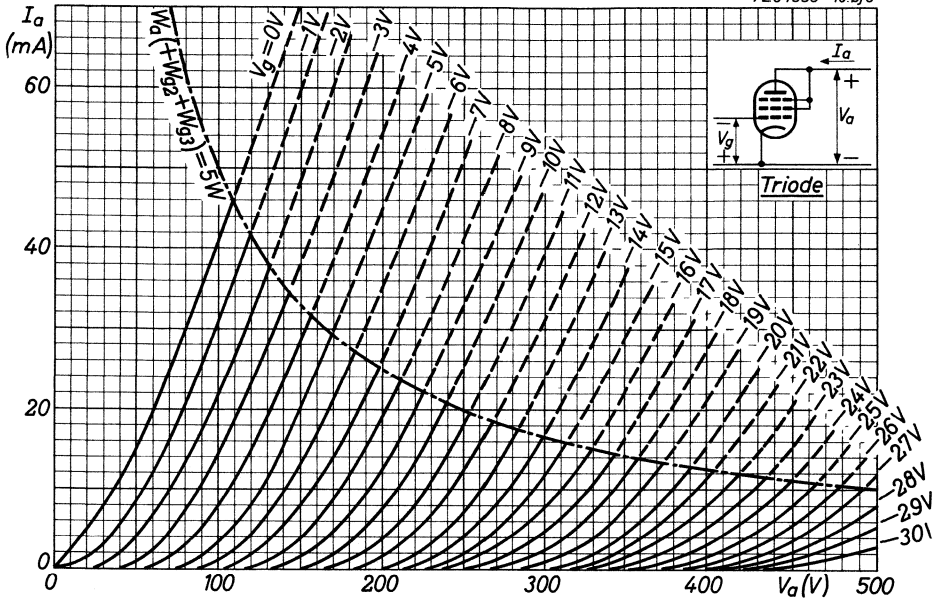

7Z04336-18.bj6

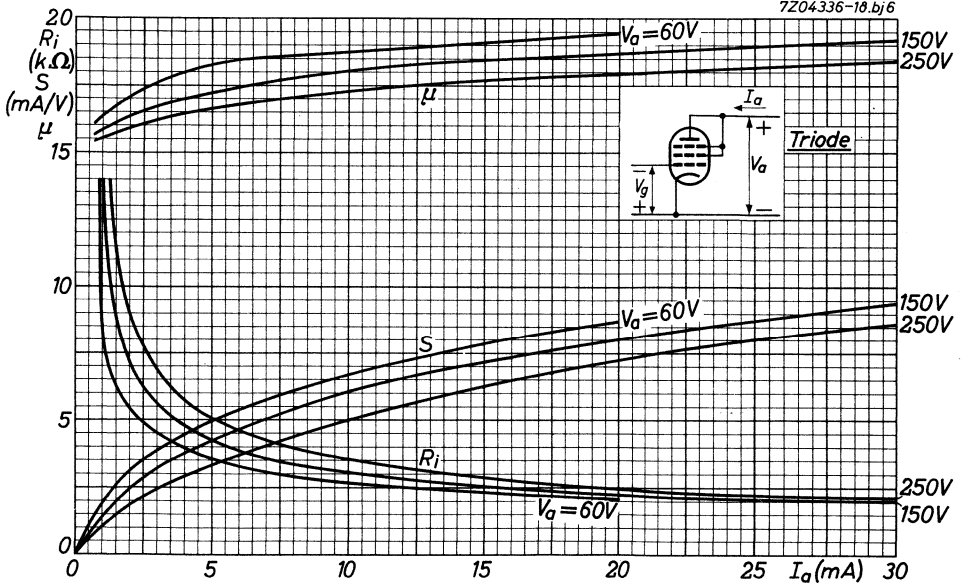

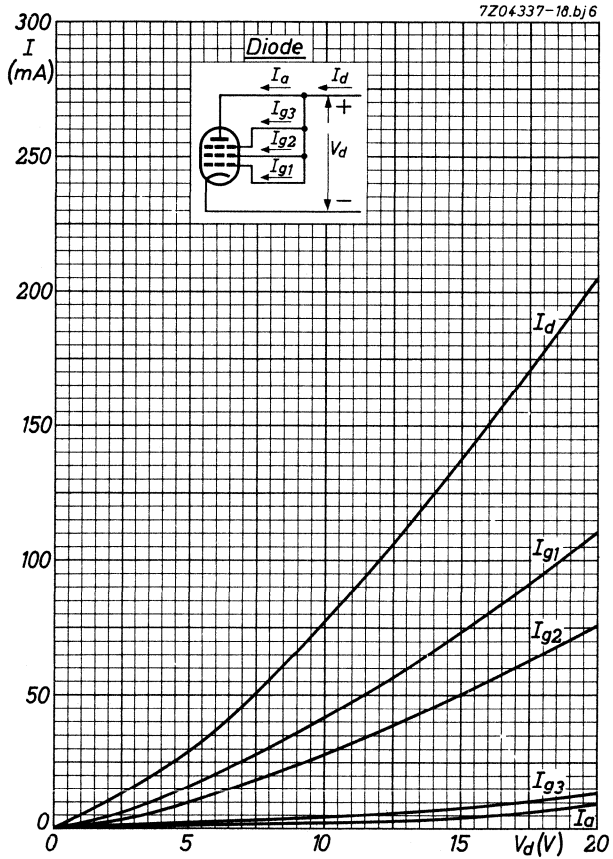

## S.Q. TUBE

Special quality pentode designed for use as wide band amplifier



### QUICK REFERENCE DATA

Life test	10 000 hours	
Low interface resistance		
Base	Noval. Gold plated pins	
Heating	Indirect A.C. or D.C.; Parallel supply	
Heater voltage	$V_f$	6.3 V
Heater current	$I_f$	315 mA
Anode current	$I_a$	22 mA
Mutual conductance	S	35 mA/V
Equivalent noise resistance	$R_{eq}$	150 $\Omega$

### DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval



**CHARACTERISTICS**

Column I Nominal value or setting of the tube  
 II Range values for equipment design: Initial spread  
 III Range values for equipment design: End of life

		I	II	III	
Heater voltage	$V_f$	6.3			V
Heater current	$I_f$	315	299	331	mA
Anode supply voltage	$V_{ba}$	190			V
Grid No.2 supply voltage	$V_{bg_2}$	160			V
Grid No.3 voltage	$V_{g_3}$	0			V
Grid No.1 supply voltage	$+V_{bg_1}$	10			V
Cathode resistor	$R_k$	400			$\Omega$
Anode current	$I_a$	22	21 - 23	min. 20	mA
Grid No.2 current	$I_{g_2}$	6.0	5.4 - 6.6		mA
Internal resistance	$R_i$	120			k $\Omega$
Mutual conductance	S	35	30 - 40	min. 24.5	mA/V
Amplification factor	$\mu_{g_2g_1}$	80			.
<u>Negative grid current</u>	$-I_{g_1}$		max. 0.3	max. 1.0	$\mu A$
<u>Equivalent noise resistance</u>	$R_{eq}$	150			$\Omega$
<u>Input resistance</u>	$R_{g_1}$	1			k $\Omega$
Frequency = 100 MHz pin No.1 connected to pin No. 3					
$\frac{S}{2\pi} \cdot \frac{1}{C_{g_1(hot)} + C_a + 5 \text{ pF}}$		230			MHz
<u>Noise factor</u>	F	7			dB
Frequency = 100 MHz (Adapted to minimum noise)					
<u>Phase angle of slope</u>	$\varphi_s$	22			o
Frequency = 100 MHz					



**CHARACTERISTICS** (continued)

<u>As triode (grid No.2 connected to anode)</u>		I	II	
Anode supply voltage	$V_{ba}$	160		V
Grid No.3 voltage	$V_{g3}$	0		V
Grid No.1 supply voltage	$+V_{bg1}$	10		V
Cathode resistor	$R_k$	470		$\Omega$
Anode current	$I_a$	24		mA
Mutual conductance	S	41		mA/V
Amplification factor	$\mu$	77		
Internal resistance	$R_i$	1.9		k $\Omega$
<u>Equivalent noise resistance</u>	$R_{eq}$	65		$\Omega$
<u>Insulation resistance</u> between anode and other electrodes Voltage between electrodes = 300 V	$R_{ins}$		min. 500	M $\Omega$
<u>Insulation resistance</u> between grid No.1 and other electrodes Voltage between electrodes = 50 V	$R_{ins}$		min. 200	M $\Omega$
<u>Leakage current</u> between cathode and heater Voltage between cathode and heater = 100 V	$I_{kf}$		max. 5	$\mu$ A
<b>CAPACITANCES</b>				
<u>Without external shield.</u>				
Grid No.1 to grid No.2, grid No.3, cathode, heater and screen	$C_{g1/g2g3kfs}$	10	9- 11	pF
Grid No.1 to grid No.2, grid No.3, cathode, heater and screen Cathode current = 28 mA	$C_{g1/g2g3kfs}$	17		pF
Anode to grid No.2, grid No.3, cathode, heater and screen	$C_{a/g2g3kfs}$	2.1	1.8- 2.4	pF



**CAPACITANCES** (continued)

		I	II	
Anode to grid No.1	$C_{ag_1}$		max. 40	mpF
Anode to cathode	$C_{ak}$		max. 50	mpF
Anode to cathode and grid No.2	$C_{a/kg_2}$	0.32	0.28-0.36	pF
Anode to cathode, grid No.2 and grid No.3	$C_{a/kg_2g_3}$	2.0	1.7- 2.3	pF
Anode to heater	$C_{af}$		max. 100	mpF
Grid No.1 to cathode	$C_{g_1k}$	6.8	6.1- 7.5	pF
Grid No.1 to cathode and grid No.2	$C_{g_1/kg_2}$	9.5	8.5-10.5	pF
Grid No.1 to cathode, grid No.2 and grid No.3	$C_{g_1/kg_2g_3}$	10	9- 11	pF
<u>With external shield</u>				
Grid No.1 to grid No.2, grid No.3, cathode, heater and screen	$C_{g_1/g_2g_3kfs}$	10.1	9.1-11.1	pF
Grid No.1 to grid No.2, grid No.3, cathode, heater and screen Cathode current = 28 mA	$C_{g_1/g_2g_3kfs}$	17.1		pF
Anode to grid No.2, grid No.3, cathode, heater and screen	$C_{a/g_2g_3kfs}$	3.3	2.9- 3.7	pF
Anode to grid No.1	$C_{ag_1}$		max. 35	mpF
<u>As triode. Without external shield.</u>				
Grid No.3 connected to cathode				
Grid No.1 to grid No.3, cathode, heater and screen	$C_{g_1/g_3kfs}$	7.3		pF
Anode and grid No.2 to grid No.3, cathode, heater and screen	$C_{ag_2/g_3kfs}$	3.1		pF
Anode and grid No.2 to grid No.1	$C_{ag_2/g_1}$	2.7		pF
<u>As triode. Without external shield</u>				
Grid No.3 connected to anode				
Grid No.1 to cathode, heater and screen	$C_{g_1/kfs}$	6.7		pF
Anode, grid No.2 and grid No.3 to cathode, heater and screen	$C_{ag_2g_3/kfs}$	1.0		pF
Anode, grid No.2 and grid No.3 to grid No.1	$C_{ag_2g_3/g_1}$	3.3		pF

**LIFE**

Production samples are tested to be within the end of life values (column III) during 10 000 hours.

**LIMITING VALUES** (Design centre rating system, if not otherwise specified)

Anode voltage		$V_{a0}$	max.	400	V
		$V_a$	max.	220	V
Anode dissipation	Des. centre	$W_a$	max.	4.2	W
	Abs. max.	$W_a$	max.	4.5	W
Grid No.2 voltage		$V_{g20}$	max.	400	V
		$V_{g2}$	max.	180	V
Grid No.2 dissipation	Des. centre	$W_{g2}$	max.	1.0	W <sup>1)</sup>
	Abs. max.	$W_{g2}$	max.	1.1	W <sup>1)</sup>
Anode plus grid No.2 dissipation (triode connected)		$W_{a+g2}$	max.	4.5	W
Grid No.1 voltage		$-V_{g1}$	max.	30	V
		$+V_{g1}$	max.	0	V
Cathode current	Des. centre	$I_k$	max.	30	mA
	Abs. max.	$I_k$	max.	33	mA
Grid resistor (Automatic bias)		$R_{g1}$	max.	0.5	M $\Omega$
Voltage between cathode and heater					
cathode positive		$V_{kf}$	max.	120	V
cathode negative		$V_{kf}$	max.	60	V
Bulb temperature	Abs. max.	$t_{bulb}$	max.	190	$^{\circ}C$



Heater voltage: The average heater voltage should be 6.3 V.



Variations of the heater voltage exceeding the range of 6.0 V to 6.6 V will shorten the tube life.


The tolerance of heater current (column II) should be taken into account.

<sup>1)</sup> Care should be taken not to exceed the rated  $W_{g2}$  values due to switching of positive supply voltages.

If the cathode is shunted by a capacitance  $> 10 \mu F$  a series resistor of minimum 1 k $\Omega$  should be inserted in the grid No.1 lead.

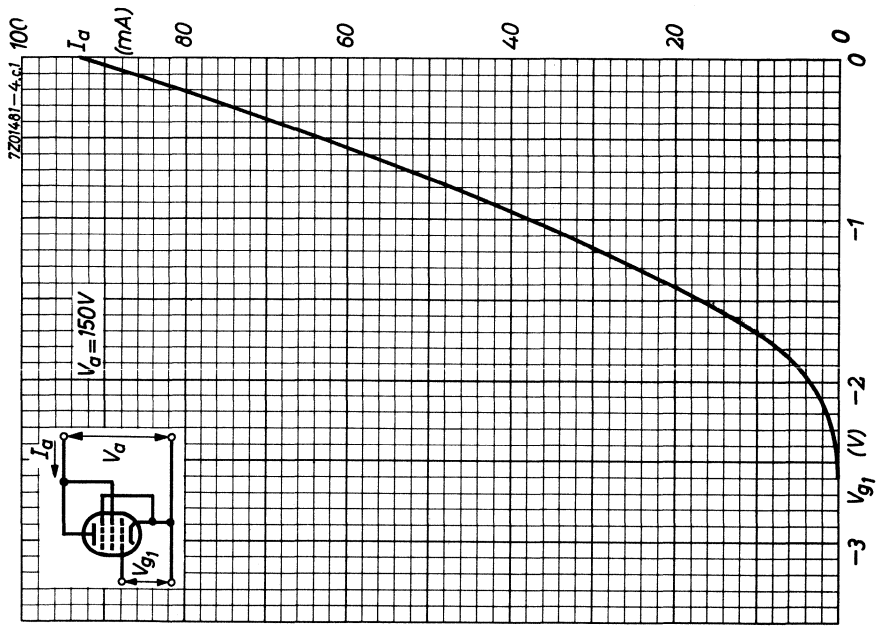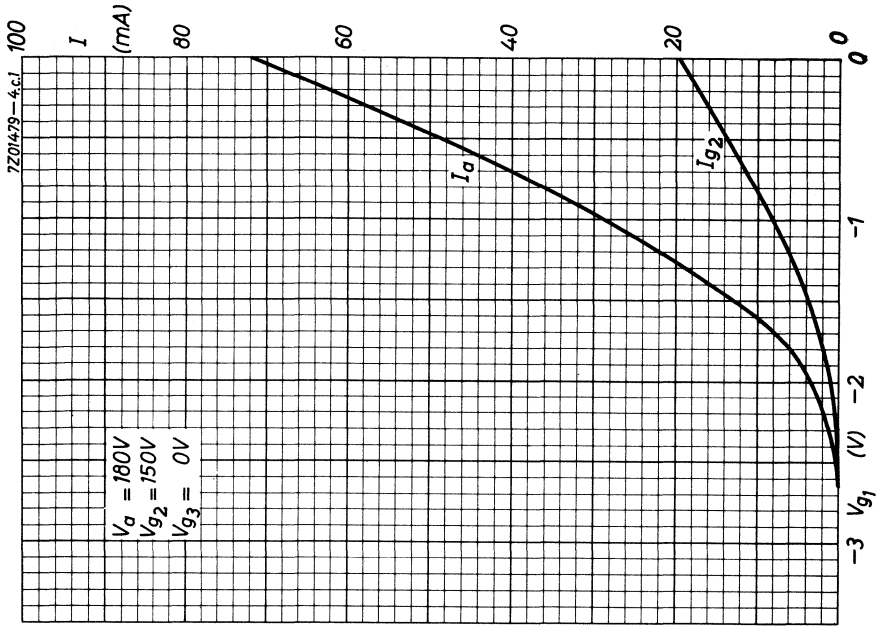

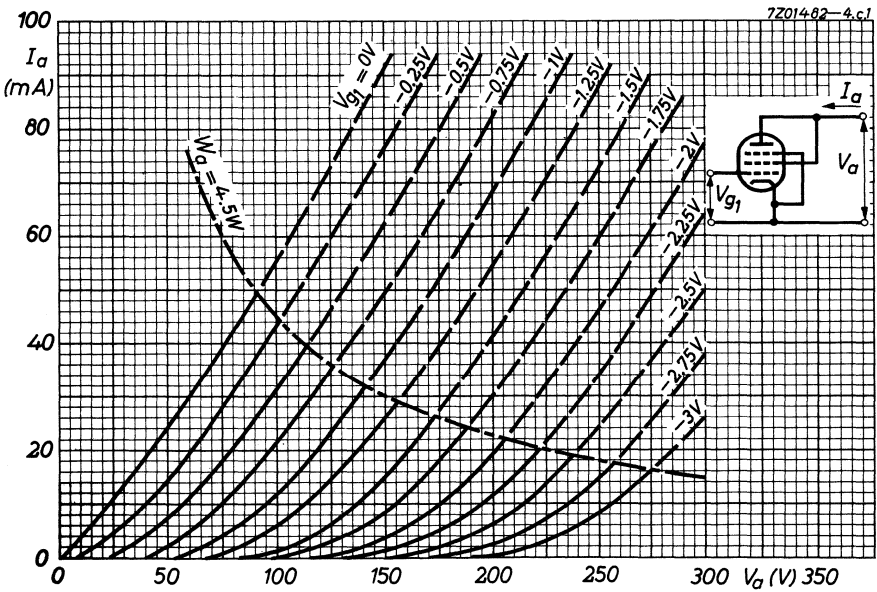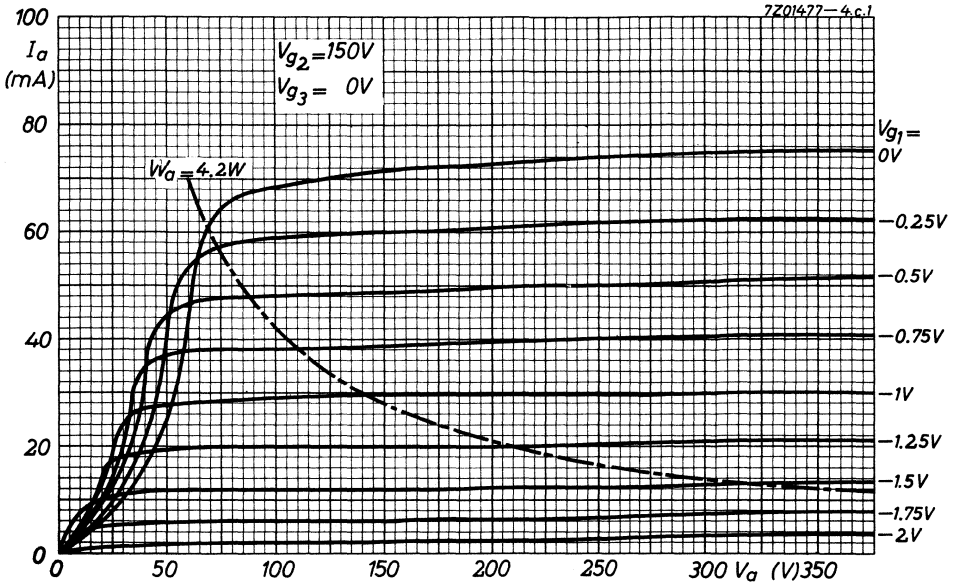

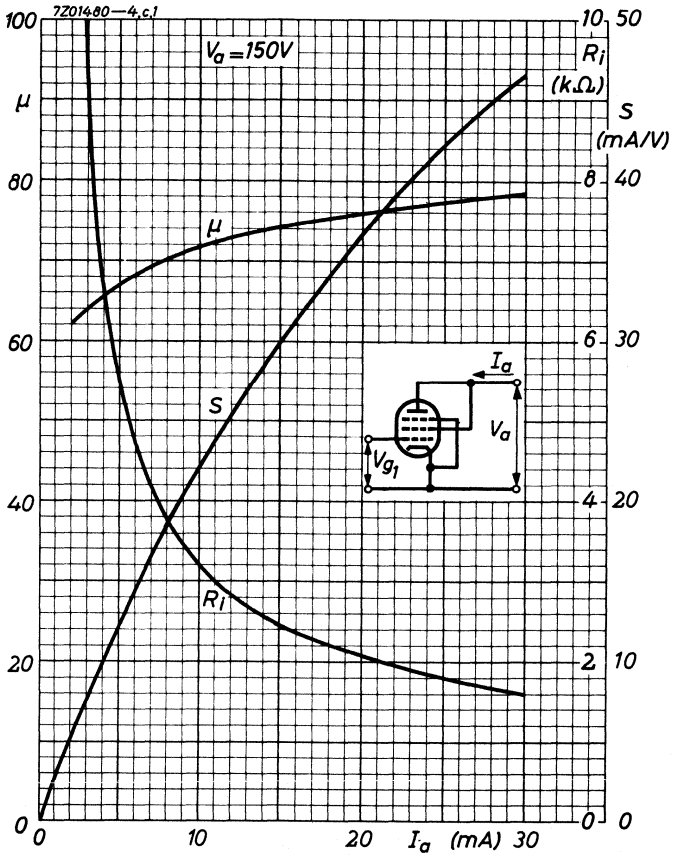

## POWER PENTODE


Pentode intended for use as power amplifier.

QUICK REFERENCE DATA	
Life test	500 hours
Base	Subminiature
Heating	Direct Battery supply
Heater voltage	$V_f$ 1.25 V
Heater current	$I_f$ 25 mA

## DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Subminiature

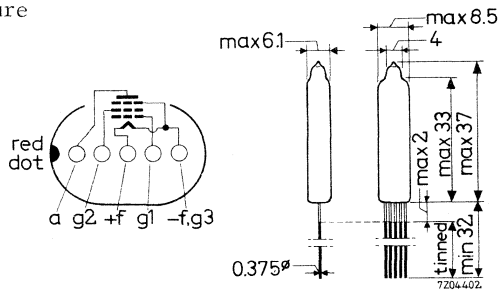

Leads should not be soldered nearer than 5 mm to the seal

Leads should not be bent nearer than 1.5 mm to the seal.

**CHARACTERISTICS**

Anode voltage	$V_a$	22.5 V
Grid No.2 voltage	$V_{g2}$	22.5 V
Anode current	$I_a$	600 $\mu A$
Grid No.2 current	$I_{g2}$	150 $\mu A$
Grid No.1 voltage	$-V_{g1}$	2.2 V
Mutual conductance	$S$	430 $\mu A/V$
Internal resistance	$R_i$	100 $k\Omega$
Amplification factor	$\mu_{g2g1}$	5

**CAPACITANCE**

Anode to grid No.1	$C_{ag1}$	max. 0.15 pF
--------------------	-----------	--------------

**LIMITING VALUES** (Design centre rating system)

Anode voltage	$V_a$	max. 45 V
Grid No.2 voltage	$V_{g2}$	max. 45 V
Anode dissipation	$W_a$	max. 100 mW
Grid No.2 dissipation	$W_{g2}$	max. 25 mW
Cathode current	$I_k$	max. 2.3 mA

**OPERATING CHARACTERISTICS**As class A amplifier (one tube)

Anode voltage	$V_a$	22.5 V
Grid No.2 voltage	$V_{g2}$	22.5 V
Grid No.1 voltage	$-V_{g1}$	2.2 V
Anode resistance	$R_{a\sim}$	37.5 $k\Omega$
Anode current ( $V_i = \text{zero}$ )	$I_a$	600 $\mu A$
Grid No.1 current ( $V_i = \text{zero}$ )	$I_{g2}$	150 $\mu A$
Input voltage	$V_i$	1.3 $V_{RMS}$
Output power	$W_o$	5 mW
Distortion	$d$	10 %



## S.Q. INDICATOR TUBE



High-input impedance, special-quality indicator tube for indication of the output level of flip flops in computer circuits etc.

### QUICK REFERENCE DATA

Life test	10 000 hours	
Mechanical quality	Shock and vibration resistant	
Base	Subminiature	
Heating	Direct	
	A. C. or D. C.; parallel supply	
Filament voltage	$V_f$	1.0 V
Filament current	$I_f$	30 mA
"On" - "off" control voltage	$\Delta V$	min. 1.4 V

### DIMENSIONS AND CONNECTIONS

Dimensions in mm



Connections should not be soldered nearer than 5 mm from the seal.  
Leads should not be bent nearer than 1.5 mm from the seal.

1) Length of the light bar.

2) Leads without letter indication are cut at the outer surface of the seal.

## CHARACTERISTICS

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Filament voltage	$V_f$	1.0			V
Filament current	$I_f$	30	24-36		mA
Anode voltage	$V_a$	50			V
Grid resistor	$R_g$	100			k $\Omega$
Grid supply voltage <sup>1)</sup> (maximum light output)	$V_{bg}$	0			V
Anode current	$I_a$	585	430-740	min. 250	$\mu$ A
Zero light output is ensured when grid supply voltage <sup>1)</sup> 2) is below	$V_{bg}$	-3	-3	-3	V
Anode current at $V_{bg} = -3$ V <sup>2)</sup>	$I_a$		max. 5	max. 5	$\mu$ A
Insulation resistance between two electrodes Voltage between two electrodes = 50 V	$R_{ins}$		min.100		M $\Omega$

## SHOCK RESISTANCE

The tube has been subjected 5 times in each of 4 positions to an acceleration of 500 g in an NRL shock machine with the hammer lifted over an angle of 30°.

These test conditions should not be considered as normal operating conditions.

## LIFE

Production samples are checked for the end of life values (column III) under the following conditions during 10 000 hours:

Filament voltage	$V_f$	1.0 V <sub>RMS</sub>
Anode voltage	$V_a$	50 V
Grid supply voltage	$V_{bg}$	0 V <sup>1)</sup>
Grid resistor	$R_g$	100 k $\Omega$

<sup>1)</sup> Voltage with respect to the midtap of the filament transformer.

<sup>2)</sup> The residual electron current may be concentrated on one spot which then may be visible in dark surroundings. This effect cannot be mistaken for the indicator being in the "on" condition.

**LIMITING VALUES** (Absolute max. rating system)

Anode voltage	$V_{a0}$	max.	100 V
	$V_a$	max.	65 V
Anode current	$I_a$	max.	850 $\mu$ A
Grid supply voltage, $R_g = 100\text{ k}\Omega \pm 10\%$	$V_{bg}$	max.	0 V
$R_g = 1\text{ M}\Omega \pm 10\%$	$V_{bg}$	max.	6 V
Grid voltage	$-V_g$	max.	50 V
Grid resistor	$R_g$	max.	1.1 M $\Omega$
		min.	0.09 M $\Omega$

Filament voltage: The average filament voltage should be 1.0 V.  
 Variations exceeding 0 or - 10 % from nominal will shorten tube life.

**APPLICATION NOTE**

The visibility of the phosphorescent light produced by the anode when the indicator tube is "on" depends on the grid voltage prevailing in that condition and the illumination level of the surroundings. With  $V_g = -3$  V for zero light output ("off" condition of the tube), the visibility is best when  $\Delta V = 3$  V ( $\Delta V$  is the difference between the "high" and "low" voltages of the flip-flop) but an unambiguous indication is still obtained at  $\Delta V = 1.4$  V under nominal conditions and a low level of ambient light. With still smaller values of drive voltage a pre-amplifier is required.

Figs.1 and 2 show typical arrangements for negative and positive logic, respectively.

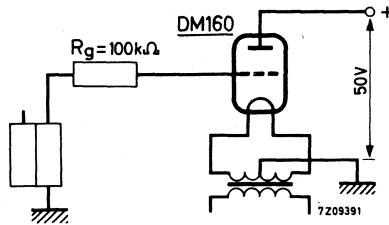


Fig.1 Digital read-out circuit with DM160 connected to negative logic circuit which uses flip-flops equipped with p-n-p transistors. This circuit can be used for all types of flip-flops with p-n-p transistors with the "high" level near zero volt and a "low" level below -3 volt.

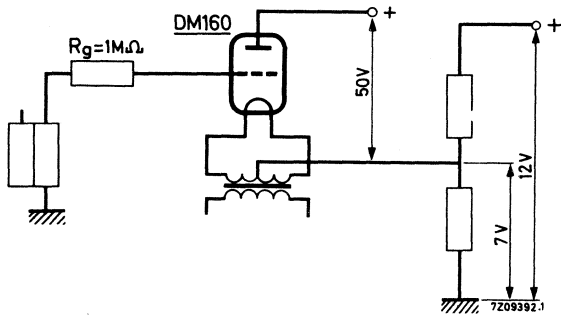


Fig.2 Digital read-out circuit with DM160 connected to positive logic circuit which uses a type of flip-flops equipped with n-p-n transistors and of which the "high" output level may be above +7.5 V and the "low" level near 0 V.  $R_g$  protects the tube against too large anode currents and too large positive grid currents when the grid supply voltage exceeds the cathode potential.

When the minimum of  $\Delta V$  lies below 3 V the spread in the "high" level of the flip-flop will give rise to an extra spread in the brightness of the phosphorescent light. When undesirable this spread may be reduced by clamping the grid voltage, see Fig.3.



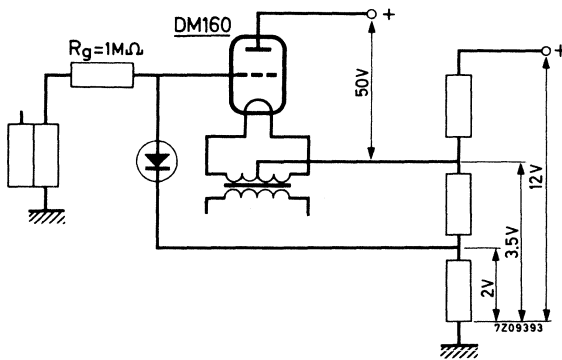



Fig.3 As Fig.2; but for a type of flip-flop with a "high" voltage level between +2.0 V and +7.0 V and "low" level between 0 V and +0.5 V; with clamping of the grid voltage.

7Z09396

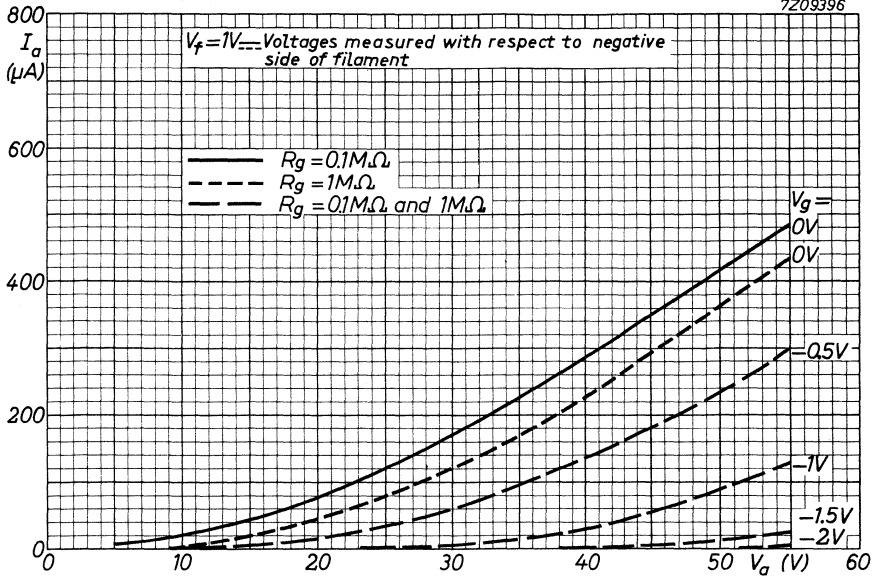

7Z09395

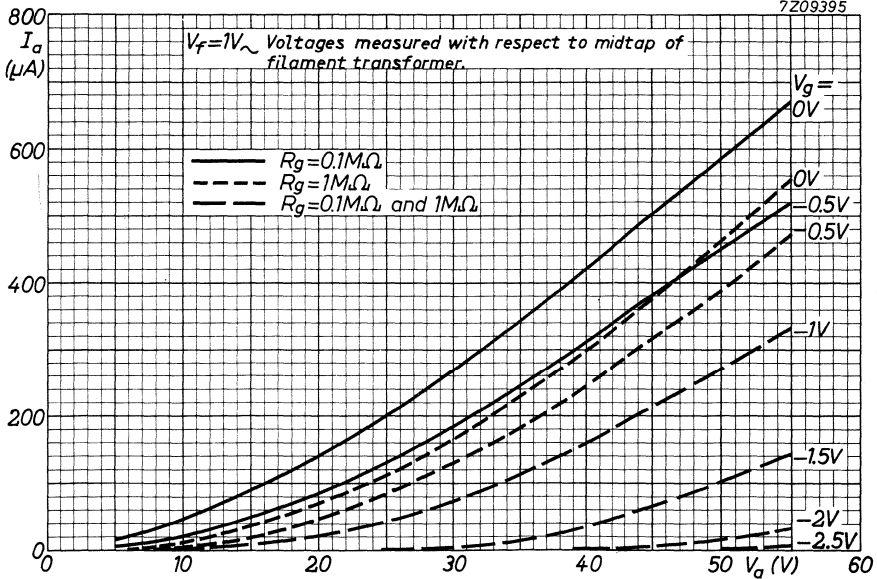

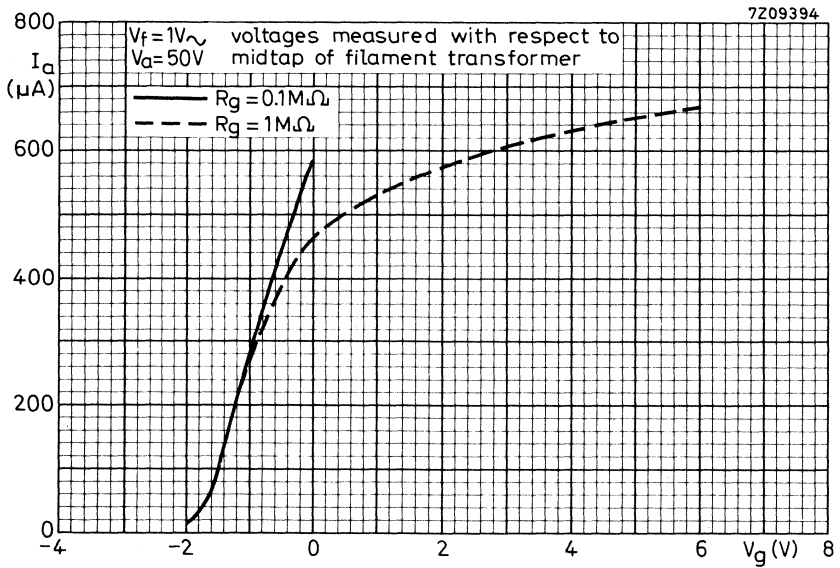

## S.Q. TUBE




Special quality decade counter tube.

QUICK REFERENCE DATA	
Life test	10 000 hours
Base	Duodecal (12 pins)
Heating	Indirect A.C. or D.C.; Series or parallel supply
Heater voltage	$V_f$ 6.3 V
Heater current	$I_f$ 300 mA

### DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Duodecal



### APPLICATION DIRECTIONS

#### Mounting

Any mounting position, except horizontal with screen down, is permitted.

#### Sensitivity to magnetic fields

To prevent interference by magnetic fields the flux density of these fields should not exceed  $2 \times 10^{-4}$  Wb/m<sup>2</sup> (= 2 Gauss) in any direction.

**APPLICATION DIRECTIONS**

Ambient illumination

To obtain a clear reading the ambient illumination should range from 40-400 lux measured with an illumination-meter placed in vertical position. This illumination range incorporates the best compromise between the visibility of the figures of the mask and the luminescent picture.

**CHARACTERISTICS**

Heater voltage	$V_f$	6.3 V
Heater current	$I_f$	300 mA

**CAPACITANCES**

Anode No.2 to all other electrodes	$C_{a_2/R}$	10.5 pF
Deflection plate to all other electrodes	$C_{D/R}$	3.5 pF
Deflection plate to all other electrodes	$C_{D'/R}$	3.8 pF
Anode No.1 to all other electrodes	$C_{a_1/R}$	4.9 pF
Grid No.1 to all other electrodes	$C_{g_1/R}$	6.8 pF
Grid No.4 to all other electrodes	$C_{g_4/R}$	7.7 pF

**OPERATING CHARACTERISTICS**

Column I Nominal value

II Permitted values of spread and variation

		I	II	
Supply voltage	$V_b$	300		V
Grid No.1 supply voltage	$V_{bg_1}$	11.9	$\pm 0.15$	V
Grid No.2 supply voltage	$V_{bg_2}$	300		V
Deflection plate supply voltage	$V_D$	156	$\pm 1.5$	V
Luminescent screen voltage	$V_l$	300		V
Cathode current	$I_k$	0.95		mA
Grid No.2 current	$I_{g_2}$	0.1		mA
Cathode resistor	$R_k$	15	$\pm 1\%$	k $\Omega$
Grid No.4 resistor	$R_{g_4}$	47	$\pm 5\%$	k $\Omega$
Anode No.1 resistor	$R_{a_1}$	39	$\pm 10\%$	k $\Omega$
Anode No.2 resistor	$R_{a_2}$	1	$\pm 1\%$	M $\Omega$



OPERATING CHARACTERISTICS (continued)

Note

The tube should be used in the circuit of fig.2.

Provided the ratio of the supply voltages  $V_{bgl}$  and  $V_D$  is strictly maintained the supply voltage  $V_b$  is allowed to vary within the range of  $V_b \text{ nom. } \pm 10\%$ .

This condition can be realised by using a voltage divider  $R_1, R_2, R_3$  with 1% precision resistors as indicated in the diagram fig.2.

A max. counting speed of 30 000 count/s can be obtained with this circuit.

The input pulse at D should have a positive value of  $13.6 \text{ V} \pm 15\%$ . The slope of the leading edge should be at least  $20 \times 10^6 \text{ V/s}$ . The slope of the trailing edge should not exceed  $1.2 \times 10^6 \text{ V/s}$ .





Fig.1

$$\tan \alpha > 20 \times 10^6 \text{ V/s}$$

$$\tan \beta < 1.2 \times 10.6 \text{ V/s}$$

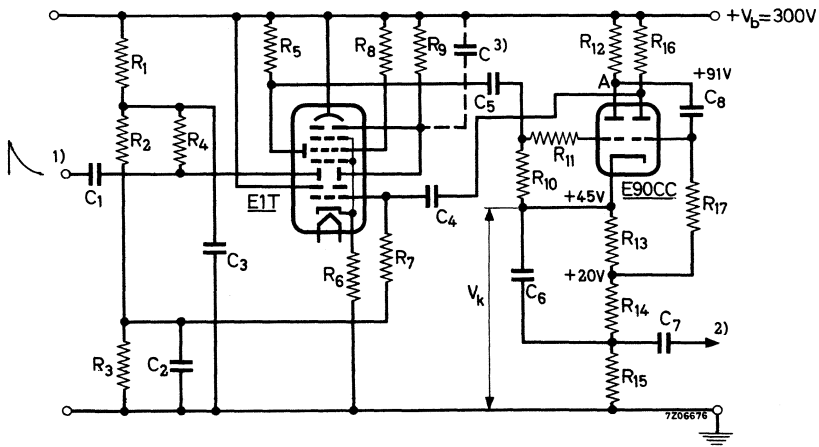

R <sub>1</sub>	68 kΩ ± 1%	R <sub>10</sub>	0.56 MΩ ± 10%	C <sub>1</sub>	1)
R <sub>2</sub>	68 kΩ ± 1%	R <sub>11</sub>	5.6 kΩ ± 10%	C <sub>2</sub>	0.39 μF ± 20%
R <sub>3</sub>	5.6 kΩ ± 1%	R <sub>12</sub>	39 kΩ ± 2%	C <sub>3</sub>	0.15 μF ± 20%
R <sub>4</sub>	15 kΩ ± 2%	R <sub>13</sub>	4.7 kΩ ± 2%	C <sub>4</sub>	6800 pF ± 10%
R <sub>5</sub>	39 kΩ ± 10%	R <sub>14</sub>	2.7 kΩ ± 2%	C <sub>5</sub>	220 pF ± 10%
R <sub>6</sub>	15 kΩ ± 1%	R <sub>15</sub>	1 kΩ ± 1%	C <sub>6</sub>	68 pF ± 2%
R <sub>7</sub>	0.33 MΩ ± 10%	R <sub>16</sub>	3.3 kΩ ± 2%	C <sub>7</sub>	680 pF ± 5%
R <sub>8</sub>	47 kΩ ± 5%	R <sub>17</sub>	0.15 MΩ ± 2%	C <sub>8</sub>	68 pF ± 2%
R <sub>9</sub>	1 MΩ ± 1%				

1. Connected to the preceding E90CC pulse shaper (C<sub>1</sub> = 6800 pF ± 10%) or the preceding E90CC interstage pulse shaper (C<sub>1</sub> = 680 pF ± 5%).
2. Connected to deflection plate D of next counter tube.
3. This parasitic capacitance should be reduced to the minimum by keeping the wiring as short as possible.

**LIMITING VALUE** of supply voltage V<sub>b</sub> (See operating characteristics):

$$V_b = \text{max. } 400 \text{ V}$$

## S.Q. TUBE

Special quality pentode designed for use as wide band output tube.



### QUICK REFERENCE DATA

Life test	10 000 hours	
Low interface resistance		
Mechanical quality	Shock and vibration resistant	
Base	Magnoval. Gold plated pins	
Heating	Indirect A.C. or D.C.; Parallel supply	
Heater voltage	$V_f$	6.3 V $\pm 5\%$
Heater current	$I_f$	600 mA
Anode current	$I_a$	50 mA
Mutual conductance	S	45 mA/V

### DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Magnoval



**CHARACTERISTICS**

Column I Nominal value or setting of the tube  
 II Range values for equipment design: Initial spread  
 III Range values for equipment design: End of life

		I	II	III	
Heater voltage	$V_f$	6.3			V
Heater current	$I_f$	600			mA
Anode voltage	$V_a$	125			V
Grid No.3 voltage	$V_{g_3}$	0			V
Grid No.2 voltage	$V_{g_2}$	125			V
Grid No.1 voltage	$-V_{g_1}$	3			V
Anode current	$I_a$	50			mA
Grid No.2 current	$I_{g_2}$	5.5			mA
Mutual conductance	$S$	45			mA/V
Internal resistance	$R_i$	20			k $\Omega$
Amplification factor	$\mu_{g_2g_1}$	30			
Input resistance	$R_{g_1}$	1			k $\Omega$
Frequency = 50 MHz					
Anode supply voltage	$V_{ba}$	140			V
Grid No.3 voltage	$V_{g_3}$	0			V
Grid No.2 supply voltage	$V_{bg_2}$	140			V
Grid No.1 supply voltage	$+V_{bg_1}$	12			V
Cathode resistor	$R_k$	270			$\Omega$
Anode current	$I_a$	50	48 - 52		mA
Grid No.2 current	$I_{g_2}$	5.5	4.5 - 6.5		mA
Grid No.1 to cathode voltage	$-V_{g_1k}$	3.0	2.3 - 3.7	1.8	V
Mutual conductance	$S$	45	38 - 52	$\Delta S =$ max. 25%	mA/V
Negative grid current	$-I_g$			2	$\mu A$

**CHARACTERISTICS** (continued)As triode (grid No.2 connected to anode)

		I	
Anode voltage	$V_a$	125	V
Grid No.1 voltage	$-V_{g1}$	3	V
Anode current	$I_a$	55.5	mA
Mutual conductance	S	50	mA/V
Internal resistance	$R_i$	600	$\Omega$
Amplification factor	$\mu$	30	

**CAPACITANCES**Pentode connected

		I	II	I	II	
		With shield		Without shield		
Anode to grid No.3, grid No.2, cathode and heater	$C_{a/g_3g_2kf}$	6.5	5.8 - 7.2	4.0	3.6 - 4.4	pF
Grid No.1 to grid No.3, grid No.2, cathode and heater	$C_{g_1/g_3g_2kf}$	18	15 - 21	18	15 - 20	pF
Grid No.1 to grid No.3, grid No.2, cathode and heater	$C_{g_1/g_3g_2kf}$	28		28		pF
Cathode current $I_k = 55.5$ mA						
Anode to grid No.1	$C_{ag_1}$	80	max. 120	110	max. 150	mpF

Triode connected (grid No.2 connected to anode)

Anode to grid No.3, cathode and heater	$C_{a/g_3kf}$	10.5	9.4-11.6	7.8	7.0- 8.6	pF
Grid No.1 to grid No.3, cathode and heater	$C_{g_1/g_3kf}$	11.8	10-13.6	11.8	10-13.6	pF
Anode to grid No.1	$C_{ag_1}$	6.2	5.5- 6.9	6.3	5.6- 7.0	pF
Cathode to heater	$C_{kf}$	6.0		6.0		pF

**SHOCK AND VIBRATION RESISTANCE**

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.


**LIMITING VALUES** (Absolute max. rating system)



Anode voltage	$V_{a_0}$	max.	400 V
	$V_a$	max.	200 V
Anode dissipation	$W_a$	max.	10 W
Grid No.2 voltage	$V_{g_{20}}$	max.	350 V
	$V_{g_2}$	max.	175 V
Grid No.2 dissipation	$W_{g_2}$	max.	1.5 W
Grid No.1 voltage, negative	$-V_{g_1}$	max.	55 V
	positive	$V_{g_1}$	max.
Cathode current	$I_k$	max.	75 mA
Grid No.1 resistor	$R_{g_1}$	max.	125 k $\Omega$
Voltage between cathode and heater	$V_{kf}$	max.	200 V
Bulb temperature	$t_{bulb}$	max.	180 °C

In applications where a long life is not required,  $I_k$  max. can be increased to 100 mA and  $t_{bulb}$  max. to 220 °C



## OPERATING CONDITIONS

Anode supply voltage	$V_{ba}$	140 V
Grid No.2 supply voltage	$V_{bg_2}$	140 V
Grid No.3 voltage	$V_{g_3}$	0 V
Grid No.1 supply voltage	$+V_{bg_1}$	12 V
Cathode resistor	$R_k$	270 $\Omega$
Anode current	$I_a$	50 mA
Grid No.2 current	$I_{g_2}$	5.5 mA
Mutual conductance	$S$	45 mA/V

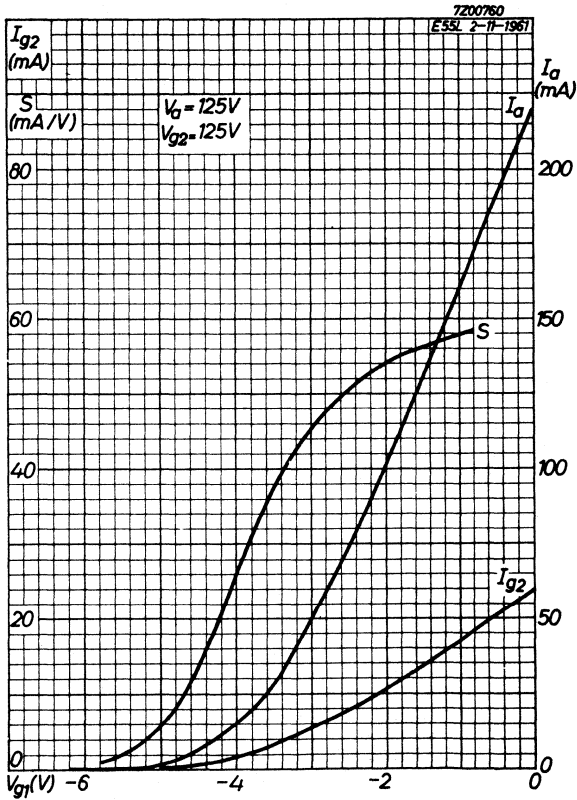


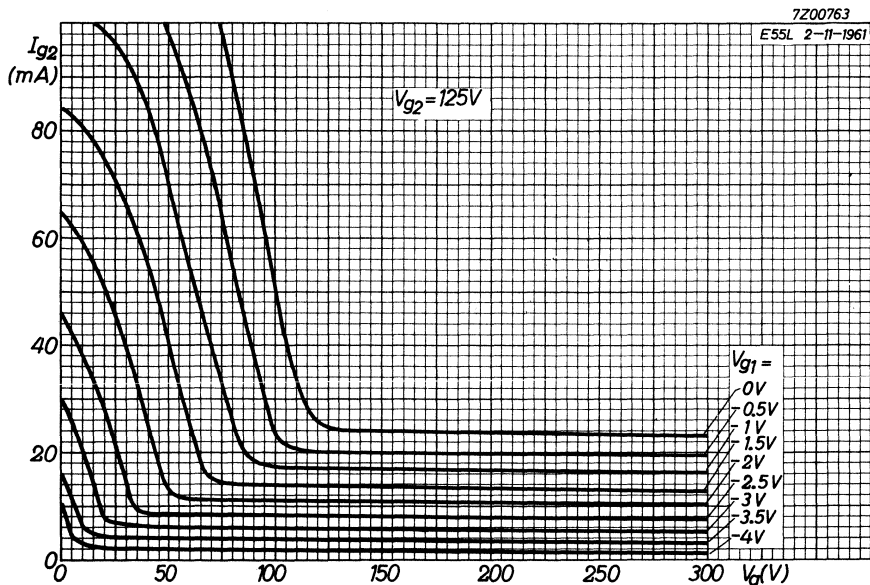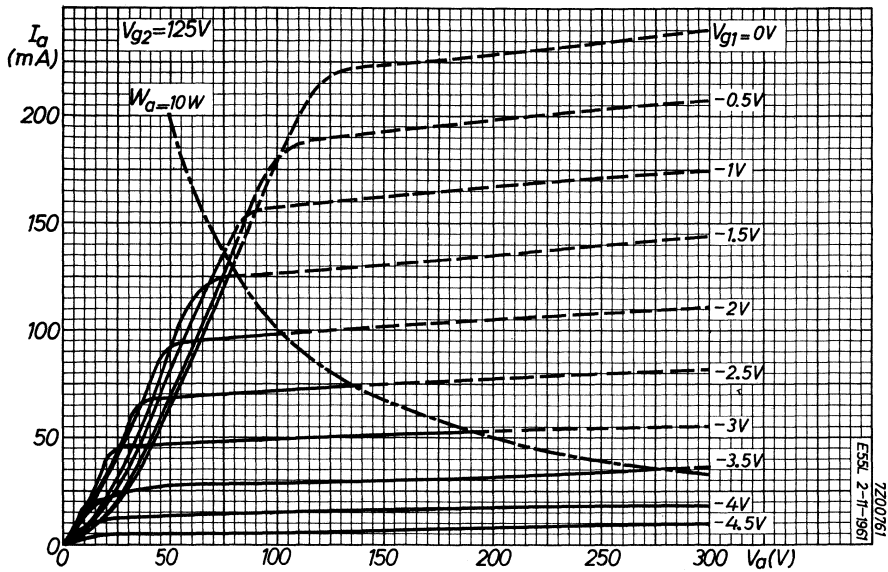




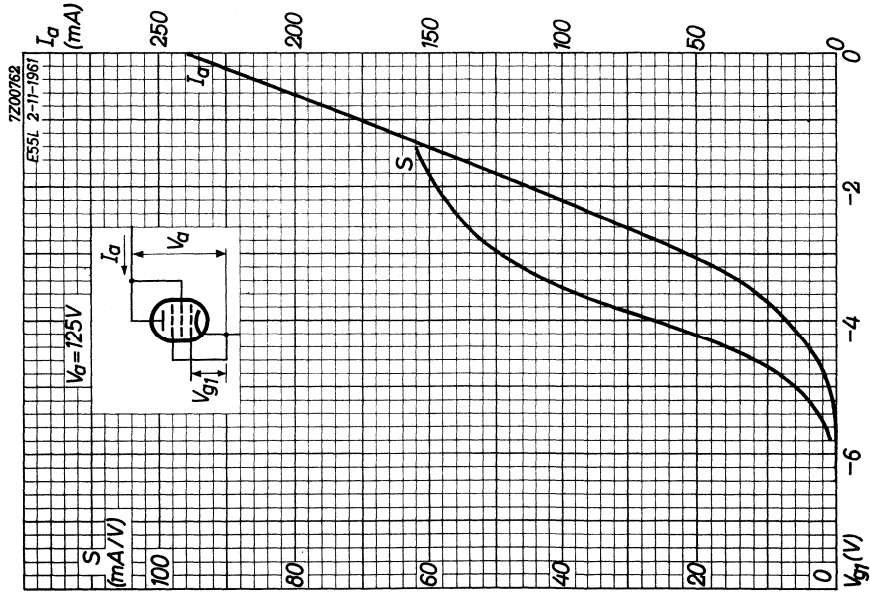
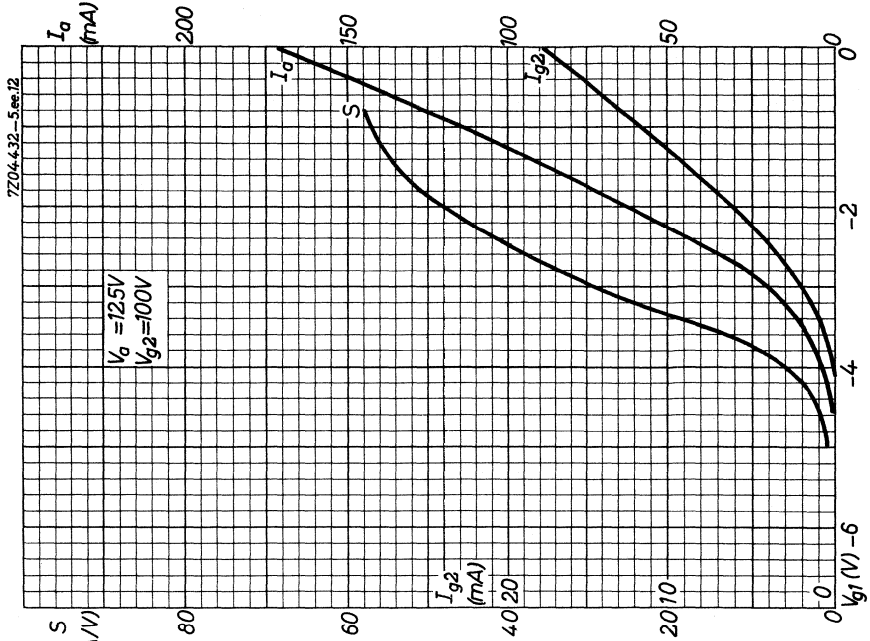



7Z04434-5.ee.12

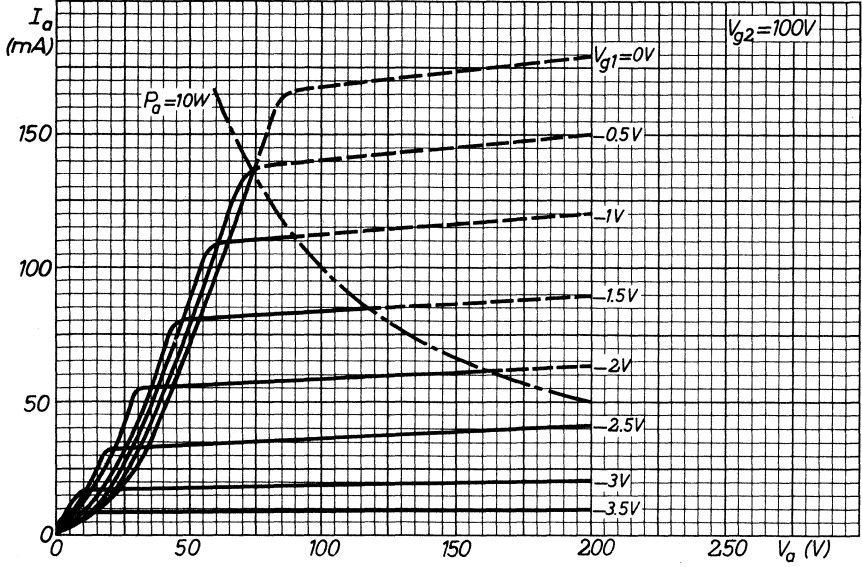

7Z04433-5.ee.12

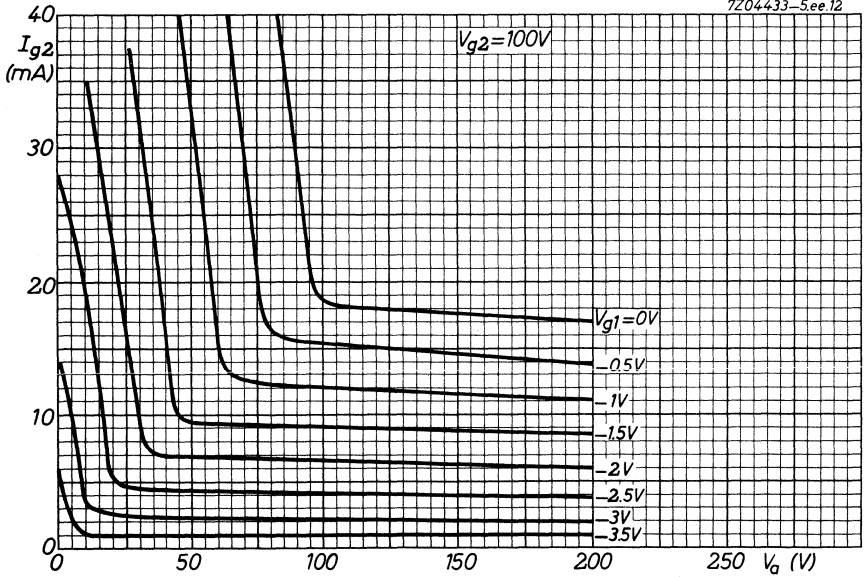

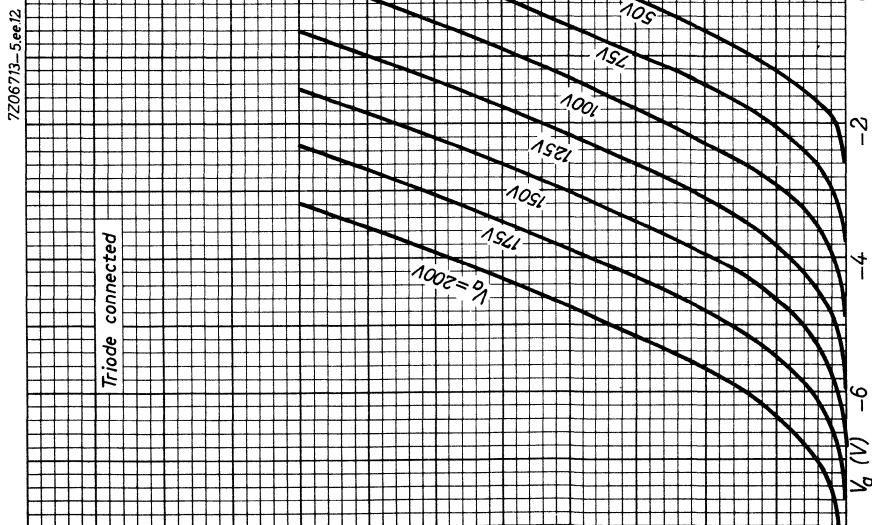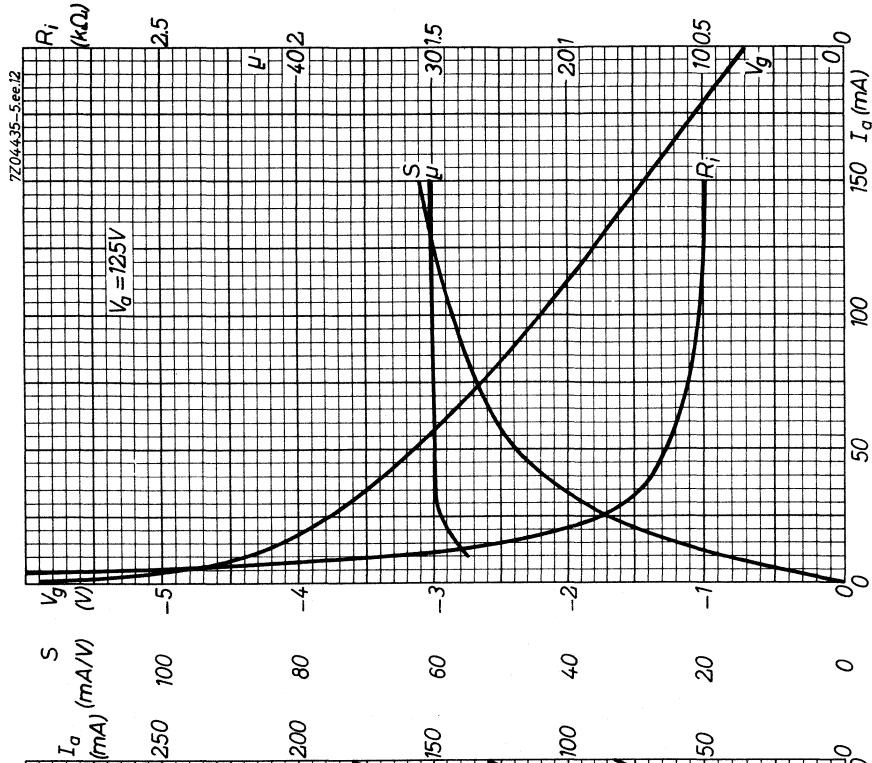

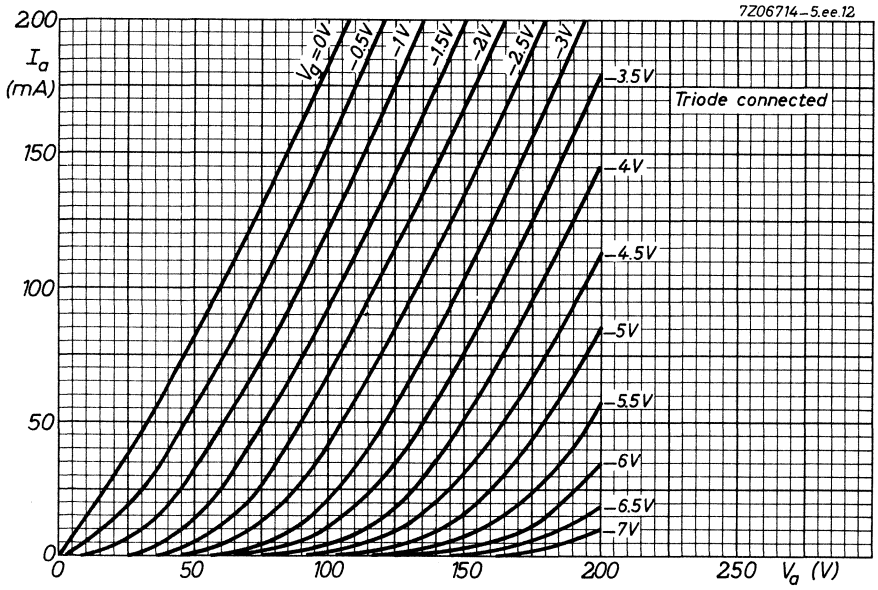

## S.Q. TUBE

Special quality double triode designed for use as A.F. and D.C. amplifier.

### QUICK REFERENCE DATA

Life test	10 000 hours		
	Low interface resistance after long periods of operation under cut-off conditions		
Mechanical quality	Shock and vibration resistant		
Base	Noval. Gold plated pins		
Heating	Indirect		
	A.C. or D.C.		
	Series or parallel supply		
Heater voltage	$V_f$	12.6	6.3 V
Heater current	$I_f$	0.3	0.6 A
Anode voltage	$V_a$		250 V
Grid voltage	$V_g$		-5.5 V
Mutual conductance	$S$		2.7 mA/V

### DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval

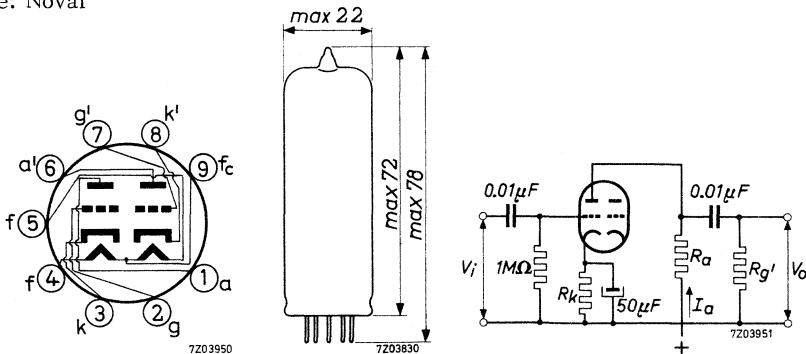


Fig. 1

## CHARACTERISTICS

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage	$V_f$	12.6			V
Heater current	$I_f$	300	285 - 315		mA
Anode voltage	$V_a$	250			V
Cathode resistor	$R_k$	920			$\Omega$
Anode current	$I_a$	6.0	5.4 - 6.6	min. 4.3	mA
Transconductance	S	2.7	2.2 - 3.2	min. 1.8	mA/V
Amplification factor	$\mu$	27			
Internal resistance	$R_i$	10	min. 7		k $\Omega$
Negative grid current	$-I_g$		max. 0.5	max. 1.0	$\mu$ A
<u>Difference in anode current of two sections</u>	$ I_a - I_a' $		max. 3.0		mA
Anode voltage	$V_a$	250			V
Negative grid voltage	$-V_g$	5.5			V
<u>Cut-off voltage</u>	$-V_g$	17			V
Anode voltage	$V_a$	250			V
Anode resistor	$R_a$	1			M $\Omega$
Anode current	$I_a$		max. 15		$\mu$ A
<u>Hum voltage</u>	$V_g$		max. 75		$\mu$ V <sub>RMS</sub>
Grid resistor $R_g = 0.5$ M $\Omega$					
<u>Leakage current between cathode and heater</u>	$I_{kf}$		max. 12		$\mu$ A
Voltage between cathode and heater $V_{kf} = 120$ V					
Cathode heating time		16	max. 23		sec
Cathode cooling time			min. 13		sec

## CAPACITANCES

		External screen		Without external screen		
		I	II	I	II	
Anode to cathode and heater	$C_{a/kf}$	3.5	2.8 - 4.2	0.45		pF
Grid to cathode and heater	$C_{g/kf}$	2.6	1.9 - 3.3	2.4		pF
Anode to grid	$C_{ag}$	3.0	2.4 - 3.6	3.1		pF
Grid to heater	$C_{gf}$		max. 0.23		max. 0.23	pF
Cathode to heater	$C_{kf}$	4.8		4.8		pF
Anode to cathode and heater	$C_{a'/k'f}$	3.0	2.3 - 3.7	0.55		pF
Grid to cathode and heater	$C_{g'/k'f}$	2.6	1.9 - 3.3	2.4		pF
Anode to grid	$C_{a'g'}$	3.0	2.4 - 3.6	3.0		pF
Grid to heater	$C_{g'f}$		max. 0.23		max. 0.23	pF
Cathode to heater	$C_{k'f}$	4.8		4.8		pF
Anode to anode other section	$C_{aa'}$	1.3	0.9 - 1.7	1.45		pF
Grid to grid other section	$C_{gg'}$		max. 13		max. 13	mpF
Anode to grid other section	$C_{ag'}$		max. 0.1		max. 0.1	pF
Grid to anode other section	$C_{ga'}$		max. 65		max. 65	mpF

## SHOCK AND VIBRATION RESISTANCE

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

## LIFE

Production samples are tested to be within the end of life values (column III) under the following conditions during 10 000 hours.

Heater voltage	$V_f$	6.3 V
Anode voltage	$V_a$	250 V
Cathode resistor	$R_k$	920 $\Omega$

## LIMITING VALUES (Absolute max. rating system)

Anode voltage	$V_{a0}$	max.	600 V
	$V_a$	max.	300 V
Anode dissipation	$W_a$	max.	2 W
Cathode current	$I_k$	max.	12 mA
Cathode current peak value	$I_{kp}$	max.	150 mA
Grid current peak value max.			30 mA
Duty factor max.			0.005
Pulse duration max.			10 $\mu s$
Cathode current peak value	$I_{kp}$	max.	30 mA
Grid current peak value max.			2 mA
Duty factor max.			0.2
Pulse duration max.			400 $\mu s$
Grid voltage	$-V_g$	max.	200 V
Grid current, average value	$I_g$	max.	0.3 mA
peak value	$I_{gp}$	max.	30 mA
Voltage between cathode and heater	$V_{kf}$	max.	120 V
Bulb temperature	$t_{bulb}$	max.	170 $^{\circ}C$
Grid resistor (automatic bias)	$R_g$	max.	1 $M\Omega$
Grid resistor (fixed bias)	$R_g$	max.	0.5 $M\Omega$

Heater voltage. The average heater voltage should be 6.3 V or 12.6 V. Variations of the heater voltage exceeding the range of 6.0 V to 6.6 V or 12.0 to 13.2 V will shorten the tube life. The tolerance of heater current (column II) should be taken into account.




**OPERATING CHARACTERISTICS**


Resistance coupled A.F. amplifier. Fig.1 page 1


Anode supply voltage	$V_{ba}$	200	250	300	350	400	V
Anode resistor	$R_a$	47	47	47	47	47	k $\Omega$
Cathode resistor	$R_k$	1.2	1.2	1.2	1.2	1.2	k $\Omega$
Grid resistor	$R_g'$	0.15	0.15	0.15	0.15	0.15	M $\Omega$
Anode current	$I_a$	1.86	2.45	3.15	3.80	4.40	mA
Voltage gain	$V_o/V_i$	18.5	18.5	18.5	18.5	18.5	
Output voltage at $+I_g = 0.3 \mu A$	$V_o$	20	30	40	50	60	$V_{RMS}$
Total distortion <sup>1)</sup>	$dt_{tot}$	3.3	3.8	4.0	4.1	4.2	%
Anode supply voltage	$V_{ba}$	200	250	300	350	400	V
Anode resistor	$R_a$	100	100	100	100	100	k $\Omega$
Cathode resistor	$R_k$	2.2	2.2	2.2	2.2	2.2	k $\Omega$
Grid resistor	$R_g'$	0.33	0.33	0.33	0.33	0.33	M $\Omega$
Anode current	$I_a$	1.00	1.30	1.65	1.95	2.30	mA
Voltage gain	$V_o/V_i$	20	20	20	20	20	
Output voltage at $+I_g = 0.3 \mu A$	$V_o$	22	32	42	52	63	$V_{RMS}$
Total distortion <sup>1)</sup>	$dt_{tot}$	3.1	3.4	3.5	3.6	3.7	%
Anode supply voltage	$V_{ba}$	200	250	300	350	400	V
Anode resistor	$R_a$	220	220	220	220	220	k $\Omega$
Cathode resistor	$R_k$	3.9	3.9	3.9	3.9	3.9	k $\Omega$
Grid resistor	$R_g'$	0.68	0.68	0.68	0.68	0.68	M $\Omega$
Anode current	$I_a$	0.52	0.67	0.83	0.99	1.15	mA
Voltage gain	$V_o/V_i$	21	21	21	21	21	
Output voltage at $+I_g = 0.3 \mu A$	$V_o$	19	29	38	47	58	$V_{RMS}$
Total distortion <sup>1)</sup>	$dt_{tot}$	2.3	2.6	3.0	3.1	3.2	%

<sup>1)</sup> At lower output voltages the distortion is proportionally lower.

7203953-5.h.j.33

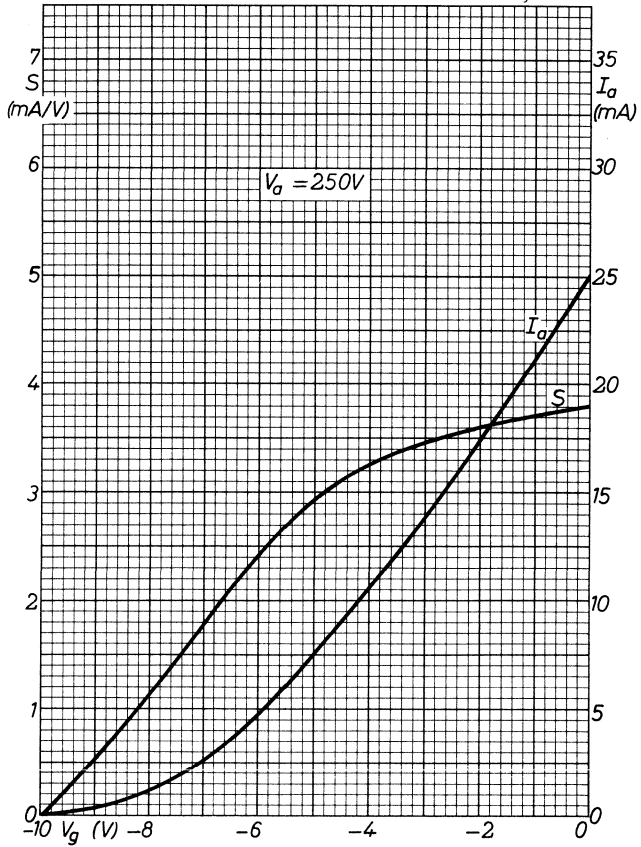

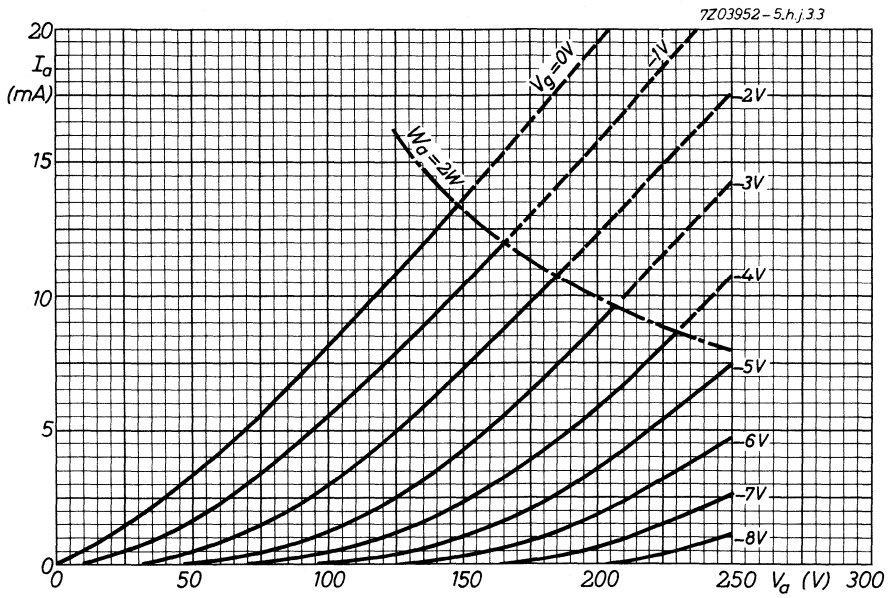

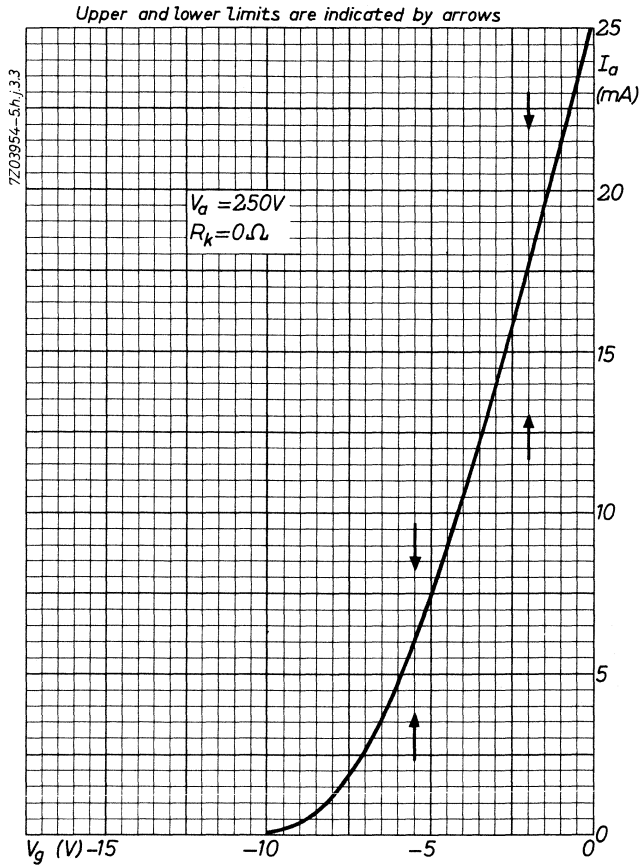

## S.Q. TUBE

Special quality triode-pentode

The pentode section is designed for use as mixer and R.F. or A.F. amplifier. The triode section is designed for use as oscillator (max. freq. 300 MHz) multivibrator or blocking oscillator.




### QUICK REFERENCE DATA

Life test	10 000 hours	
Low interface resistance		
Mechanical quality	Shock and vibration resistant	
Base	Noval. Gold plated pins	
Heating	Indirect A.C. or D.C.; parallel supply	
Heater voltage	$V_f$	6.3 V
Heater current	$I_f$	330 mA
Pentode: Anode current	$I_a$	10 mA
Mutual conductance	$S$	6.2 mA/V
Amplification factor	$\mu$	40
Triode: Anode current	$I_a$	14 mA
Mutual conductance	$S$	5 mA/V
Amplification factor	$\mu$	18

### DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval

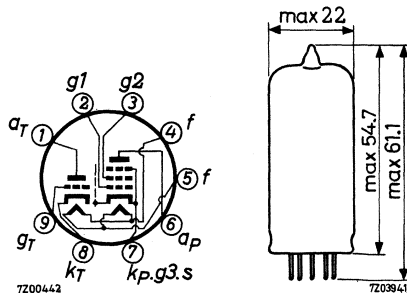

## CHARACTERISTICS

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage	$V_f$	6.3			V
Heater current	$I_f$	330	313 - 347		mA
<u>Pentode section</u>					
Anode supply voltage	$V_{ba}$	170			V
Grid No.2 supply voltage	$V_{bg_2}$	170			V
Cathode resistor	$R_k$	155			$\Omega$
Anode current	$I_a$	10	7.5 - 12.5	min. 6	mA
Grid No.2 current	$I_{g_2}$	2.8	1.55 - 4.05		mA
Mutual conductance	$S$	6.2	5.2 - 7.2	min. 4.3	mA/V
Amplification factor grid No.2 to grid No.1	$\mu_{g_2g_1}$	40			
Internal resistance	$R_i$	0.4	min. 0.26		$M\Omega$
Negative grid No.1 current	$-I_{g_1}$		max. 0.5	max. 1.0	$\mu A$
<u>Triode section</u>					
Anode supply voltage	$V_{ba}$	100			V
Cathode resistor	$R_k$	120			$\Omega$
Anode current	$I_a$	14	10 - 18	min. 8.4	mA
Mutual conductance	$S$	5.0	4 - 6	min. 3.5	mA/V
Amplification factor	$\mu$	18			
Negative grid current	$-I_g$		max. 0.5	max. 1.0	$\mu A$

**CAPACITANCES** Without external shield

<u>Pentode</u>		I	II	
Grid No.1 to grid No.2, grid No.3 cathode, heater and screen	$C_{g_1/g_2g_3kfs}$	5.6	5.2 - 6	pF
Anode to grid No.2, grid No.3 cathode, heater and screen	$C_{a/g_2g_3kfs}$	3.4	3 - 3.8	pF
Anode to grid No.1	$C_{ag_1}$		max. 25	mpF
Grid No.1 to heater	$C_{g_1f}$		max.0.16	pF
<u>Triode</u>				
Grid to cathode (triode), cathode (pentode) grid No.3, heater and screen	$C_{g/k_Tk_pg_3fs}$	2.5	2.2 - 2.8	pF
Anode to cathode (triode), cathode (pentode) grid No.3, heater and screen	$C_{a/k_Tk_pg_3fs}$	1.5	1.2 - 1.8	pF
Anode to grid	$C_{ag}$	1.5	1.2 - 1.8	pF
Grid to heater	$C_{gf}$		max.0.22	pF
<u>Pentode to triode</u>				
Anode (pentode) to anode (triode)	$C_{aP-aT}$		max.0.07	pF
Anode (pentode) to grid (triode)	$C_{aP-gT}$		max.0.02	pF
Grid No.1 (pentode) to anode (triode)	$C_{g_1P-aT}$		max.0.16	pF

**MICROPHONY**

The pentode section can be used without special precautions against microphony in circuits where an input voltage of more than 50 mV is required for an output of 50 mW.

**SHOCK AND VIBRATION RESISTANCE**

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

**LIFE**

Production samples are tested to be within the end of life values (column III) under the following conditions during 10 000 hours.

Pentode section

$$V_{ba} = 170 \text{ V}$$

$$V_{bg_2} = 170 \text{ V}$$

$$R_k = 155 \ \Omega$$

Triode section

$$V_{ba} = 100 \text{ V}$$

$$R_k = 120 \ \Omega$$

**LIMITING VALUES** (Absolute max. rating system)Pentode section

Anode voltage	$V_{a_0}$	max. 550 V
	$V_a$	max. 275 V
Anode dissipation	$W_a$	max. 2.15 W
Grid No.2 voltage	$V_{g_{20}}$	max. 550 V
Grid No.2 voltage:		
Cathode current > 10 mA	$V_{g_2}$	max. 200 V
Cathode current < 10 mA	$V_{g_2}$	max. 225 V
Grid No.2 dissipation:		
Anode dissipation > 1.2 W	$W_{g_2}$	max. 0.7 W
Anode dissipation < 1.2 W	$W_{g_2}$	max. 0.8 W
Grid No.1 dissipation	$W_{g_1}$	max. 0.1 W
Negative grid No.1 voltage	$-V_{g_1}$	max. 100 V
Cathode current	$I_k$	max. 18 mA
Voltage between cathode and heater	$V_{kf}$	max. 100 V
Grid resistor (fixed bias)	$R_{g_1}$	max. 0.5 M $\Omega$



**LIMITING VALUES** (Absolute max. rating system) (continued)Triode section

Anode voltage	$V_{a0}$	max. 550 V
	$V_a$	max. 275 V
Anode dissipation	$W_a$	max. 1.75 W
Grid dissipation	$W_g$	max. 0.1 W
Grid, voltage, peak value	$V_{gp}$	max. 30 V
Duty factor max. 0.04		
Pulse duration max. 0.8 ms		
Grid voltage	$-V_g$	max. 100 V
Cathode current	$I_k$	max. 18 mA
Cathode current peak value	$I_{kp}$	max. 100 mA
Duty factor max. 0.04		
Pulse duration max. 0.8 ms		
Voltage between cathode and heater	$V_{kf}$	max. 100 V
Grid resistor (fixed bias)	$R_g$	max. 0.5 M $\Omega$
Bulb temperature	$t_{bulb}$	max. 170 $^{\circ}$ C

Heater voltage: The average heater voltage should be 6.3 V.

Variation of the heater voltage exceeding the range of 6.0 V to 6.6 V will shorten the tube life.

The tolerance of heater current (column II) should be taken into account.



## OPERATING CHARACTERISTICS

### Pentode section as R.F. amplifier

Anode supply voltage	$V_{ba}$	170 V
Grid No.2 supply voltage	$V_{bg_2}$	170 V
Cathode resistor	$R_k$	155 $\Omega$
Anode current	$I_a$	10 mA
Grid No.2 current	$I_{g_2}$	2.8 mA
Mutual conductance	$S$	6.2 mA/V
Amplification factor grid No.2 to grid No.1	$\mu_{g_2g_1}$	40
Internal resistance	$R_i$	0.4 $M\Omega$
Input resistance at 50 MHz	$r_{g_1}$	10 $k\Omega$
Equivalent noise resistance	$R_{eq}$	1.5 $k\Omega$



### Pentode section as mixer



Anode supply voltage	$V_{ba}$	170 V
Grid No.2 supply voltage	$V_{bg_2}$	170 V
Grid No.1 resistor	$R_{g_1}$	0.1 $M\Omega$
Cathode resistor	$R_k$	330 $\Omega$
Oscillator voltage	$V_{osc}$	3.5 $V_{RMS}$
Anode current	$I_a$	8 mA
Grid No.2 current	$I_{g_2}$	2.5 mA
Grid No.1 current	$I_{g_1}$	12 $\mu A$
Conversion conductance	$S_c$	2.4 mA/V
Internal resistance	$R_i$	0.5 $M\Omega$



### Triode as oscillator

Operation in Colpitts circuit is recommended.


Operation in Hartley circuit is not recommended.

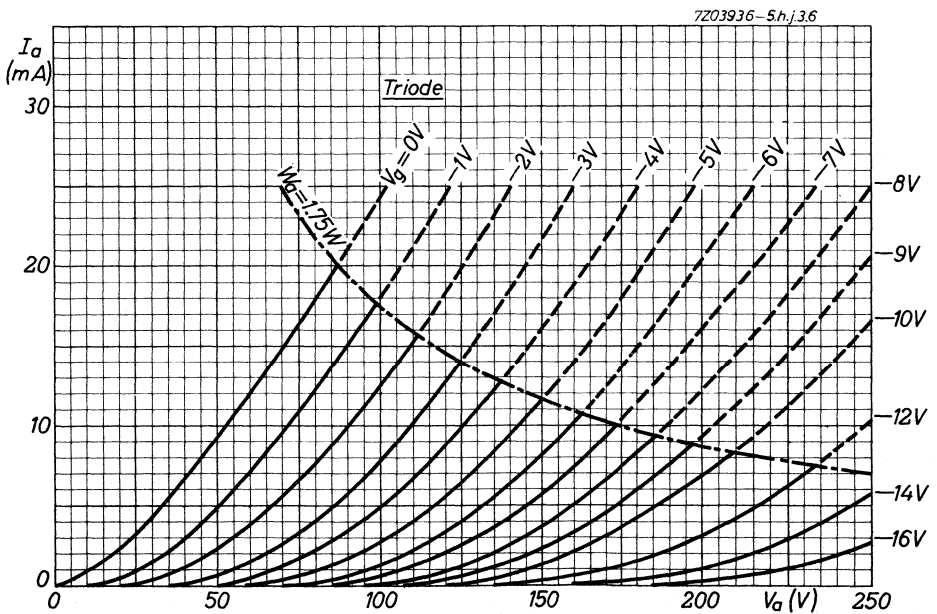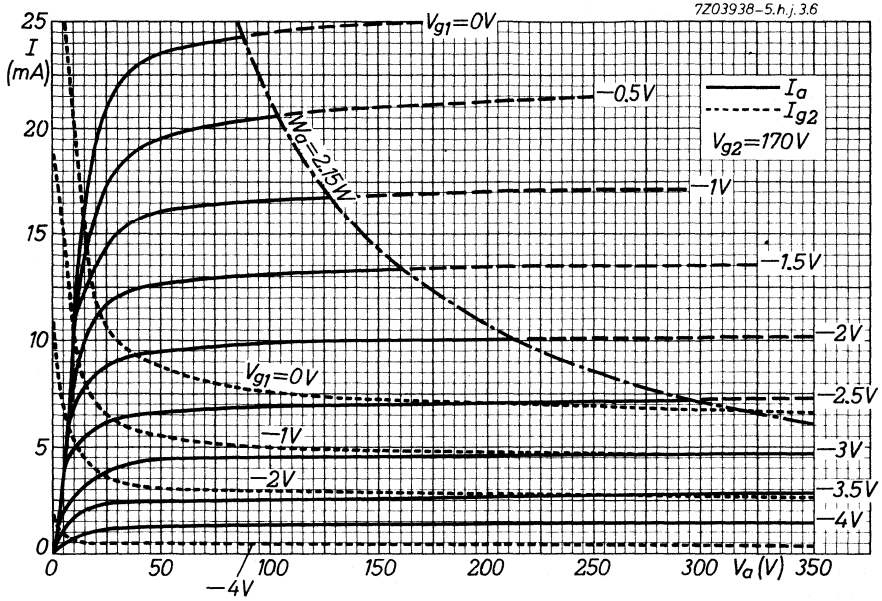

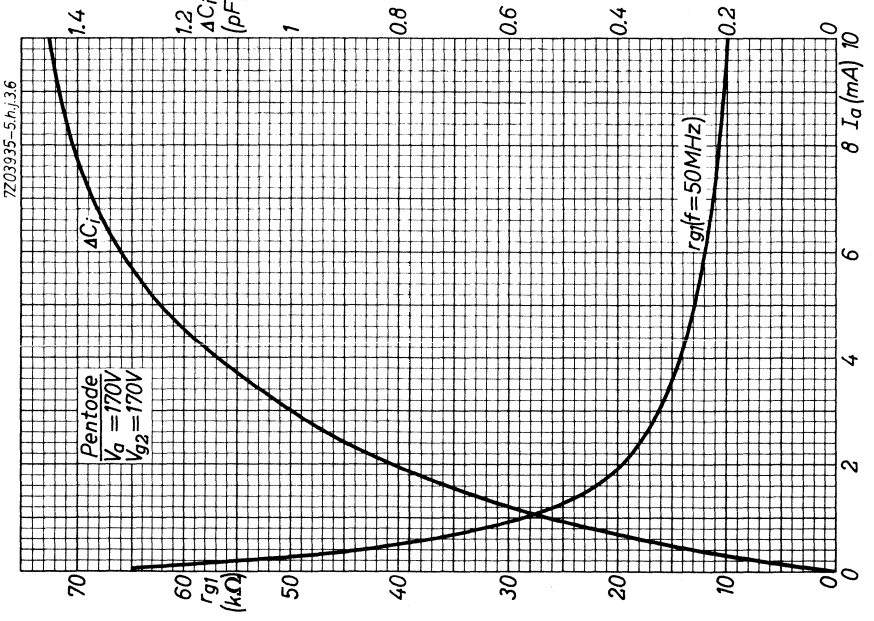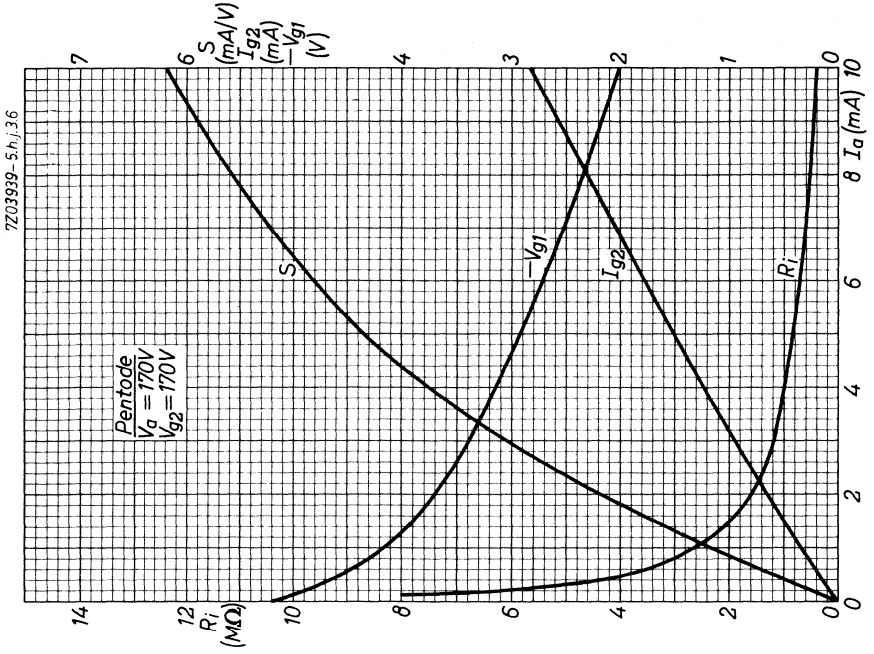

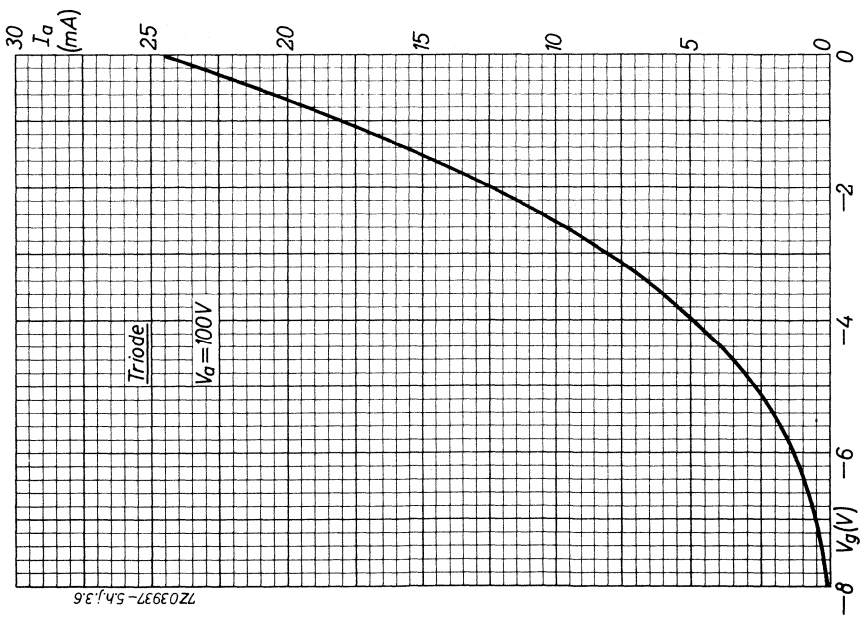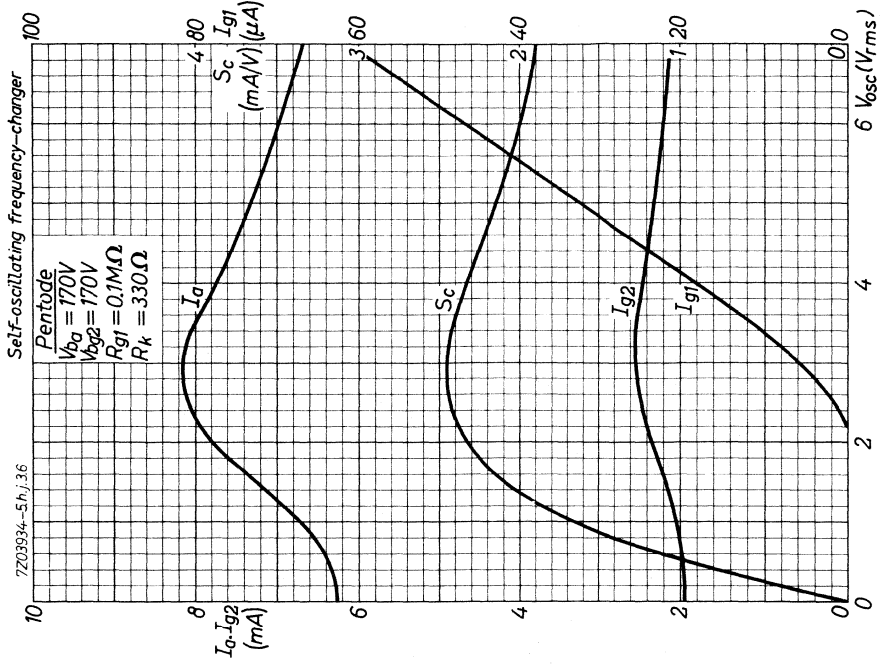

7203940-5.h.j.36

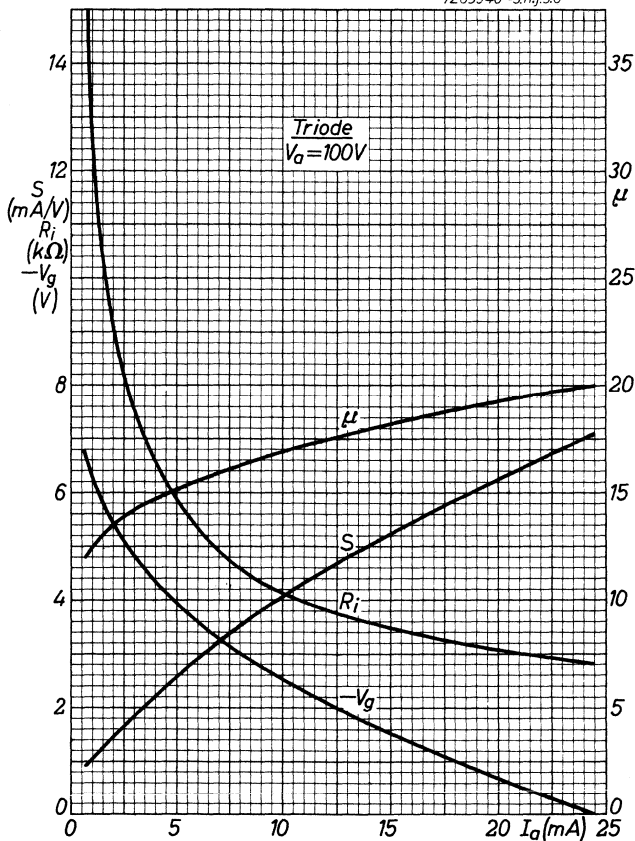

## S.Q. TUBE

Special quality pentode designed for use as amplifier.




### QUICK REFERENCE DATA

Life test	10 000 hours	
Low interface resistance		
Mechanical quality	Shock and vibration resistant	
Base	Noval. Gold plated pins	
Heating	Indirect A.C. or D.C. Series or parallel supply	
Heater voltage	$V_f$	6.3 V
Heater current	$I_f$	300 mA
Anode current	$I_a$	3 mA
Mutual conductance	S	1.85 mA/V
Equivalent noise resistance (A.F.)	$R_{eq}$	40 k $\Omega$
Hum voltage	$V_{g1}$	max. 5 $\mu V_{RMS}$

### DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval

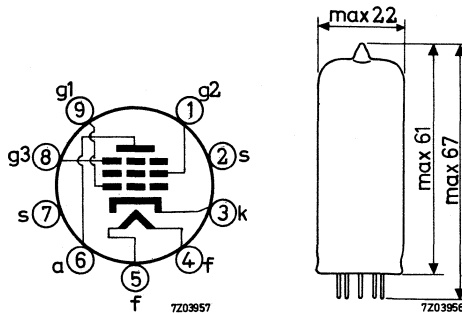

## CHARACTERISTICS

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage	$V_f$	6.3			V
Heater current	$I_f$	300	285- 315		mA
Anode voltage	$V_a$	250			V
Grid No.3 voltage	$V_{g3}$	0			V
Grid No.2 voltage	$V_{g2}$	100			V
Cathode resistor	$R_k$	550			$\Omega$
Anode current	$I_a$	3	2.5- 3.5	min. 2.0	mA
Grid No.2 current	$I_{g2}$	0.65	0.45-0.85	min. 0.35	mA
Mutual conductance	S	1.85	1.5- 2.2	min. 1.2	mA/V
Internal resistance	$R_i$	1.5	min. 1.0		M $\Omega$
Amplification factor grid No.2 to grid No.1	$\mu_{g2g1}$	25			
<u>Equivalent noise resistance</u> Frequency 0-10 kHz Grid No.1 resistor $R_{g1} = 0 \Omega$	$R_{eq}$		max. 40		k $\Omega$
<u>Negative grid No.1 current</u>	$-I_{g1}$		max. 0.1	max. 0.2	$\mu A$
<u>Cut off voltage</u>	$-V_{g1}$	7.5			V
Anode voltage	$V_a$	250			V
Grid No.3 voltage	$V_{g3}$	0			V
Grid No.2 voltage	$V_{g2}$	100			V
Anode current	$I_a$		max. 20		$\mu A$
<u>Hum voltage</u> Grid resistor $R_{g1} = 1 M\Omega$ Cathode resistor bypassed	$V_{g1}$		max. 5		$\mu V_{RMS}$
<u>Leakage current between cathode and heater</u> Voltage between cathode and heater $V_{kf} = 120 V$			max. 12		$\mu A$



**CAPACITANCES** With external shield

	I	II	
Anode to grid No.2, grid No.3, cathode and heater	$C_{a/g_2g_3kf}$	7.3	6.8-7.8 pF
Grid No.1 to grid No.2, grid No.3, cathode and heater	$C_{g_1/g_2g_3kf}$	5.0	4.5-5.5 pF
Anode to grid No.1	$C_{ag_1}$		max. 25 mpF
Grid No.1 to heater	$C_{g_1f}$		max. 2 mpF
Cathode to heater	$C_{kf}$	3.7	pF

**SHOCK AND VIBRATION RESISTANCE**

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

**LIFE**

Production samples are tested to be within the end of life values (column III) under the following conditions during 10 000 hours.

Anode voltage	$V_a$	250	V
Grid No.3 voltage	$V_{g_3}$	0	V
Grid No.2 voltage	$V_{g_2}$	100	V
Cathode resistor	$R_k$	550	$\Omega$

**LIMITING VALUES** (Absolute max. rating system)

Anode voltage	$V_{a0}$	max. 600 V
	$V_a$	max. 300 V
Anode dissipation	$W_a$	max. 1.3 W
Grid No.2 voltage	$V_{g20}$	max. 600 V
	$V_{g2}$	max. 200 V
Grid No.2 dissipation	$W_{g2}$	max. 0.4 W
Negative grid No.3 voltage	$-V_{g3}$	max. 100 V
Negative grid No.1 voltage	$-V_{g1}$	max. 100 V
Cathode current	$I_k$	max. 9 mA
Voltage between cathode and heater		
Cathode positive	$V_{kf}$ (k pos)	max. 120 V
Cathode negative	$V_{kf}$ (k neg)	max. 60 V
Grid No.1 resistor	$R_{g1}$	See curve on page G
Bulb temperature		max. 170 °C

Heater voltage: The average heater voltage should be 6.3 V.  
 Variations of the heater voltage exceeding the range of 6.0 V to 6.6 V will shorten the tube life.  
 The tolerance of heater current (column II) should be taken into account.



**OPERATING CHARACTERISTICS**



Resistance coupled A.F. amplifier

Anode supply voltage	$V_{ba}$	100	200	250	300	400	V
Grid No.2 supply voltage	$V_{bg2}$	100	200	250	300	400	V
Anode resistor	$R_a$	0.22	0.22	0.22	0.22	0.22	$M\Omega$
Grid No.2 resistor	$R_{g2}$	1.0	1.2	1.2	1.2	1.2	$M\Omega$
Cathode resistor	$R_k$	3.3	1.8	1.5	1.2	1.0	$k\Omega$
Grid No.1 resistor	$R_{g1}$	1	1	1	1	1	$M\Omega$
Grid resistor next stage	$R_{g1'}$	0.68	0.68	0.68	0.68	0.68	$M\Omega$
Anode current	$I_a$	0.29	0.61	0.80	0.98	1.37	mA
Grid No.2 current	$I_{g2}$	0.07	0.13	0.17	0.20	0.28	mA
Gain	$V_o/V_i$	120	165	175	190	200	
Output voltage at $+I_g = 0.3 \mu A$	$V_o$	8	20	25	30	40	$V_{RMS}$
Total distortion	$d_{tot}$	1.7	1.6	1.4	1.1	0.9	%


Electrometer pentode



Heater voltage	$V_f$	4.5	V
Anode voltage	$V_a$	40	V
Grid No.3 voltage	$V_{g3}$	0	V
Grid No.2 voltage	$V_{g2}$	40	V
Negative grid No.1 voltage	$-V_{g1}$	2.15	V
Anode current	$I_a$	40	$\mu A$
Grid No.2 current	$I_{g2}$	9	$\mu A$
Negative grid No.1 current	$-I_{g1}$	max. $10^{-10}$	A

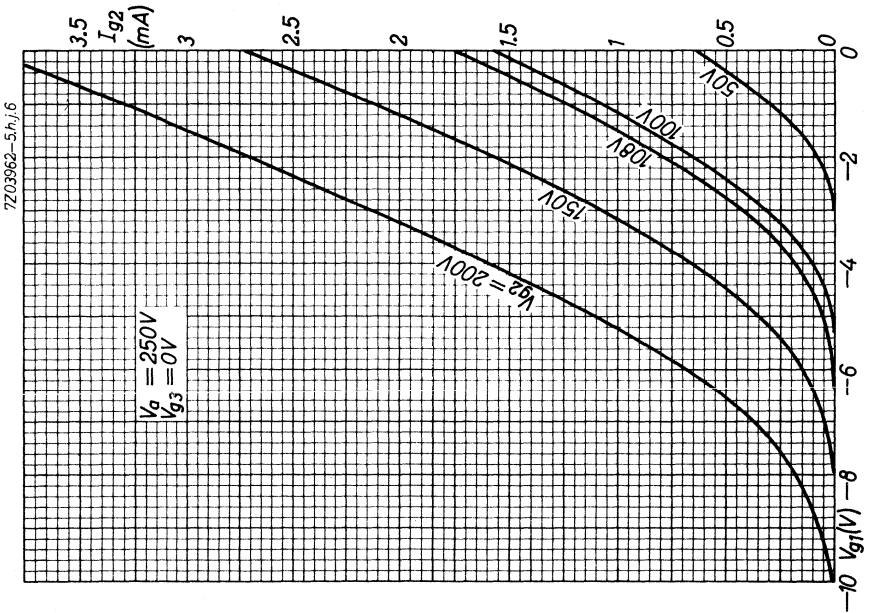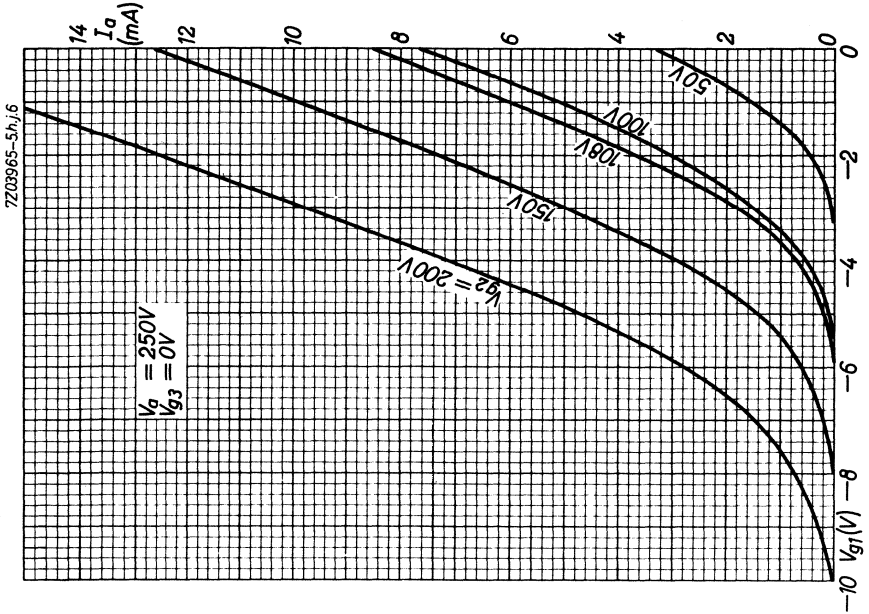


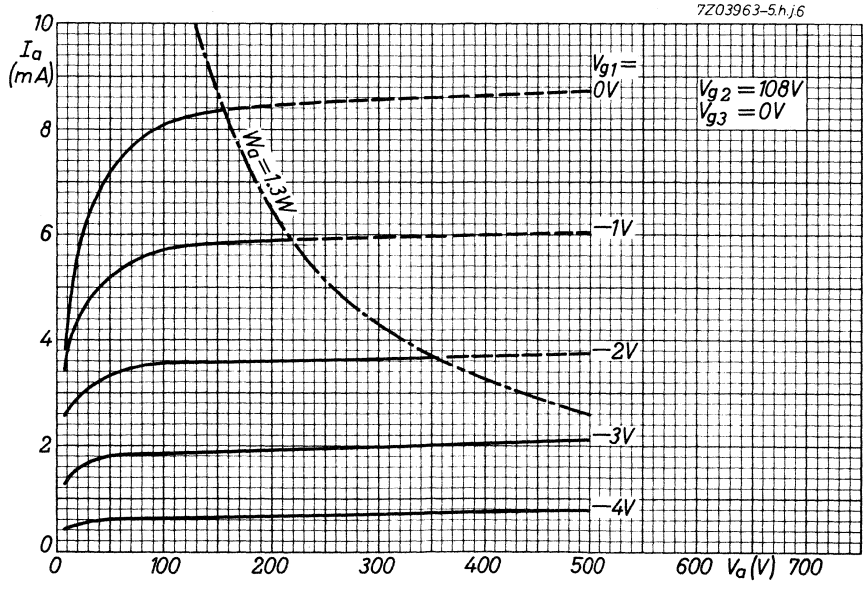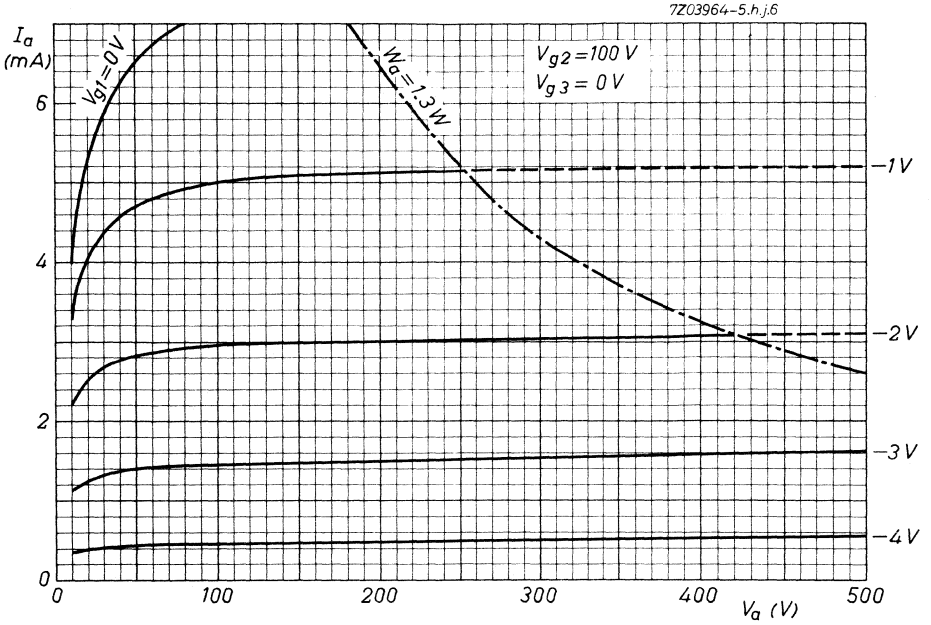

7Z0395E-5,h,j,6

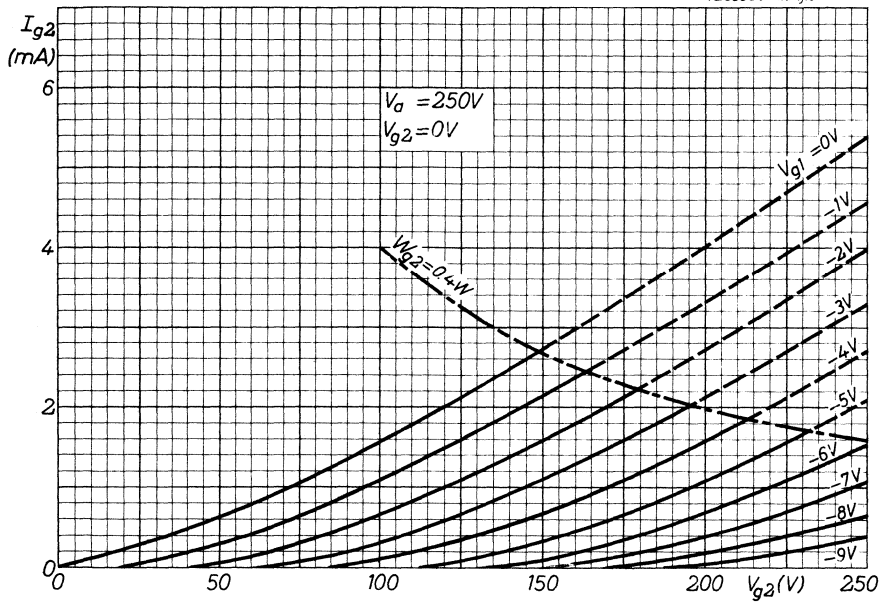

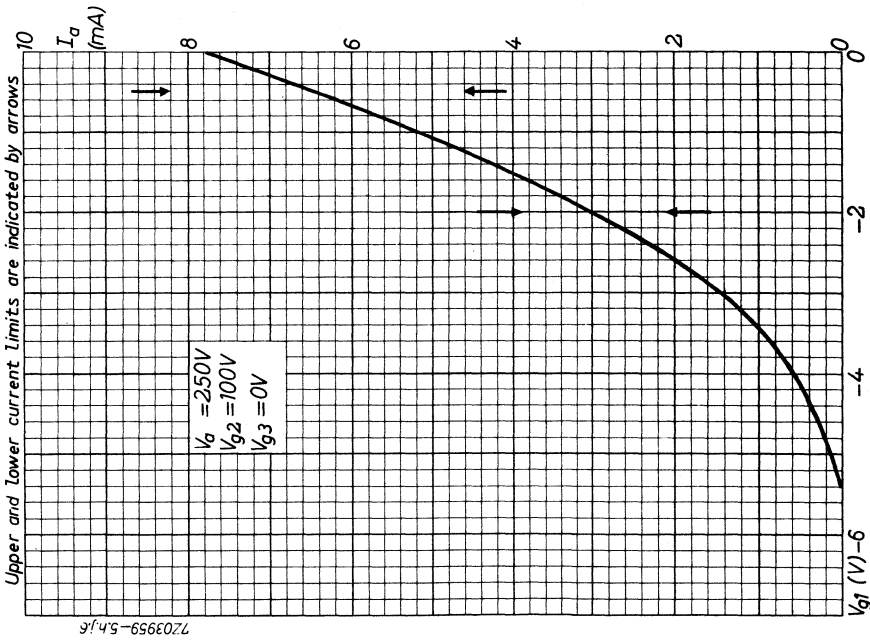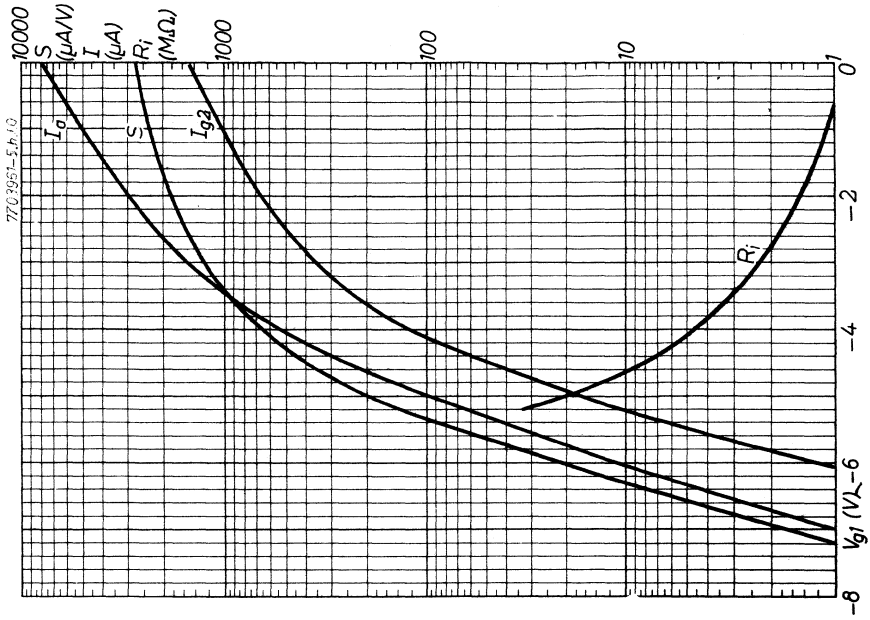

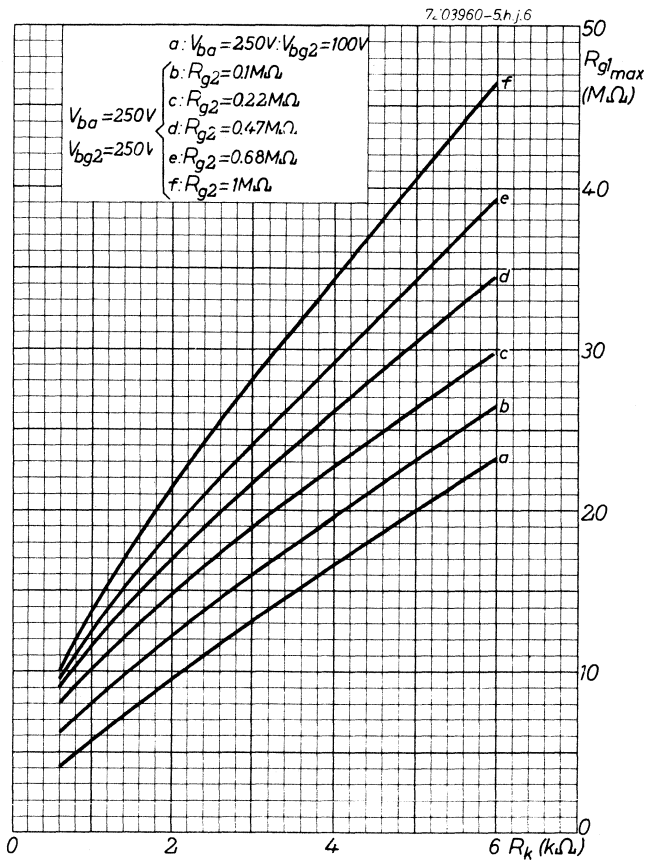



## S.Q. TUBE

Special quality output pentode





QUICK REFERENCE DATA		
Life test	10 000 hours	
Low interface resistance		
Mechanical quality	Shock and vibration resistant	
Base	Noval. Gold plated pins	
Heating	Indirect A.C. or D.C. Series or parallel supply	
Heater voltage	$V_f$	6.3 V
Heater current	$I_f$	700 mA
Anode current	$I_a$	30 mA
Output power, one tube	$W_o$	2.7 W
two tubes class AB	$W_o$	5.7 W

### DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval



## CHARACTERISTICS

Column I Nominal value or setting of the tube  
 II Range values for equipment design: Initial spread  
 III Range values for equipment design: End of life

		I	II	III	
Heater voltage	$V_f$	6.3			V
Heater current	$I_f$	700	665 - 735		mA
Anode voltage	$V_a$	200			V
Grid No.3 voltage	$V_{g3}$	0			V
Grid No.2 voltage	$V_{g2}$	200			V
Cathode resistor	$R_k$	130			$\Omega$
Anode current	$I_a$	30	26.5 - 33.5	min. 21	mA
Grid No.2 current	$I_{g2}$	4.1	2.7 - 5.5	min. 2.0	mA
Mutual conductance	S	9.0	7.4 - 10.6	min. 6.0	mA/V
Amplification factor grid No.2 to grid No.1	$\mu_{g2g1}$	21.5			
Negative grid No.1 current	$-I_{g1}$		max. 0.5	max. 1.0	$\mu A$
Anode voltage	$V_a$	200			V
Grid No.3 voltage	$V_{g3}$	0			V
Grid No.2 voltage	$V_{g2}$	200			V
Anode current	$I_a$	30			mA
Load resistance	$R_{a\sim}$	7			k $\Omega$
Output power	$W_o$	2.7	min. 2.0		W
<u>Cut-off voltage</u>	$-V_{g1}$	14			V
Anode voltage	$V_a$	200			V
Grid No.3 voltage	$V_{g3}$	0			V
Grid No.2 voltage	$V_{g2}$	200			V
Anode current	$I_a$		max. 0.2		mA

**CHARACTERISTICS** (continued)

	I	II	III	
<u>Hum voltage</u> Grid No.1 resistor $R_{g1} = 0.5 \text{ M}\Omega$ Cathode resistor by-passed	$V_{g1}$	max. 0.25		mVRMS
<u>Leakage current between cathode and heater</u> Voltage between cathode and heater $V_{kf} = 120 \text{ V}$	$I_{kf}$	max. 15	max. 20	$\mu\text{A}$
<u>Insulation resistance between two electrodes</u> Voltage between electrodes = 300 V	R	min. 50	min. 10	$\text{M}\Omega$

**CAPACITANCES**

	I	II	
Grid No.1 to grid No.3, grid No.2, cathode heater and screen	$C_{g1/g3g2kfs}$	10	9.2 - 10.8 pF
Anode to grid No.3, grid No.2, cathode heater and screen	$C_{a/g3g2kfs}$	6.8	6.3 - 7.3 pF
Anode to grid No.1	$C_{ag1}$		max. 0.15 pF
Grid No.1 to heater	$C_{g1f}$		max. 0.25 pF
Cathode to heater	$C_{kf}$	7.0	pF

**SHOCK AND VIBRATION RESISTANCE**

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of  $30^\circ$ .

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

**LIFE**

Production samples are tested to be within the end of life values (column III) under the following conditions during 10 000 hours.

Anode voltage	$V_a$	200	V
Grid No.3 voltage	$V_{g_3}$	0	V
Grid No.2 voltage	$V_{g_2}$	200	V
Cathode resistor	$R_k$	130	$\Omega$

**LIMITING VALUES** (Absolute max. rating system)

Anode voltage	$V_{a_0}$	max.	600	V
	$V_a$	max.	300	V
Anode dissipation	$W_a$	max.	8	W
Negative grid No.3 voltage	$-V_{g_3}$	max.	100	V
Grid No.2 voltage	$V_{g_{20}}$	max.	600	V
	$V_{g_2}$	max.	300	V
Grid No.2 dissipation	$W_{g_2}$	max.	2.6	W
Grid No.1 voltage	$-V_{g_1}$	max.	100	V
Cathode current	$I_k$	max.	50	mA
Voltage between cathode and heater	$V_{kf}$	max.	120	V
Bulb temperature	$t_{bulb}$	max.	225	$^{\circ}\text{C}$
Grid No.1 resistor (automatic bias)	$R_{g_1}$	max.	1	$\text{M}\Omega$

Heater voltage: The average heater voltage should be 6.3 V.

Variations of the heater voltage exceeding the range of 6.0 V to 6.6 V will shorten the tube life.

The tolerance of heater current (column II) should be taken into account.

**OPERATING CHARACTERISTICS**

Output tube class A

Anode voltage	$V_a$	200	250	V
Grid No.3 voltage	$V_{g3}$	0	0	V
Grid No.2 voltage	$V_{g2}$	200	250	V
Grid No.2 resistor	$R_{g2}$		1	$k\Omega$
Cathode resistor	$R_k$	130	270	$\Omega$
Anode current	$I_a$	30	24	mA
Grid No.2 current	$I_{g2}$	4.1	3.3	mA
Mutual conductance	$S$	9	-	mA/V
Internal resistance	$R_i$	52	-	$k\Omega$
Load resistance	$R_{a\sim}$	7	10	$k\Omega$
Output power	$W_o$	2.7	2.8	W
Total distortion	$d_{tot}$	10	10	%

Output tube class AB (two tubes)



Anode voltage	$V_a$	200		V
Grid No.3 voltage	$V_{g3}$	0		V
Grid No.2 voltage	$V_{g2}$	200		V
Cathode resistor	$R_k$	130		$\Omega$
Load resistance	$R_{aa\sim}$	9		$k\Omega$
Input voltage	$V_i$	0	0.31	5.2 $V_{RMS}$
Anode current	$I_a$	2x20.6	-	2x24.6 mA
Grid No.2 current	$I_{g2}$	2x2.8	-	2x4.9 mA
Output power	$W_o$	0	0.05	5.7 W
Total distortion	$d_{tot}$	-	-	3.0 %





**OPERATING CHARACTERISTICS (continued)**



Output tube class AB (two tubes)



Anode voltage	$V_a$	250	V
Grid No.3 voltage	$V_{g3}$	0	V
Grid No.2 voltage	$V_{g2}$	250	V
Cathode resistor	$R_k$	150	$\Omega$
Load resistance	$R_{aa\sim}$	9	$k\Omega$
Input voltage	$V_i$	0 0.32 7.8	$V_{RMS}$
Anode current	$I_a$	2x23.5 - 2x29.5	mA
Grid No.2 current	$I_{g2}$	2x3.2 - 2x6.6	mA
Output power	$W_o$	0 0.05 9	W
Total distortion	$d_{tot}$	- 4.5	%

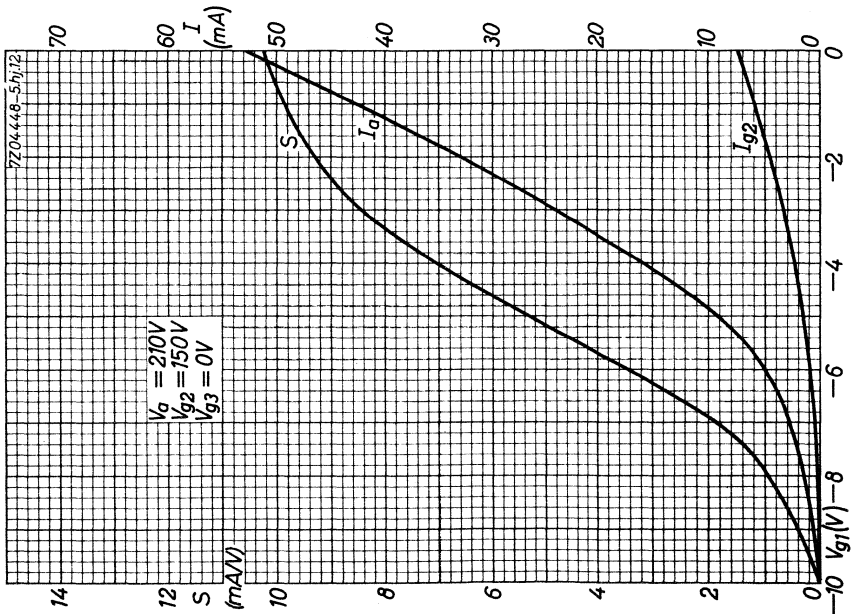
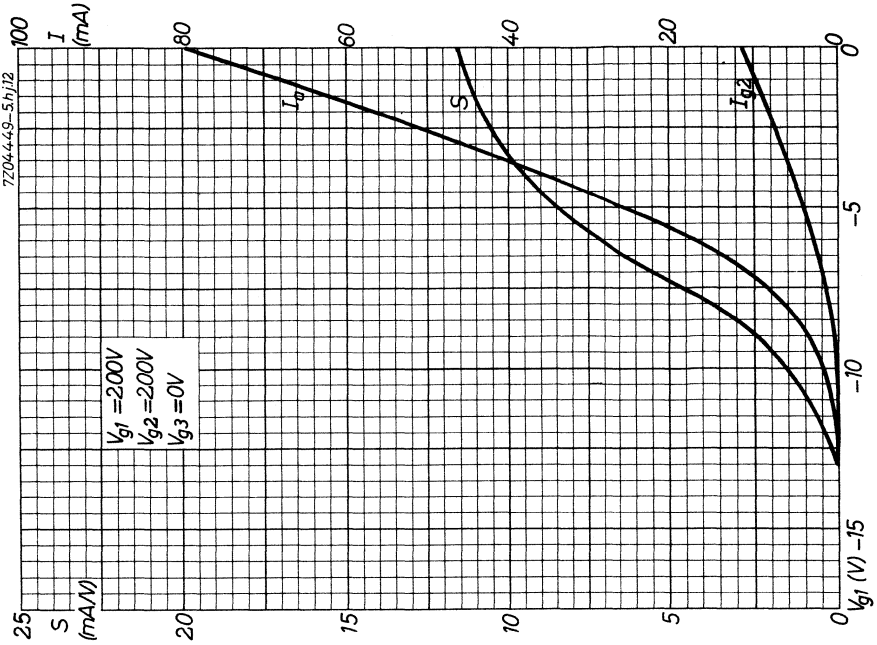


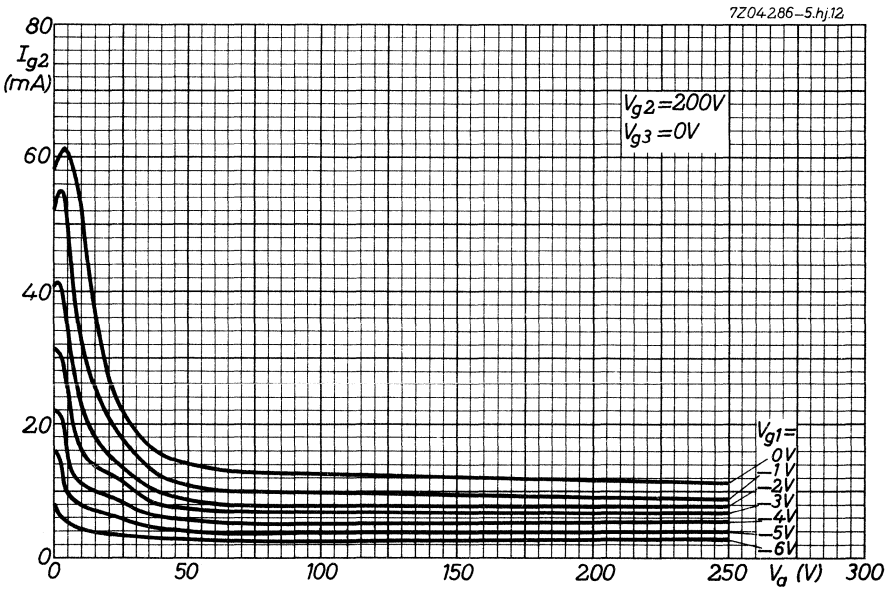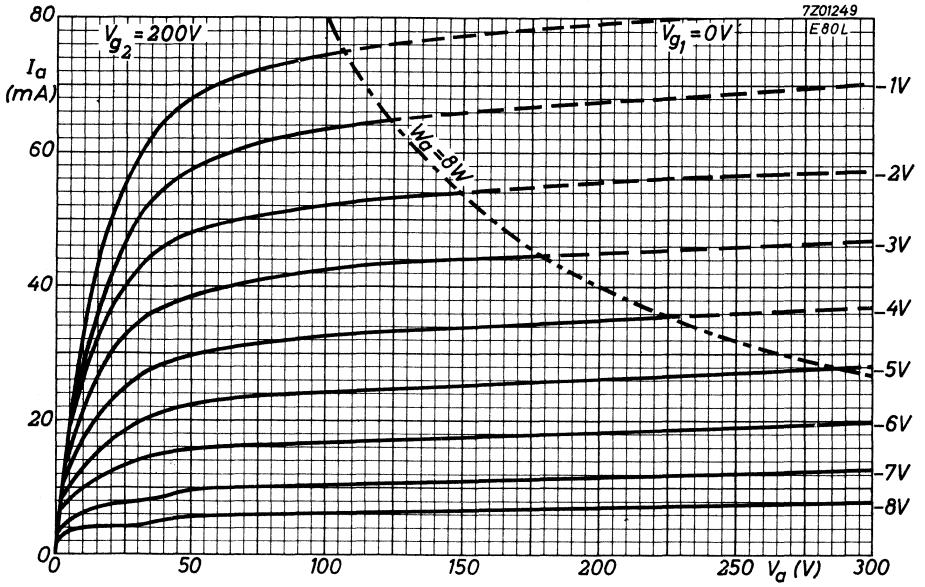





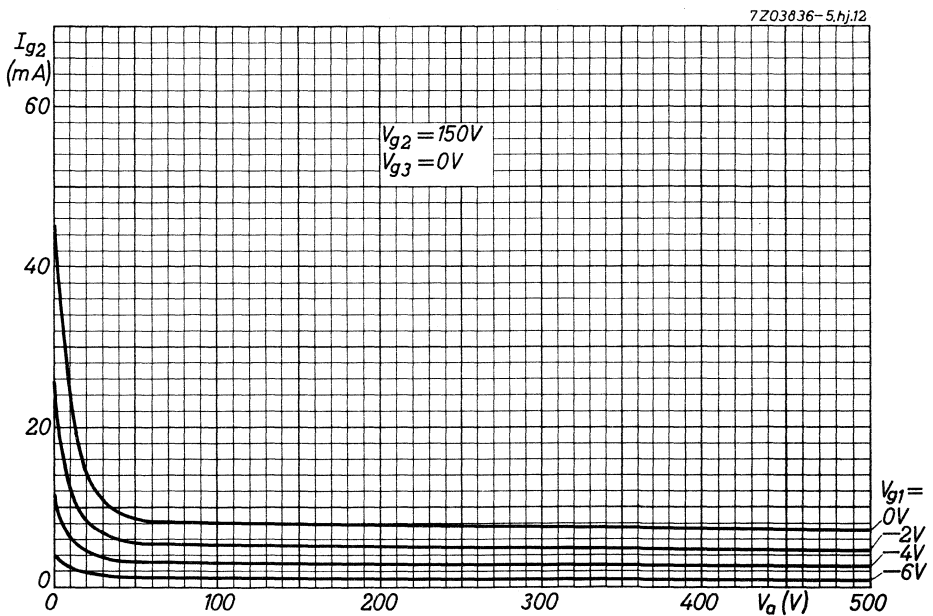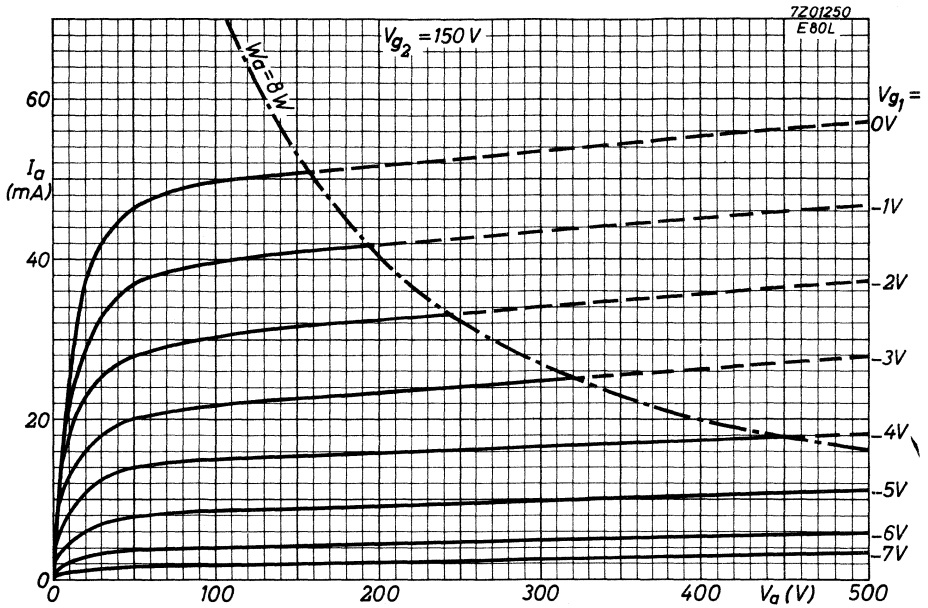

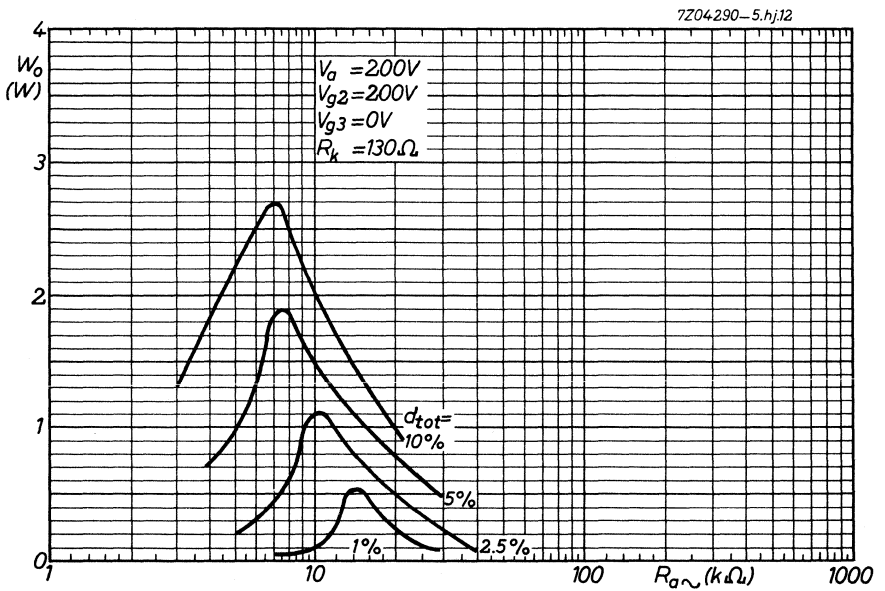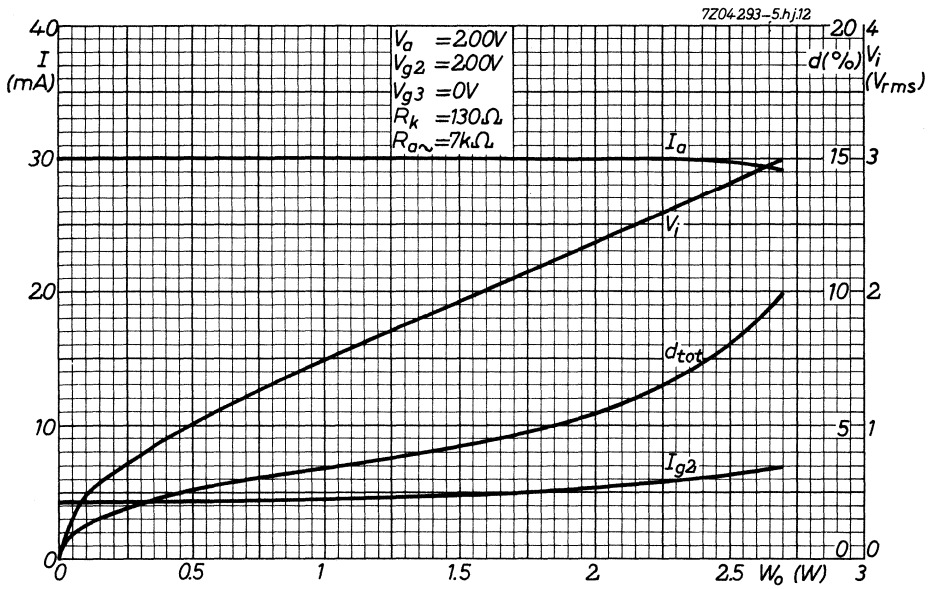

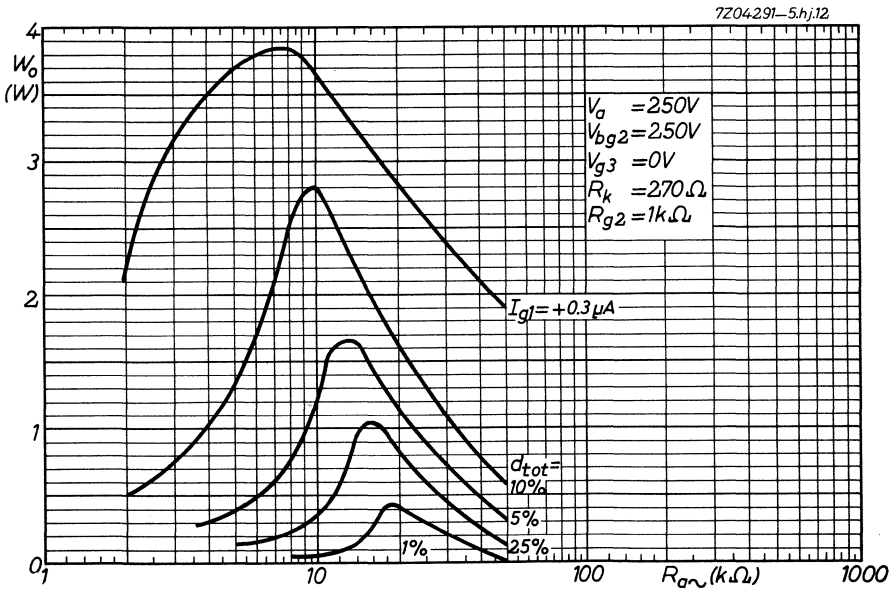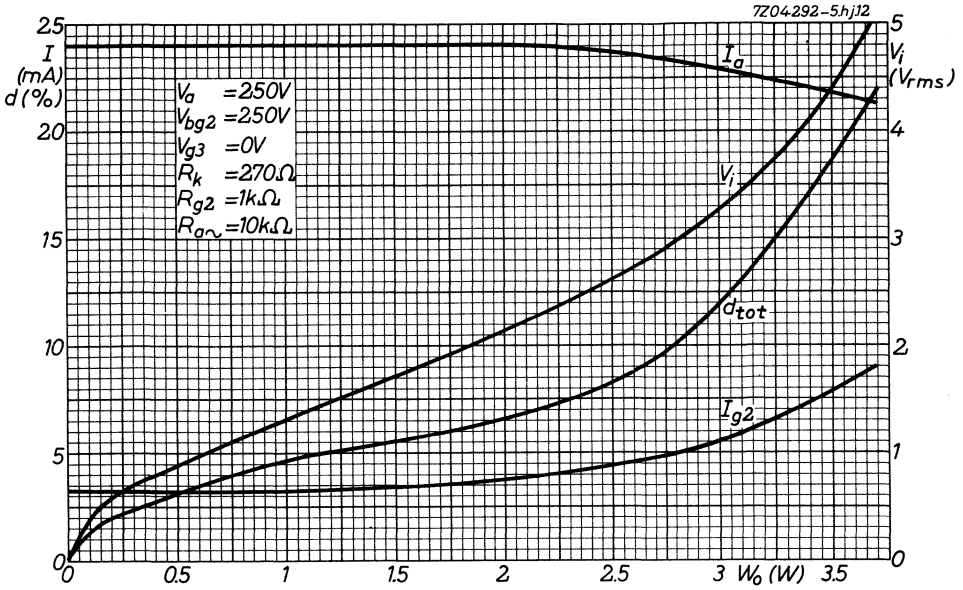

# E80L

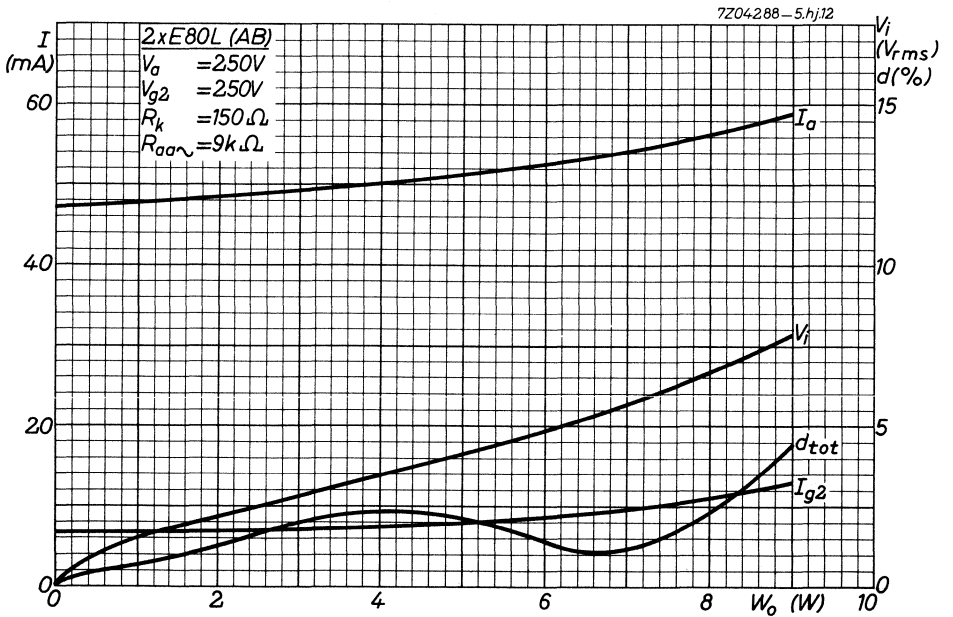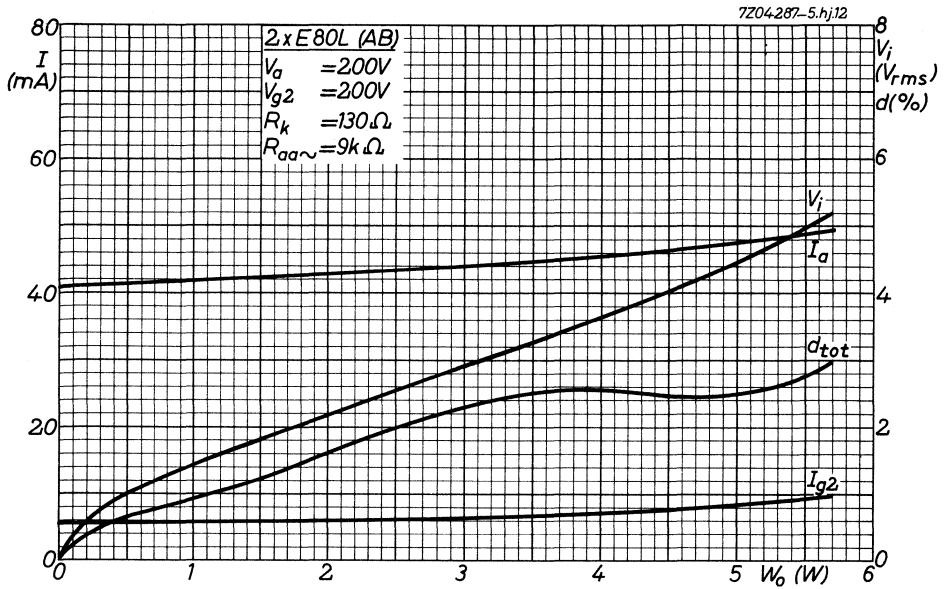

## S.Q. TUBE

Special quality output pentode designed for use in telephone equipment.


### QUICK REFERENCE DATA

Life test	10 000 hours	
Base	Noval. Gold plated pins	
Heating	Indirect a.c. or d.c. Series or parallel supply	
Heater voltage	$V_f$	6.3 V
Heater current	$I_f$	375 mA
Anode current	$I_a$	20 mA
Output power	$W_o$	1 W

### DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval

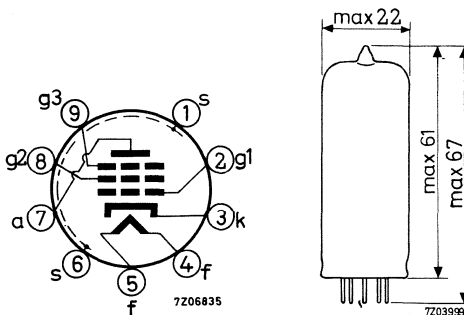

## CHARACTERISTICS

- Column I Nominal value or setting of the tube  
 II Range values for equipment design: Initial spread  
 III Range values for equipment design: End of life

		I	II	III	
Heater voltage	$V_f$	6.3			V
Heater current	$I_f$	375	355- 395		mA
Anode voltage	$V_a$	210			V
Grid No.3 voltage	$V_{g_3}$	0			V
Grid No.2 voltage	$V_{g_2}$	210			V
Cathode resistor	$R_k$	120			$\Omega$
Anode current	$I_a$	20	17- 23	min. 13.5	mA
Grid No.2 current	$I_{g_2}$	5.3	4.1- 6.5	min. 3.1	mA
Mutual conductance	S	11	9.5-12.5	min. 7.8	mA/V
Internal resistance	$R_i$	0.3	min. 0.2		M $\Omega$
Amplification factor grid No.2 to grid No.1	$\mu_{g_2g_1}$	36			
Equivalent noise resistance	$R_{eq}$	1.2			k $\Omega$
<u>Negative grid current</u>	$-I_{g_1}$		max. 0.5	max. 1.0	$\mu A$
<u>Hum voltage</u>	$V_{g_1}$		max. 0.2		mVRMS
Grid resistor $R_{g_1} = 0.5 M\Omega$ Heater centre earthed Cathode resistor bypassed					
<u>Leakage current between cathode and heater</u>	$I_{kf}$		max. 24		$\mu A$
Voltage between cathode and heater $V_{kf} = 120 V$					

**CAPACITANCES**

	I	II	
Anode to grid No.3, grid No.2 cathode heater and screen	$C_{a/g_3g_2}$ kfs	6.5	5.9 - 7.1 pF
Grid No.1 to grid No.3, grid No.2 cathode heater and screen	$C_{g_1/g_3g_2}$ kfs	11.2	10.4 - 12 pF
Grid No.1 to grid No.3, grid No.2 cathode heater and screen Measured with cathode current $I_k = 25$ mA	$C_{g_1/g_3g_2}$ kfs	14.3	pF
Anode to grid No.1	$C_{ag_1}$		max. 0.02 pF
Grid No.1 to heater	$C_{g_1f}$		max. 0.2 pF
Cathode to heater	$C_{kf}$	4.2	pF

**SHOCK AND VIBRATION RESISTANCE**

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

**LIFE**

Production samples are tested to be within the end of life values (column III) under the following conditions during 10.000 hours.

Anode voltage	$V_a$	210	V
Grid No.3 voltage	$V_{g_3}$	0	V
Grid No.2 voltage	$V_{g_2}$	210	V
Cathode resistor	$R_k$	120	$\Omega$

**LIMITING VALUES** (Design centre rating system)

Anode voltage	$V_{a0}$	max.	550 V
	$V_a$	max.	210 V
Anode dissipation	$W_a$	max.	4.5 W
Grid No.2 voltage	$V_{g20}$	max.	550 V
	$V_{g2}$	max.	210 V
Grid No.2 dissipation	$W_{g2}$	max.	1.2 W
Cathode current	$I_k$	max.	30 mA
Grid No.1 resistor:			
automatic bias	$R_{g1}$	max.	0.5 MΩ
fixed bias	$R_{g1}$	max.	0.25 MΩ
Voltage between cathode and heater	$V_{kf}$	max.	120 V
Bulb temperature	$t_{bulb}$	max.	170 °C

Heater voltage: The average heater voltage should be 6.3 V. Variations of the heater voltage exceeding the range of 6.0 V to 6.6 V will shorten the tube life. The tolerance of heater current (column II) should be taken into account.

**OPERATING CHARACTERISTICS**

Output tube. Class A


Anode voltage	$V_a$	210 V
Grid No.3 voltage	$V_{g3}$	0 V
Grid No.2 voltage	$V_{g2}$	210 V
Cathode resistor	$R_k$	120 Ω
Load resistance	$R_{a\sim}$	15 kΩ
Anode current	$I_a$	20 mA
Grid No.2 current	$I_{g2}$	5.3 mA
Output power	$W_o$	1 W
Total distortion	$d_{tot}$	5 %




OPERATING CHARACTERISTICS (continued)

Amplifier


Anode voltage	$V_a$	210 V
Grid No.3 voltage	$V_{g3}$	0 V
Grid No.2 voltage	$V_{g2}$	210 V
Cathode resistor	$R_k$	180 $\Omega$
Load resistance	$R_{a\sim}$	20 k $\Omega$
Anode current	$I_a$	15 mA
Grid No.2 current	$I_{g2}$	4 mA
Voltage gain	$V_o/V_i$	5.15 N


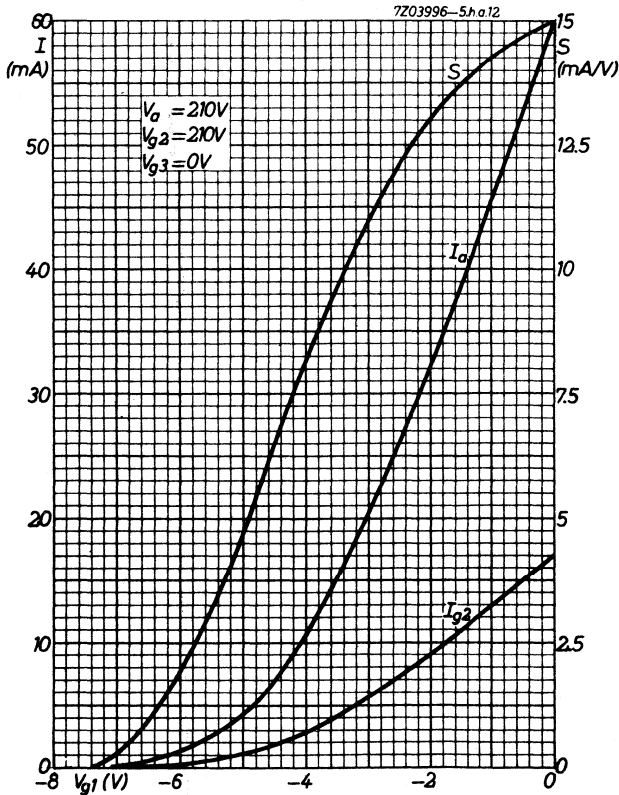



7203993-5.h.a.12

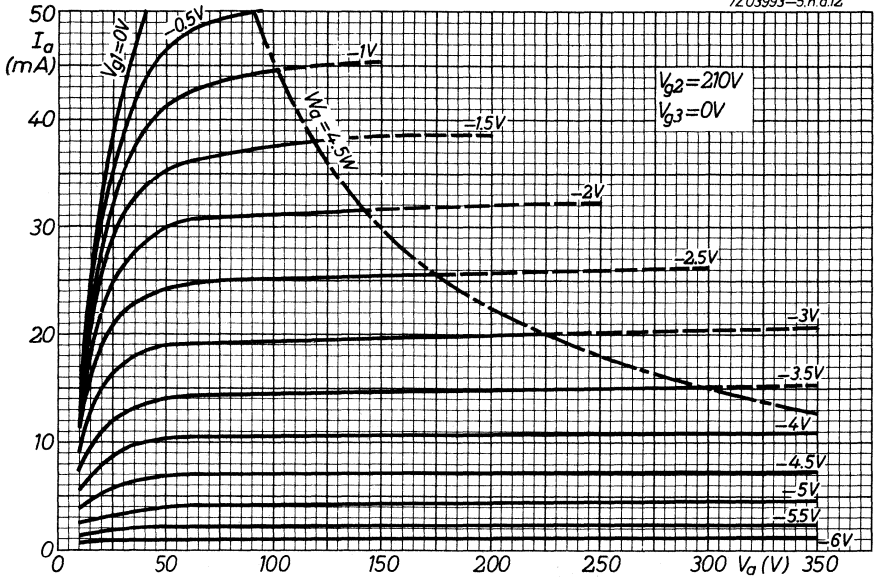

7203995-5.h.a.12

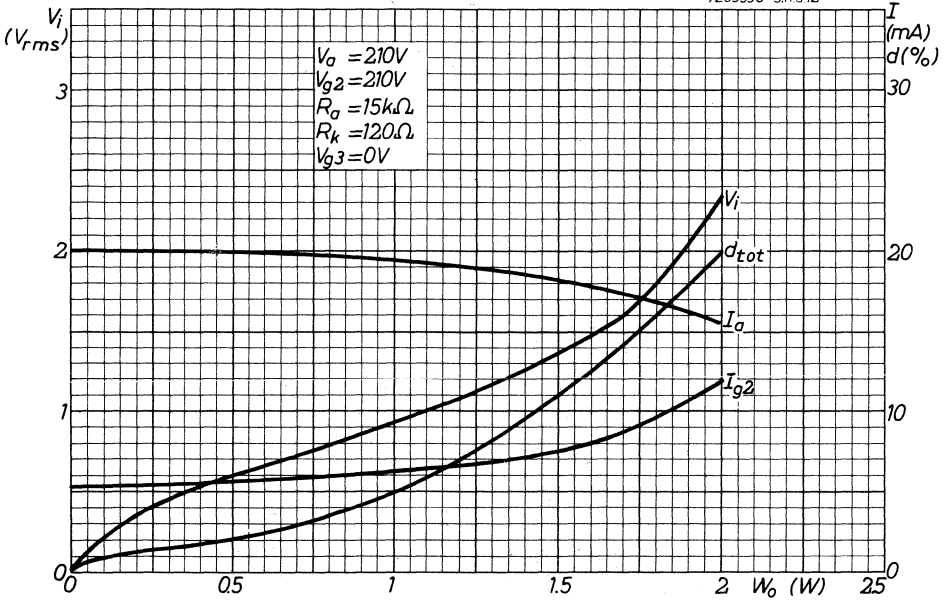

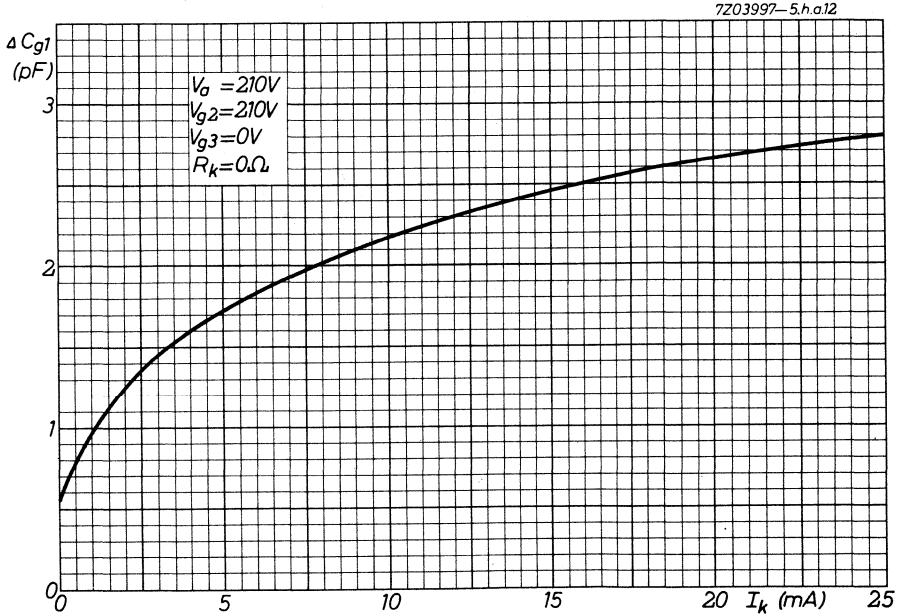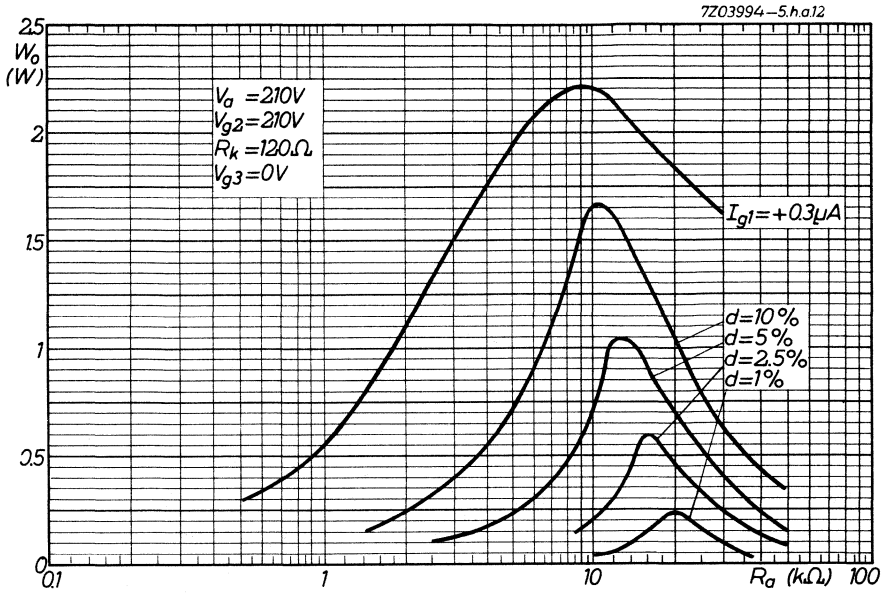

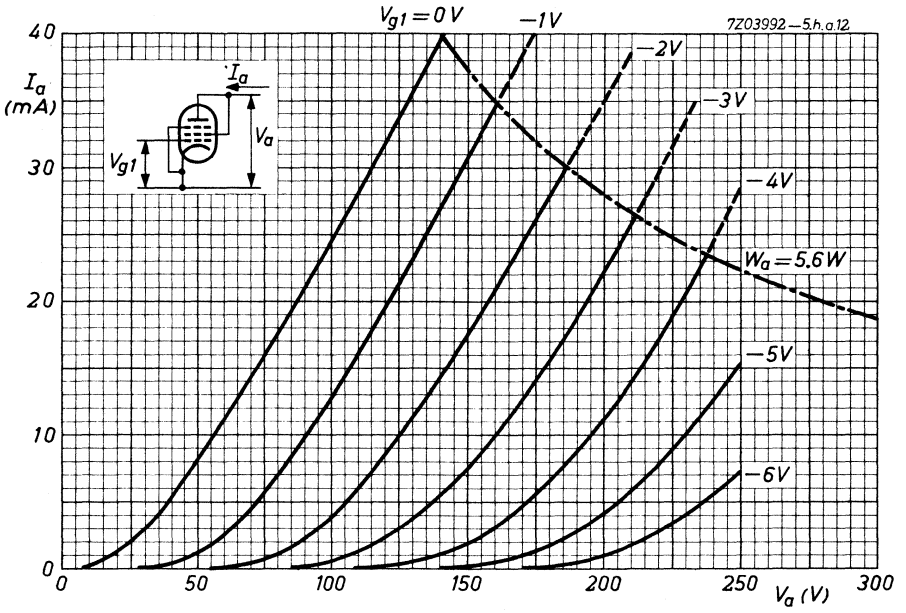

## S.Q. TUBE

Special quality double triode designed for use as amplifier oscillator, multivibrator and blocking oscillator.


### QUICK REFERENCE DATA

Life	10 000 hours	
Low interface resistance		
Mechanical quality	Shock and vibration resistant	
Base	Noval	
Heating	Indirect A.C. or D.C. ; Parallel supply	
Heater voltage	$V_f$	6.3 or 12.6 V
Heater current	$I_f$	300 or 150 mA
Anode current	$I_a$	10.5 mA
Mutual conductance	S	2.2 mA/V

### DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval

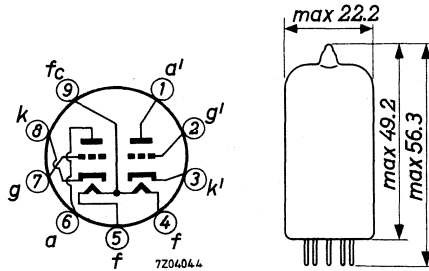

## CHARACTERISTICS (Both sections if applicable)

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage, pin 9 and 4 + 5	$V_f$	6.3			V
Heater current	$I_f$	300	285- 315		mA
Heater voltage, pin 4 and 5	$V_f$	12.6			V
Heater current	$I_f$	150			mA
Anode voltage	$V_a$	250			V
Cathode resistor	$R_k$	800			$\Omega$
Anode current	$I_a$	10.5	8.7-12.3	min. 7.0	mA
Difference in anode current of both systems	$I_a - I_a'$		max. 1.6		mA
Mutual conductance	S	2.2	1.8- 2.6	min. 1.5	mA/V
Amplification factor	$\mu$	17.0	15.7-18.3		
Internal resistance	$R_i$	7.7			k $\Omega$
<u>Cut-off voltage</u>					
Grid voltage	$-V_g$	22			V
Anode current	$I_a$	10			$\mu$ A
Grid voltage	$-V_g$		max. 30		V
Anode current	$I_a$	20			$\mu$ A
Grid voltage	$-V_g$		min. 18		V
Anode current	$I_a$	5			$\mu$ A
<u>Negative grid current</u>	$-I_g$		max. 0.5	max. 1.0	$\mu$ A
Anode voltage	$V_a$	100			V
Grid voltage	$V_g$	0			V
Anode current	$I_a$	11.8			mA
Mutual conductance	S	3.1			mA/V
Amplification factor	$\mu$	19.5			
Internal resistance	$R_i$	6.25			k $\Omega$

**CHARACTERISTICS** (continued)

		I	II	
<u>Leakage current between cathode and heater</u>	$I_{kf}$		max. 6.5	$\mu A$
<u>Insulation resistance:</u>				
Between grid and other electrodes Voltage between electrodes = 100 V	$R_{ins}$		min. 500	$M\Omega$
Between anode and other electrodes Voltage between electrodes = 300 V	$R_{ins}$		min. 500	$M\Omega$
<u>Vibrational noise output (20 to 5000 Hz)</u>	$V_o$		max. 100	$mV_{RMS}$
Anode voltage $V_a = 250$ V				
Grid voltage $-V_g = 8.5$ V				
Anode resistor $R_a = 2$ $k\Omega$				
Vibration frequency = 40 Hz				
Acceleration = 10 g				
Units in parallel				
<b>CAPACITANCES</b>				
Anode to cathode and heater	$C_{a/kf}$	0.5	0.3 - 0.7	pF
	$C_{a'/k'f}$	0.4	0.2 - 0.6	pF
Grid to cathode and heater	$C_{g/kf}$	1.6	1.25 - 1.95	pF
Anode to grid	$C_{ag}$	1.5	1.2 - 1.8	pF

**SHOCK AND VIBRATION RESISTANCE**

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

**LIFE**

Production samples are tested to be within the end of life values (column III) during 10 000 hours.

**LIMITING VALUES** (Absolute max. rating system)



Anode voltage	$V_{a0}$	max. 600 V
	$V_a$	max. 330 V
Anode dissipation	$W_a$	max. 3 W
Grid voltage	$-V_g$	max. 55 V
	$+V_g$	max. 0 V
Grid current	$I_g$	max. 5 mA
Grid resistor: fixed bias	$R_g$	max. 0.5 M $\Omega$
automatic bias	$R_g$	max. 1.0 M $\Omega$
Cathode current	$I_k$	max. 22 mA
Voltage between cathode and heater	$V_{kf}$	max. 100 V
Bulb temperature	$t_{bulb}$	max. 165 °C


Heater voltage: The average heater voltage should be 6.3 V.

Variations of the heater voltage exceeding the range of 6.0 V to 6.6 V will shorten the tube life.

The tolerance of heater current (column II) should be taken into account.



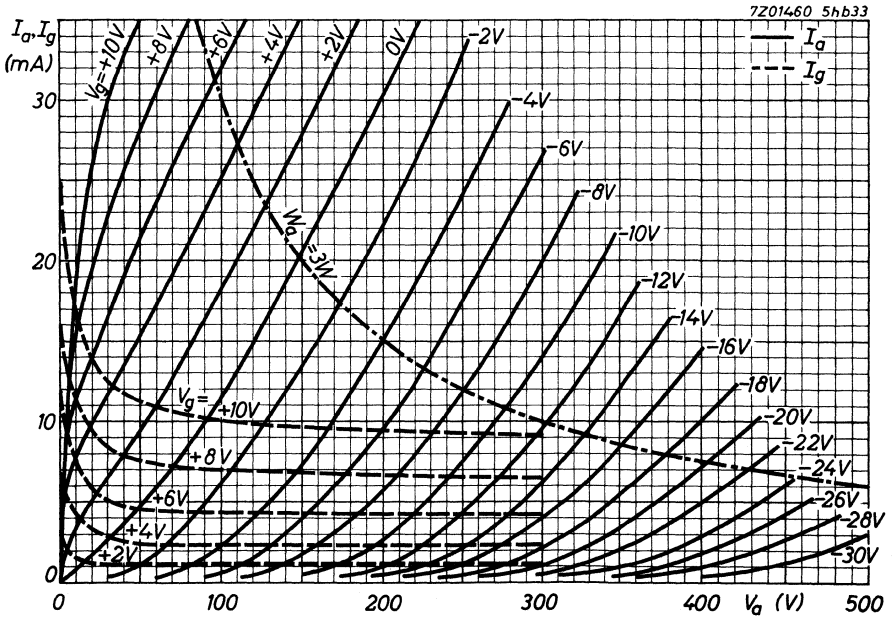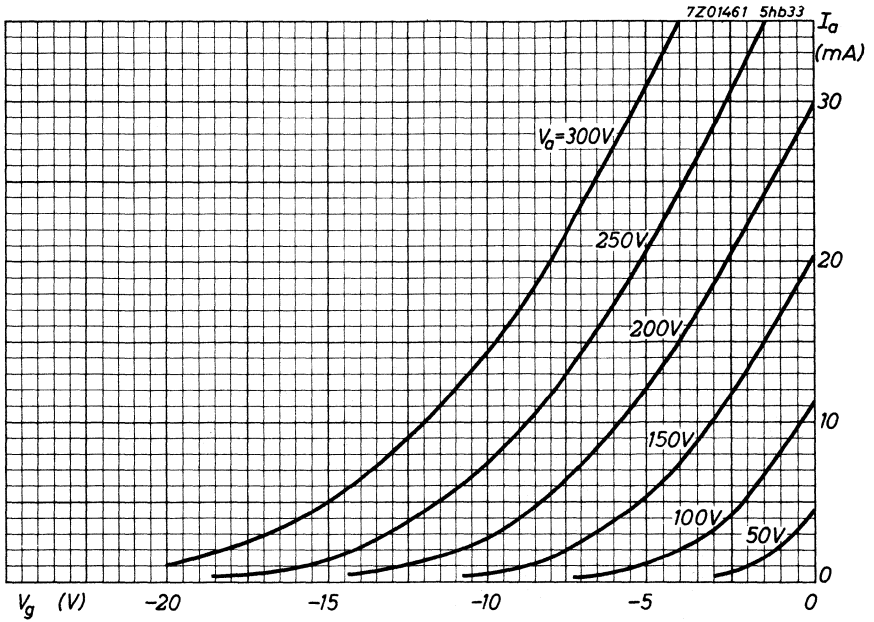

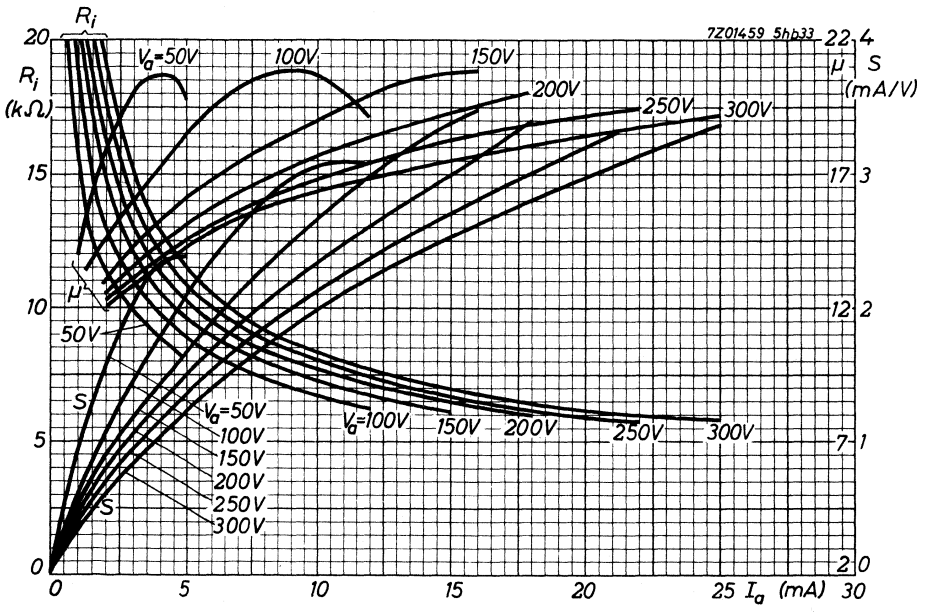

## S.Q. TUBE

Special quality double triode designed for use as A.F. amplifier, phase inverter and amplifier in measuring equipment.


### QUICK REFERENCE DATA

Life test	10 000 hours
Low interface resistance	
Low microphony level	
Mechanical quality	Shock and vibration resistant
Base	Noval
Heating	Indirect A.C. or D.C.; parallel supply
Heater voltage	$V_f$ 6.3 V or 12.6 V
Heater current	$I_f$ 300 mA or 150 mA
Anode current	$I_a$ 1.25 mA
Mutual conductance	$S$ 1.3 mA/V
Amplification factor	$\mu$ 100

### DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval

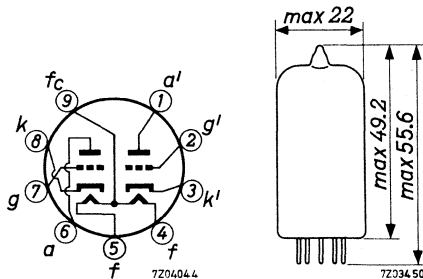

**CHARACTERISTICS** (Both systems if applicable)

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage pin 9 and 4 + 5	$V_f$	6.3			V
Heater current	$I_f$	300	285 - 315		mA
Heater voltage pin 4 and 5	$V_f$	12.6			V
Heater current	$I_f$	150			mA
Anode voltage	$V_a$	250			V
Cathode resistor	$R_k$	1.6			k $\Omega$
Anode current	$I_a$	1.25	1.1 - 1.4	min. 0.8	mA
Mutual conductance	S	1.6	1.3 - 1.95	min. 1.05	mA/V
Amplification factor	$\mu$	100			
Internal resistance	$R_i$	62.5			k $\Omega$
<u>Negative grid current</u>	$-I_g$		max. 0.2	max. 0.5	$\mu A$
<u>Cut-off voltage</u>	$-V_g$		max. 4		V
Anode current $I_a = 20 \mu A$					
Anode voltage	$V_a$	100			V
Anode current	$I_a$	0.5			mA
Cathode resistor	$R_k$	2			k $\Omega$
Mutual conductance	S	1.25			mA/V
Amplification factor	$\mu$	100			
Internal resistance	$R_i$	80			k $\Omega$
<u>Leakage current between cathode and heater</u>	$I_{kf}$		max. 5		$\mu A$
Voltage between cathode and heater $V_{kf} = 100 V$					

**CHARACTERISTICS** (continued)Insulation resistance:

Between grid and other electrodes

	I	II	
$R_{ins}$		max. 300	$M\Omega$

Voltage between electrodes = 100 V

Between anode and other electrodes

$R_{ins}$		max. 300	$M\Omega$
-----------	--	----------	-----------

Voltage between electrodes = 300 V

Vibrational noise output (20 to 5000 Hz)

$V_o$		max. 10	$mV_{RMS}$
-------	--	---------	------------

Anode supply voltage  $V_{ba} = 250$  VAnode resistor  $R_a = 5$  k $\Omega$ Grid voltage  $-V_g = 2$  V

Vibration frequency = 25 Hz

Acceleration = 2.5 g

Units in parallel

**CAPACITANCES**

Grid to cathode and heater

$C_{g/kf}$	1.6		pF
------------	-----	--	----

Anode to cathode and heater

$C_{a/kf}$	0.46		pF
------------	------	--	----

$C_{a'/kf}$	0.34		pF
-------------	------	--	----

Anode to grid

$C_{ag}$	1.7		pF
----------	-----	--	----

Grid to heater

$C_{gf}$		max. 0.15	pF
----------	--	-----------	----

Anode to anode other system

$C_{aa'}$		max. 0.6	pF
-----------	--	----------	----

Grid to grid other system

$C_{gg'}$		max. 10	mpF
-----------	--	---------	-----

Anode to grid other system

$C_{ag'}$		max. 60	mpF
-----------	--	---------	-----

$C_{ga'}$		max. 60	mpF
-----------	--	---------	-----

**LIMITING VALUES** (Absolute max. rating system) (Each unit)

Anode voltage

$V_{a_o}$	max. 600	V
-----------	----------	---

$V_a$	max. 330	V
-------	----------	---

Anode dissipation

$W_a$	max. 1.2	W
-------	----------	---

Grid voltage

$-V_g$	max. 55	V
--------	---------	---

$+V_g$	max. 0.5	V
--------	----------	---

Cathode current

$I_k$	max. 9	mA
-------	--------	----

## LIMITING VALUES (continued)

Grid resistor: fixed bias	$R_g$	max. 1.2 $M\Omega$
automatic bias	$R_g$	max. 2.2 $M\Omega$
grid current bias	$R_g$	max. 25 $M\Omega$
Voltage between cathode and heater	$V_{kf}$	max. 200 V
Resistance in cathode heater circuit in case of phase inverter circuit	$R_{kf}$	max. 135 $k\Omega$
Bulb temperature	$t_{bulb}$	max. 170 $^{\circ}C$
Microphony:		
Input voltage required for 50 mW output	$V_i$	min. 0.5 mV

Heater voltage: The average heater voltage should be 6.3 V  
 Variations of the heater voltage exceeding the range of 6.0 V to 6.6 V will shorten the tube life.  
 The tolerance of the heater current (column II) should be taken into account.

## OPERATING CHARACTERISTICS

### A.F. amplifier - circuit fig.1

Anode supply voltage	$V_{ba}$	200	250	300	350	400	V
Anode resistor	$R_a$	47	47	47	47	47	$k\Omega$
Cathode resistor	$R_k$	1500	1200	1000	820	680	$\Omega$
Grid resistor next stage	$R_{g'}$	150	150	150	150	150	$k\Omega$
Anode current	$I_a$	0.86	1.18	1.55	1.98	2.45	mA
Output voltage (Grid current = 0.3 $\mu A$ )	$V_o$	18	23	26	33	37	$V_{RMS}$
Voltage gain	$V_o/V_i$	34.0	37.5	40.0	42.5	44.0	
Total distortion	$d_{tot}$	8.5	7.0	5.0	4.4	3.6	%

## OPERATING CHARACTERISTICS (continued)

## A.F. amplifier - circuit fig.1 (continued)

Anode supply voltage	$V_{ba}$	200	250	300	350	400	V
Anode resistor	$R_a$	100	100	100	100	100	$k\Omega$
Cathode resistor	$R_k$	1800	1500	1200	1000	820	$\Omega$
Grid resistor next stage	$R_{g'}$	330	330	330	330	330	$k\Omega$
Anode current	$I_a$	0.65	0.86	1.11	1.40	1.72	mA
Output voltage (Grid current = $0.3 \mu A$ )	$V_o$	20	26	30	36	38	$V_{RMS}$
Voltage gain	$V_o/V_i$	50	54.5	57.0	61.0	63.0	
Total distortion	$d_{tot}$	4.8	3.9	3.7	2.2	1.7	%

Anode supply voltage	$V_{ba}$	200	250	300	350	400	V
Anode resistor	$R_a$	220	220	220	220	220	$k\Omega$
Cathode resistor	$R_k$	3300	2700	2200	1500	1200	$\Omega$
Grid resistor next stage	$R_{g'}$	680	680	680	680	680	$k\Omega$
Anode current	$I_a$	0.36	0.48	0.63	0.85	1.02	mA
Output voltage (Grid current = $0.3 \mu A$ )	$V_o$	24	28	36	37	38	$V_{RMS}$
Voltage gain	$V_o/V_i$	56	66.5	72.0	75.5	76.5	
Total distortion	$d_{tot}$	4.6	3.4	2.6	1.6	1.1	%

## A.F. amplifier - circuit fig.2.

Anode supply voltage	$V_{ba}$	200	250	300	350	400	V
Anode resistor	$R_a$	47	47	47	47	47	$k\Omega$
Grid resistor next stage	$R_{g'}$	150	150	150	150	150	$k\Omega$
Anode current	$I_a$	1.02	1.45	2.02	2.50	3.10	mA
Output voltage	$V_o$	18	23	26	33	37	$V_{RMS}$
Voltage gain	$V_o/V_i$	37	39	41	44	45	
Total distortion	$d_{tot}$	5.6	4.2	2.9	2.7	2.5	%

## OPERATING CHARACTERISTICS (continued)

### A.F. amplifier - circuit fig.2. (continued)

Anode supply voltage	$V_{ba}$	200	250	300	350	400	V
Anode resistor	$R_a$	100	100	100	100	100	k $\Omega$
Grid resistor next stage	$R_{g'}$	330	330	330	330	330	k $\Omega$
Anode current	$I_a$	0.70	1.00	1.29	1.62	1.95	mA
Output voltage	$V_o$	20	26	30	36	38	V <sub>RMS</sub>
Voltage gain	$V_o/V_i$	50	51	54	56	58	
Total distortion	$d_{tot}$	3.9	2.6	2.0	1.8	1.6	%
<hr/>							
Anode voltage	$V_{ba}$	200	250	300	350	400	V
Anode resistor	$R_a$	220	220	220	220	220	k $\Omega$
Grid resistor next stage	$R_{g'}$	680	680	680	680	680	k $\Omega$
Anode current	$I_a$	0.39	0.56	0.75	0.88	1.09	mA
Output voltage	$V_o$	24	28	36	37	38	V
Voltage gain	$V_o/V_i$	58	62	66	67	68	
Total distortion	$d_{tot}$	4.6	2.7	2.2	1.7	1.4	%

### A.F. amplifier - circuit fig.3.

Anode supply voltage	$V_{ba}$	100	150	200	250	300	350	400	V
Anode resistor	$R_a$	47	47	47	47	47	47	47	k $\Omega$
Grid resistor next stage	$R_{g'}$	150	150	150	150	150	150	150	k $\Omega$
Anode current	$I_a$	0.35	0.84	1.40	1.95	2.52	3.19	3.80	mA
Voltage gain	$V_o/V_i$	25	33	34	36	38	40	41	
Total distortion:									
at $V_o = 2 V_{RMS}$	$d_{tot}$	1.7	2.5	2.4	2.3	2.2	2.2	2.1	%
at $V_o = 4 V_{RMS}$	$d_{tot}$	2.1	4.6	4.7	4.6	4.5	4.2	4.2	%
at $V_o = 6 V_{RMS}$	$d_{tot}$	6.0	5.2	5.6	5.6	5.5	5.5	5.4	%



**OPERATING CHARACTERISTICS** (continued)

A.F. amplifier - circuit fig.3. (continued)

Anode supply voltage	$V_{ba}$	100	150	200	250	300	350	400	V
Anode resistor	$R_a$	100	100	100	100	100	100	100	k $\Omega$
Grid resistor next stage	$R_{g'}$	330	330	330	330	330	330	330	k $\Omega$
Anode current	$I_a$	0.24	0.56	0.88	1.23	1.58	1.92	2.29	mA
Voltage gain	$V_o/V_i$	34	43	46	48	50	51	52	
Total distortion:									
at $V_o = 2 V_{RMS}$	$d_{tot}$	1.6	1.9	1.9	1.8	1.8	1.8	1.7	%
at $V_o = 4 V_{RMS}$	$d_{tot}$	2.3	3.0	3.8	3.8	3.6	3.6	3.5	%
at $V_o = 6 V_{RMS}$	$d_{tot}$	2.6	4.7	5.1	5.1	5.0	4.9	4.8	%

Anode supply voltage	$V_{ba}$	100	150	200	250	300	350	400	V
Anode resistor	$R_a$	220	220	220	220	220	220	220	k $\Omega$
Grid resistor next stage	$R_{g'}$	680	680	680	680	680	680	680	k $\Omega$
Anode current	$I_a$	0.14	0.32	0.49	0.67	0.85	1.05	1.23	mA
Voltage gain	$V_o/V_i$	42	51	54	57	58	59	60	
Total distortion:									
at $V_o = 2 V_{RMS}$	$d_{tot}$	1.6	1.7	1.7	1.6	1.6	1.6	1.6	%
at $V_o = 4 V_{RMS}$	$d_{tot}$	2.5	3.0	3.0	2.9	2.9	2.8	2.7	%
at $V_o = 6 V_{RMS}$	$d_{tot}$	3.2	4.4	4.4	4.4	4.4	4.3	4.2	%

Phase inverter - circuit fig.4

Supply voltage	$V_b$	250	350	V
Anode voltage	$V_a$	65	90	V
Anode resistor	$R_a, R_{a'}$	100	150	k $\Omega$
Cathode resistor	$R_k$	68	82	k $\Omega$
Anode current	$I_a + I_{a'}$	1.0	1.2	mA
Voltage gain	$V_o/V_i$	25		27
Output voltage (Grid current = 0.3 $\mu$ A)	$V_o$	7	20	10 35 $V_{RMS}$
Total distortion	$d_{tot}$	0.6	1.8	0.5 1.8 %

$V_a$  should be adjusted to the specified value for  $I_a + I_{a'}$ .

## OPERATING CHARACTERISTICS (continued)

Phase inverter - circuit fig.5.

Supply voltage	$V_b$	250	350	V		
Cathode resistor	$R_k$	1200	820	$\Omega$		
Anode current	$I_a + I_{a'}$	1.08	1.7	mA		
Voltage gain	$V_o/V_i$	58	62			
Output voltage (Grid current = $0.3 \mu A$ )	$V_o$	7	35	9	45	$V_{RMS}$
Total distortion	$d_{tot}$	1.1	5.5	0.7	3.5	%

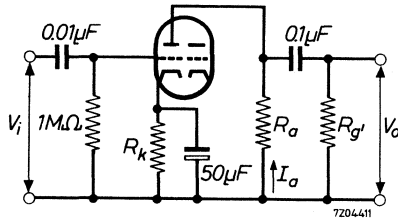


Fig. 1

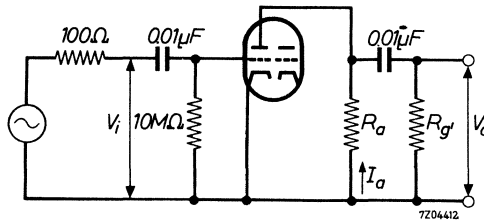


Fig. 2

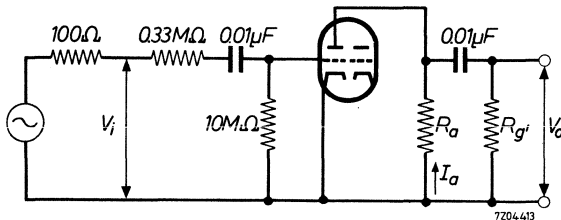


Fig. 3

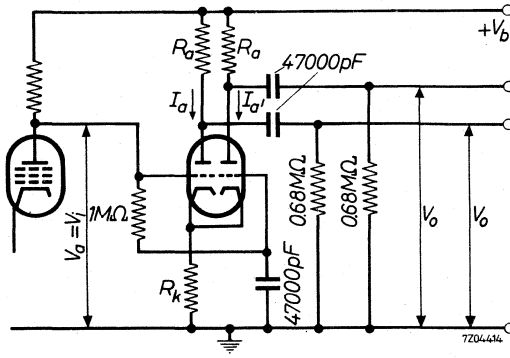


Fig. 4



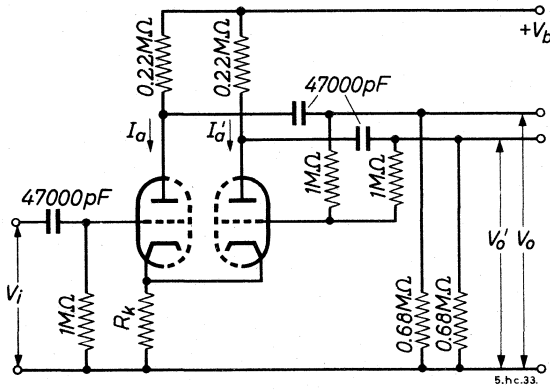




Fig. 5



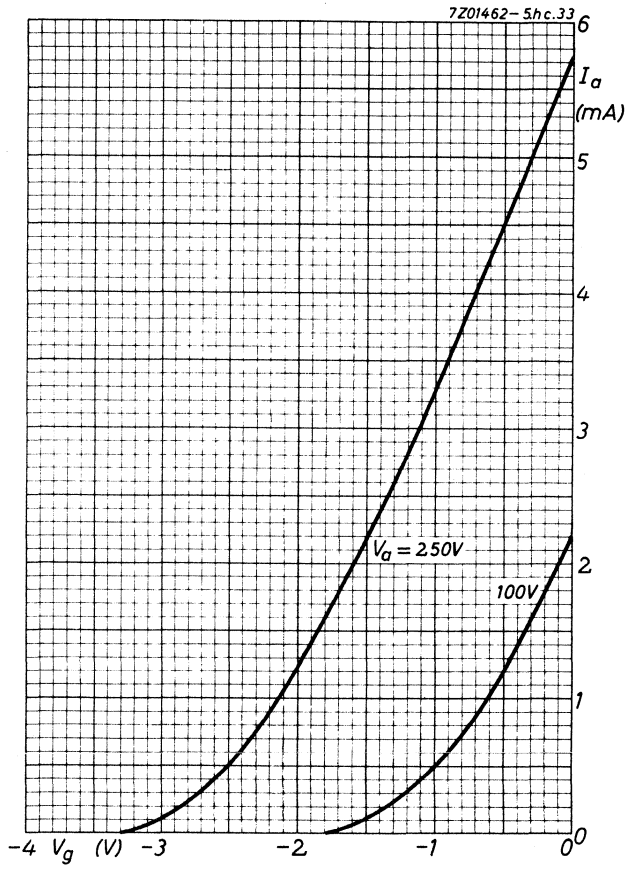

7201463-5.hc.33

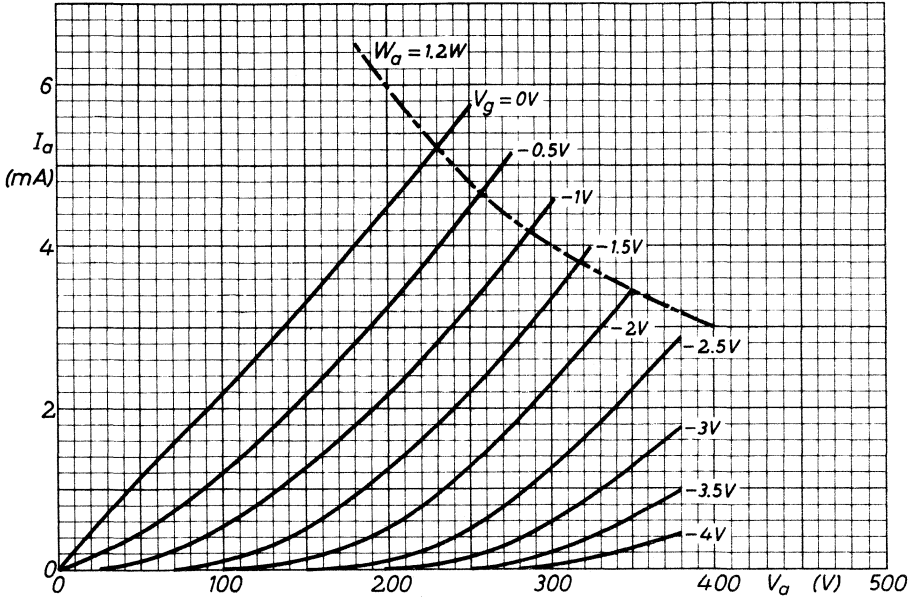

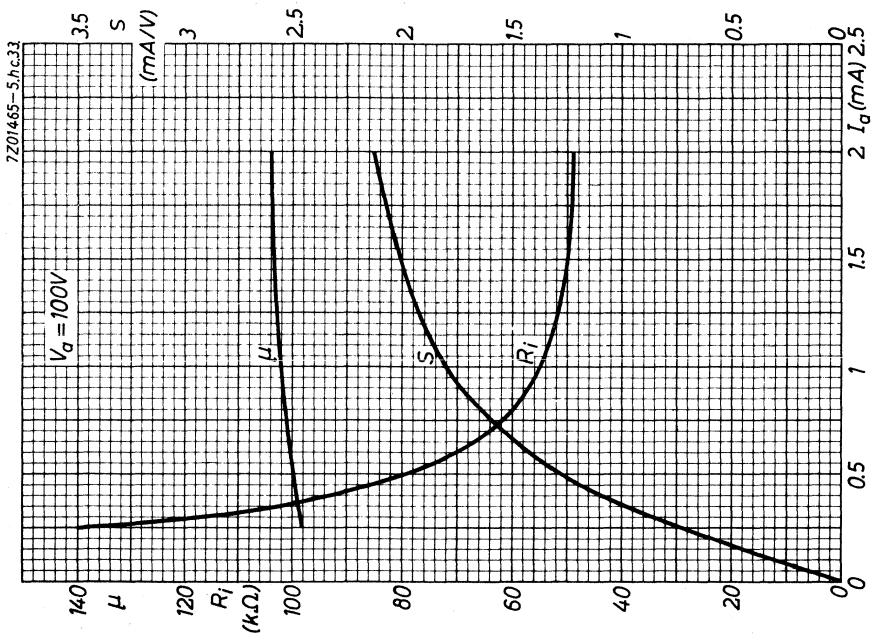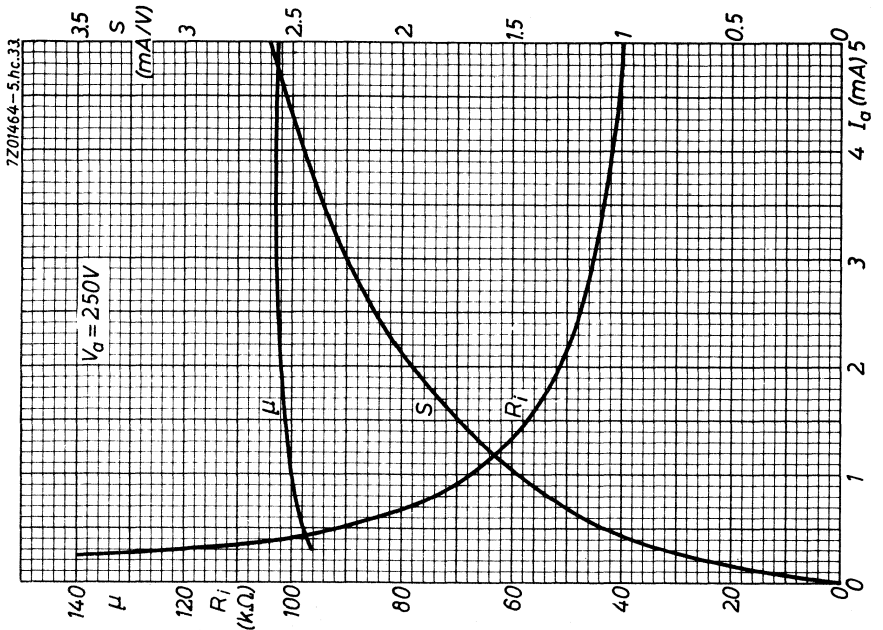

## S.Q. TUBE

Special quality pentode designed for use in telephone equipment.





### QUICK REFERENCE DATA

Life expectancy	10 000 hours	
Low interface resistance		
Base	Noval. Gold plated pins	
Heating	Indirect A.C. or D.C. Series or parallel supply	
Heater voltage	$V_f$	6.3 V
Heater current	$I_f$	0.3 A
Anode current	$I_a$	10 mA
Mutual conductance	S	9 mA/V

### DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval



## CHARACTERISTICS

Column I Nominal value or setting of the tube.

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage	$V_f$	6.3			V
Heater current	$I_f$	300	285 - 315		mA
Anode voltage	$V_a$	210			V
Grid No.3 voltage	$V_{g_3}$	0			V
Grid No.2 voltage	$V_{g_2}$	120			V
Cathode resistor	$R_k$	165			$\Omega$
Anode current	$I_a$	10	8.7 - 11.3	7	mA
Grid No.2 current	$I_{g_2}$	2.1	1.7 - 2.5	1.25	mA
Mutual conductance	S	9	7.8 - 10.2	6.4	mA/V
Internal resistance	$R_i$	0.5	min. 0.3		M $\Omega$
Amplification factor grid No.2 to grid No.1	$\mu_{g_2g_1}$	38			
Equivalent noise resistance (R.F.)	$R_{eq}$	750	max.1000		$\Omega$
Equivalent noise resistance (A.F.)	$R_{eq}$		max. 36		k $\Omega$
<u>Negative grid No.1 current</u>	$-I_{g_1}$		max. 0.5	max.1.0	$\mu A$
<u>Hum voltage</u>	$V_{g_1}$		max. 0.5		mV <sub>RMS</sub>
Grid resistor $R_{g_1} = 0.5 M\Omega$					
Cathode resistor by passed					
<u>Cut off voltage</u>	$-V_{g_1}$	5	max.5.25		V
Anode voltage	$V_a$	210			V
Grid No.3 voltage	$V_{g_3}$	0			V
Grid No.2 voltage	$V_{g_2}$	120			V
Anode current	$I_a$	0.5			mA



**CHARACTERISTICS (continued)**

Leakage current between cathode and heater

Voltage between heater and cathode  $V_{kf} = 100$  V

	I	II	III	
$I_{kf}$		max. 15		$\mu A$

Insulation resistance between two arbitrary electrodes

Voltage between electrodes  $V = 250$  V

$R$		min. 100		$M\Omega$
-----	--	----------	--	-----------

**CAPACITANCES**

Radiation capacitances measured to a surrounding cylinder, internal diameter 52 mm, height 98 mm.

Grid No.1 to grid No.2, grid No.3, cathode, heater and screen

	I	II	
$C_{g_1/g_2g_3kfs}$	8	8.7	pF

Grid No.1 to grid No.2, grid No.3, cathode, heater and screen  
Cathode current = 12.1 mA

$C_{g_1/g_2g_3kfs}$	10.8		pF
---------------------	------	--	----

Anode to grid No.2, grid No.3, cathode, heater and screen

$C_{a/g_2g_3kfs}$	3.5	max. 4.1	pF
-------------------	-----	----------	----

Anode to grid No.1

$C_{ag_1}$		max. 15	mpF
------------	--	---------	-----

Grid No.1 to heater

$C_{g_1f}$		max.0.15	pF
------------	--	----------	----

Cathode to heater

$C_{kf}$	4		pF
----------	---	--	----

Grid No.1 radiation capacitance

$C_{rg_1}$	max.25		mpF
------------	--------	--	-----

Anode radiation capacitance



$C_{ra}$	max.25		mpF
----------	--------	--	-----

**LIFE EXPECTANCY**



When the tube is operated under the following conditions the range values of the characteristics in column III may be expected not to be exceeded during an operation period of 10 000 hours.



Anode voltage	$V_a$	210 V
Grid No.3 voltage	$V_{g_3}$	0 V
Grid No.2 voltage	$V_{g_2}$	120 V
Cathode resistor	$R_k$	165 $\Omega$





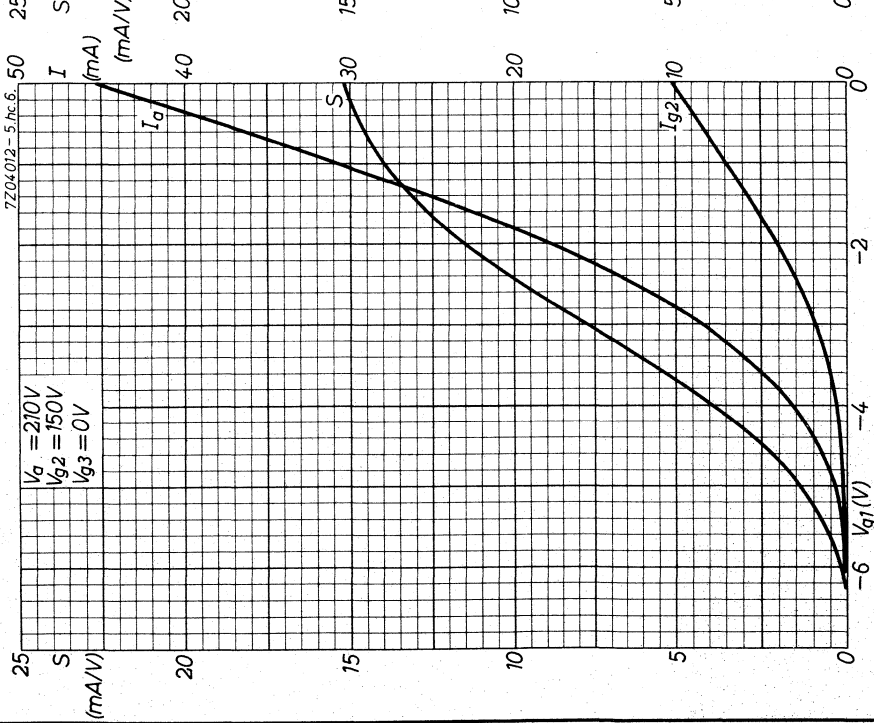
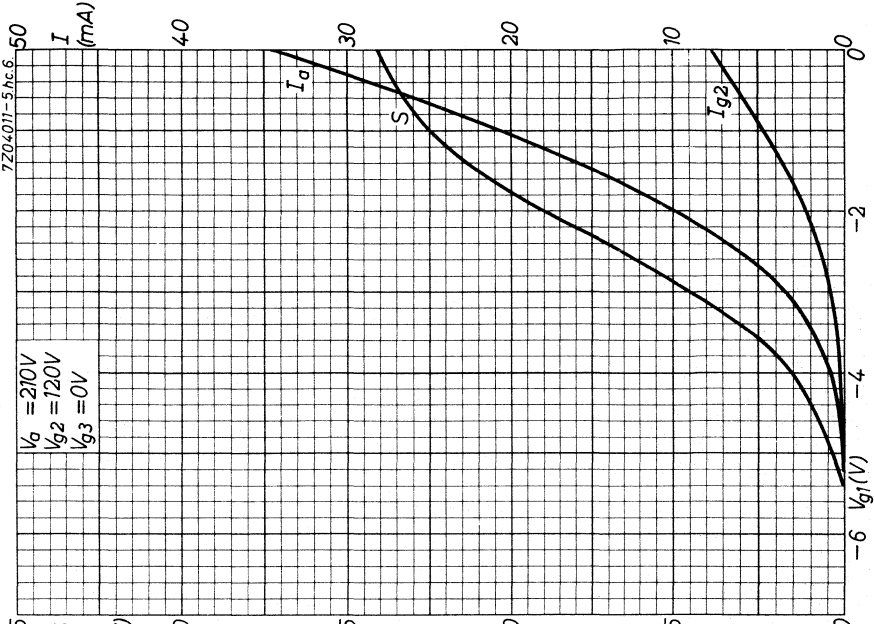



# E83F

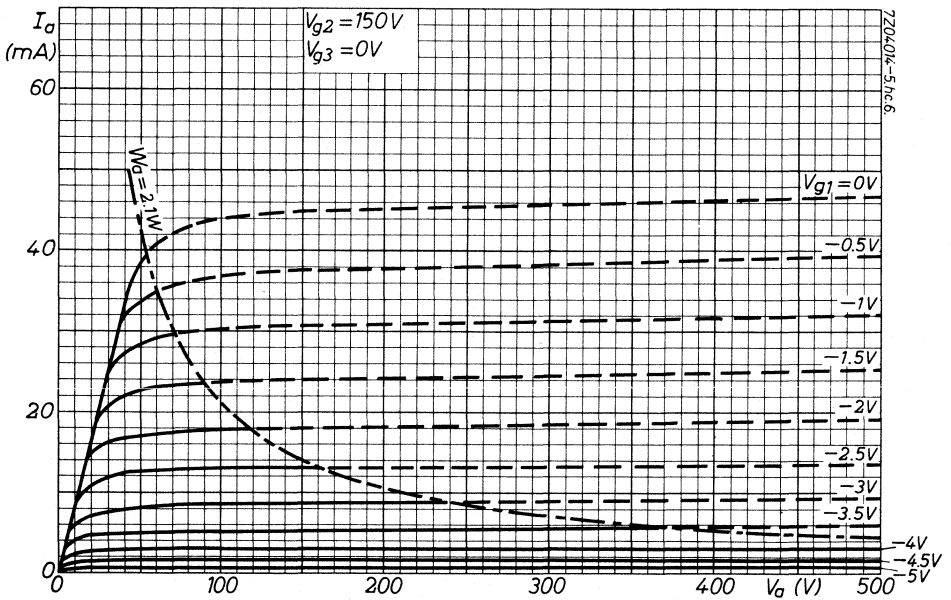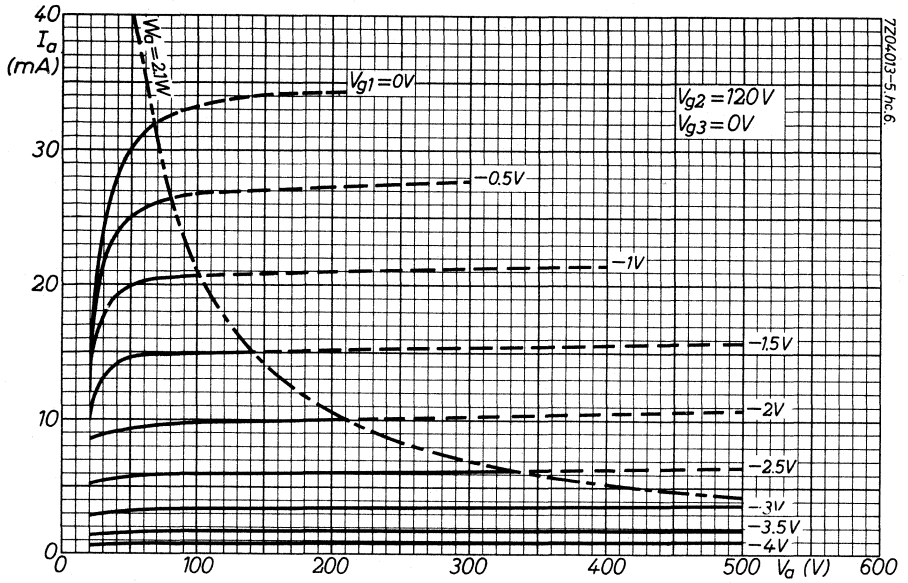

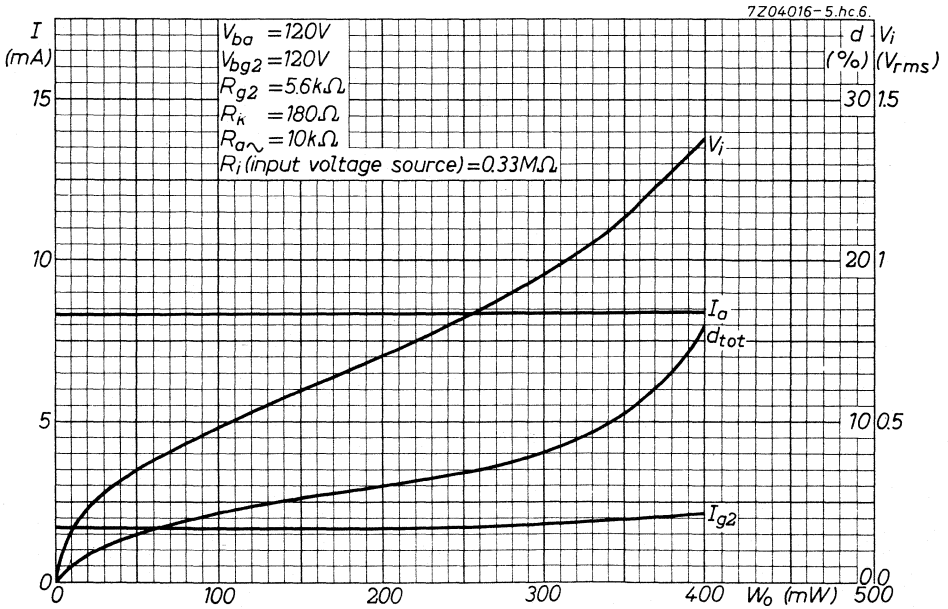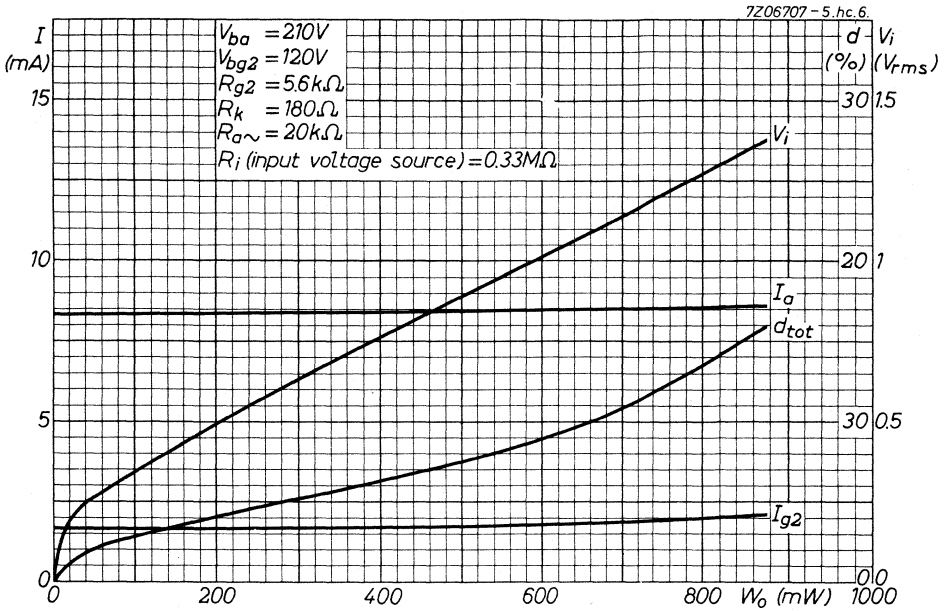

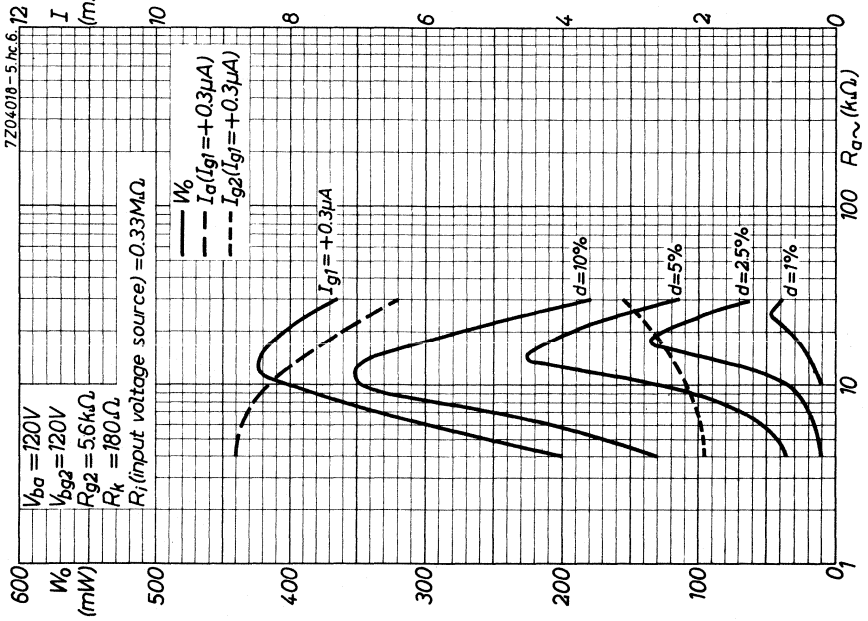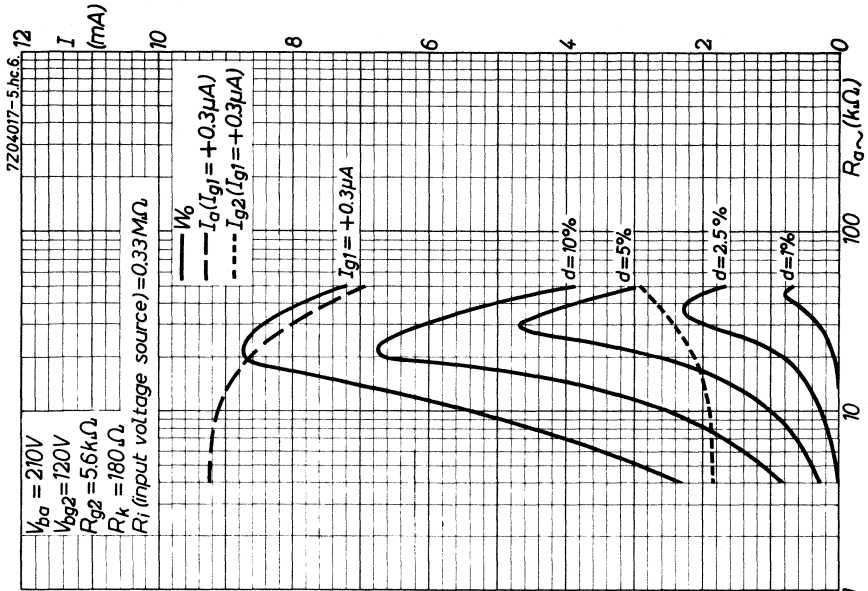

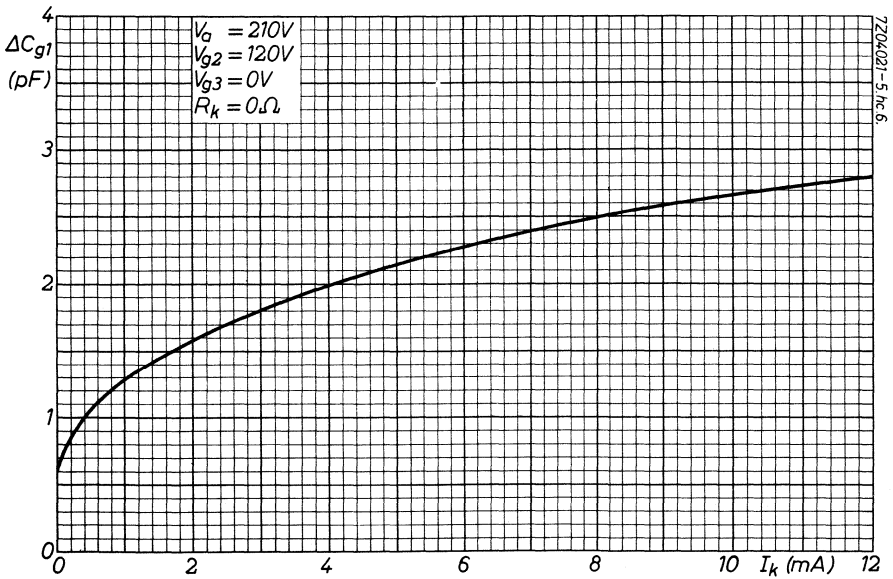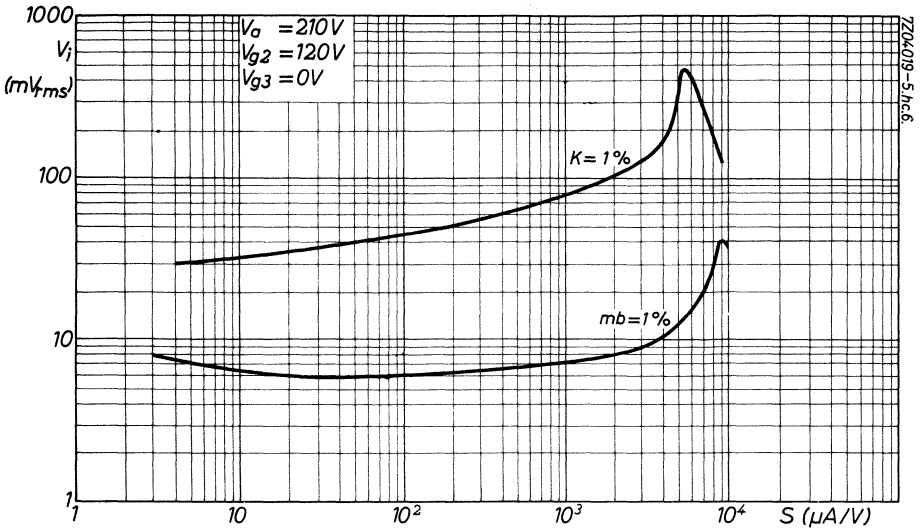

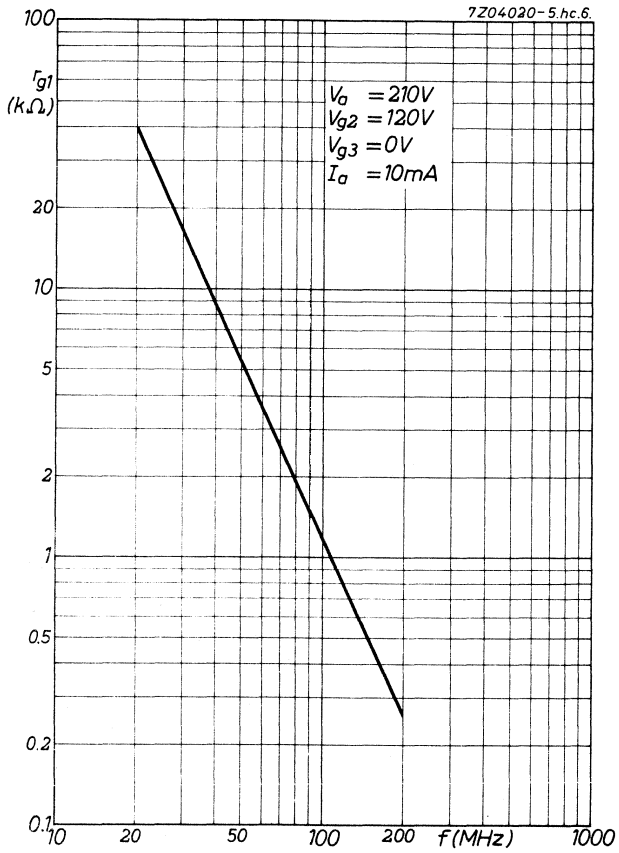



## S.Q. TUBE

Special quality output pentode designed for use as wide band amplifier, series regulator tube and power output tube.



### QUICK REFERENCE DATA

Life test	10 000 hours	
Low interface resistance		
Mechanical quality	Shock and vibration resistant	
Base	Noval	
Heating	Indirect	
	A. C. or D. C. ; parallel supply	
Heater voltage	$V_f$	6.3 V
Heater current	$I_f$	760 mA
Anode current	$I_a$	48 mA
Mutual conductance	$S$	11.3 mA/V
Output power, one tube	$W_o$	6 W

### DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval

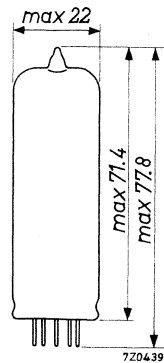

**CHARACTERISTICS**

- Column I Nominal values or setting of the tube
- II Range values for equipment design: Initial spread
- III Range values for equipment design: End of life

		I	II	III	
Heater voltage	$V_f$	6.3			V
Heater current	$I_f$	760	720 - 800		mA
Anode voltage	$V_a$	250			V
Grid No.2 voltage	$V_{g_2}$	250			V
Cathode resistor	$R_k$	135			$\Omega$
Anode current	$I_a$	48	42 - 54	min. 32	mA
Grid No.2 current	$I_{g_2}$	5.5	4 - 7		mA
Mutual conductance	S	11.3	9.2 - 13.4	min. 7.5	mA/V
Amplification factor	$\mu_{g_2g_1}$	19			
Internal resistance	$R_i$	40			k $\Omega$
Negative grid current	$-I_{g_1}$		max. 0.5	max. 1.0	$\mu A$
<u>As triode</u>					
Anode voltage	$V_a$	250			V
Cathode resistor	$R_k$	270			$\Omega$
Anode current	$I_a$	34			mA
Mutual conductance	S	10.2			mA/V
Amplification factor	$\mu$	18.5			
Internal resistance	$R_i$	1.8			k $\Omega$
<u>Leakage current between cathode and heater</u>	$I_{kf}$		max. 12.5		$\mu A$
Voltage between cathode and heater $V_{kf} = 100$ V					
<u>Insulation resistance between electrodes</u>	R		min. 100		M $\Omega$
Voltage between electrodes = 300 V					

## CAPACITANCES

	I	II	
Anode to grid No.2, grid No.3 cathode and heater	$C_{a/g_2g_3kf}$	6.0	5.2 - 6.8 pF
Grid No.1 to grid No.2, grid No.3 cathode and heater	$C_{g_1/g_2g_3kf}$	10	9 - 11 pF
Anode to grid No.1	$C_{ag_1}$		max. 0.5 pF
Grid No.1 to heater	$C_{g_1f}$		max. 0.25 pF

## SHOCK AND VIBRATION RESISTANCE

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

## LIFE

Production samples are tested to be within the end of life values (column III) during 10 000 hours

## LIMITING VALUES (Absolute max. rating system)

Anode voltage	$V_{a_0}$	max.	600 V
	$V_a$	max.	450 V
Anode dissipation	$W_a$	max.	13.5 W
Grid No.2 voltage	$V_{g_{20}}$	max.	600 V
	$V_{g_2}$	max.	450 V
Grid No.2 dissipation			
Continuously	$W_{g_2}$	max.	2.2 W
Peak value in case of excitation by speech and music	$W_{g_{2p}}$	max.	4.4 W

## LIMITING VALUES (continued)

Grid No. 1 dissipation	$W_{g1}$	max.	0.5	W
Grid No. 1 voltage	$-V_{g1}$	max.	100	V
Cathode current	$I_k$	max.	75	mA
Grid resistor				
Fixed bias	$R_{g1}$	max.	0.5	$M\Omega$
Automatic bias	$R_{g1}$	max.	1.0	$M\Omega$
Voltage between cathode and heater	$V_{kf}$	max.	100	V
Bulb temperature	$t_{bulb}$	max.	225	$^{\circ}C$

Heater voltage: The average heater voltage should be 6.3 V.

Variations of the heater voltage exceeding the range of 6.0 V to 6.6 V will shorten the tube life.

The tolerance of heater current (column II) should be taken into account.

## OPERATING CHARACTERISTICS

### Output tube class A (one tube) 2)3)

Anode voltage	$V_a$	250	V
Grid No. 2 voltage	$V_{g2}$	250	V
Cathode resistor	$R_k$	135	$\Omega$
Load resistance	$R_{a\sim}$	4.5	$k\Omega$
-----			
Input voltage	$V_i$	0 0.3 3.5 4.4 4.8 <sup>1)</sup>	$V_{RMS}$
Anode current	$I_a$	48	50.5 50.5 mA
Grid No. 2 current	$I_{g2}$	5.5	10.0 11.0 mA
Output power	$W_o$	0 0.05 4.5 5.7 6.0	W
Total distortion	$d_{tot}$		7.5 10 %
Second harmonic	$d_2$		5.7 5.0 %
Third harmonic	$d_3$		4.5 8.0 %

## OPERATING CHARACTERISTICS (continued)

## Output tube class A (one tube) 2)3)

Anode voltage	$V_a$		250		V	
Grid No.2 voltage	$V_{g2}$		250		V	
Cathode resistance	$R_k$		135		$\Omega$	
Load resistance	$R_{a\sim}$		5.2		$k\Omega$	
Input voltage	$V_i$	0	0.3	3.4	4.3	4.7 <sup>1)</sup> $V_{RMS}$
Anode current	$I_a$	48			49.5	49.2 mA
Grid No.2 current	$I_{g2}$	5.5			10.8	11.6 mA
Output power	$W_o$	0	0.05	4.5	5.7	6.0 W
Total distortion	$d_{tot}$			6.8	10	%
Second harmonic	$d_2$			3.0	2.0	%
Third harmonic	$d_3$			5.8	9.5	%
Anode voltage	$V_a$		250			V
Grid No.2 voltage	$V_{g2}$		250			V
Cathode resistance	$R_k$		210			$\Omega$
Load resistance	$R_{a\sim}$		7.0			$k\Omega$
Input voltage	$V_i$	0	0.3		3.5	5.5 <sup>1)</sup> $V_{RMS}$
Anode current	$I_a$	36			36.8	36 mA
Grid No.2 current	$I_{g2}$	4.1			8.5	14.6 mA
Output power	$W_o$	0	0.05		4.2	5.6 W
Total distortion	$d_{tot}$				10	%
Second harmonic	$d_2$				1.7	%
Third harmonic	$d_3$				8.7	%

**OPERATING CHARACTERISTICS** (continued)

Output tube class A (one tube) 2)

Anode voltage	$V_a$	250	V
Grid No.2 voltage	$V_{g2}$	210	V
Cathode resistor	$R_k$	160	$\Omega$
Load resistance	$R_{a\sim}$	7.0	$k\Omega$

Input voltage	$V_i$	0 0.3	3.4 3.8 <sup>1)</sup>	$V_{RMS}$
Anode current	$I_a$	36	36.6 36.5	mA
Grid No.2 current	$I_{g2}$	3.9	7.3 8.0	mA
Output power	$W_o$	0 0.05	4.3 4.7	W
Total distortion	$d_{tot}$		10	%
Second harmonic	$d_2$		1.8	%
Third harmonic	$d_3$		9.3	%

Output tube class AB (two tubes) 2)

Anode voltage	$V_a$	250	300	V
Grid No.2 voltage	$V_{g2}$	250	300	V
Cathode resistor	$R_k$	130	130	$\Omega$
Load resistance	$R_{aa\sim}$	8	8	$k\Omega$
Input voltage	$V_i$	0 8	0 10 <sup>3)</sup>	$V_{RMS}$
Anode current	$I_a$	2x31 2x37.5	2x36 2x46	mA
Grid No.2 current	$I_{g2}$	2x3.5 2x7.5	2x4 2x11	mA
Output power	$W_o$	0 11	0 17	W
Total distortion	$d_{tot}$		3 4	%

## OPERATING CHARACTERISTICS (continued)

Output tube class B (two tubes)

Anode voltage	$V_a$	250	300	V
Grid No.2 voltage	$V_{g2}$	250	300	V
Grid No.1 voltage	$-V_{g1}$	11.6	14.7	V
Load resistance	$R_{aa \sim}$	8		k $\Omega$
Input voltage	$V_i$	0	8	$10^3 V_{RMS}$
Anode current	$I_a$	2x10	2x37.5	2x7.5 2x46 mA
Grid No.2 current	$I_{g2}$	2x1.1	2x7.5	2x0.8 2x11 mA
Output power	$W_o$	0	11	0 17 W
Total distortion	$d_{tot}$		3	4 %

As triodeOutput tube class A (one tube)

Anode voltage	$V_a$	250	V
Cathode resistor	$R_k$	270	$\Omega$
Load resistance	$R_{a \sim}$	3.5	k $\Omega$
Input voltage	$V_i$	0	1.0 6.7 $V_{RMS}$
Anode current	$I_a$	34	36 mA
Output power	$W_o$	0	0.05 1.95 W
Total distortion	$d_{tot}$		9.0 %



Output tube class AB (2 tubes)

Anode voltage	$V_a$	250	300	V
Cathode resistor	$R_k$	270	270	$\Omega$
Load resistance	$R_{aa \sim}$	10	10	k $\Omega$
Input voltage	$V_i$	0	0.95 8.3	0 0.9 10 $V_{RMS}$
Anode current	$I_a$	2x20	2x21.7 2x24	2x26 mA
Output power	$W_o$	0	0.05 3.4	0 0.05 5.2 W
Total distortion	$d_{tot}$		2.5	2.5 %



1) Grid No.1 current  $I_{g1} = 0.3 \mu A$ 



2) Measured with fixed bias

3) With speech and music signal

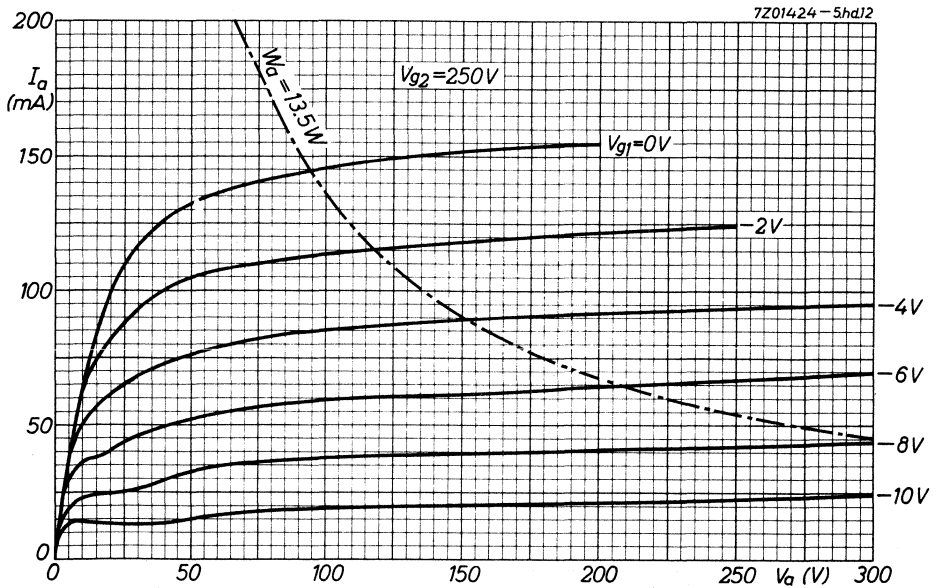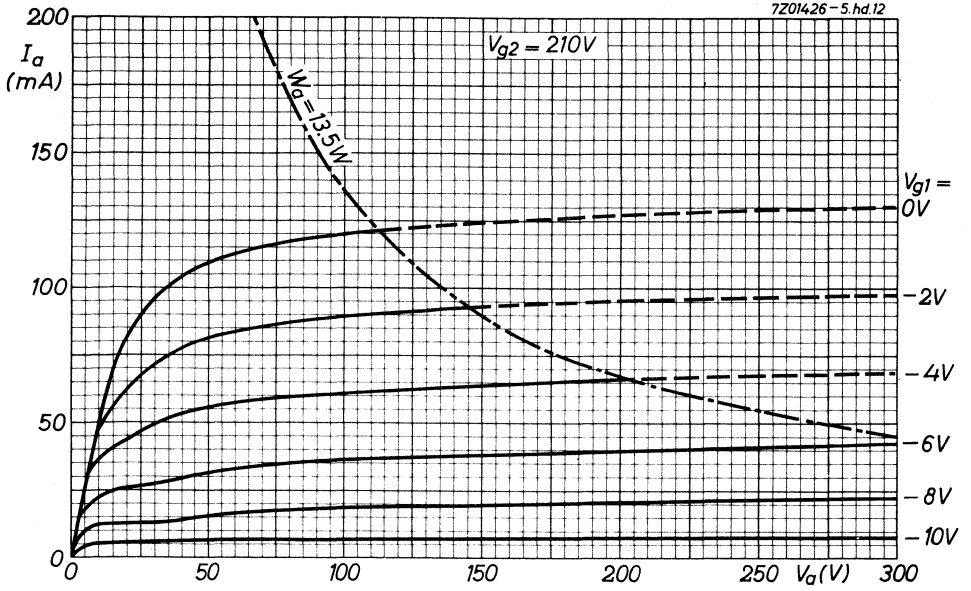



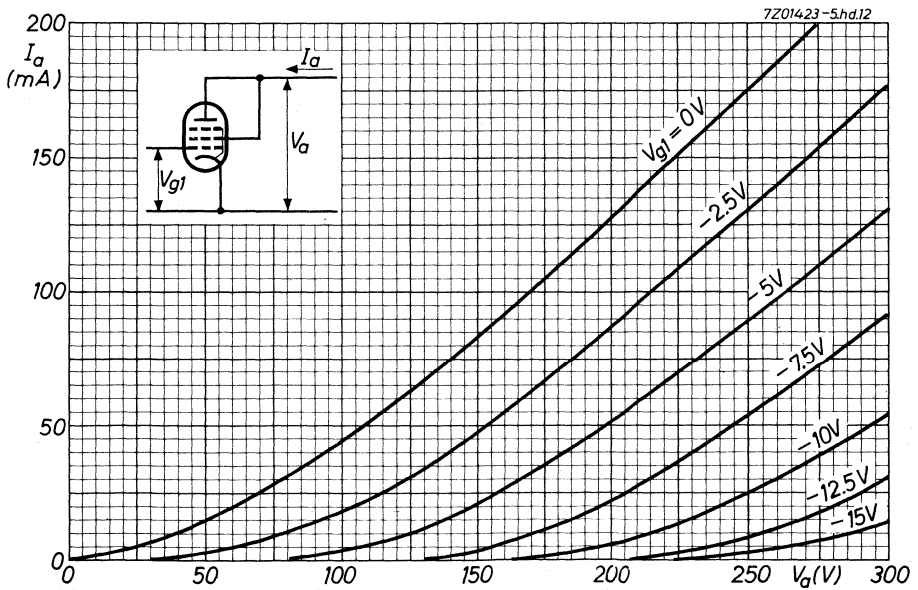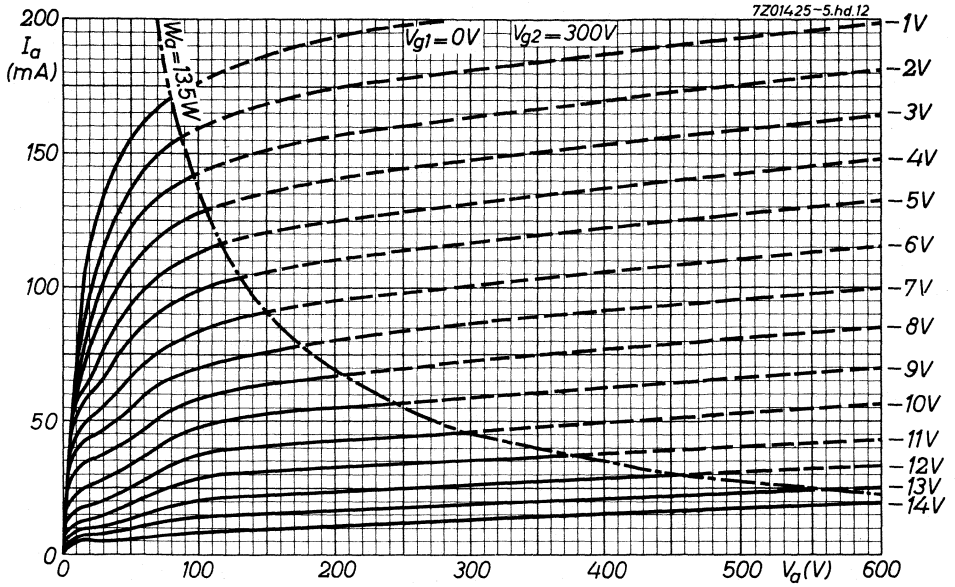

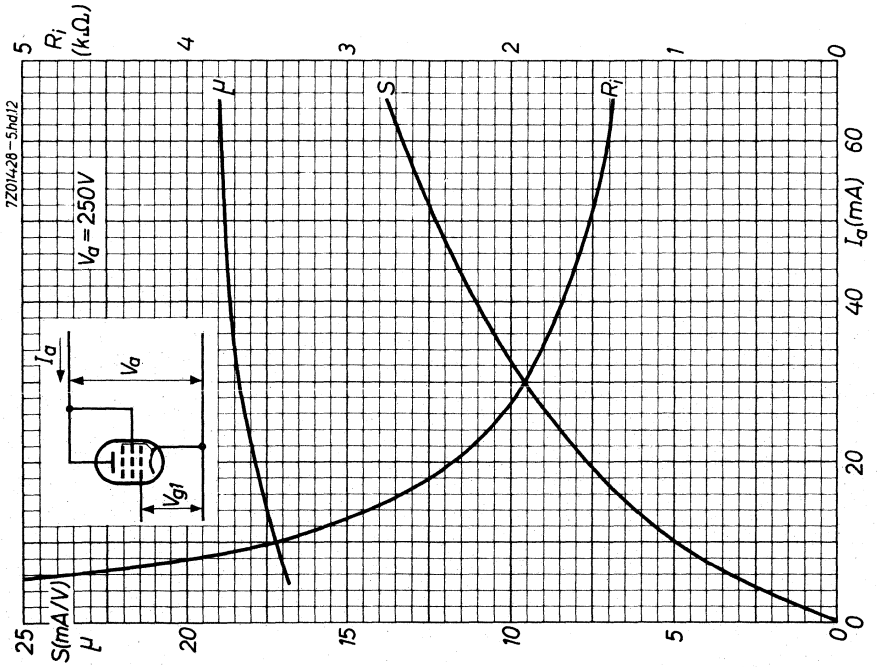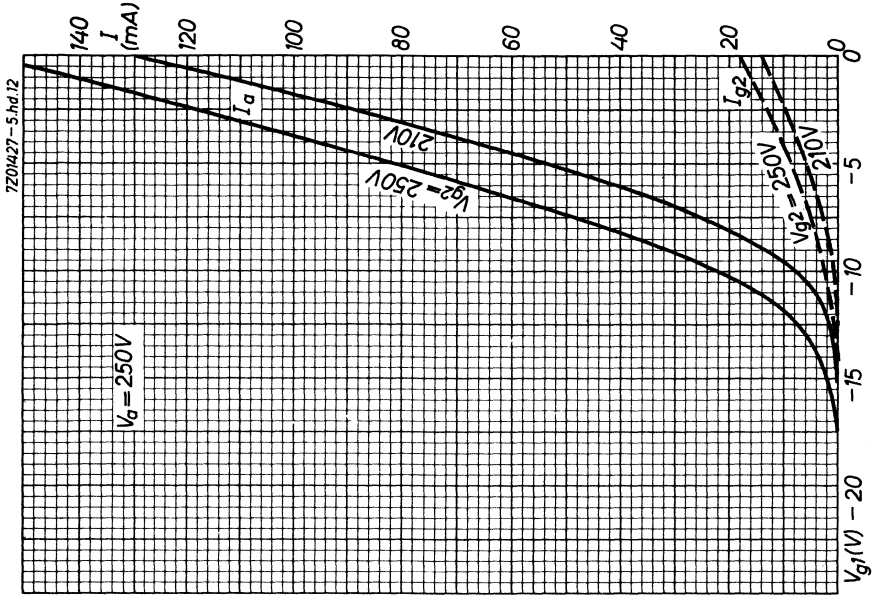

## S.Q. TUBE


Special quality U.H.F. triode designed for use as oscillator, amplifier and self-oscillating mixer (max. frequency 800 MHz).

QUICK REFERENCE DATA	
Life	10 000 hours
Low interface resistance	
Mechanical quality	Shock and vibration resistant
Base	Noval. Gold plated pins.
Heating	Indirect A.C. or D.C.; Parallel supply
Heater voltage	$V_f$ 6.3 V
Heater current	$I_f$ 165 mA
Anode current	$I_a$ 12 mA
Mutual conductance	$S$ 14 mA/V

### DIMENSIONS AND CONNECTIONS

Dimensions in mm.

Base: Noval

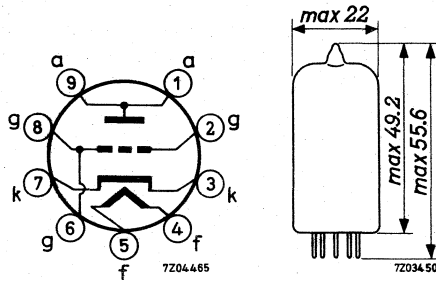

## CHARACTERISTICS

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage	$V_f$	6.3			V
Heater current	$I_f$	165	155 - 175		mA
Anode supply voltage	$V_{ba}$	185			V
Grid supply voltage	$+V_{bg}$	8			V
Cathode resistor	$R_k$	800			$\Omega$
Anode current	$I_a$	12	11.2 - 12.8	min. 10.5	mA
Mutual conductance	$S$	14	11.5 - 17	min. 9.5	mA/V
Amplification factor	$\mu$	68			
<u>Negative grid current</u>	$-I_g$		max. 0.5	max. 1.0	$\mu A$
<u>Cut-off voltage</u>	$-V_g$		max. 5		V
Anode current $I_a = 0.1$ mA					
<u>Equivalent noise resistance</u>	$R_{eq}$	250			$\Omega$
<u>Input resistance</u>	$r_g$	2			k $\Omega$
Frequency = 100 MHz					
<u>Phase angle of slope</u>	$\varphi_s$	-7			o
Frequency = 100 MHz					
<u>Leakage current between cathode and heater</u>	$I_{kf}$		max. 10		$\mu A$
Voltage between cathode and heater $V_{kf} = 100$ V					
<u>Insulation resistance between anode and other electrodes</u>	$R_{ins}$		min. 100		M $\Omega$
Voltage between anode and other electrode = 300 V					
<u>Insulation resistance between grid and other electrode</u>	$R_{ins}$		min. 100		M $\Omega$
Voltage between grid and other electrode = 100 V					

**CAPACITANCES**

		I	II	
Anode to grid	$C_{ag}$	2	1.7 - 2.3	pF
Anode to cathode	$C_{ak}$	0.2	0.16 - 0.24	pF
Grid to cathode	$C_{gk}$	3.6	3.0 - 4.2	pF
Grid to heater	$C_{gf}$		max. 0.3	pF
Cathode to grid and heater	$C_{k/gf}$	6.6	5.5 - 7.7	pF
Anode to grid and heater	$C_{a/gf}$	2.1	1.75 - 2.45	pF
Grid to cathode and heater	$C_{g/kf}$	3.9	3.3 - 4.5	pF
Anode to cathode and heater	$C_{a/kf}$	0.3	0.25 - 0.35	pF
Grid to cathode	$C_{gk}$	5.6		pF
Anode current $I_a = 12$ mA				
<u>With external shield</u>				
Anode to grid and shield	$C_{a/gs}$	3.1	2.8 - 3.4	pF
Grid and shield to cathode and heater	$C_{gs/kf}$	4.2	3.6 - 4.8	pF
Anode to cathode and heater	$C_{a/kf}$	0.25	0.2 - 0.3	pF

**SHOCK AND VIBRATION RESISTANCE**

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of  $30^\circ$ .

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

**LIFE**

Production samples are tested to be within the end of life values (column III) during 10000 hours.

Heater voltage: The average heater voltage should be 6.3 V. Variations of the heater voltage exceeding the range of 6.0 V to 6.6 V will shorten the tube life. The tolerance of heater current (column II) should be taken into account.

## LIMITING VALUES (Absolute max. rating system)

Anode voltage	$V_{a0}$	max. 440	V
	$V_a$	max. 250	V
Anode dissipation	$W_a$	max. 2.4	W
Grid voltage	$-V_g$	max. 50	V
Grid dissipation	$W_g$	max. 20	mW
Grid resistor	$R_g$	max. 1.2	M $\Omega$
Cathode current	$I_k$	max. 20	mA
Voltage between cathode and heater	$V_{kf}$	max. 100	V
Bulb temperature	$t_{bulb}$	max. 165	$^{\circ}$ C
Frequency (as amplifier)	$f$	up to 800	MHz


## OPERATING CHARACTERISTICS


### As R.F. amplifier, grounded grid

Anode supply voltage	$V_{ba}$	185	175	V
Grid supply voltage	$V_{bg}$	8	0	V
Cathode resistor	$R_k$	800	125	$\Omega$
Anode current	$I_a$	12	12	mA
Mutual conductance	$S$	14	14	mA/V

### As mixer

Anode supply voltage	$V_{ba}$	220		V
Anode resistor	$R_a$	5.6		k $\Omega$
Grid resistor	$R_g$	47		k $\Omega$
Anode current	$I_a$	12		mA
Grid current	$I_g$	50		$\mu$ A

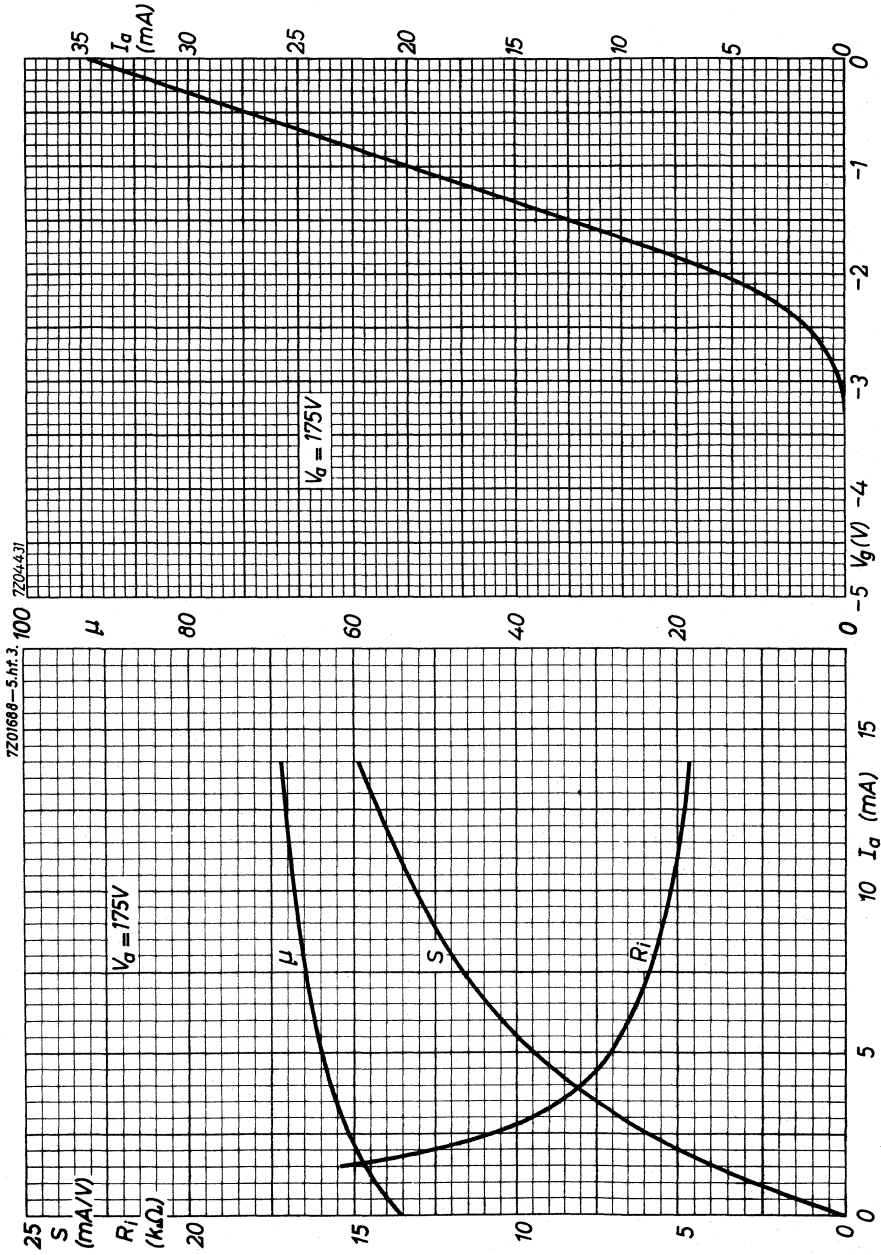

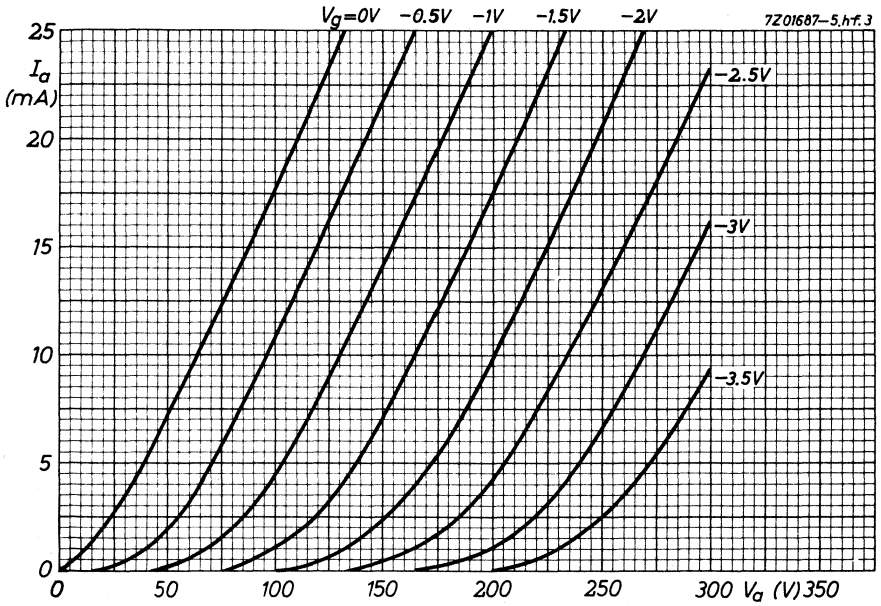



**S.Q. TUBE**

Special quality triode. Designed for use as grounded grid aerial amplifier for band IV and V.




**QUICK REFERENCE DATA**

Life test	10 000 hours	
Low interface resistance		
Mechanical quality	Shock and vibration resistant	
Base	Noval. Gold plated pins	
Heating	Indirect A.C. or D.C.; parallel supply	
Heater voltage	$V_f$	6.3 V
Heater current	$I_f$	165 mA
Anode current	$I_a$	12.5 mA
Mutual conductance	$S$	13.5 mA/V
Noise figure at 850 MHz	$F$	9.6 dB
Equivalent noise resistance	$R_{eq}$	240 $\Omega$

**DIMENSIONS AND CONNECTIONS**

Dimensions in mm

Base: Noval

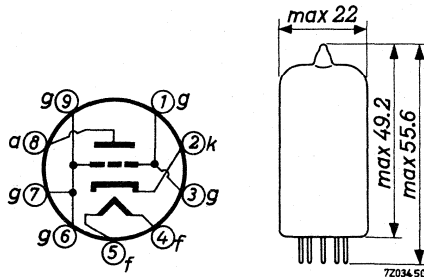

## CHARACTERISTICS

Column I Nominal value

II Range values for equipment design: Initial spread

		I	II	
Heater voltage	$V_f$	6.3		V
Heater current	$I_f$	165	157-173	mA
Anode voltage	$V_a$	160		V
Grid voltage	$-V_g$	1.25		V
Anode current	$I_a$	12.5		mA
Mutual conductance	S	13.5		mA/V
Amplification factor	$\mu$	70		
Internal resistance	$R_i$	5.2		k $\Omega$
Equivalent noise resistance	$R_{eq}$	240		$\Omega$
Noise figure	F	9.6		dB
Frequency 850 MHz				
Bandwidth 15 MHz				
Anode supply voltage	$V_{ba}$	170		V
Cathode resistor	$R_k$	820		$\Omega$
Grid supply voltage	$+V_{bg}$	9		V
Anode current	$I_a$	12.5		mA
Mutual conductance	S	13.5	10.5-16.5	mA/V
Anode supply voltage	$V_{ba}$	161		V
Cathode resistor	$R_k$	100		$\Omega$
Grid supply voltage	$V_{bg}$	0		V
Anode current	$I_a$	12.5	9.5-16.1	mA
Mutual conductance	S	13.5		mA/V
Grid current, negative	$-I_g$		max. 0.1	$\mu A$
<u>Leakage current between cathode and heater</u>	$I_{kf}$		max. 15	$\mu A$
Voltage between cathode and heater $V_{kf} = 125$ V				

**CHARACTERISTICS** (continued)

		I	
Input series resonance frequency <sup>1)</sup>	$f_{inp}$	1700	MHz
Output series resonance frequency <sup>1)</sup>	$f_{outp}$	1000	MHz

**CAPACITANCES**

		With screen		Without screen		
		I	II	I	II	
Anode to cathode and heater	$C_{a/kf}$	50	35- 65			mpF
Grid to cathode and heater	$C_{g/kf}$	3.8	3.2-4.4			pF
Anode to grid	$C_{ag}$	1.7	1.4-2.0	1.1	0.9 - 1.3	pF

**SHOCK AND VIBRATION RESISTANCE**

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

**LIFE**

Production samples are tested during 10 000 hours under the following conditions:

Anode supply voltage	$V_{ba}$	170 V
Grid supply voltage	$+V_{bg}$	9 V
Cathode resistor	$R_k$	820 Ω

<sup>1)</sup> Measured between the tube pin connected to the relevant electrode and a metal reference plane placed against the tube bottom. The relevant pin and the reference plane are connected to the measuring device so that the minimum distance is obtained between these two connecting points. The remaining tube pins are connected to the reference plane with a negligible impedance. The tube is screened by a cylinder with an internal diameter of 23 mm placed on the reference plane.

## LIMITING VALUES (Absolute max. rating system)

Anode voltage	$V_{a0}$	max.	400 V
	$V_a$	max.	200 V
Anode dissipation	$W_a$	max.	2.6 W
Cathode current	$I_k$	max.	16.5 mA
Grid voltage	$-V_g$	max.	50 V
Grid dissipation	$W_g$	max.	50 mW
Grid resistor	$R_g$	max.	1 M $\Omega$
Cathode resistor $R_k = 100 \Omega$			
Voltage between cathode and heater			
Cathode positive	$V_{kf(k+)}$	max.	125 V
Cathode negative	$V_{kf(k-)}$	max.	60 V
Bulb temperature	$t_{bulb}$	max.	170 °C

Heater voltage: The average heater voltage should be 6.3 V.

Variation of the heater voltage exceeding the range of 6.0 V to 6.6 V will shorten the tube life.

## OPERATING CHARACTERISTICS

Driver or output tube (circuit fig. 1)

Frequency	$f$	800	MHz
Bandwidth		8	MHz
Anode supply voltage	$V_{ba}$	200	V
Anode resistor	$R_a$	1.5	k $\Omega$
Cathode resistor	$R_k$	150	$\Omega$
Input voltage	$V_i$	0 0.5 1.65	V <sub>RMS</sub>
Anode current	$I_a$	11.4 12.8	mA
Output voltage	$V_o$	0 2.0 6.0	V <sub>RMS</sub> <sup>1)</sup>
Inter modulation ratio		min. 26	dB
Sync. impuls compression		max. 30	%

<sup>1)</sup> Value of the sync. level with video modulation according to CCIR and with  $Z = 60 \Omega$ .



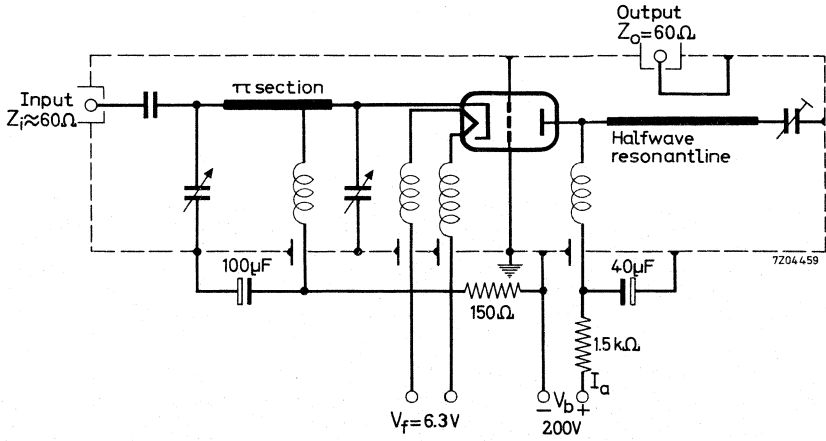


Fig.1

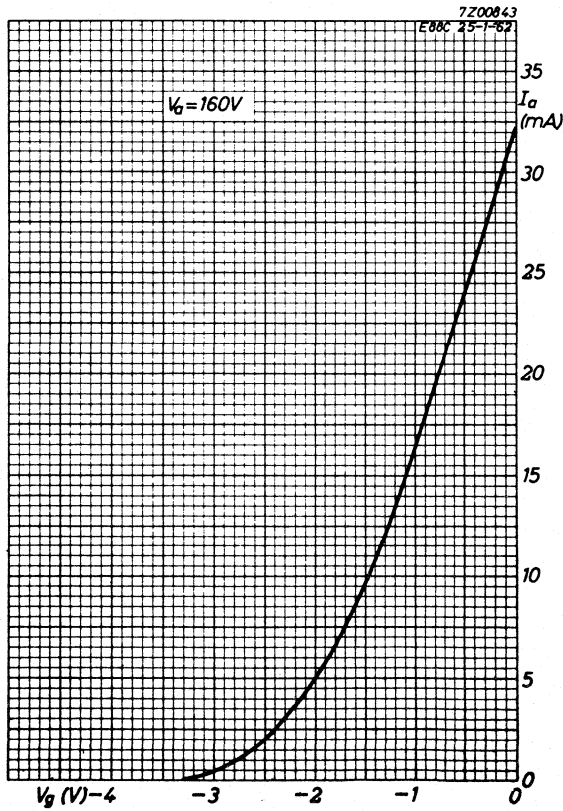

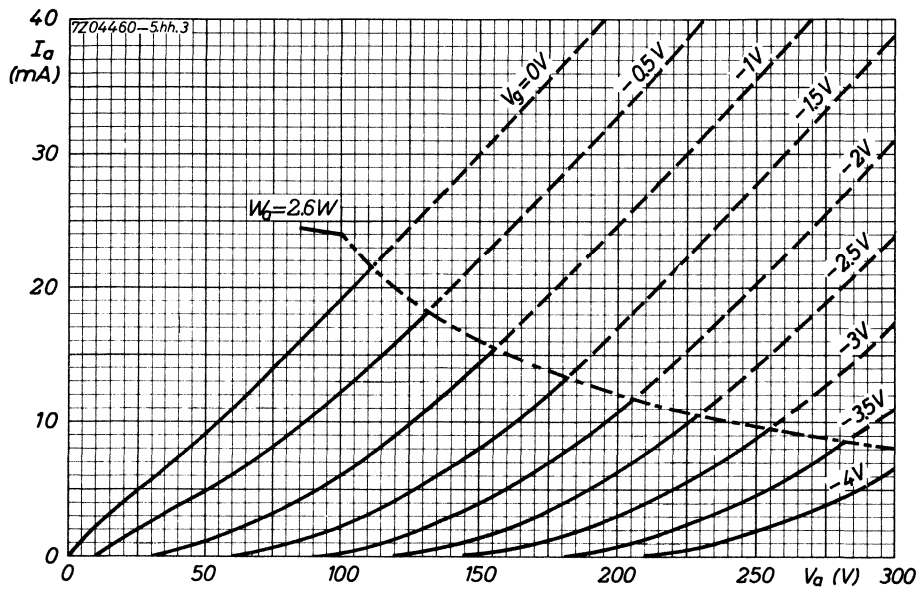

## S.Q. TUBE

Special quality double triode designed for  
 Cascode circuits  
 H.F. or I.F. amplifiers  
 Mixer or phase inverter stages  
 Multivibrator and cathode follower in computers


### QUICK REFERENCE DATA

Life	10 000 hours	
Low interface resistance		
Mechanical quality	Shock and vibration resistant	
Base	Noval. Gold plated pins	
Heating	Indirect A.C. or D.C.; parallel supply	
Heater voltage	$V_f$	6.3 V
Heater current	$I_f$	300 mA
Anode current	$I_a$	15 mA
Mutual conductance	$S$	12.5 mA/V
Equivalent noise resistance	$R_{eq}$	300 $\Omega$
Noise factor ( $f = 200$ MHz)	$F$	4.6 dB

### DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval

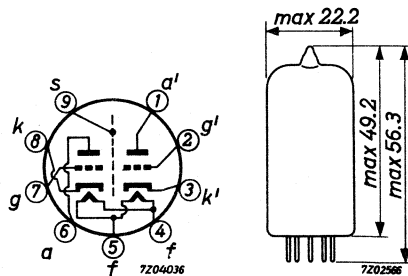

## CHARACTERISTICS

- Column I Nominal value or setting of the tube  
 II Range values for equipment design: Initial spread  
 III Range values for equipment design: End of life

		I	II	III	
Heater voltage	$V_f$	6.3			V
Heater current	$I_f$	300	285 - 315		mA
Anode supply voltage	$V_{ba}$	100			V
Grid supply voltage	$+V_{bg}$	9			V
Cathode resistor	$R_k$	680			$\Omega$
Anode current	$I_a$	15	14.2 - 15.8	min. 13.5	mA
Mutual conductance	S	12.5	10.5 - 15	min. 9	mA/V
Amplification factor	$\mu$	33			
<u>Equivalent noise resistance</u>	$R_{eq}$	300			$\Omega$
Frequency = 45 MHz					
<u>Noise figure</u>	F	4.6			dB
Frequency = 200 MHz					
In cascode circuit adapted to minimum noise					
<u>Input resistance</u>	$r_g$	3			$k\Omega$
Frequency = 100 MHz					
<u>Start of grid current</u>	$V_g$	0.75			$V_{RMS}$
<u>Negative grid current</u>	$-I_g$		max. 0.1	max. 1	$\mu A$
Anode voltage	$V_a$	90			V
Anode current	$I_a$	15			mA
Anode supply voltage	$V_{ba}$	90			V
Cathode resistor	$R_k$	120			$\Omega$
Anode current	$I_a$	12			mA
Mutual conductance	S	11.5			mA/V



**CHARACTERISTICS** (continued)

		I	II	III	
<u>Cut-off voltage</u>	$-V_g$	6.5	5 - 8.5		V
Anode voltage	$V_a$	150			V
Anode current	$I_a$	0.1			mA
<u>Difference in grid voltage of two sections</u>	$ V_g - V_g' $		max. 2	max. 2	V
Anode voltage	$V_a = V_a'$	150			V
Anode current	$I_a = I_a'$	0.1			mA
Anode supply voltage	$V_{ba}$	150			V
Negative grid voltage	$-V_g$	15			V
Anode current	$I_a$		max. 5		$\mu A$
<u>In circuit fig. 1 "pag. 7"</u>					
Anode supply voltage	$V_{ba}$	150			V
Anode current (not permitted continuously)	$I_a$	33	28 - 38		mA
Anode supply voltage	$V_{ba}$	60			V
Anode current	$I_a$		max. 9		mA
<u>Leakage current between cathode and heater</u>	$I_{kf}$		max. 6	max. 12	$\mu A$
Voltage between cathode and heater = 90 V, cath. neg.					
Voltage between cathode and heater = 120 V, cath. pos.					
<u>Insulation resistance between two electrodes</u>	$R_{ins}$		min. 100	min. 20	$M\Omega$
Voltage between electrodes = 200 V					
<u>Hum voltage</u>	$V_g$		max. 50		$\mu V_{RMS}$
Centre heater transformer earthed					
Grid resistor $R_g = 0.5 M\Omega$					



**CAPACITANCES** Both sections if applicable

		I	II	
Anode to cathode, heater and screen	$C_a/kfs$	1.75	1.55 - 1.95	pF
	$C_a'/k'fs$	1.65	1.45 - 1.85	pF
Anode to cathode and heater	$C_a/kf$	0.5	0.4 - 0.6	pF
	$C_a'/k'f$	0.4	0.3 - 0.5	pF
Grid to cathode, heater and screen	$C_g/kfs$	3.3	2.7 - 3.9	pF
Grid to cathode and heater	$C_g/kf$	3.3	2.7 - 3.9	pF
Anode to grid	$C_{ag}$	1.4	1.2 - 1.6	pF
Anode to cathode	$C_{ak}$	0.18	0.14 - 0.22	pF
Cathode to heater	$C_{kf}$	2.6		pF
	$C_k'f$	2.7		pF
Anode to screen	$C_{as}$	1.3	1.1 - 1.5	pF
Anode to grid, heater and screen	$C_a/gfs$	3.0	2.7 - 3.3	pF
	$C_a'/g'fs$	2.9	2.6 - 3.2	pF
Cathode to grid, heater and screen	$C_k/gfs$	6.0	5.1 - 6.9	pF
Anode to anode other section	$C_{aa'}$		max. 0.045	pF
Grid to grid other section	$C_{gg'}$		max. 0.005	pF
Anode to grid other section	$C_{ag'}, C_a'g$		max. 0.005	pF
Grid to cathode other section	$C_{gk'}, C_g'k$		max. 0.005	pF

**SHOCK AND VIBRATION RESISTANCE**

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

**LIFE**

Production samples are tested to be within the end of life values (column III) during 10000 hours under the following conditions:

Anode supply voltage	$V_{ba}$	100	V
Grid supply voltage	$+V_{bg}$	9	V
Cathode resistor	$R_k$	680	$\Omega$
Grid resistor	$R_g$	47	$k\Omega$
Voltage between cathode and heater (cath. neg.)	$V_{kf}$	60	V
Anode current	$I_a$	15	mA

**LIMITING VALUES** Design centre rating system

Anode voltage	$V_{a0}$	max.	550	V
Anode voltage (Zero cathode current)	$V_a$	max.	400	V
Anode voltage	$V_a$	max.	220	V
Anode voltage (Max. anode dissipation 0.8 W)	$V_a$	max.	250	V
Anode dissipation	$W_a$	max.	1.5	W
Anode dissipation (Max. anode dissipation of section 1 plus section 2 = 2 W)	$W_a$	max.	1.8	W
Grid dissipation	$W_g$	max.	30	mW
Grid voltage	$-V_g$	max.	100	V
Grid peak voltage Max. pulse duration 200 $\mu$ sec Max. duty factor 0.1	$-V_{gp}$	max.	200	V
Cathode current	$I_k$	max.	20	mA
Cathode peak current Max. pulse duration 200 $\mu$ sec Max. duty factor 0.1	$I_{kp}$	max.	100	mA

## LIMITING VALUES (continued)

Voltage between cathode and heater

Cathode positive	$V_{kf}$	max.	150 V
Cathode negative	$V_{kf}$	max.	100 V
Bulb temperature (Absolute max.)	$t_{bulb}$	max.	170 °C
Grid resistor (Anode current < 5 mA)	$R_g$	max.	1 MΩ

Heater voltage: The average heater voltage should be 6.3 V.

Variations of the heater voltage exceeding the range of 6.0 V to 6.6 V will shorten the tube life.

The tolerance of heater current (column II) should be taken into account.

## OPERATING CHARACTERISTICS

### Output tube class A

Anode voltage	$V_a$	220	V
Load resistance	$R_{a\sim}$	20	kΩ
Grid voltage	$-V_g$	6.5	V
Input voltage	$V_i$	0 1.5 4.5	V <sub>RMS</sub>
Anode current	$I_a$	6.5 9.2	mA
Output power	$W_o$	0.05 0.5	W
Total distortion	$d_{tot}$	7	%

### Output tube class B (two tubes)

Continuous single tone input signal

Anode voltage	$V_a$	200	V
Load resistance	$R_{aa\sim}$	22	kΩ
Grid voltage	$-V_g$	6	V
Input voltage	$V_i$	0 0.9 4.0	V <sub>RMS</sub>
Anode current	$I_a$	2x5 2x9	mA
Output power	$W_o$	0.05 1.2	W
Total distortion	$d_{tot}$	3	%

OPERATING CHARACTERISTICS (continued)

Output tube class B (two tubes)

Speech and music input signal

Anode voltage	$V_a$	200		V
Load resistance	$R_{a-a\sim}$	10		$k\Omega$
Grid voltage	$-V_{g1}$	6		V
Input voltage	$V_i$	0	0.9	4.0 $V_{RMS}$
Anode current	$I_a$	2x5		2x13.5 mA
Output power	$W_o$	0.05		1.5 W
Total distortion	$d_{tot}$			4 %

Mixer

Anode supply voltage	$V_{ba}$	60	90	150 V
Anode resistor	$R_a$	0	1	3.9 $k\Omega$
Grid resistor	$R_g$	1	1	1 $M\Omega$
Oscillator voltage	$V_{osc}$	2	2.5	3 $V_{RMS}$
Anode current	$I_a$	4.7	7.7	11 mA
Conversion conductance	$S_c$	2.9	3.5	4.1 mA/V
Internal resistance	$R_i$	8.3	7	6.1 $k\Omega$












Fig. 1

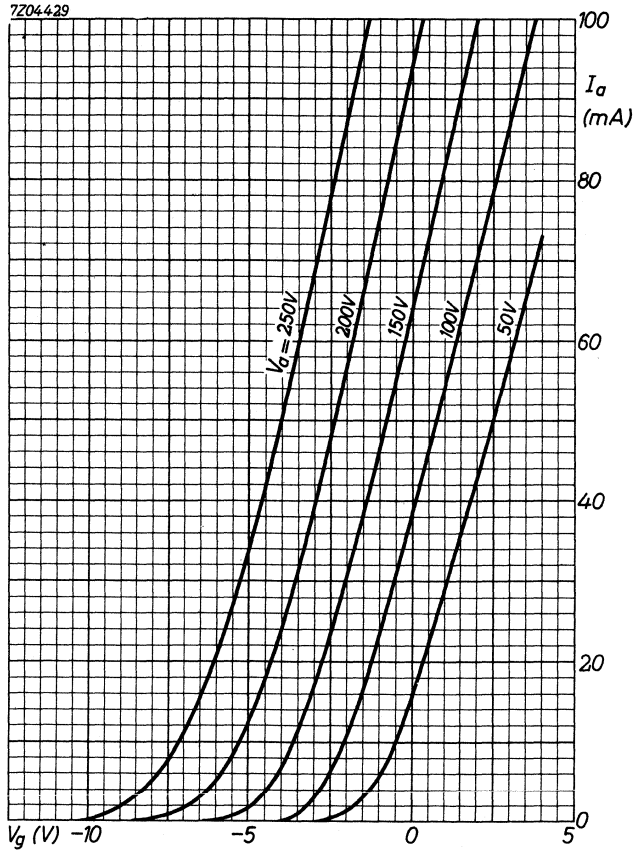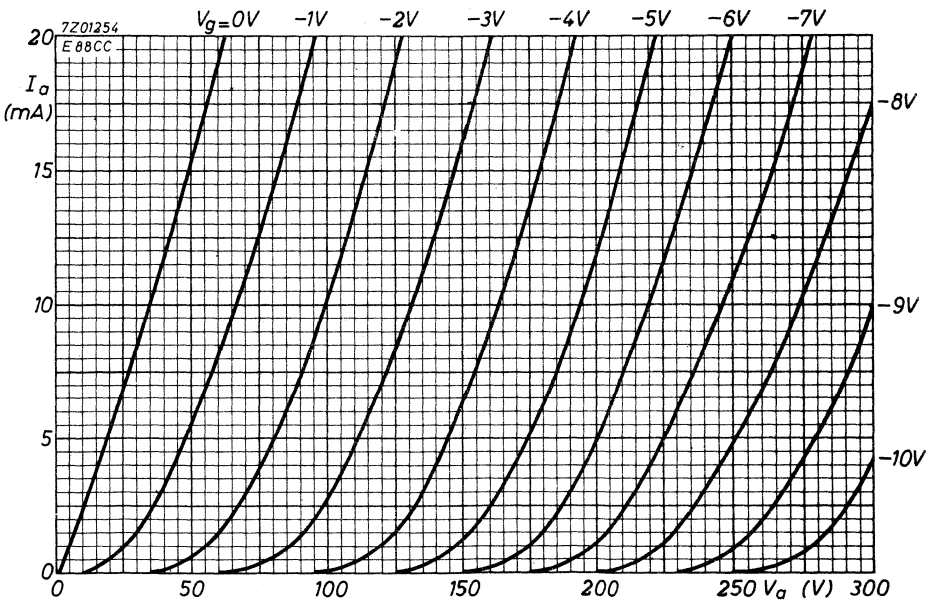

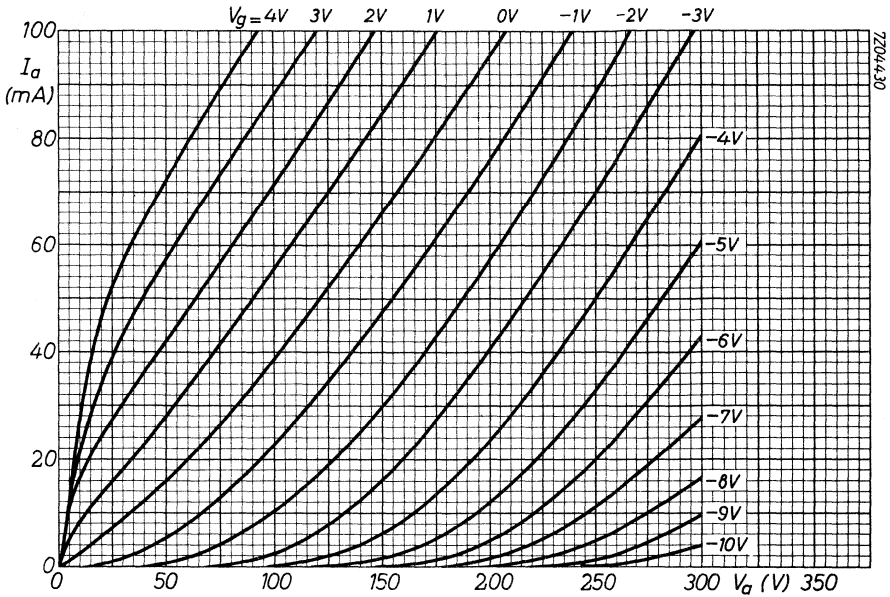


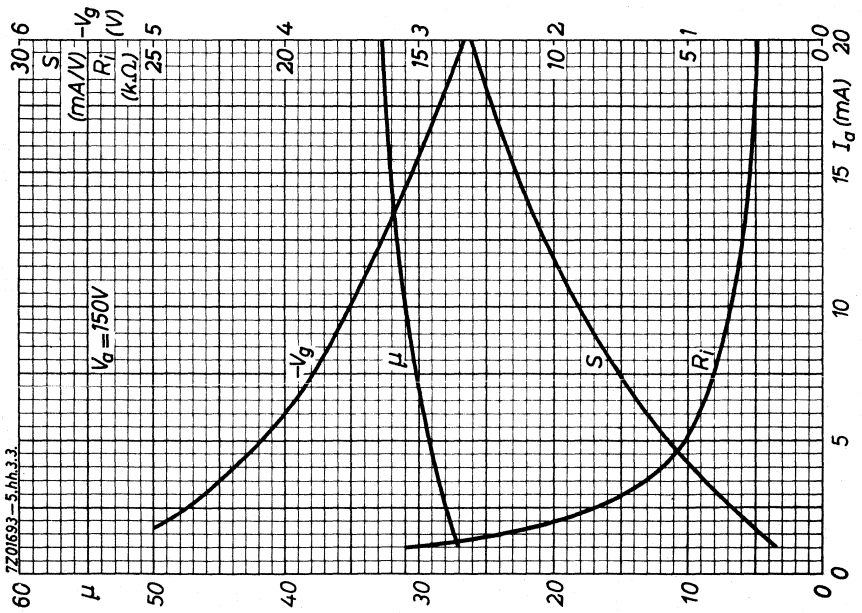

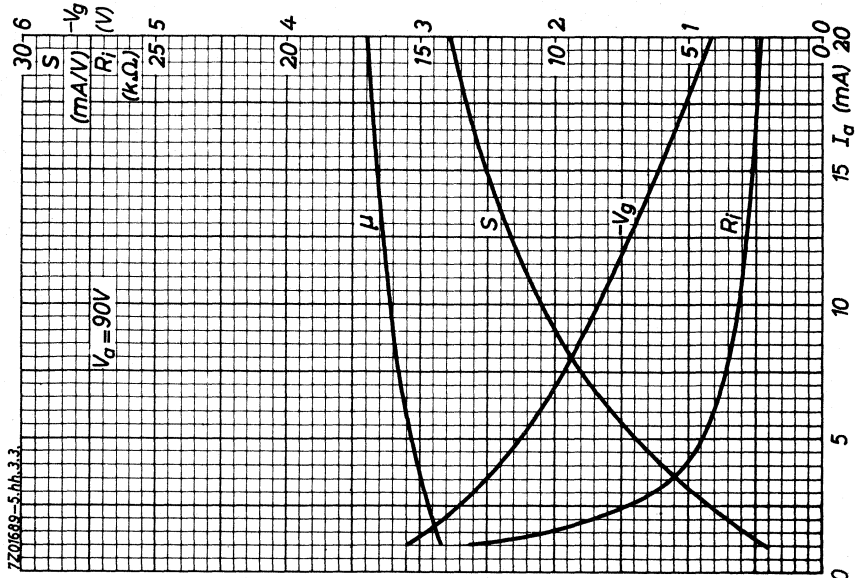

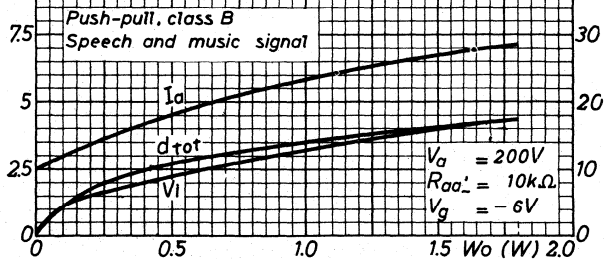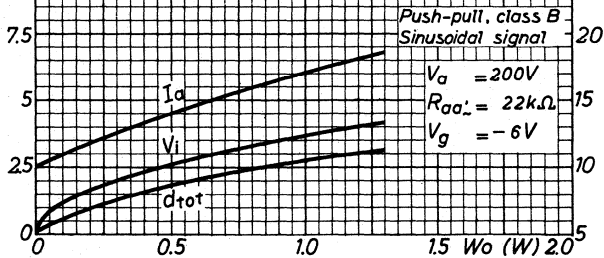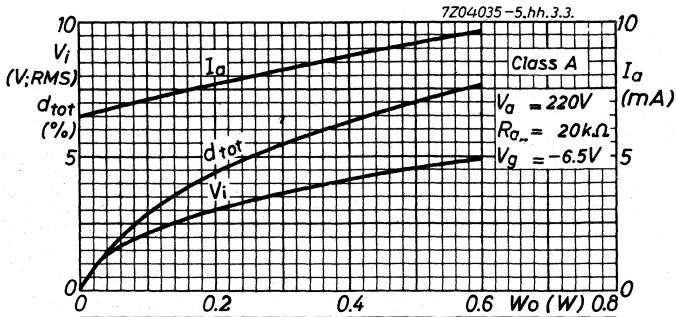

7Z04034-5.hh.3.3.

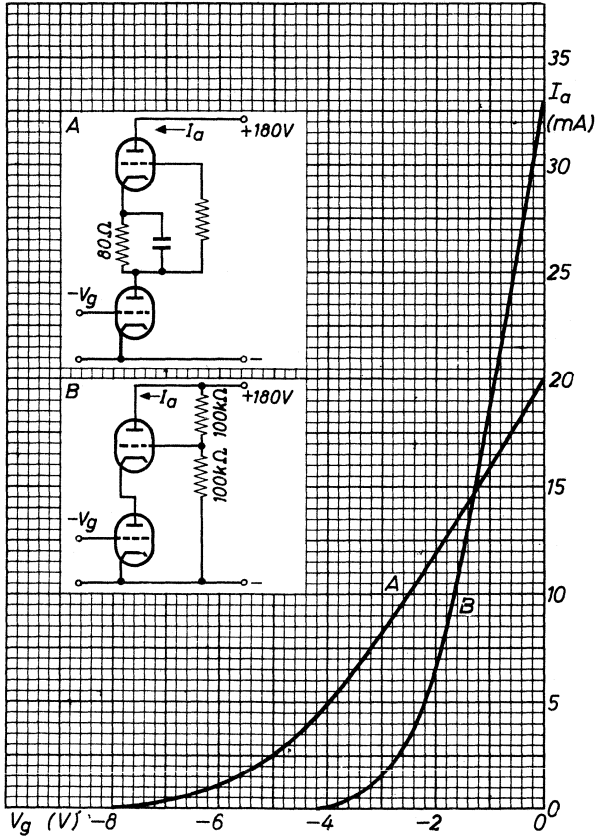

**S.Q. TUBE**

Special quality double triode designed for use in computer circuits.




**QUICK REFERENCE DATA**

Life expectancy	10 000 hours	
Low interface resistance		
Base	Miniature, 7 pin	
Heating	Direct A.C. or D.C. Series or parallel supply	
Heater voltage	$V_f$	6.3 V
Heater current	$I_f$	400 mA

**DIMENSIONS AND CONNECTIONS**

Dimensions in mm

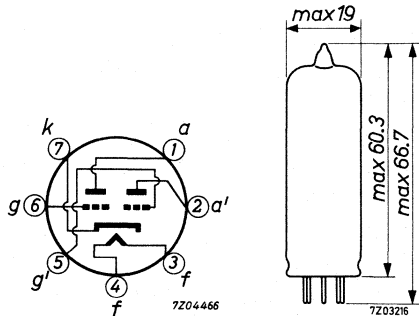

## CHARACTERISTICS

- Column I Nominal value or setting of the tube  
 II Range values for equipment design: Initial spread  
 III Range values for equipment design: End of life


		I	II	III	
Heater voltage	$V_f$	6.3			V
Heater current	$I_f$	400	380 - 420		mA
Anode voltage	$V_a$	100			V
Negative grid voltage	$-V_g$	2.1			V
Anode current	$I_a$	8.5	4.5 - 12.5		mA
Mutual conductance	S	6.0			mA/V
Amplification factor	$\mu$	27			
Anode voltage	$V_a$	100			V
Cathode resistor	$R_k$	250			$\Omega$
Mutual conductance	S	6.0	4.5 - 7.5	min. 3.0	mA/V
<u>Negative grid current</u>	$-I_{g1}$		max. 0.2	max. 1.0	$\mu A$
Anode supply voltage	$V_{ba}$	150			V
Anode resistor	$R_a$	20			k $\Omega$
Grid resistor	$R_g$	47			k $\Omega$
Anode current	$I_a$	5.6	5.0 - 6.2	min. 4.5	mA
Grid supply voltage	$V_{bg}$	0			V
Anode current	$I_a$		max. 0.1	max. 0.1	mA
Grid supply voltage	$-V_{bg}$	10			V
Difference in grid voltage of two sections	$ V_g - V_{g'} $		max. 2	max. 2	V
Anode current	$I_a = I_a'$	0.1			V
<u>Leakage current</u> <u>between cathode and heater</u>	$I_{kf}$		max. 15	max. 30	$\mu A$
Voltage between cathode and heater	$V_{kf}$	100			V
<u>Insulation between two electrodes</u>	$R_{ins}$		min. 100	min. 20	M $\Omega$
Voltage between electrodes	V	300			V

**CAPACITANCES** Each system if applicable.

		I	II	
Anode to cathode and heater	$C_{a/kf}$	0.35	0.25 - 0.45	pF
	$C_{a' / k' f}$	0.4	0.3 - 0.5	pF
Grid to cathode and heater	$C_{g/kf}$	3.4	2.9 - 3.9	pF
Anode to grid	$C_{ag}$	2.5	2.0 - 3.0	pF
Grid to heater	$C_{gf}$		max. 0.15	pF
	$C_{g' f}$		max. 0.3	pF
Anode to anode other section	$C_{aa'}$		max. 1.4	pF
Grid to grid other section	$C_{gg'}$		max. 0.22	pF
Anode to grid other section	$C_{ag'}$		max. 0.35	pF
Grid to anode other section	$C_{ga'}$		max. 0.15	pF
Cathode to heater	$C_{kf}$	6.5		pF

**LIFE**

Production samples are tested to be within the end of life values (column III) under the following conditions during 10 000 hours:



$I_a = 8 \text{ mA}$   
 $I_{a'} = 0 \text{ mA}$   
 $V_{kf} = 100 \text{ V (k pos)}$


## LIMITING VALUES (Absolute max. rating system)


Anode voltage	$V_{a_0}$	max.	600 V
	$V_a$	max.	300 V
Anode dissipation	$W_a$	max.	2.0 W
Grid voltage	$+V_g$	max.	0 V
	$-V_g$	max.	100 V
Grid peak voltage	$-V_{g_p}$	max.	200 V
Grid current	$I_g$	max.	250 $\mu$ A
Grid, peak current	$I_{g_p}$	max.	1 mA
max. pulse duration 2.5 msec			
Cathode current	$I_k$	max.	15 mA
Cathode peak current	$I_{k_p}$	max.	75 mA
max. pulse duration 2 msec			
Voltage between cathode and heater	$V_{kf}$	max.	100 V
Grid resistor, automatic bias	$R_g$	max.	1 $M\Omega$
	$R_g$	max.	0.5 $M\Omega$
fixed bias			
Bulb temperature	$t_{bulb}$	max.	170 $^{\circ}$ C

Heater voltage: The average heater should be 6.3 V.

Variations of the heater voltage exceeding the range of 6.0 V to 6.6 V will shorten the tube life.

The tolerance of heater current (column II) should be taken into account.

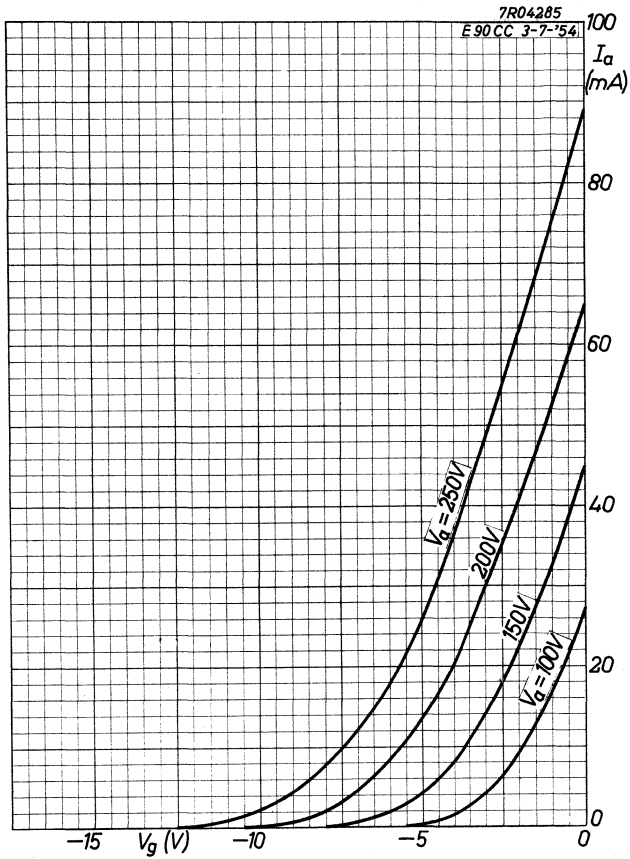

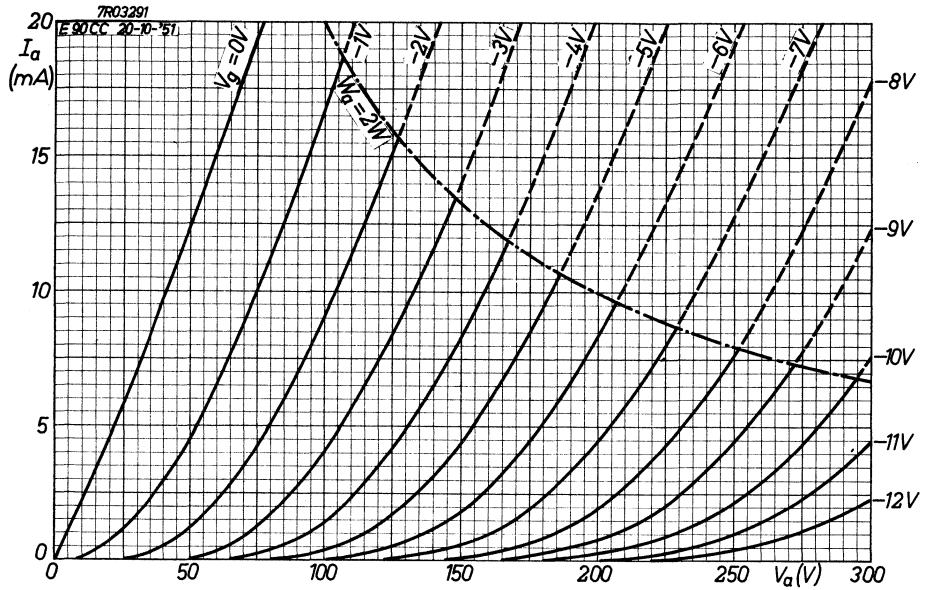



## S.Q. TUBE

Special quality tube designed for use as wide band amplifier, cathode follower, series regulator tube for stabilised d.c. supply and output tube.



### QUICK REFERENCE DATA

Life test	10 000 hours	
Mechanical quality	Shock and vibration resistant	
Base	Octal	
Heating	Indirect A.C. or D.C.; parallel supply	
Heater voltage	$V_f$	6.3 V
Heater current	$I_f$	1.7 A
Anode current	$I_a$	100 mA
Mutual conductance	$S$	27.5 mA/V
Output power, one tube	$W_o$	11.5 W
two tubes, class AB	$W_o$	60 W

### DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Octal



## CHARACTERISTICS

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage	$V_f$	6.3			V
Heater current	$I_f$	1.7	1.62 - 1.78		A
Anode voltage	$V_a$	250			V
Grid No.2 voltage	$V_{g2}$	150			V
Grid No.1 voltage	$-V_{g1}$	15.5			V
Anode current	$I_a$	100			mA
Grid No.2 current	$I_{g2}$	4			mA
Mutual conductance	S	27.5			mA/V
Amplification factor	$\mu_{g2g1}$	6.5			
Internal resistance	$R_i$	10			k $\Omega$
Anode supply voltage	$V_{ba}$	275			V
Grid No.2 supply voltage	$V_{bg2}$	180			V
Positive grid No.1 supply voltage	$V_{bg1}$	15.7			V
Cathode resistor	$R_k$	300			$\Omega$
Anode current	$I_a$	100	85 - 115	decrease max.40%	mA
Grid No.2 current	$I_{g2}$	4	max. 6		mA
Mutual conductance	S	27.5	22.5 - 32.5	decrease max.30%	mA/V
Negative grid No.1 current	$-I_{g1}$		max. 0.5	max. 1	$\mu$ A
<u>Cut off voltage</u>					
Anode voltage	$V_a$	250			V
Grid No.2 voltage	$V_{g2}$	150			V
Anode current	$I_a$	1			mA
Negative grid No.1 voltage	$-V_{g1}$		max. 30		V

**CHARACTERISTICS** (continued)

Insulation resistance  
between one electrode and all  
other electrodes measured  
with V = 400 V

	II	III	
$R_{isol}$	min. 100	min. 20	MΩ

**CAPACITANCES** Without external shield

Grid No.1 to grid No.3, grid No.2,  
cathode and heater

	I	II	
$C_{g_1/g_3g_2kf}$	35		pF
Anode to grid No.3, grid No.2, cathode and heater	$C_{a/g_3g_2kf}$	17	pF
Anode to grid No.1	$C_{ag_1}$	max. 2	pF

Anode to grid No.3, grid No.2,  
cathode and heater

Anode to grid No.1

**SHOCK AND VIBRATION RESISTANCE**

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

**LIFE**

Production samples are tested to be within the end of life values (column III) under the following conditions during 10 000 hours.

Anode supply voltage	$V_{ba}$	275 V
Grid No.2 supply voltage	$V_{bg_2}$	180 V
Grid No.1 supply voltage	$+V_{bg_1}$	15.7 V
Cathode resistor	$R_k$	300 Ω
Grid No.1 resistor	$R_{g_1}$	47 kΩ
Voltage between cathode and heater cathode positive	$V_{kf}$ (k pos)	100 V

## LIMITING VALUES (Absolute max. rating system)

Anode voltage	$V_{a0}$	max. 2000 V
	$V_a$	max. 900 V
Anode and grid No.2 voltage (triode connection)	$V_{a+g2}$	max. 250 V
Anode peak voltage	$+V_{ap}$	max. 8000 V
Pulse duration: 18% of a cycle		
Anode peak voltage	$-V_{ap}$	max. 2000 V
Anode dissipation	$W_a$	max. 27.5 W
Anode plus grid No.2 dissipation (triode connection)	$W_{a+g2}$	max. 27.5 W
Grid No.2 voltage	$V_{g20}$	max. 550 V
	$V_{g2}$	max. 250 V
Grid No.2 dissipation	$W_{g2}$	max. 5 W
Grid No.1 voltage	$-V_{g1}$	max. 150 V
	$+V_{g1}$	max. 15 V
Grid No.1 dissipation	$W_{g1}$	max. 0.1 W
Grid No.1 resistor with fixed bias	$R_{g1}$	max. 0.5 M $\Omega$
with automatic bias	$R_{g1}$	max. 1.0 M $\Omega$
Cathode current	$I_k$	max. 300 mA
Cathode peak current	$I_{kp}$	max. 1.5 A
Pulse duration max. 4 ms		
Average value max. 150 mA		
Cathode peak current	$I_{kp}$	max. 4.6 A
Pulse duration max. 1.5 $\mu$ s		
Average value max. 14 mA		
Voltage between cathode and heater		
Cathode positive	$V_{kf}$ (k pos)	max. 200 V
Cathode negative	$V_{kf}$ (k neg)	max. 100 V
Bulb temperature	$t_{bulb}$	max. 225 $^{\circ}$ C

**LIMITING VALUES** (continued)

Heater voltage: The average heater voltage should be 6.3 V.



Variations of the heater voltage exceeding the range of 6.0 V to 6.6 V will shorten the tube life. The tolerance of the heater current (column II) should be taken into account.



**OPERATING CHARACTERISTICS**Output tube class A

Anode voltage	$V_a$	250	V
Grid No.2 voltage	$V_{g2}$	150	V
Grid No.1 voltage	$-V_{g1}$	15.5	V
Load resistance	$R_{a\sim}$	2.7	$k\Omega$
Input voltage	$V_i$	3.82	$V_{RMS}$
Anode current	$I_a$	100	mA
Grid No.2 current	$I_{g2}$	18	mA
Output power	$W_o$	11.5	W
Total distortion	$d_{tot}$	10	%


Output tube class AB (2 tubes)

Anode voltage	$V_a$	300	V
Grid No.2 voltage	$V_{g2}$	150	V
Grid No.1 voltage	$-V_{g1}$	17	V
Load resistance	$R_{aa\sim}$	1.6	$k\Omega$
Input voltage	$V_i$	0 0.24 9.0	$V_{RMS}$
Anode current	$I_a$	2x80 - 2x182	mA
Grid No.2 current	$I_{g2}$	2x2.5 - 2x22	mA
Output power	$W_o$	0 0.05 60	W
Total distortion	$d_{tot}$	- - 5	%

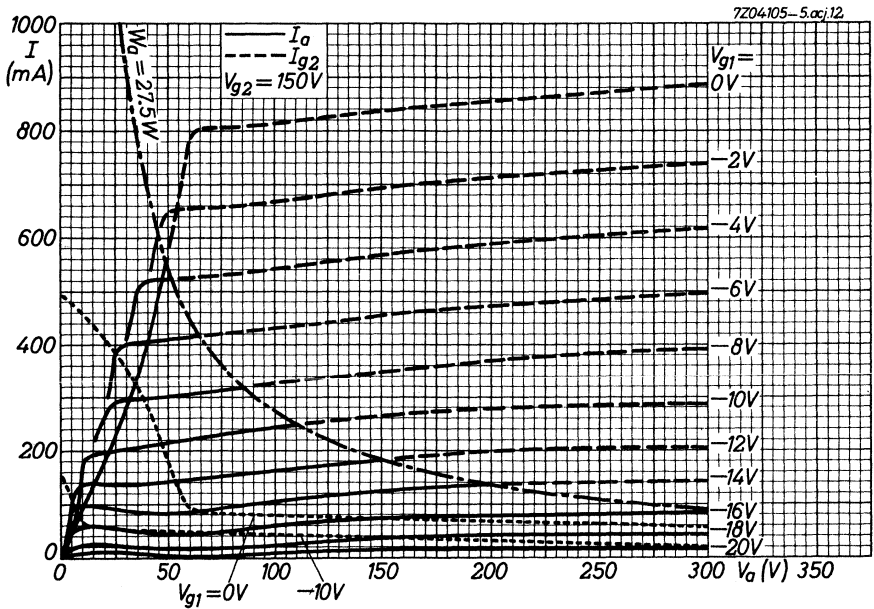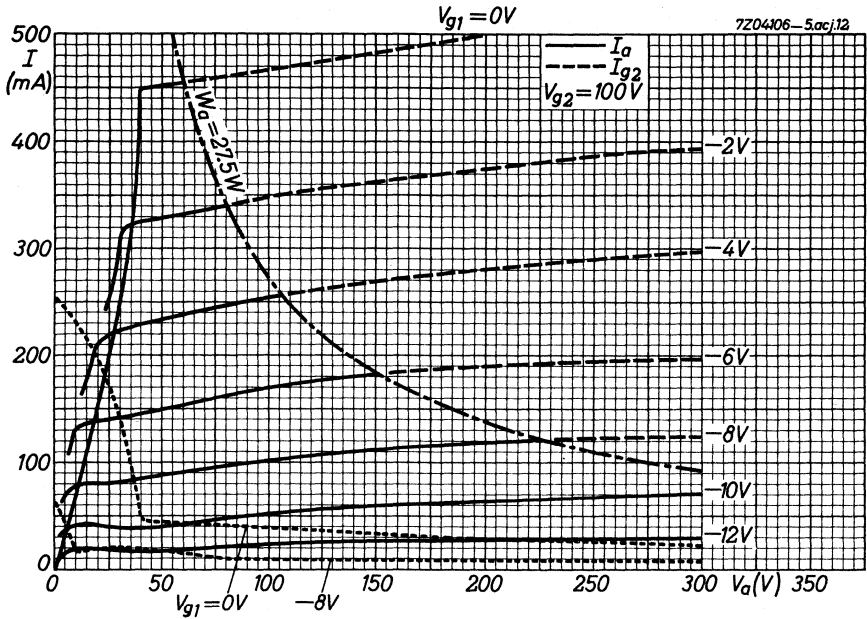

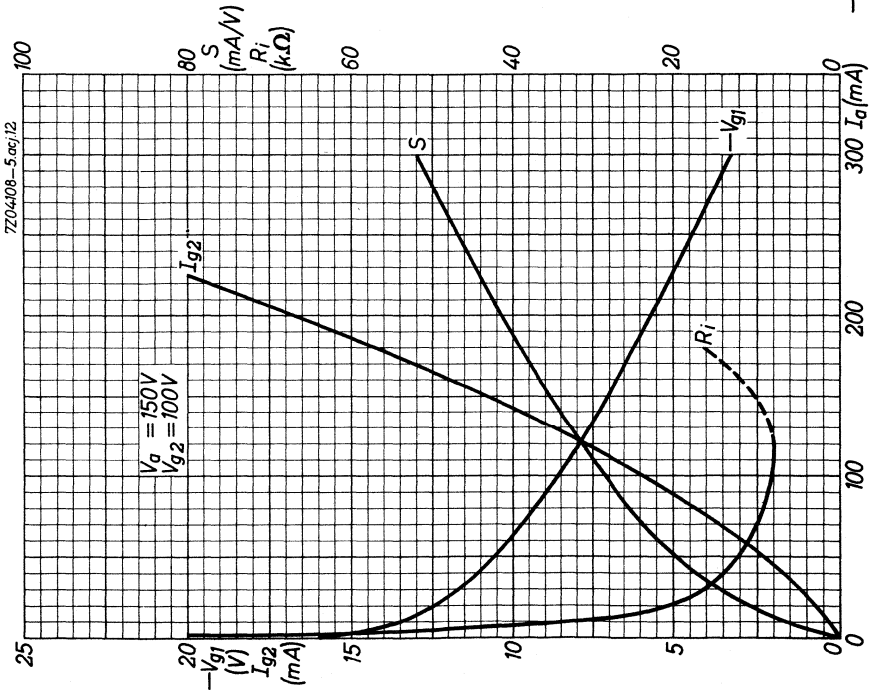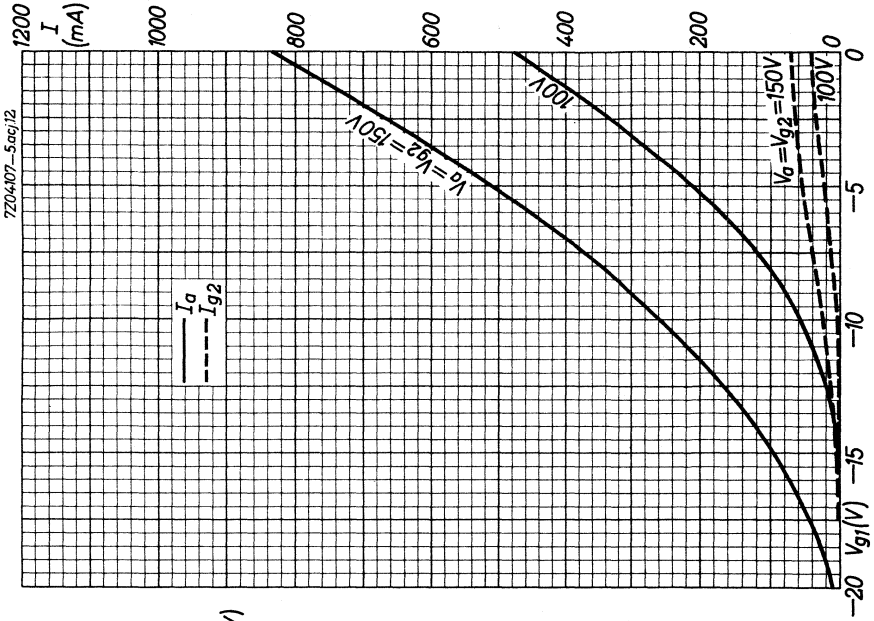

7204109-5.acj12

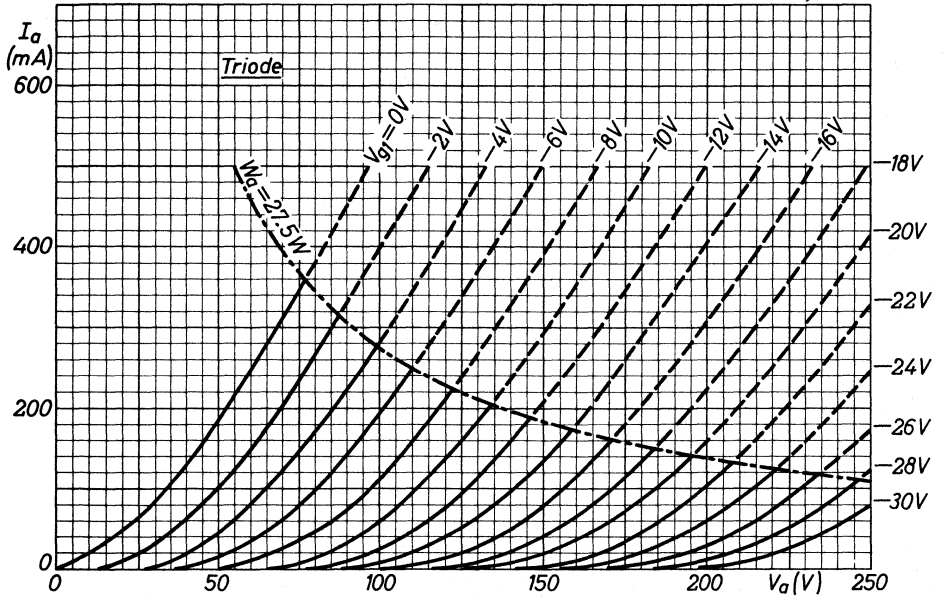



### S.Q. TUBE

Special quality double triode designed for use in computer circuits.




QUICK REFERENCE DATA	
Life test	10 000 hours
Low interface resistance	
Base	Noval
Heating	Indirect A.C. or D.C.; parallel supply
Heater voltage	$V_f$ 6.3 or 12.6 V
Heater current	$I_f$ 400 or 200 mA

#### DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval

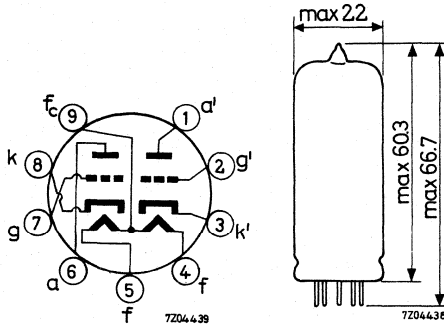

## CHARACTERISTICS

- Column I Nominal value or setting of the tube  
 II Range values for equipment design: Initial spread  
 III Range values for equipment design: End of life

		I	II	III	
Heater voltage (pin 9 and 4 and 5)	$V_f$	6.3			V
Heater current	$I_f$	400	380 - 420		mA
Heater voltage (pin 4 and 5)	$V_f$	12.6			V
Heater current	$I_f$	200			mA
Anode voltage	$V_a$	150			V
Grid voltage	$-V_g$	1.85			V
Anode current	$I_a$	8.5			mA
Mutual conductance	S	6.4			mA/V
Amplification factor	$\mu$	46			
Internal resistance	$R_i$	7.2			k $\Omega$
Anode voltage	$V_a$	150			V
Cathode resistor	$R_k$	220			$\Omega$
Anode current	$I_a$	8.5	6.3 - 10.7	min. 5.0	mA
Mutual conductance	S	6.4	5.3 - 8.1	min. 4.0	mA/V
Negative grid current	$-I_g$		max. 0.2	max. 1.0	$\mu$ A
<u>Cut off voltage</u>	$-V_g$	7.5			V
Anode voltage	$V_a$	150			V
Anode current	$I_a$		max. 150	max. 150	$\mu$ A
<u>Difference in grid voltage</u> of 2 sections	$ V_g - V_g' $		max. 2	max. 2	V
Anode voltage	$V_a$	150			V
Anode current	$I_a$	0.15			mA

**CHARACTERISTICS** (continued)

		I	II	III	
Anode voltage	$V_a$	100			V
Grid voltage	$-V_g$	0.8			V
Anode current	$I_a$	8.5			mA
Mutual conductance	$S$	7.8			mA/V
Amplification factor	$\mu$	50			
Internal resistance	$R_i$	6.4			k $\Omega$
Anode voltage	$V_a$	100			V
Grid supply voltage	$+V_{bg}$	100			V
Grid resistor	$R_g$	0.5			M $\Omega$
Anode current	$I_a$	17.8	13.6 - 22.0	min. 9.5	mA
<u>Leakage current between cathode and heater</u>	$I_{kf}$		max. 15	max. 30	$\mu$ A
Voltage between cathode and heater $V_{kf} = 200$ V					
Series resistor = 1 M $\Omega$					
<u>Insulation resistance between two electrodes</u>			min. 100	min. 20	M $\Omega$
Voltage between electrodes $V = 275$ V					

**CAPACITANCES** Without external screen

Each system if applicable		I	II	
Anode to cathode and heater	$C_{a/kf}$	0.5	0.3 - 0.7	pF
Anode to cathode and heater	$C_{a'/k'f}$	0.45	0.25 - 0.65	pF
Grid to cathode and heater	$C_{g/kf}$	3.5	3.0 - 4.0	pF
Anode to grid	$C_{ag}$	2.2	1.8 - 2.6	pF
Anode to grid	$C_{a'g'}$	2.3	1.9 - 2.7	pF
Cathode to heater	$C_{kf}$	3.5		pF
Anode to anode other section	$C_{aa'}$		max. 1.3	pF
Grid to grid other section	$C_{gg'}$		max. 0.06	pF

## LIFE

Production samples are tested to be within the end of life values (column III) under the following conditions during 10 000 hours.

Anode supply voltage	$V_{ba}$	150 V
Grid supply voltage	$V_{bg}$	150 V
Anode resistor	$R_a$	2.6 k $\Omega$
Grid resistor	$R_g$	1.5 M $\Omega$ ( $I_g = 100 \mu A$ )
Voltage between cathode and heater (k pos)	$V_{kf}$	200 V

## LIMITING VALUES (Absolute max. rating system)


Anode voltage	$V_{a0}$	max. 600 V
	$V_a$	max. 275 V
Anode dissipation	$W_a$	max. 2.0 W
Grid, voltage	$-V_g$	max. 100 V
Grid, peak voltage	$-V_{gp}$	max. 200 V
Max. pulse duration = 10 $\mu s$		
Max. duty factor = 0.01		
Grid voltage	$+V_g$	max. 1 V
Grid current	$I_g$	max. 2 mA
Grid, peak current	$I_{gp}$	max. 50 mA
Max. pulse duration = 10 $\mu s$		
Max. duty factor = 0.01		
Cathode current	$I_k$	max. 20 mA
Cathode, peak current	$I_{kp}$	max. 200 mA
Max. pulse duration = 10 $\mu s$		
Max. duty factor = 0.01		


**LIMITING VALUES** (continued)

Voltage between cathode and heater,

Cathode positive (k pos.)	$V_{kf}$	max. 200 V
Cathode negative (k neg.)	$V_{kf}$	max. 100 V
Grid resistor with fixed bias	$R_g$	max. 0.5 M $\Omega$
	$R_g$	max. 1.0 M $\Omega$
Bulb temperature	$t_{bulb}$	max. 170 °C

**Heater voltage:** The average heater voltage should be 6.3 V. Variations of the heater voltage exceeding the range of 6.0 V to 6.6 V will shorten the tube life. The tolerance of the heater current (column II) should be taken into account.

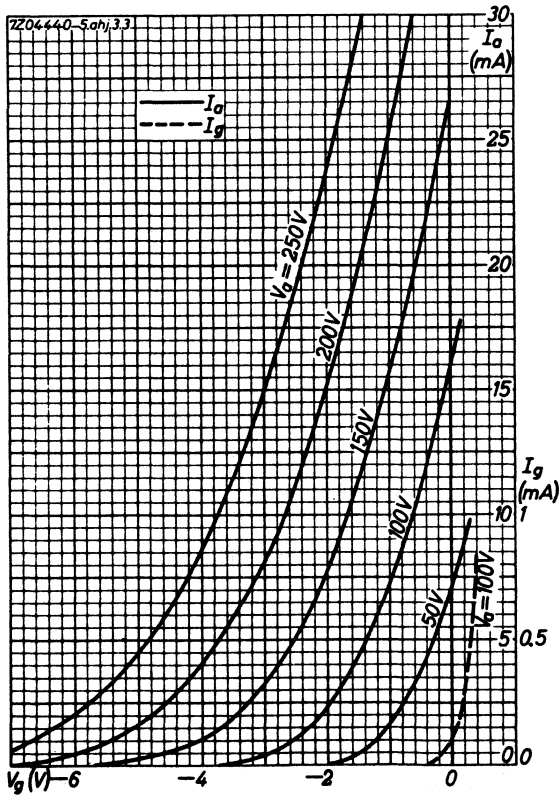

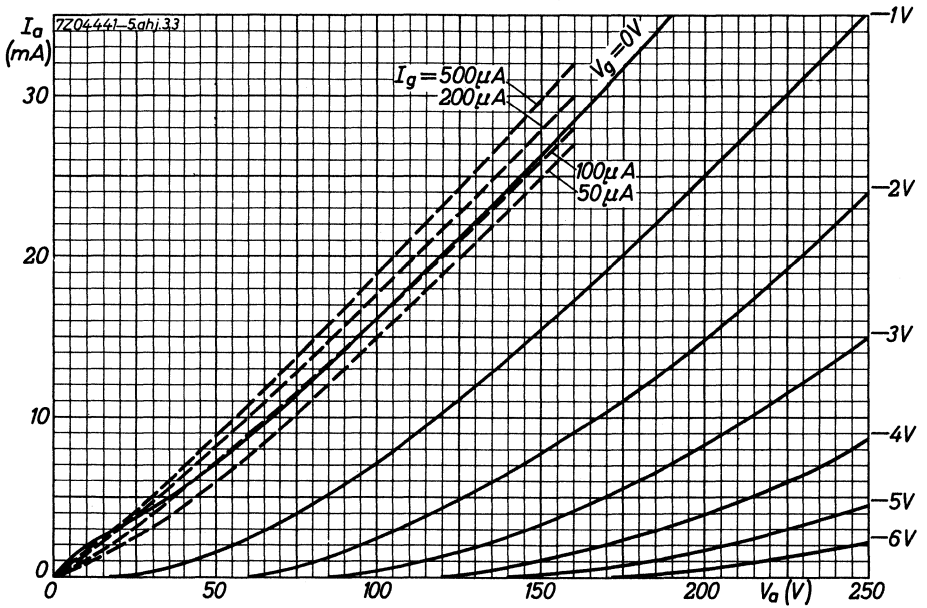

## S.Q. TUBE

Special quality pentode designed for use as wide band amplifier.



### QUICK REFERENCE DATA

Life test	10 000 hours	
Low interface resistance		
Mechanical quality	Shock and vibration resistant	
Base	Noval. Gold plated pins	
Heating	Indirect A. C. or D. C. ; parallel supply	
Heater voltage	$V_f$	6.3 V
Heater current	$I_f$	300 mA
Anode current	$I_a$	13 mA
Mutual conductance	$S$	16.5 mA/V
Equivalent noise resistance	$R_{eq}$	330 $\Omega$
Hum voltage	$V_{g1}$	max. 100 $\mu$ V

### DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval



**CHARACTERISTICS**

- Column I Nominal value or setting of the tube
- II Range values for equipment design: Initial spread
- III Range values for equipment design: End of life

		I	II	III	
Heater voltage	$V_f$	6.3			V
Heater current	$I_f$	300	285- 315		mA
Anode supply voltage	$V_{ba}$	190			V
Grid No.3 voltage	$V_{g3}$	0			V
Grid No.2 supply voltage	$V_{bg2}$	160			V
Grid No.1 supply voltage	$V_{bg1}$	9			V
Cathode resistor	$R_k$	630			$\Omega$
Anode current	$I_a$	13	12.2-13.8	min. 11.5	mA
Grid No.2 current	$I_{g2}$	3.3	2.9- 3.7		mA
Mutual conductance	S	16.5	14.2-18.8	min. 11	mA/V
Amplification factor grid No.2 to grid No.1	$\mu_{g2g1}$	50			
Internal resistance	$R_i$	90	min. 45		k $\Omega$
Equivalent noise resistance	$R_{eq}$	330	max. 650		$\Omega$
Negative grid No.1 current	$-I_{g1}$		max. 0.5	max. 1.0	$\mu A$
<u>Equivalent grid hum voltage</u>	$V_{g1}$		max. 100		$\mu V_{RMS}$
Grid resistor $R_{g1} = 0.5 M\Omega$					
Centre tap of heater transformer grounded					
<u>Distortion</u>	$d_2$	1.6			%
Load resistor $R_a = 1 k\Omega$					
Input voltage $V_i = 100 mV_{RMS}$					
Cathode heating time		12	max. 18		sec



## CHARACTERISTICS (continued)

		I	II	
Anode supply voltage	$V_{ba}$	180		V
Grid No.3 voltage	$V_{g3}$	0		V
Grid No.2 supply voltage	$V_{bg2}$	150		V
Cathode resistor	$R_k$	100		$\Omega$
Anode current	$I_a$	11.5		mA
Grid No.2 current	$I_{g2}$	2.9		mA
Mutual conductance	$S$	15.5		mA/V
<u>Cut-off voltage</u>	$-V_{g1}$		max. 4.5	V
Anode voltage	$V_a$	180		V
Grid No.2 voltage	$V_{g2}$	150		V
Grid No.3 voltage	$V_{g3}$	0		V
Anode current	$I_a$	0.8		mA
<u>Start of grid No.1 current</u>	$-V_{g1}$		max. 0.5	V
Grid No.1 current $I_{g1} = 0.3 \mu A$				
<u>Input resistance</u>	$r_{g1}$	2000		$\Omega$
Frequency = 100 MHz				
<u>Phase angle of the slope</u>		9		$^\circ$
Frequency = 50 MHz				
Pin 1 connected to pin 3				
<u>Leakage current between cathode and heater</u>	$I_{kf}$		max. 15	$\mu A$
Voltage between cathode and heater $V_{kf} = 60 V$				
<u>Insulation resistance between two electrodes</u>			min. 20	$M\Omega$

## CHARACTERISTICS AS TRIODE

( $g_2$  connected to anode)

		I	II	
Anode supply voltage	$V_{ba}$	160		V
Grid No.3 voltage	$V_{g_3}$	0		V
Grid No.1 voltage	$+V_{bg_1}$	9		V
Cathode resistor	$R_k$	620		$\Omega$
Anode current	$I_a$	16.5		mA
Mutual conductance	S	21		mA/V
Amplification factor	$\mu$	50		
Internal resistance	$R_i$	2.4		k $\Omega$
Equivalent noise resistance	$R_{eq}$	225		$\Omega$

## CAPACITANCES . With external shield

Anode to grid No.3, grid No.2, cathode and heater	$C_{a/g_3g_2kf}$	3	2.5 - 3.5	pF <sup>1)</sup>
Grid No.1 to grid No.3, grid No.2, cathode and heater				
( $I_k = 0$ mA) :	$C_{g_1/g_3g_2kf}$	7.5	6.6 - 8.4	pF <sup>1)</sup>
( $I_k = 16.3$ mA, $f = 100$ MHz) :	$C_{g_1/g_3g_2kf}$	11.1		pF <sup>1)</sup>
Anode to grid No.1	$C_{ag_1}$	0.018	max. 0.03	pF
Anode to cathode	$C_{ak}$		max. 0.1	pF
Grid No.1 to heater	$C_{g_1f}$		max. 0.1	pF

## SHOCK AND VIBRATION RESISTANCE

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal-operating conditions.

### Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

### Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

<sup>1)</sup> Pin No.6 left floating

**LIFE**

Production samples are tested to be within the end of life values (column III) under the following conditions during 10 000 hours.

Anode supply voltage	$V_{ba}$	190	V
Grid No.3 voltage	$V_{g3}$	0	V
Grid No.2 supply voltage	$V_{bg2}$	160	V
Grid No.1 supply voltage	$+V_{bg1}$	9	V
Cathode resistor	$R_k$	630	$\Omega$

**LIMITING VALUES** (Absolute max. rating system)

Anode voltage	$V_{a0}$	max.	400	V
	$V_a$	max.	210	V
Anode dissipation	$W_a$	max.	3	W
Grid No.2 voltage	$V_{g20}$	max.	400	V
	$V_{g2}$	max.	175	V
Grid No.2 dissipation	$W_{g2}$	max.	0.9	W
Cathode current	$I_k$	max.	25	mA
Grid No.1 voltage	$+V_{g1}$	max.	0	V
	$-V_{g1}$	max.	50	V
Grid No.1 peak voltage	$-V_{g1p}$	max.	100	V
Grid resistor, fixed bias	$R_{g1}$	max.	0.25	$M\Omega$
	automatic bias	$R_{g1}$	max.	0.5
Voltage between cathode and heater	$V_{kf}$	max.	60	V
Bulb temperature	$t_{bulb}$	max.	155	$^{\circ}C$


Heater voltage: The average heater voltage should be 6.3 V.



Variations of the heater voltage exceeding the range of 6.0 V to 6.6 V will shorten the tube life.


The tolerance of heater current (column II) should be taken into account.

7204257  
E180F 14-12-57

$V_a = 180V$   
 $V_{g2} = 150V$   
 $V_{g3} = 0V$

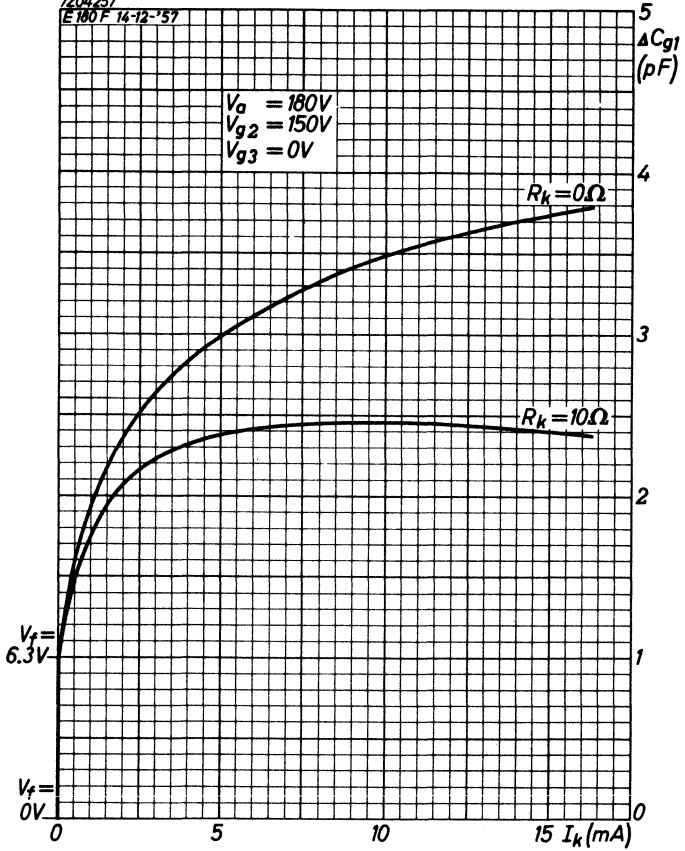

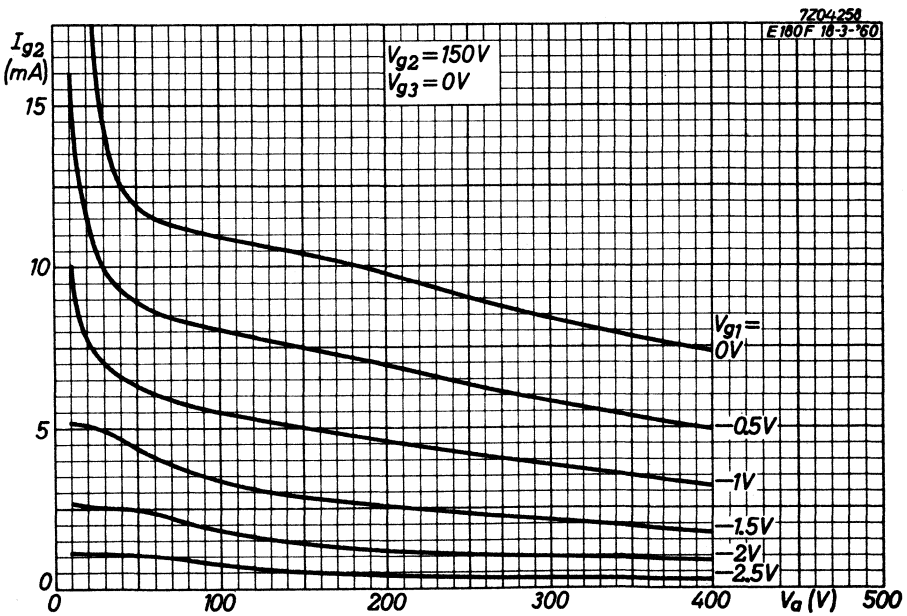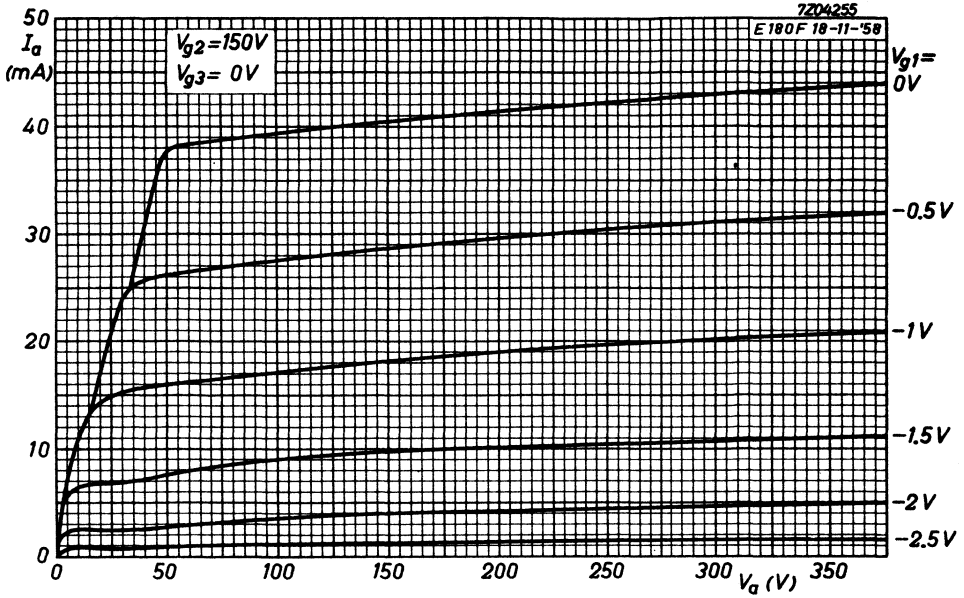

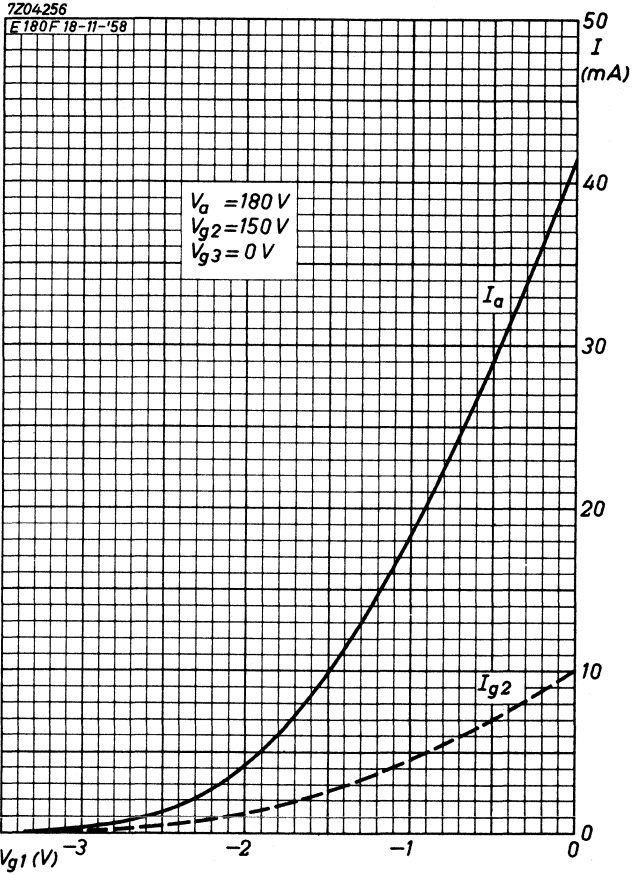

## S.Q. TUBE

Special quality double triode designed for use in computer circuits.





QUICK REFERENCE DATA	
Life test	10 000 hours
Low interface resistance	
Base	Noval
Heating	Indirect A.C. or D.C. ; Parallel supply
Heater voltage	$V_f$ 6.3 or 12.6 V
Heater current	$I_f$ 640 or 320 mA
Anode current	$I_a$ 36 mA
Mutual conductance	S 15 mA/V

### DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval



**CHARACTERISTICS**

Column I Nominal value or setting of the tube  
 II Range values for equipment design: Initial spread  
 III Range values for equipment design: End of life

		I	II	III	
Heater voltage (pin 8 and 4+5)	$V_f$	6.3			V
Heater current	$I_f$	640	605- 675		mA
Heater voltage (pin 4 and 5)	$V_f$	12.6			V
Heater current	$I_f$	320			mA
Anode voltage	$V_a$	120			V
Grid voltage	$-V_g$	2			V
Anode current	$I_a$	36	26- 45		mA
Mutual conductance	S	15			mA/V
Amplification factor	$\mu$	24			
Negative grid current	$-I_g$		max. 0.2	max. 1.0	$\mu A$
Anode voltage	$V_a$	120			V
Cathode resistor	$R_k$	55			$\Omega$
Mutual conductance	S	15	11.2-18.8	min. 8	mA/V
Anode voltage	$V_a$	90			V
Grid current	$I_g$	250			$\mu A$
Anode current	$I_a$		41- 62	min. 24	mA
<u>Cut-off voltage</u>	$-V_g$	14			V
Anode voltage	$V_a$	150			V
Anode current	$I_a$		max. 0.2		mA
<u>Leakage current between cathode and heater</u>	$I_{kf}$		max. 15	max. 30	$\mu A$
Voltage between cathode and heater = 200 V					
<u>Insulation resistance between two electrodes</u>			min. 100	min. 20	M $\Omega$



**CAPACITANCES** Each system if applicable

		I	II	
Anode to cathode and heater	$C_{a/kf}$	1.1	0.75-1.45	pF
	$C_{a'}/k'f$	1.0	0.65-1.35	pF
Grid to cathode and heater	$C_{g/kf}$	6.0	5.3- 6.7	pF
Anode to grid	$C_{ag}$	4.0	3.4- 4.6	pF
	$C_{a'g'}$	4.1	3.4- 4.8	pF
Cathode to heater	$C_{kf}$	4.0		pF
Anode to anode other section	$C_{aa'}$	0.6	max. 0.8	pF
Grid to grid other section	$C_{gg'}$		max. 0.15	pF
Anode to grid other section	$C_{ag'}$		max. 0.1	pF

**LIFE**

Production samples are tested to be within the end of life values (column III) during 10 000 hours under the following conditions.

Anode supply voltage	$V_{ba}$	150	V
Anode resistor	$R_a$	1.5	k $\Omega$
Grid supply voltage	$V_{bg}$	150	V
Grid resistor	$R_g$	62	k $\Omega$
Voltage between cathode and heater (cath. neg.)	$V_{kf}$	120	V

**LIMITING VALUES** (Absolute max. rating system)

Anode voltage	$V_{a0}$	max.	600	V
	$V_a$	max.	300	V
Anode dissipation	$W_a$	max.	4.5	W
Anode dissipation (both sections)	$W_{a+a'}$	max.	8.0	W
Grid voltage	$-V_g$	max.	100	V
	$+V_g$	max.	1	V


## LIMITING VALUES (continued)



Grid voltage, peak	}	$+V_{gp}$	max.	30 V
		$-V_{gp}$	max.	200 V
Pulse duration max. $10 \mu s$				
Duty factor max. 0.01				
Grid current		$I_g$	max.	8 mA
Grid peak current		$I_{gp}$	max.	200 mA
Pulse duration max. $10 \mu s$				
Duty factor max. 0.01				
Cathode current		$I_k$	max.	60 mA
Cathode peak current		$I_{kp}$	max.	400 mA
Pulse duration max. $10 \mu s$				
Duty factor max. 0.01				
Voltage between cathode and heater d.c. component		$V_{kf}$	max.	200 V
		$V_{kf}$	max.	120 V
Bulb temperature		$t_{bulb}$	max.	160 °C
Grid resistor with automatic bias		$R_g$	max.	1 MΩ
Grid resistor with fixed bias		$R_g$	max.	0.5 MΩ


Heater voltage: The average heater voltage should be 6.3/12.6 V.

Variations of the heater voltage exceeding the range of 6.0/12.0 V to 6.6/13.2 V will shorten the tube life.

The tolerance of heater current (column II) should be taken into account.

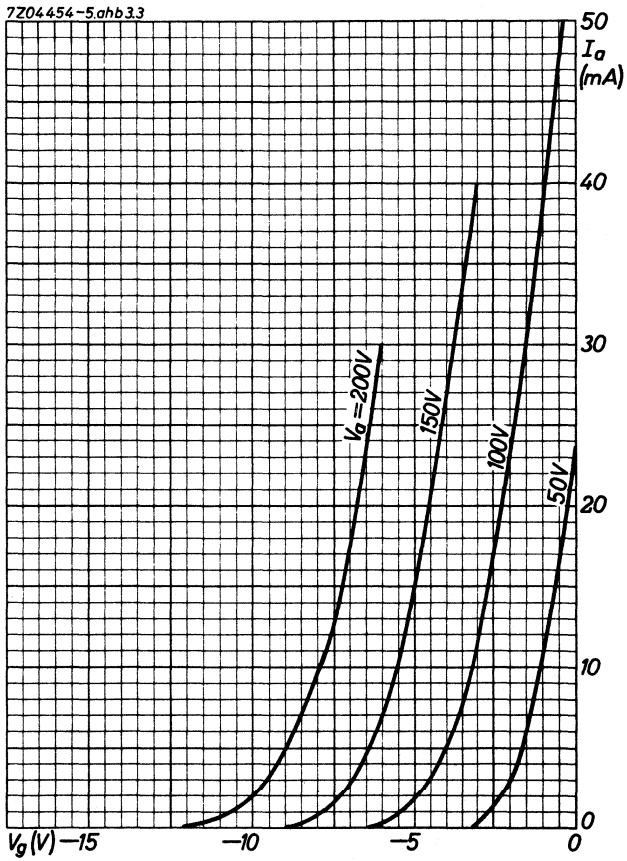

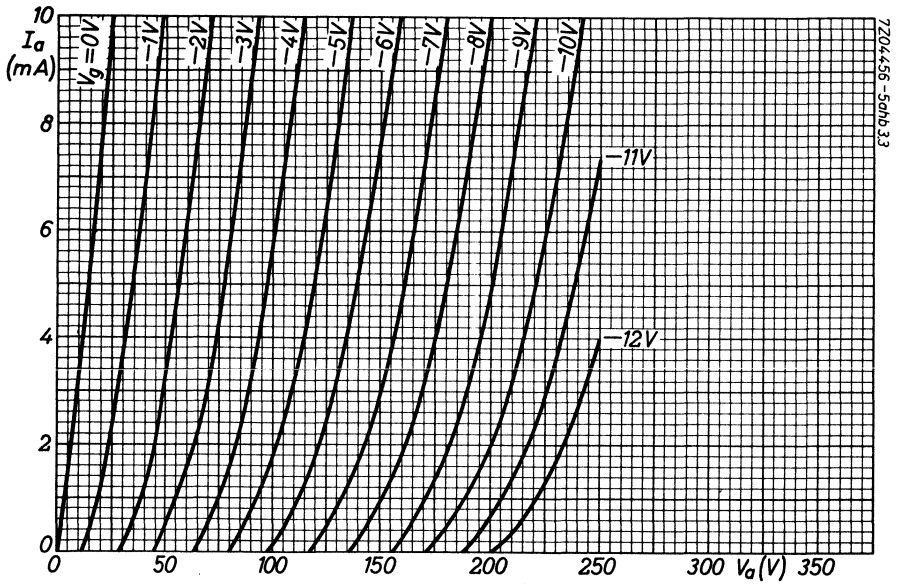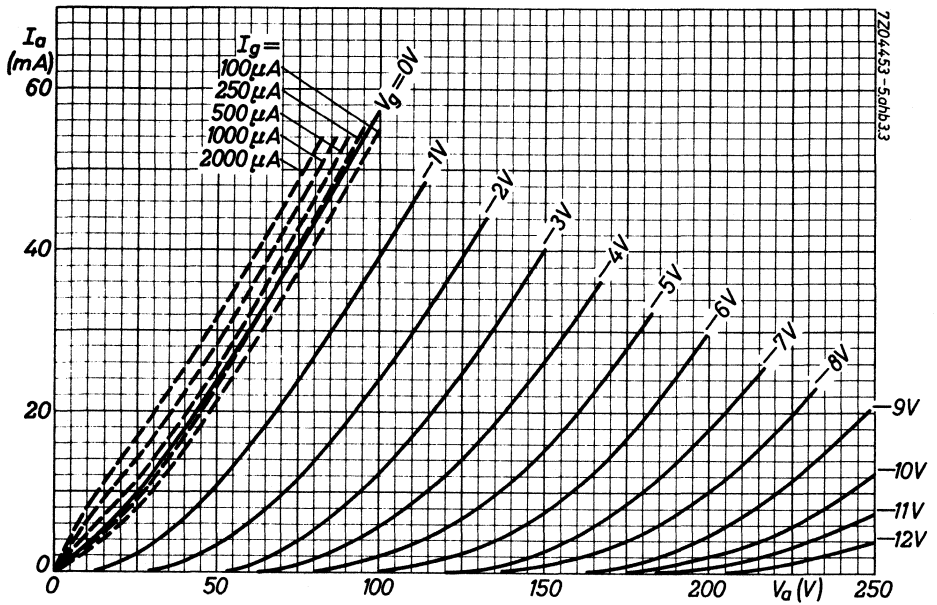

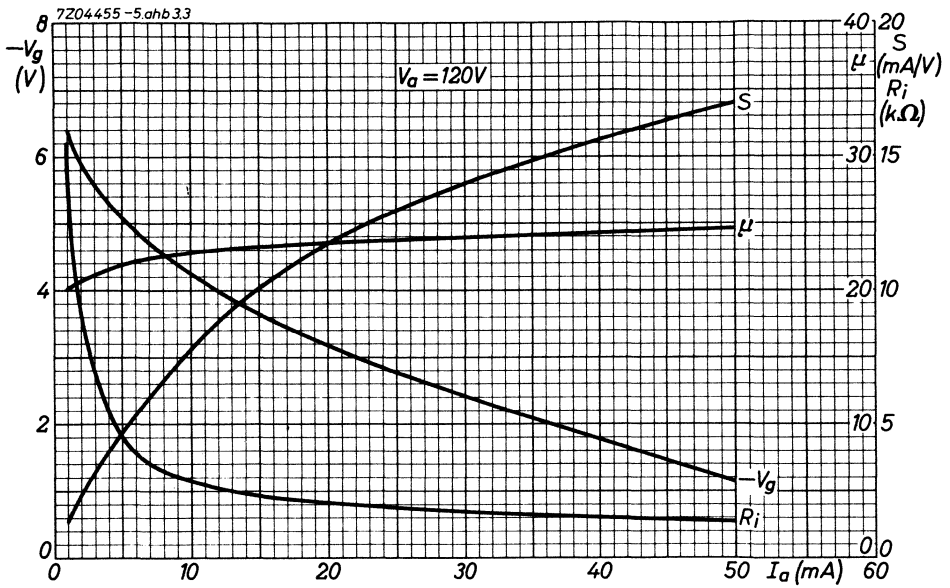



## S.Q. TUBE





Special quality pentode designed for use as broad band amplifier.

QUICK REFERENCE DATA	
Life test	10 000 hours
Mechanical quality	Shock and vibration resistant
Low microphony level	
Base	Noval
Heating	Indirect a.c. or d.c.; parallel supply
Heater voltage	$V_f$ 6.3 V
Heater current	$I_f$ 320 mA
Anode current	$I_a$ 13 mA
Mutual conductance	$S$ 16.5 mA/V
Equivalent noise resistance	$R_{eq}$ 330 $\Omega$
Hum voltage	$V_{g1}$ <100 $\mu$ V

### DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval



**CHARACTERISTICS**

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage	$V_f$	6.3			V
Heater current	$I_f$	320	300- 340		mA
Anode supply voltage	$V_{ba}$	190			V
Grid No.3 voltage	$V_{g3}$	0			V
Grid No.2 supply voltage	$V_{bg2}$	160			V
Grid No.1 supply voltage	$+V_{bg1}$	9			V
Cathode resistor	$R_k$	630			$\Omega$
Anode current	$I_a$	13	12.2-13.8	min. 11.5	mA
Grid No.2 current	$I_{g2}$	3.3	2.9- 3.7		mA
Mutual conductance	S	16.5	14.2-18.6	min. 11	mA/V
Amplification factor grid No.2 to grid No.1	$\mu_{g2g1}$	53			
Internal resistance	$R_i$	100			k $\Omega$
<u>Equivalent noise resistance</u> frequency 45 MHz	$R_{eq}$	330			$\Omega$
<u>Negative grid No.1 current</u>	$-I_{g1}$		max. 0.2	max.0.5	$\mu A$
Anode supply voltage	$V_{ba}$	180			V
Grid No.3 voltage	$V_{g3}$	0			V
Grid No.2 supply voltage	$V_{bg2}$	150			V
Cathode resistor	$R_k$	100			$\Omega$
Anode current	$I_a$	11.5			mA
Grid No.2 current	$I_{g2}$	2.9			mA
Mutual conductance	S	15.5			mA/V



**CHARACTERISTICS** (continued)

	I	II	III	
<u>Cut-off voltage</u>	$-V_{g1}$	4.5		V
Anode voltage	$V_a$	180		V
Grid No.3 voltage	$V_{g3}$	0		V
Grid No.2 voltage	$V_{g2}$	150		V
Anode current	$I_a$		max. 0.8	mA
<u>Leakage current between cathode and heater</u>	$I_{kf}$		max. 10	max. 20 $\mu$ A
Voltage between cathode and heater $V_{kf} = 100$ V				
<u>Insulation resistance between two electrodes</u>	$R_{ins}$		min. 100	min. 50 $M\Omega$
Voltage between electrodes = 100 V				
<u>Hum voltage</u>	$V_{g1}$		max. 100	$\mu$ V
Grid No.1 resistor $R_{g1} = 0.5 M\Omega$				
Centre tapping of heater transformer grounded				
Cathode resistor by-passed				
<u>Vibrational noise output</u>				
With vibration frequency = 50-2000 Hz	$V_{g1}$		max. 500	$mV_{RMS}$
With vibration frequency = 50 Hz	$V_{g1}$		max. 200	$mV_{RMS}$
Anode supply voltage $V_{b_a} = 216$ V				
Anode resistor $R_a = 2 k\Omega$				
Grid No.2 supply voltage $V_{bg_2} = 160$ V				
Grid No.3 voltage $V_{g_3} = 0$ V				
Cathode resistor $R_k = 630 \Omega$ (not by-passed)				
Grid No.1 supply voltage $+V_{bg_1} = 9$ V				
Acceleration (peak value) = 10 g				



**CAPACITANCES** . With external shield

Anode to grid No.3, grid No.2  
cathode, heater and screen

	I	II	
$C_{a/g_3g_2kfs}$	3.45		pF
$C_{g_1/g_3g_2kfs}$	7.6		pF
$C_{ag_1}$		max.0.03	pF

Grid No.1 to grid No.3, grid No.2  
cathode, heater and screen

Anode to grid No.1

**SHOCK AND VIBRATION RESISTANCE**

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

**LIFE**

Production samples are tested to be within the end of life values (column III) under the following conditions during 10 000 hours.

Anode supply voltage	$V_{b_a}$	190	V
Grid No.3 voltage	$V_{g_3}$	0	V
Grid No.2 voltage	$V_{g_2}$	160	V
Grid No.1 supply voltage	$+V_{b_{g_1}}$	9	V
Cathode resistor	$R_k$	630	$\Omega$
Voltage between cathode and heater (cathode negative)	$V_{k_f}$	70	V

**LIMITING VALUES** (Absolute max. rating system)


Anode voltage	$V_{a_0}$	max.	400 V
	$V_a$	max.	210 V
Anode dissipation	$W_a$	max.	3 W
Grid No.2 dissipation	$W_{g_2}$	max.	0.7 W
Grid No.2 voltage	$V_{g_{20}}$	max.	400 V
	$V_{g_2}$	max.	175 V
Grid No.1 voltage			
positive	$+V_{g_1}$	max.	0 V
negative	$-V_{g_1}$	max.	50 V
negative peak	$-V_{g_{1p}}$	max.	100 V
Grid No.1 resistor			
fixed bias	$R_{g_1}$	max.	0.25 M $\Omega$
automatic bias	$R_{g_1}$	max.	0.5 M $\Omega$
Cathode current	$I_k$	max.	25 mA
Voltage between cathode and heater	$V_{kf}$	max.	60 V
Bulb temperature	$t_{bulb}$	max.	165 °C

Heater voltage: The average heater voltage should be 6.3 V.


Variation of the heater voltage exceeding the range of 6.0 V to 6.6 V will shorten the tube life.

The tolerance of heater current (column II) should be taken into account.

7Z04052-5.shf.6.

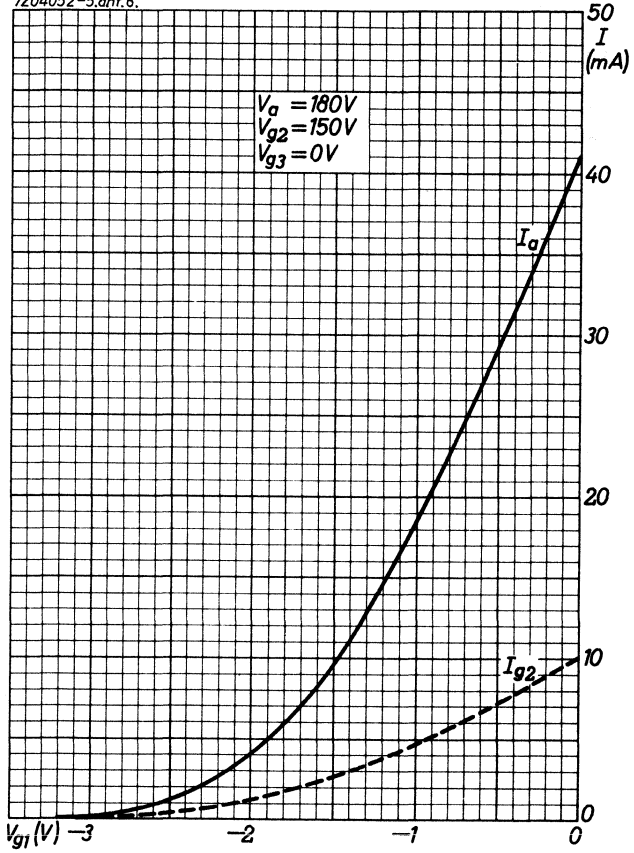

7204051-5ahf.6

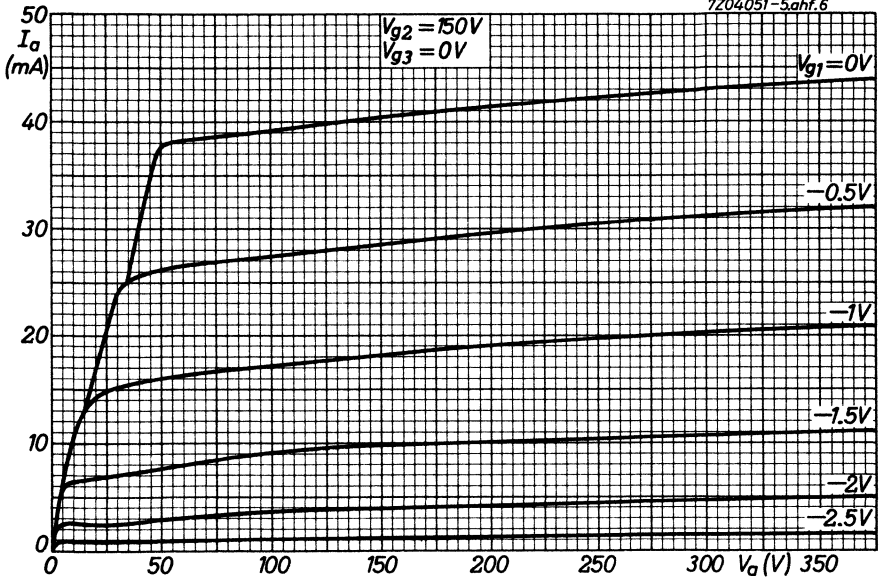



## S.Q. TUBE

Special quality double triode designed for use as cascode amplifier, cathode follower etc. in R.F. and A.F. circuits.



### QUICK REFERENCE DATA

Life test	10 000 hours	
Low interface resistance		
Mechanical quality	Shock and vibration resistant	
Base	Noval. Gold plated pins	
Heating	Indirect A.C. or D.C.; parallel supply	
Heater voltage	$V_f$	6.3 V
Heater current	$I_f$	335 mA
Anode current	$I_a$	15 mA
Mutual conductance	$S$	12.5 mA/V
Equivalent noise resistance	$R_{eq}$	250 $\Omega$
Noise factor ( $f = 200$ MHz)	$F$	4.6 dB
Hum voltage	$V_g$ max.	50 $\mu V_{RMS}$

### DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval



## CHARACTERISTICS

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage	$V_f$	6.3			V
Heater current	$I_f$	335	318 - 352		mA
Anode supply voltage	$V_{ba}$	100			V
Grid supply voltage	$+V_{bg}$	9			V
Cathode resistor	$R_k$	680			$\Omega$
Anode current	$I_a$	15	14.2-15.8	min. 13.5	mA
Mutual conductance	S	12.5	10.5-14.5	min. 9	mA/V
Amplification factor	$\mu$	33			
<u>Negative grid current</u>	$-I_g$		max. 0.1	max. 1.0	$\mu$ A
<u>Equivalent noise resistance</u> Frequency f = 45 MHz	$R_{eq}$	250			$\Omega$
<u>Noise factor in cascode circuit,</u> adapted to minimum noise Frequency f = 200 MHz	F	4.6			dB
<u>Input resistance</u> Frequency f = 100 MHz	$r_g$	3			k $\Omega$
<u>Cut off voltage</u>	$-V_{g1}$	15			V
Anode voltage	$V_a$	150			V
Anode current	$I_a$		max. 5		mA
Anode supply voltage	$V_{ba}$	90			V
Cathode resistor	$R_k$	120			$\Omega$
Anode current	$I_a$	12			mA
Mutual conductance	S	11.5			mA/V



## CHARACTERISTICS (continued)

	I	II	III	
<u>Leakage current between cathode and heater</u> Voltage between cathode and heater $V_{kf} = 60$ V (k neg) or = 120 V (k pos)	$I_{kf}$	max. 6	max. 12	$\mu A$
<u>Insulation resistance between two electrodes</u> Voltage between electrodes $V = 200$ V	R	min. 100	min. 20	$M\Omega$
<u>Hum voltage</u> Grid resistor $R_{g1} = 0.5$ $M\Omega$	$V_g$	max. 50		$\mu V_{RMS}$
<u>Vibrational noise output</u> Anode supply voltage $V_{ba} = 100$ V Anode resistor $R_a = 2$ $k\Omega$ Grid supply voltage $+V_{bg} = 9$ V Cathode resistor $R_k = 680$ $\Omega$ (by passed) Vibration frequency $f = 10-50$ Hz Acceleration = 2.5 g	$V_g$	max. 100		mV
<u>Vibrational noise output</u> Anode supply voltage $V_{ba} = 270$ V Anode resistor $R_a = 18$ $k\Omega$ Grid resistor $R_g = 1$ $M\Omega$ Cathode resistor $R_k = 180$ $\Omega$ By pass capacitor $C_k = 50$ $\mu F$ Vibration frequency $f = 50-5000$ Hz Acceleration = 0.5 g	$V_g$	max. 140		mV

**CAPACITANCES.** Both sections if not otherwise indicated.

		I.	II	
Anode to cathode, heater and screen	$C_{a/kfs}$	1.75	1.55 - 1.95	pF
	$C_{a' /k'fs}$	1.65	1.45 - 1.85	pF
Anode to cathode and heater	$C_{a/kf}$	0.5	0.4 - 0.6	pF
	$C_{a' /k'f}$	0.4	0.3 - 0.5	pF
Grid to cathode, heater and screen	$C_{g/kfs}$	3.3	2.7 - 3.9	pF
Grid to cathode and heater	$C_{g/kf}$	3.3	2.7 - 3.9	pF
Anode to grid	$C_{ag}$	1.4	1.2 - 1.6	pF
Anode to cathode	$C_{ak}$	0.18	0.14 - 0.22	pF
Cathode to heater	$C_{kf}$	2.6		pF
	$C_{k'f}$	2.7		pF
Anode to screen	$C_{as}$	1.3	1.1 - 1.5	pF
Anode to grid, heater and screen	$C_{a/gfs}$	3.0	2.7 - 3.3	pF
	$C_{a' /gfs}$	2.9	2.6 - 3.2	pF
Cathode to grid, heater and screen	$C_{k/gfs}$	6.0	5.1 - 6.9	pF
Anode to anode other section	$C_{aa'}$	0.025	max.0.045	pF
Grid to grid other section	$C_{gg'}$		max.0.005	pF
Anode to grid other section	$C_{ag'}$		max.0.005	pF
Grid to anode other section	$C_{ga'}$		max.0.005	pF
Grid to cathode other section	$C_{gk'}$		max.0.005	pF
Cathode to grid other section	$C_{kg'}$		max.0.005	pF

**SHOCK AND VIBRATION RESISTANCE**

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

**LIFE**

Production samples are tested to be within the end of life values (column III) under the following conditions during 10 000 hours.

Anode supply voltage	$V_{ba}$	100 V
Grid supply voltage	$+V_{bg}$	9 V
Cathode resistor	$R_k$	680 $\Omega$
Grid resistor	$R_g$	47 k $\Omega$
Cathode to heater voltage (k neg)	$V_{kf}$	60 V

**LIMITING VALUES** (Absolute max. rating system)

Anode voltage	$V_{a0}$	max. 550 V
	$V_a$	max. 250 V
Anode voltage (Zero anode current)	$V_a(I_a = 0)$	max. 400 V
Anode dissipation	$W_a$	max. 1.65 W
Both sections	$\left\{ \begin{array}{l} W_a \\ W_{a+a'} \end{array} \right.$	max. 2.0 W
		max. 2.2 W
Grid dissipation	$W_g$	max. 30 mW
Grid voltage	$-V_g$	max. 110 V
Grid peak voltage	$-V_{gp}$	max. 200 V
Pulse duration max. 200 $\mu s$		
Duty factor max. 0.1		
Cathode current	$I_k$	max. 22 mA
Cathode peak current	$I_{kp}$	max. 110 mA
Pulse duration max. 200 $\mu s$		
Duty factor max. 0.1%		
Voltage between cathode and heater		
cathode positive	$V_{kf}(k \text{ pos})$	max. 150 V
cathode negative	$V_{kf}(k \text{ neg})$	max. 100 V
Bulb temperature	$t_{bulb}$	max. 165 $^{\circ}C$
Grid resistor with fixed bias	$R_g$	max. 0.5 M $\Omega$
with automatic bias	$R_g$	max. 1.0 M $\Omega$

## LIMITING VALUES (continued)

Heater voltage: The average heater voltage should be 6.3 V.

Variations of the heater voltage exceeding the range of 6.0 V to 6.6 V will shorten the tube life.

The tolerance of heater current (column II) should be taken into account.

## OPERATING CHARACTERISTICS

### Additive mixer

Anode supply voltage	$V_{ba}$	60	90	150	V
Anode resistor	$R_a$	0	1	3.9	$k\Omega$
Grid resistor	$R_g$	1	1	1	$M\Omega$
Grid oscillator voltage	$V_{osc}$	2	2.5	3	$V_{RMS}$
Anode current	$I_a$	4.7	7.7	11	mA
Conversion conductance	$S_C$	2.9	3.5	4.1	mA/V
Internal resistance	$R_i$	8.3	7	6.1	$k\Omega$

### Output tube class A

Anode voltage	$V_a$		220		V
Load resistance	$R_{a\sim}$		20		$k\Omega$
Negative grid voltage	$-V_g$		6.5		V
Input voltage	$V_i$	0	1.5	4.5	$V_{RMS}$
Anode current	$I_a$	6.5	-	9.2	mA
Output power	$W_o$	-	0.05	0.5	W
Total distortion	$d_{tot}$			7	%


### Output tube class B (two units). Constant sinusoidal input voltage (single tone).

Anode voltage	$V_a$		200		V
Load resistance	$R_{aa\sim}$		22		$k\Omega$
Negative grid voltage	$-V_g$		6		V
Input voltage	$V_i$	0	0.9	4.0	$V_{RMS}$
Anode current	$I_a$	2x5	-	2x9	mA
Output power	$W_o$	-	0.05	1.2	W
Total distortion	$d_{tot}$	-	-	3	%


OPERATING CHARACTERISTICS (continued)

Output tube class B (two units). Speech and music input voltage


Anode voltage	$V_a$	200	V
Load resistance	$R_{aa \sim}$	10	$k\Omega$
Negative grid voltage	$-V_g$	6 V	
Input voltage	$V_i$	0    0.9    4.0	$V_{RMS}$
Anode current	$I_a$	2x5    -    2x13.5	mA
Output power	$W_o$	-    0.05    1.5	W
Total distortion	$d_{tot}$	-    -    4	%


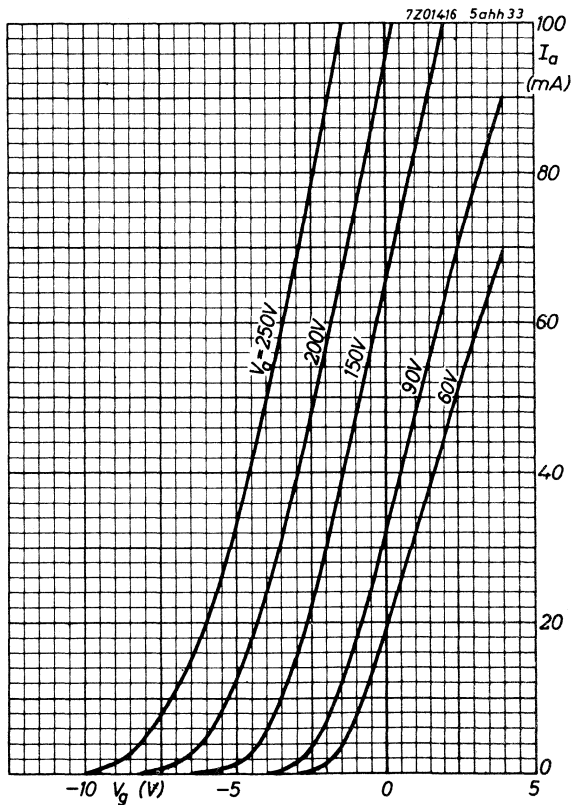



7201415 5ahh33

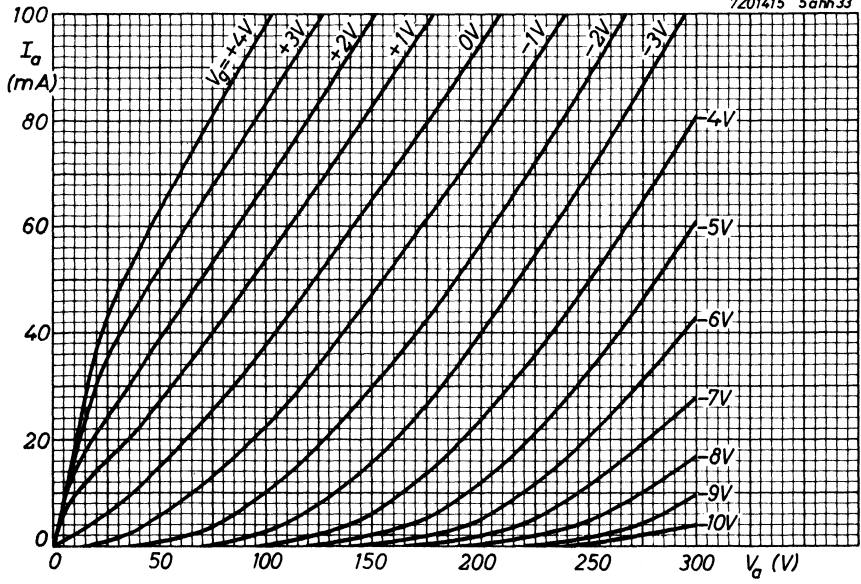

7201417 5ahh33

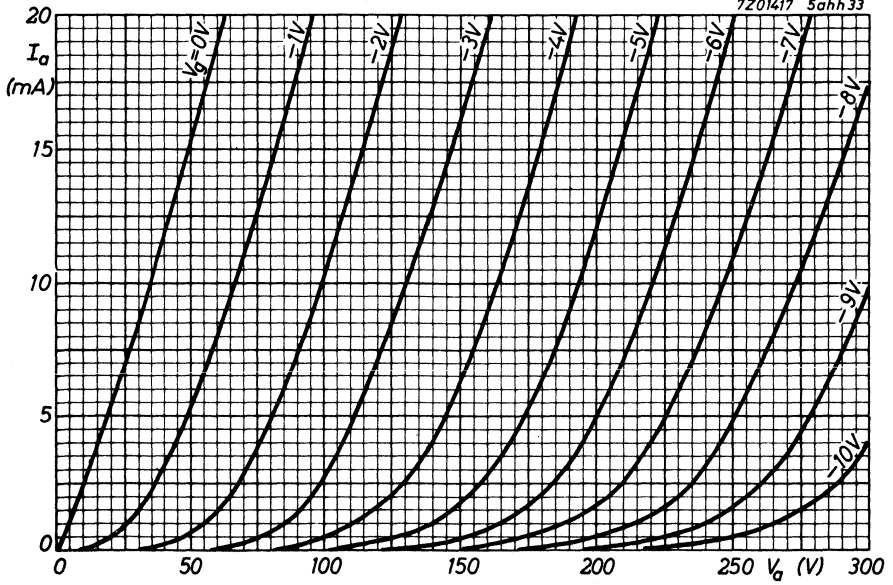

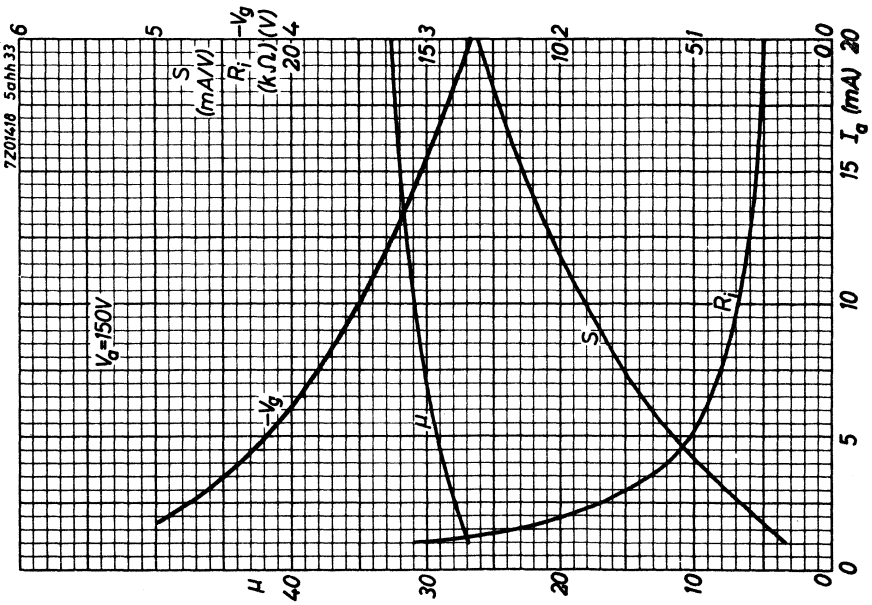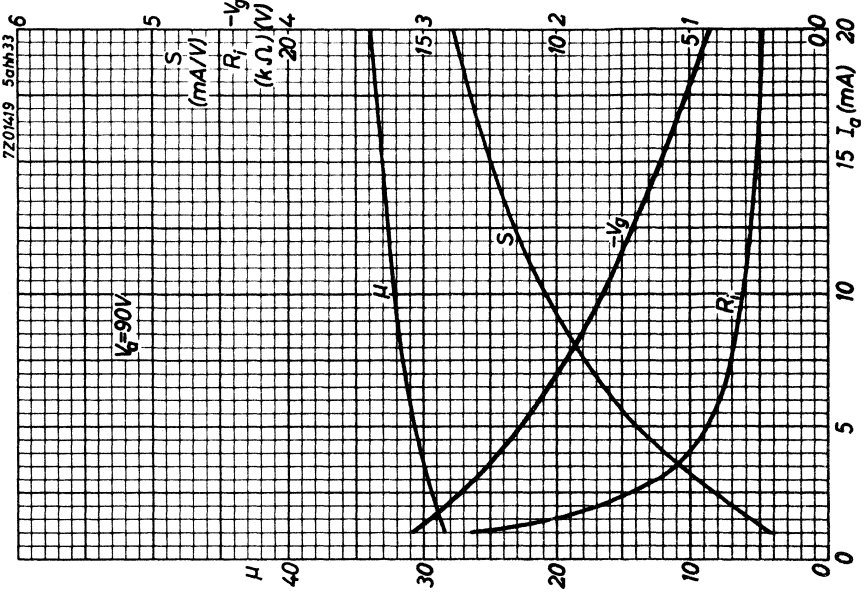

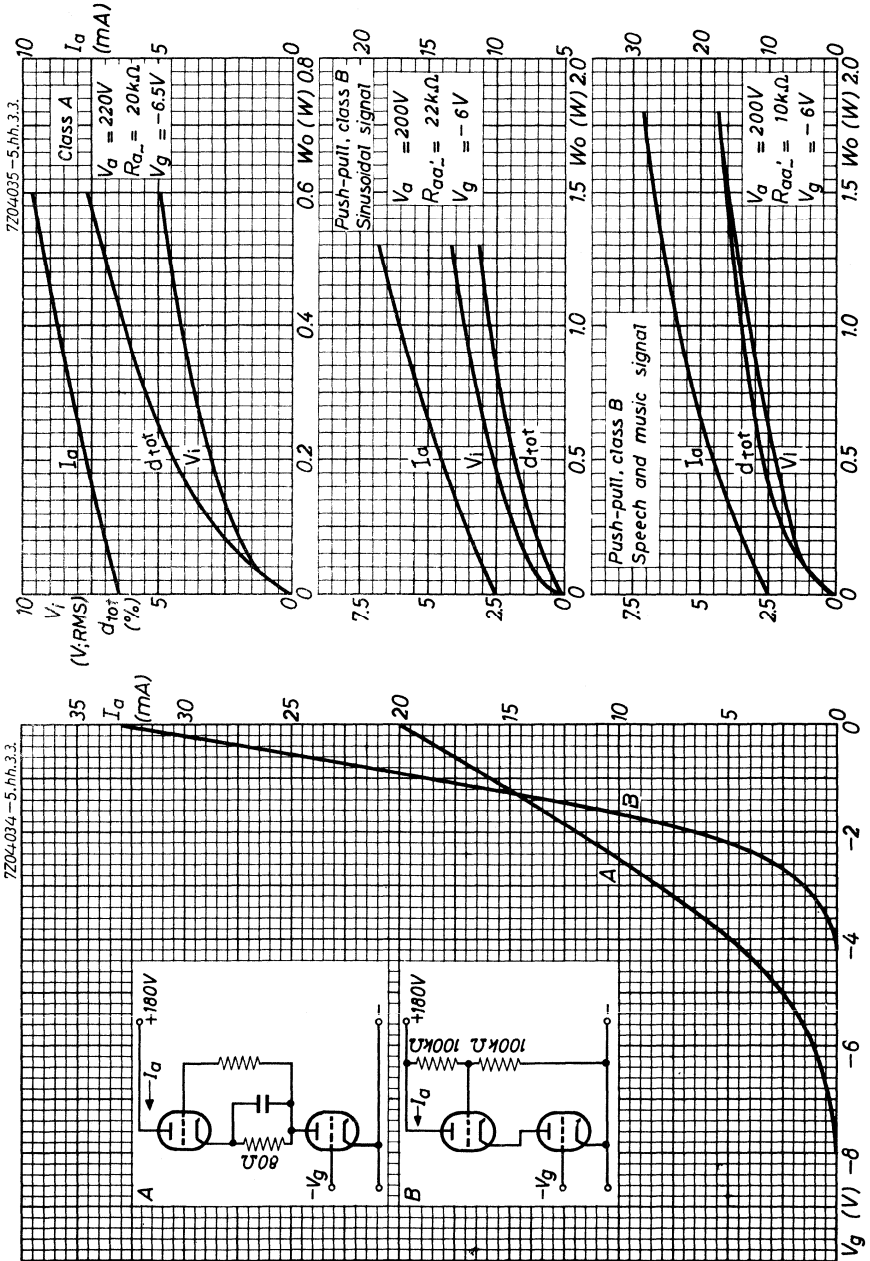



**S.Q. TUBE**

Special quality tube designed for use as wide band amplifier, power output tube and series regulator tube.





**QUICK REFERENCE DATA**

Life test	10 000 hours
Low interface resistance	
Mechanical quality	Shock and vibration resistant
Base	Octal
Heating	Indirect A.C. or D.C.; Parallel supply
Heater voltage	$V_f$ 6.3 V
Heater current	$I_f$ 1.2 A
Anode current	$I_a$ 100 mA
Mutual conductance	S 14 mA/V
Output power . Class B (two tubes)	$W_o$ 30 W

**DIMENSIONS AND CONNECTIONS**

Dimensions in mm

Base: Octal

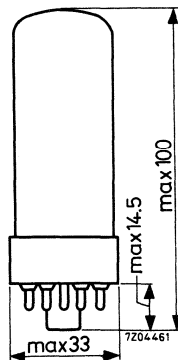

## CHARACTERISTICS

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage	$V_f$	6.3			V
Heater current	$I_f$	1.2	1.12-1.28		A
Anode voltage	$V_a$	100			V
Grid No.2 voltage	$V_{g2}$	100			V
Cathode resistor	$R_k$	75			$\Omega$
Anode current	$I_a$	100	85- 118	min. 65	mA
Grid No.2 current	$I_{g2}$	5.2	4.0- 6.5		mA
Mutual conductance	$S$	14	11.5-16.5	min. 9.5	mA/V
Amplification factor	$\mu_{g2g1}$	5.6			
Internal resistance	$R_i$	5.0			k $\Omega$
<u>Cut off voltage</u>	$-V_{g1}$	35			V
Anode current	$I_a$	0.1			mA
<u>Negative grid current</u>	$-I_{g1}$		max. 1	max. 2	$\mu$ A
<u>As triode. (Grid No.2 connected to anode)</u>					
Anode voltage	$V_a$	100			V
Cathode resistor	$R_k$	85			$\Omega$
Anode current	$I_a$	100			mA
Mutual conductance	$S$	14			mA/V
Amplification factor	$\mu$	5.2			
Internal resistance	$R_i$	0.35			k $\Omega$
<u>Insulation resistance between;</u>					
Anode and other electrodes	$R_{ins}$		min. 100		M $\Omega$
Grid No.1 and other electrodes	$R_{ins}$		min. 100		M $\Omega$
<u>Leakage current between cathode and heater</u>					
	$I_{kf}$		max. 20		$\mu$ A

**CAPACITANCES**

Anode to grid No.2, grid No.3,  
cathode and heater

	I	II	
$C_{a/g_2g_3kf}$	9	8 - 10	pF

Grid No.1 to grid No.2, grid No.3,  
cathode and heater

$C_{g_1/g_2g_3kf}$	18	16.5-19.5	pF
--------------------	----	-----------	----

Anode to grid No.1

$C_{ag_1}$		max. 1.2	pF
------------	--	----------	----



**SHOCK AND VIBRATION RESISTANCE**

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

**LIFE**

Production samples are tested to be within the end of life values (column III) during 10000 hours

**LIMITING VALUES** (Absolute max. rating system)

Anode voltage	$V_{a0}$	max. 650 V
	$V_a$	max. 400 V
Anode dissipation	$W_a$	max. 15 W
Anode + grid No.2 dissipation	$W_{a+g_2}$	max. 16 W
Grid No.2 voltage	$V_{g_{20}}$	max. 650 V
	$V_{g_2}$	max. 300 V
Grid No.2 dissipation	$W_{g_2}$	max. 5.5 W
Grid No.1 resistor	$R_{g_1}$	max. 0.5 MΩ
Cathode current	$I_k$	max. 220 mA
$T_{av} = 10$ ms		

**LIMITING VALUES** (continued)

Cathode peak current	$I_{kp}$	max. 1.2 A
Voltage between cathode and heater		
cathode positive	$V_{kf}(k\text{ pos})$	max. 250 V
cathode negative	$V_{kf}(k\text{ neg})$	max. 200 V
Bulb temperature	$t_{bulb}$	max. 220 °C

Heater voltage: The average heater value should be 6.3 V.

Variation of the heater voltage exceeding the range of 6.0 V to 6.6 V will shorten the tube life.


The tolerance of heater current should be taken into account.


**OPERATING CHARACTERISTICS**

Output tube. Class B (two tubes). Excitation up to maximum output is continuously permitted.

Anode voltage	$V_a$	250	V
Grid No.2 voltage	$V_{g2}$	170	V
Grid No.1 voltage	$-V_{g1}$	34	V
Load resistor	$R_{aa\sim}$	3	kΩ
Grid No.2 resistor	$R_{g2}$	2x0.5	kΩ <sup>1)</sup>
Input voltage	$V_i$	0      22	VRMS
Anode current	$I_a$	2x12      2x94	mA
Grid No.2 current	$I_{g2}$	2x1      2x28	mA
Output power	$W_o$	0      30	W
Total distortion	$d_{tot}$	-      6	%

<sup>1)</sup> To avoid overloading of grid No.2 this resistor should not be by-passed.

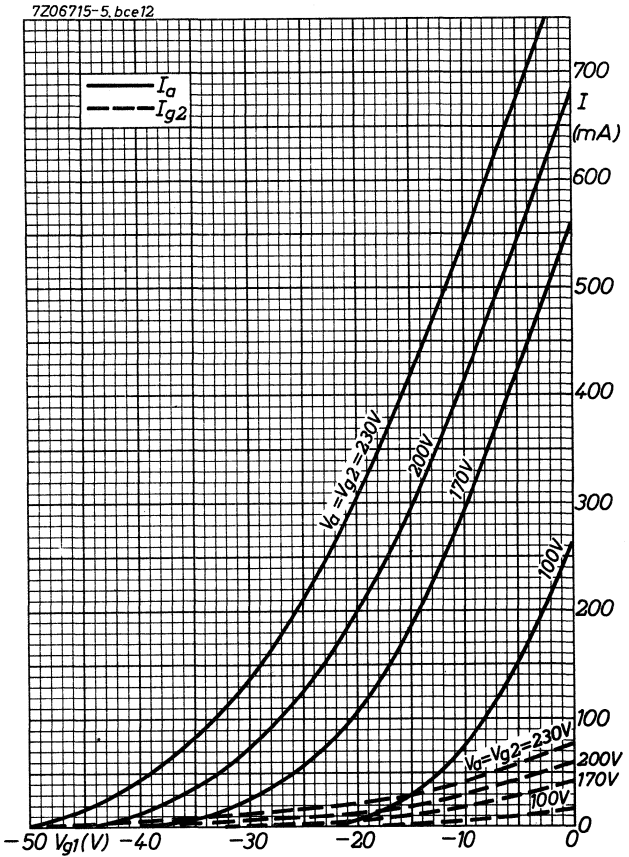

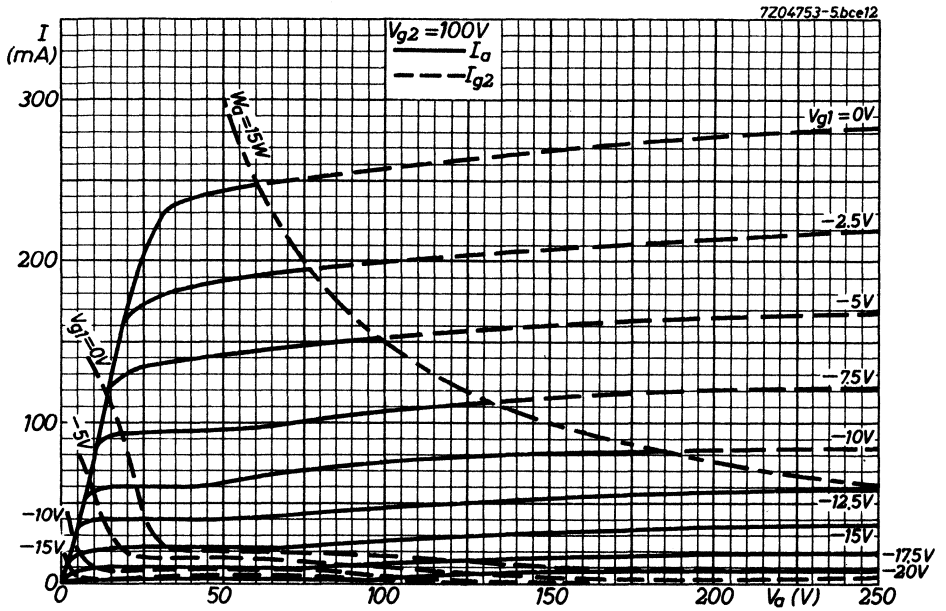

## S.Q. TUBE


Special quality output pentode designed for use as line output tube, power output tube, wide band amplifier and series regulator tube.

QUICK REFERENCE DATA	
Life test	10 000 hours
Low interface resistance	
Mechanical quality	Shock and vibration resistant
Base	Octal
Heating	Indirect
	A.C. or D.C.; parallel supply
Heater voltage	$V_f$ 6.3 V
Heater current	$I_f$ 1.2 A
Anode current	$I_a$ 100 mA
Mutual conductance	S 14 mA/V
Output power. Class B (2 tubes)	$W_o$ 30 W

### DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Octal

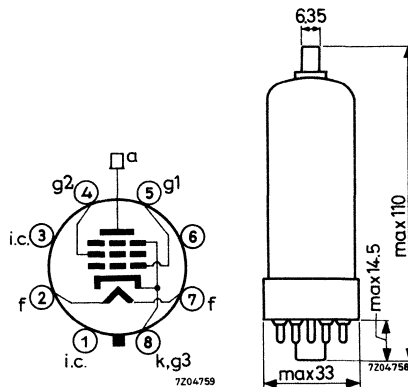

**CHARACTERISTICS**

- Column I Nominal value or setting of the tube
- II Range values for equipment design: Initial spread
- III Range values for equipment design: End of life

		I	II	III	
Heater voltage	$V_f$	6.3			V
Heater current	$I_f$	1.2	1.12 - 1.28		A
Anode voltage	$V_a$	100			V
Grid No. 2 voltage	$V_{g_2}$	100			V
Cathode resistor	$R_k$	75			$\Omega$
Anode current	$I_a$	100	85 - 118	min. 65	mA
Grid No. 2 current	$I_{g_2}$	5.2	4.0 - 6.5		mA
Mutual conductance	S	14	11.5 - 16.5	min. 9.5	mA/V
Amplification factor	$\mu_{g_2g_1}$	5.6			
Internal resistance	$R_i$	5.0			k $\Omega$
<u>Cut-off voltage</u>	$-V_{g_1}$	35			V
Anode current	$I_a$	0.1			mA
<u>Negative grid No. 1 current</u>	$-I_{g_1}$		max. 1	max. 2	$\mu$ A
<u>Cut-off voltage</u>	$-V_{g_1}$		max. 120		V
Anode voltage	$V_a$	7			kV <sub>p</sub>
Grid No. 2 voltage	$V_{g_2}$	190			V
Cathode current	$I_k$	60			$\mu$ A
<u>As triode (grid No. 2 connected to anode)</u>					
Anode voltage	$V_a$	100			V
Cathode resistor	$R_k$	85			$\Omega$
Anode current	$I_a$	100			mA
Mutual conductance	S	14			mA/V
Amplification factor	$\mu$	5.2			
Internal resistance	$R_i$	350			$\Omega$



**CHARACTERISTICS** (continued)

Insulation resistance between:

Anode and other electrodes

	II	
$R_{ins}$	min. 100	MΩ

Grid No.1 and other electrodes

$R_{ins}$	min. 100	MΩ
-----------	----------	----

Leakage current between  
cathode and heater

$I_{kf}$	max. 20	μA
----------	---------	----

**CAPACITANCES**

Anode to grid No.2, grid No.3,  
cathode and heater

	I	II		
$C_{a/g_2g_3kf}$	10	9 -	11	pF

Grid No.1 to grid No.2, grid No.3,  
cathode and heater

$C_{g_1/g_2g_3kf}$	19	17.5 - 20.5		pF
--------------------	----	-------------	--	----

Anode to grid No.1

$C_{ag_1}$		max.	1.1	pF
------------	--	------	-----	----

**SHOCK AND VIBRATION RESISTANCE**

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

**LIFE**

Production samples are tested to be within the end of life values (column III) during 10 000 hours.

## LIMITING VALUES (Absolute max. rating system)

Anode voltage	$V_{aO}$	max.	650 V
	$V_a$	max.	400 V
Anode peak voltage	$+V_{ap}$	max.	7 kV
	$-V_{ap}$	max.	1.5 kV
Pulse duration = max. 18 $\mu$ sec			
Duty factor = max. 0.22			
Anode dissipation	$W_a$	max.	15 W
Anode + grid No. 2 dissipation	$W_{a+g_2}$	max.	16 W
Grid No. 2 voltage	$V_{g_2O}$	max.	650 V
	$V_{g_2}$	max.	300 V
Grid No. 2 dissipation	$W_{g_2}$	max.	5.5 W
Grid No. 2 dissipation during heating up of EHT diode	$W_{g_2}$	max.	7.0 W
Grid No. 1 peak voltage	$-V_{g_1p}$	max.	1 kV
Pulse duration = max. 18 $\mu$ sec			
Duty factor = max. 0.22			
Grid No. 1 resistor	$R_{g_1}$	max.	0.5 $M\Omega$
Grid No. 1 resistor in line output circuits	$R_{g_1}$	max.	2.2 $M\Omega$
Cathode current	$I_k$	max.	220 mA
Cathode peak current	$I_{kp}$	max.	1.2 A
Averaging time = max. 10 msec			
Voltage between cathode and heater			
Cathode positive	$V_{kf}$ (k pos)	max.	250 V
Cathode negative	$V_{kf}$ (k neg)	max.	200 V
Bulb temperature	$t_{bulb}$	max.	220 $^{\circ}C$

Heater voltage: The average heater value should be 6.3 V.

Variation of the heater voltage exceeding the range of 6.0 V to 6.6 V will shorten the tube life.


The tolerance of heater current should be taken into account.


**OPERATING CHARACTERISTICS**

Output tube class B (2 tubes) Excitation to maximum output is continuously permitted.

Anode voltage	$V_a$	250	V
Grid No.2 voltage	$V_{g2}$	170	V
Grid No.1 voltage	$-V_{g1}$	34	V
Load resistance	$R_{aa} \sim$	3	$k\Omega$
Grid No.2 resistor	$R_{g2}$	2x0.5	$k\Omega$ <sup>1)</sup>
Input voltage	$V_i$	0	22 $V_{RMS}$
Anode current	$I_a$	2x12	2x94 mA
Grid No.2 current	$I_{g2}$	2x1	2x28 mA
Output power	$W_o$	0	30 W
Total distortion	$d_{tot}$		6 %

<sup>1)</sup> To avoid overloading of grid No.2 this resistor should not be by-passed.

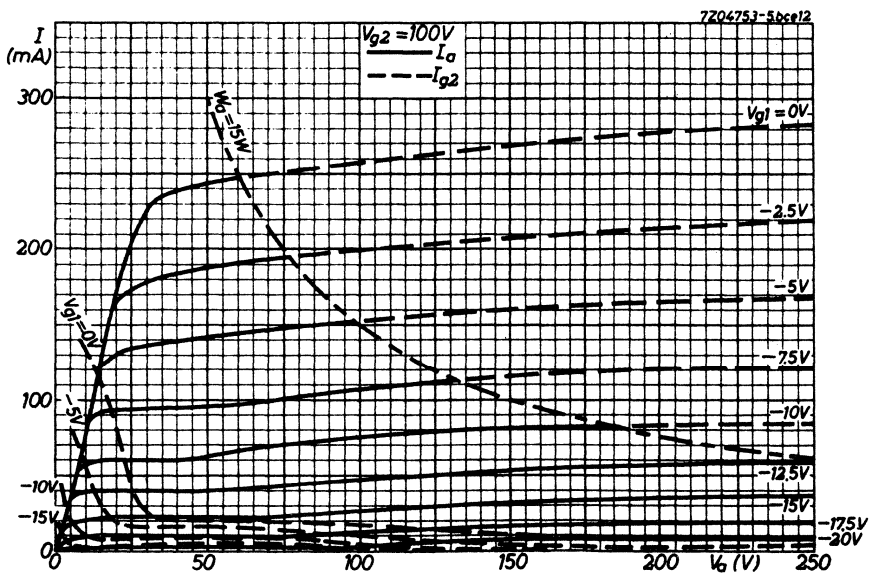

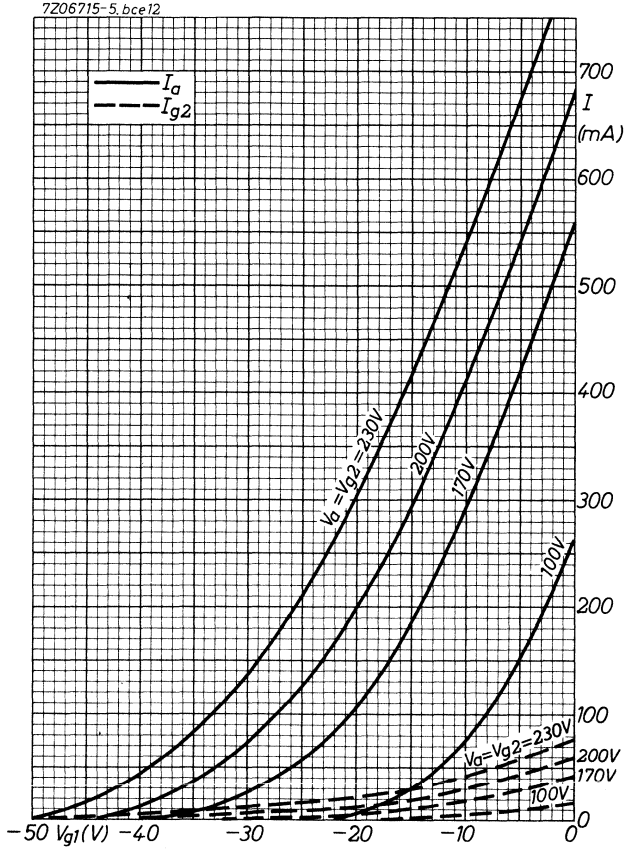

**S.Q. TUBE**




Special quality pentode designed for use as wide band amplifier.

QUICK REFERENCE DATA		
Life test	10 000 hours	
Low interface resistance		
Mechanical quality	Shock and vibration resistant	
Base	Noval. Gold plated pins	
Heating	Indirect A.C. or D.C.; Parallel supply	
Heater voltage	$V_f$	6.3 V
Heater current	$I_f$	315 mA
Anode current	$I_a$	20 mA
Transconductance	S	26 mA/V
Equivalent noise resistance	$R_{eq}$	220 $\Omega$

**DIMENSIONS AND CONNECTIONS**

Dimensions in mm

Base: Noval

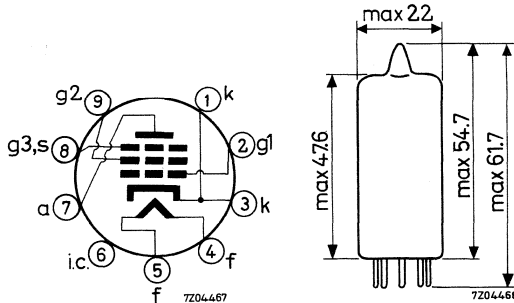

## CHARACTERISTICS

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage	$V_f$	6.3			V
Heater current	$I_f$	315	299- 331		mA
Anode supply voltage	$V_{ba}$	190			V
Grid No.2 supply voltage	$V_{bg_2}$	160			V
Grid No.3 voltage	$V_{g_3}$	0			V
Grid No.1 supply voltage	$+V_{bg_1}$	8			V
Cathode resistor	$R_k$	370			$\Omega$
Anode current	$I_a$	20	18.8-21.2	min. 17	mA
Grid No.2 current	$I_{g_2}$	6	5.3- 6.7		mA
Mutual conductance	$S$	26	22- 30	min.17.5	mA/V
Internal resistance	$R_i$	100			k $\Omega$
Amplification factor	$\mu_{g_2g_1}$	60			
Negative grid current	$-I_{g_1}$		max. 0.3	max. 1.0	$\mu A$
Equivalent noise resistance	$R_{eq}$	220			$\Omega$
Input resistance	$r_{g_1}$	1.4			k $\Omega$
Pin 1 connected to pin 3					
Frequency 100 MHz					
S/C		2.2			mA/V/pF
$S/2\pi(C_g + C_a + 5 \text{ pF})$		180			MHz
Anode supply voltage	$V_{ba}$	180			V
Grid No.2 supply voltage	$V_{bg_2}$	150			V
Grid No.3 voltage	$V_{g_3}$	0			V
Cathode resistor	$R_k$	80			$\Omega$
Anode current	$I_a$	17			mA
Grid No.2 current	$I_{g_2}$	5.1			mA
Mutual conductance	$S$	24.5			mA/V

**CHARACTERISTICS** (continued)

As triode (grid No.2 connected to anode,  
grid No.3 connected to cathode)

	I	
Anode supply voltage	$V_a$	160 V
Grid No.1 supply voltage	$+V_{bg_1}$	8 V
Cathode resistor	$R_k$	400 $\Omega$
Anode current	$I_a$	24 mA
Mutual conductance	S	33 mA/V
Internal resistance	$R_i$	1.8 k $\Omega$
Amplification factor	$\mu$	60
Equivalent noise resistance	$R_{eq}$	100 $\Omega$

**CAPACITANCES**

	Without external shield		With external shield			
	I	II	I	II		
Grid No.1 to grid No.2, grid No.3, cathode, heater and screen	$C_{g_1/g_2g_3kfs}$	9.3	8.3-10.3	9.4	8.4-10.4	pF
Anode to grid No.2, grid No.3, cathode, heater and screen	$C_{a/g_2g_3kfs}$	2.6	2.3- 2.9	3.6	3.2- 4.0	pF
Anode to grid No.1	$C_{ag_1}$		max. 35		max. 30	mpF
Grid No.1 to grid No.2, grid No.3, cathode, heater and screen	$C_{g_1/g_2g_3kfs}$	15.5		15.6		pF

Cathode current  
 $I_k = 26$  mA

**SHOCK AND VIBRATION RESISTANCE**

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

**LIFE**

Production samples are tested to be within the end of life values (column III) during 10 000 hours.

**LIMITING VALUES** (Absolute max. rating system)

Anode voltage	$V_{a_0}$	max.	400	V
	$V_a$	max.	220	V
Anode dissipation	$W_a$	max.	4	W
Grid No. 2 voltage	$V_{g_{20}}$	max.	400	V
	$V_{g_2}$	max.	180	V
Grid No. 2 dissipation	$W_{g_2}$	max.	1.1	W
Cathode current	$I_k$	max.	30	mA
Grid No. 1 current	$I_{g_1}$	max.	5	mA
Grid No. 1 voltage negative	$-V_{g_1}$	max.	50	V
positive	$+V_{g_1}$	max.	2	V
Grid No. 1 resistor	$R_{g_1}$	max.	0.5	M $\Omega$
Voltage between cathode and heater				
cathode positive	$V_{kf}(k \text{ pos})$	max.	120	V
cathode negative	$V_{kf}(k \text{ neg})$	max.	60	V
Bulb temperature	$t_{bulb}$		180	$^{\circ}\text{C}$

Heater voltage: The average heater voltage should be 6.3 V.

Variation of the heater voltage exceeding the range of 6.0 V to 6.6 V will shorten the tube life.

The tolerance of heater current should be taken into account.



**OPERATING CHARACTERISTICS**


Anode supply voltage	$V_{ba}$	190	190	190	190	190	V
Grid No.3 voltage	$V_{g3}$	0	0	0	0	0	V
Grid No.2 supply voltage	$V_{bg2}$	160	160	160	160	120	V
Grid No.1 supply voltage	$+V_{bg1}$	8	8	8	9	8	V
Cathode resistor	$R_k$	370	500	780	630	730	$\Omega$
Anode current	$I_a$	20	15	10	13.5	10	mA
Grid No.2 current	$I_{g2}$	6	4.5	3	4	2.8	mA
Mutual conductance	$S$	26	23	19	22	20	mA/V
Internal resistance	$R_i$	100	120	155	130	155	k $\Omega$
Amplification factor	$\mu_{g2g1}$	60	58	56	58	56	
Equivalent noise resistance	$R_{eq}$	220	230	250	240	220	$\Omega$
<u>Input resistance</u>	$r_{g1}$	1.4	1.5	1.7	1.6	1.6	k $\Omega$



Pin No.1 connected  
to pin No.3


Frequency = 100 MHz


Capacitance grid No.1  
to grid No.2, grid No.3,  
cathode, heater and  
screen (no external  
shield)



$C_{g1}/g_2g_3$ kfs	15.5	15	14.3	14.8	14.8	pF
$S/2 \pi(C_g + C_a + 5 \text{ pF})$	180	162	138	156	142	MHz
S/C	2.2	1.9	1.6	1.85	1.7	mA/V/pF

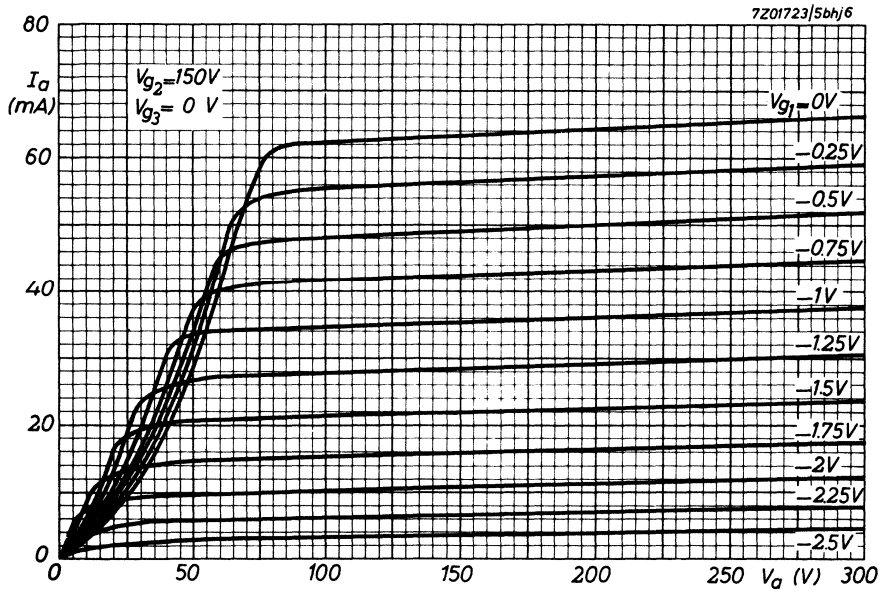

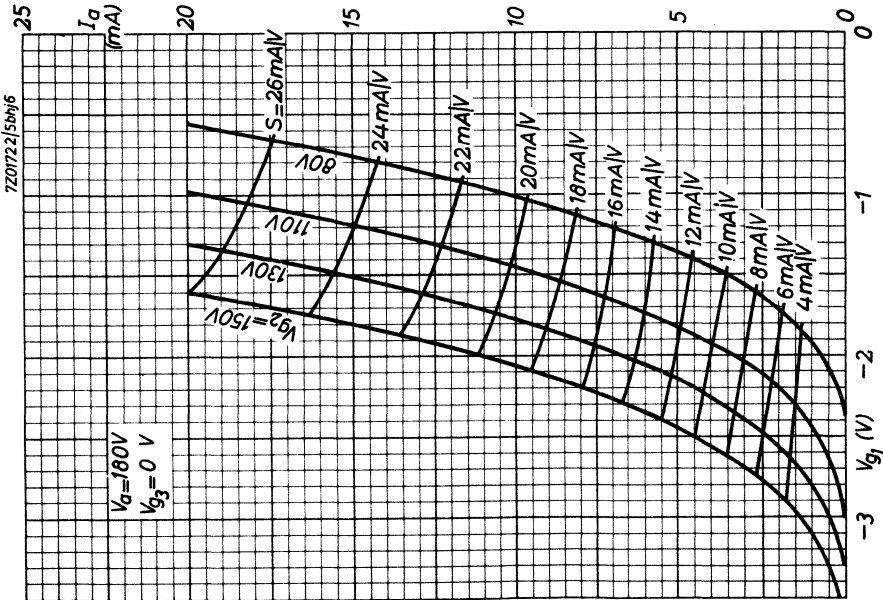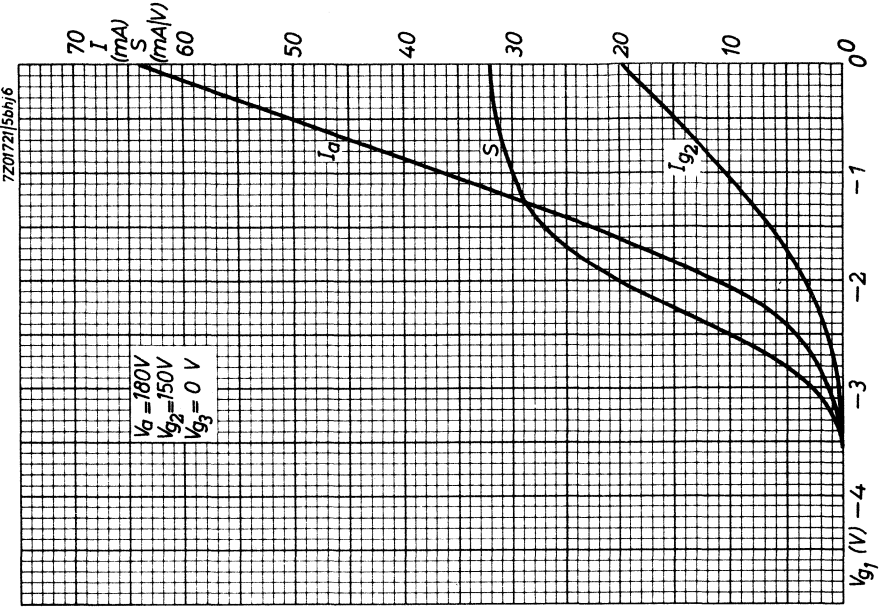

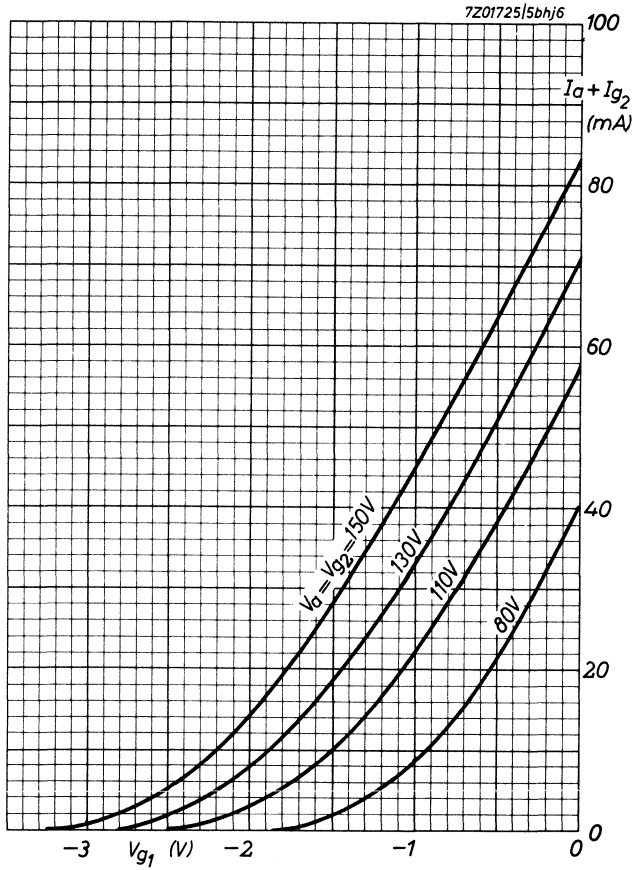

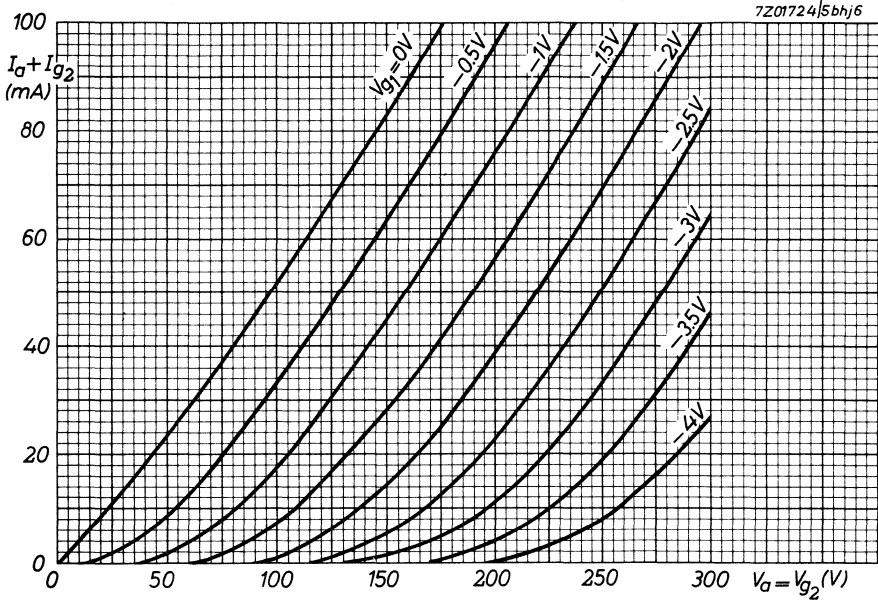

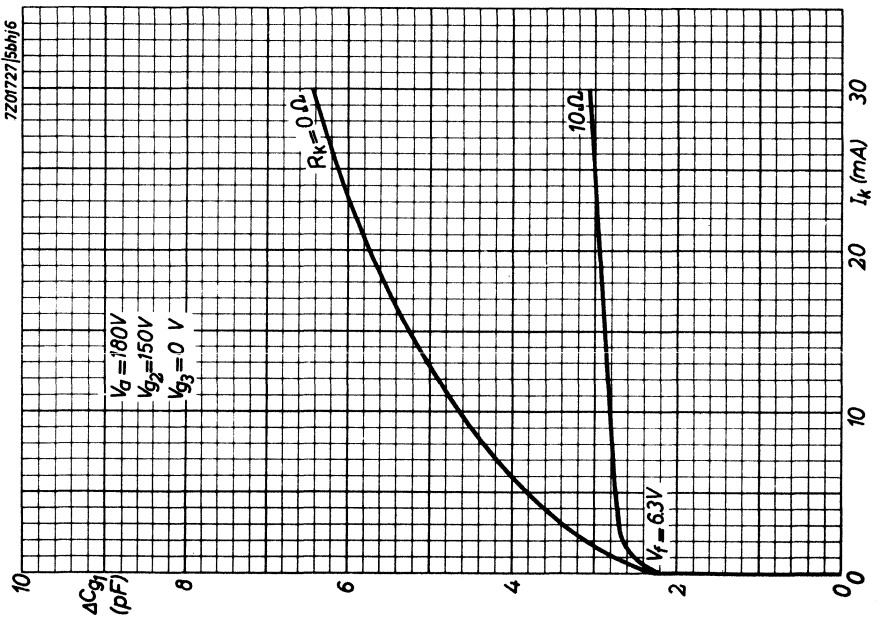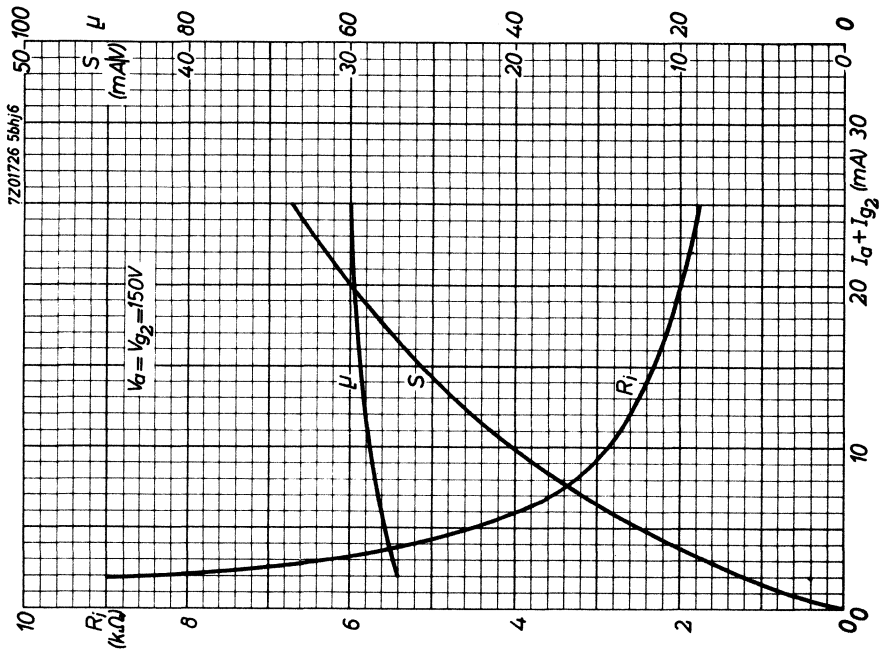

## S.Q. TUBE

Special quality pentode designed for use as wide band amplifier for frequencies up to 250 MHz


### QUICK REFERENCE DATA

Life test	10 000 hours	
Low interface resistance		
Mechanical quality	Shock and vibration resistant	
Base	Noval. Gold plated pins	
Heating	Indirect A. C. or D. C. ; parallel supply	
Heater voltage	$V_f$	6.3 V
Heater current	$I_f$	350 mA
Anode current	$I_a$	35 mA
Mutual conductance	S	26 mA/V
Equivalent noise resistance	$R_{eq}$	200 $\Omega$
Noise factor at 100 MHz	F	7 dB

### DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval

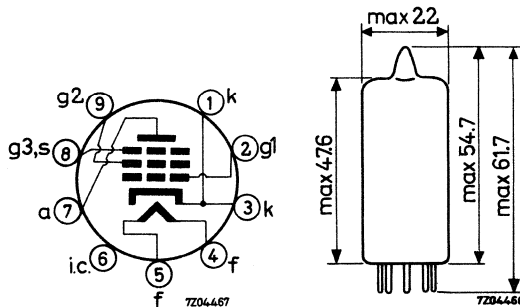

## CHARACTERISTICS

- Column I Nominal value or setting of the tube  
 II Range values for equipment design: Initial spread  
 III Range values for equipment design: End of life

		I	II	III	
Heater voltage	$V_f$	6.3			V
Heater current	$I_f$	350			mA
Anode supply voltage	$V_{ba}$	125			V
Grid No. 2 supply voltage	$V_{bg_2}$	125			V
Grid No. 3 voltage	$V_{g_3}$	0			mA/V
Grid No. 1 supply voltage	$+V_{bg_1}$	12			V
Cathode resistor	$R_k$	300			$\Omega$
Anode current	$I_a$	35	33 - 37	min. 31	mA
Grid No. 2 current	$I_{g_2}$	11	9.9 - 12.1		mA
Mutual conductance	$S$	26	22 - 30	min. 17.5	mA/V
Amplification factor	$\mu_{g_2g_1}$	27			
Equivalent noise resistance	$R_{eq}$	200			$\Omega$
Noise factor at 100 MHz	$F$	7			dB
Adapted to minimum noise					
Negative grid current	$-I_{g_1}$		max. 0.3	max. 1.0	$\mu A$
Anode supply voltage	$V_{ba}$	135			V
Grid No. 2 supply voltage	$V_{bg_2}$	125			V
Grid No. 3 voltage	$V_{g_3}$	0			V
Grid No. 1 supply voltage	$+V_{bg_1}$	12			V
Cathode resistor	$R_k$	360			$\Omega$
Anode current	$I_a$	30			mA
Grid No. 2 current	$I_{g_2}$	9.5			mA
Mutual conductance	$S$	25			mA/V
Amplification factor	$\mu_{g_2g_1}$	27			
Equivalent noise resistance	$R_{eq}$	200			$\Omega$



**CHARACTERISTICS** (continued)

As triode (grid No. 2 connected to anode)  
(grid No. 3 connected to cathode)

		I	II	
Anode supply voltage	$V_{ba}$	125		V
Grid No. 3 supply voltage	$V_{bg_3}$	0		V
Grid No. 1 supply voltage	$+V_{bg_1}$	12		V
Cathode resistor	$R_k$	350		$\Omega$
Anode current	$I_a$	40		mA
Mutual conductance	$S$	32		mA/V
Amplification factor	$\mu$	25.5		
Internal resistance	$R_i$	800		$\Omega$
Equivalent noise resistance	$R_{eq}$	100		$\Omega$

Leakage current between cathode  
and heater

$I_{kf}$		max.	5	$\mu A$
----------	--	------	---	---------

Voltage between cathode and heater

$$V_{kf} = 100 \text{ V}$$

Insulation resistance

Anode to other electrodes (V = 300 V)	R		min. 100	M $\Omega$
Grid No. 1 to other electrodes (V = 50 V)	R		min. 100	M $\Omega$

**CAPACITANCES**

		I	II	
Grid No. 1 to grid No. 2, grid No. 3 cathode, heater and screen	$C_{g_1/g_2g_3kfs}$	10		pF
Grid No. 1 to grid No. 2, grid No. 3 cathode, heater and screen	$C_{g_1/g_2g_3kfs}$	16		pF
Cathode current $I_k = 46 \text{ mA}$				
Anode to grid No. 2, grid No. 3 cathode, heater and screen	$C_{a/g_2g_3kfs}$	2.6		pF
Anode to grid No. 1	$C_{ag_1}$		max. 50	mpF
Anode to cathode	$C_{ak}$		max. 50	mpF
Cathode to heater	$C_{kf}$	4.7		pF
Grid No. 1 to heater	$C_{g_1f}$		max. 50	mpF
Anode to heater	$C_{af}$		max. 100	mpF

**SHOCK AND VIBRATION RESISTANCE**

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

**LIFE**

Production samples are tested to be within the end of life values (column III) during 10 000 hours.

**LIMITING VALUES** (Absolute max. rating system)


Anode voltage	$V_{a0}$	max.	400 V
	$V_a$	max.	200 V
Anode dissipation	$W_a$	max.	4.2 W
Grid No. 2 voltage	$V_{g20}$	max.	400 V
	$V_{g2}$	max.	150 V
Grid No. 2 dissipation <sup>1)</sup>	$W_{g2}$	max.	1.4 W
Grid voltage	$-V_g$	max.	50 V
Grid resistor, automatic bias	$R_{g1}$	max.	0.5 MΩ
Cathode current	$I_k$	max.	50 mA
Voltage between cathode and heater	$V_{kf}$	max.	100 V
Bulb temperature	$t_{bulb}$	max.	180 °C

Heater voltage: The average heater voltage should be 6.3 V.


Variations of the heater voltage exceeding the range of 6.0 V to 6.6 V will shorten the tube life.

The tolerance of heater current should be taken into account.


<sup>1)</sup> Grid No. 2 dissipation: Care should be taken not to exceed the limiting value during switching in of positive voltages. If the cathode resistor is shunted by more than 10 μF a grid No. 1 series resistor of minimum 1 kΩ should be applied.


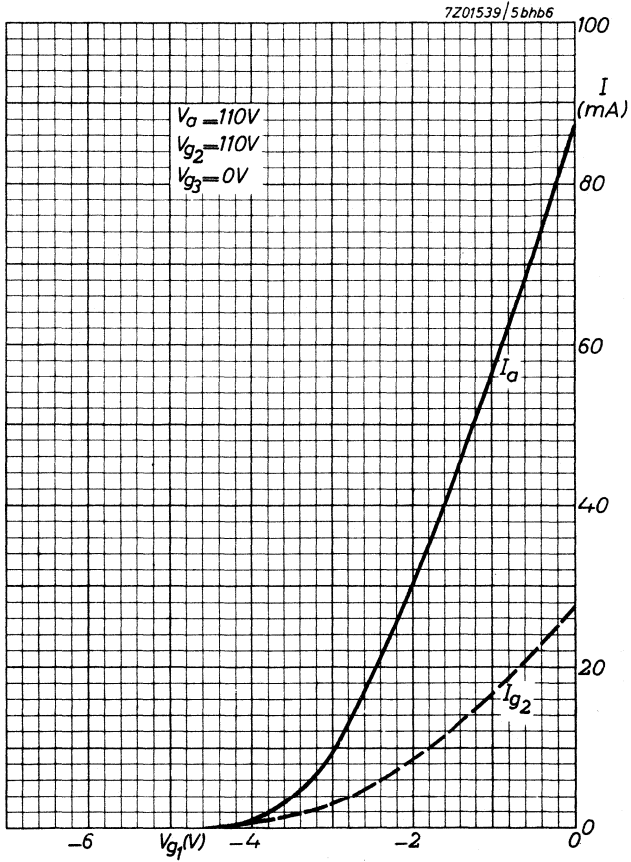



7201537/5bhb6

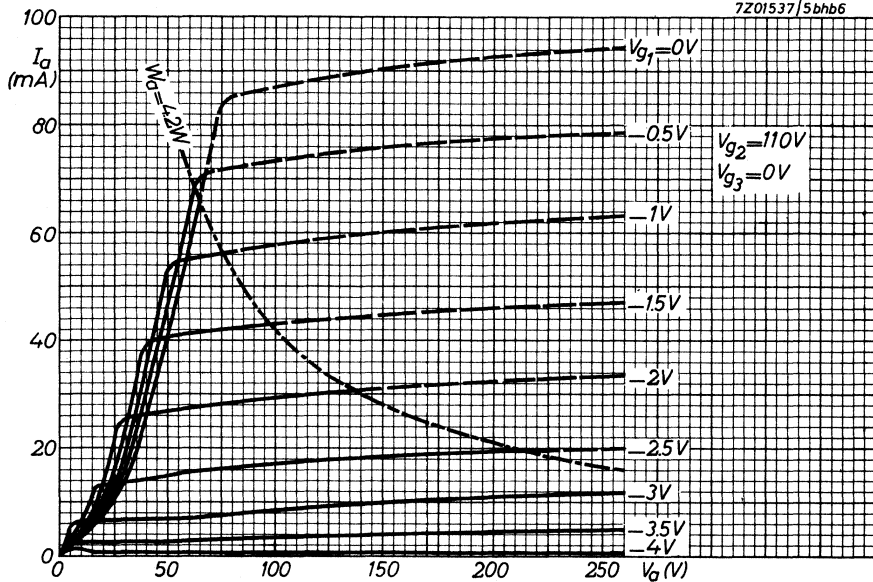

7201538/5bhb6

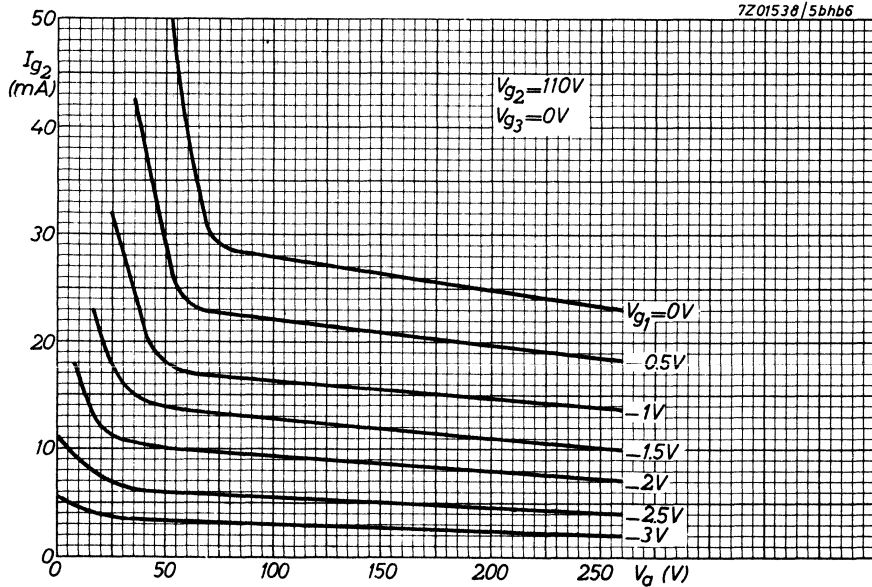

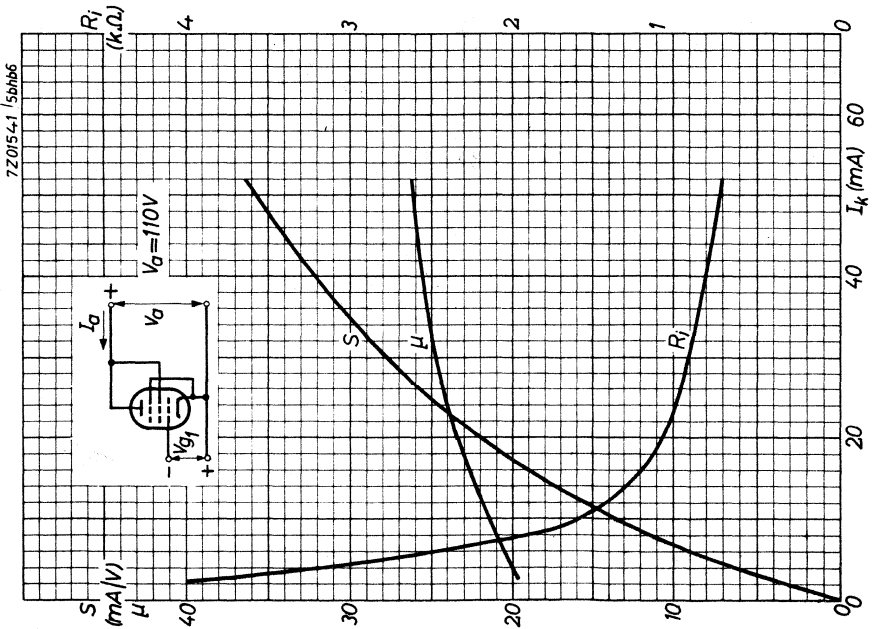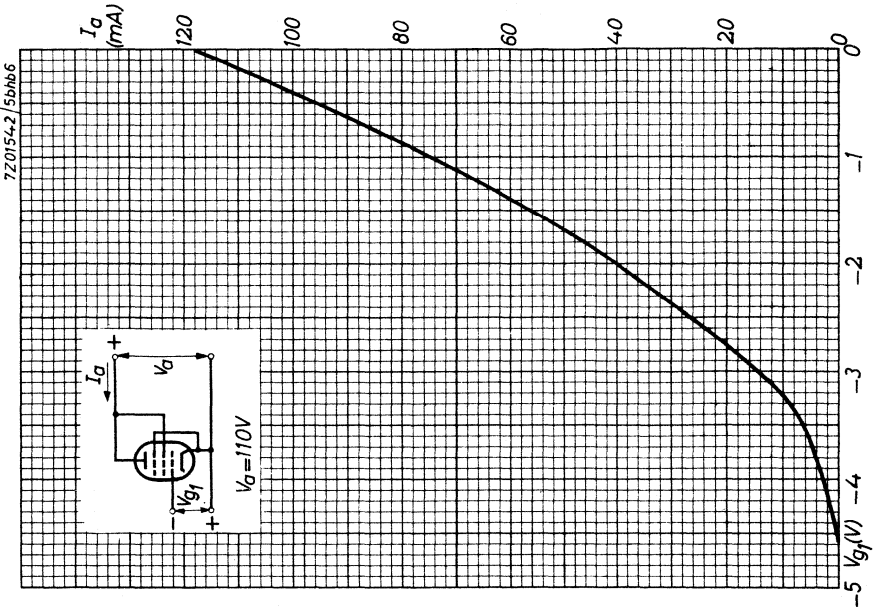

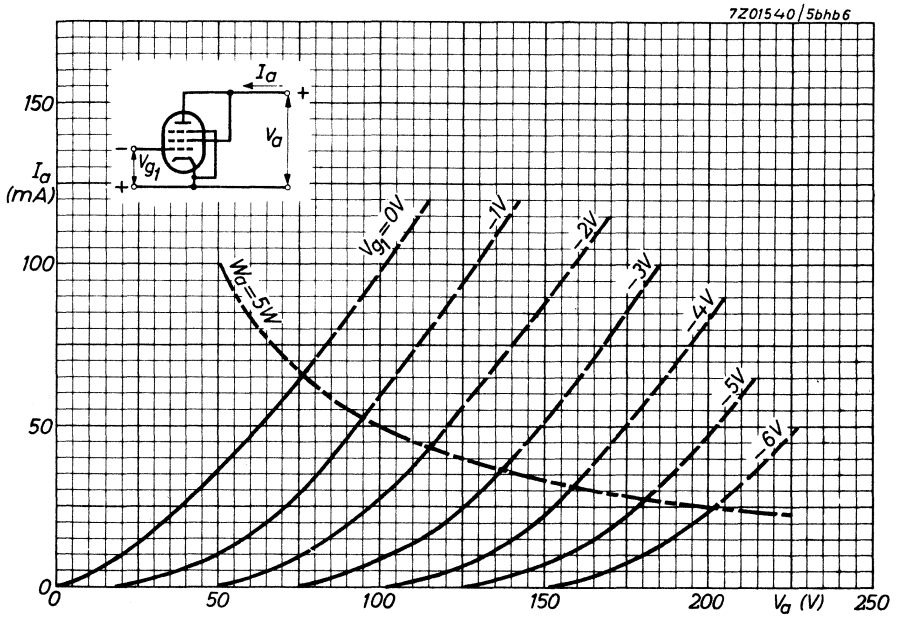

## S.Q. TUBE


Special quality double triode designed for use as A. F. amplifier.

QUICK REFERENCE DATA			
Life test	10 000 hours		
Low interface resistance			
Mechanical quality	Shock and vibration resistant		
Base	Noval		
Heating	Indirect A. C. or D. C. ; parallel supply		
Heater voltage	$V_f$	6.3	V
Heater current	$I_f$	330	mA
Anode current	$I_a$	1.25	mA
Mutual conductance	$S$	1.6	mA/V
Amplification factor	$\mu$	100	
Hum voltage	Section 1	$V_g$	max. 5 $\mu V_{RMS}$
		Section 2	$V_g$

### DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval

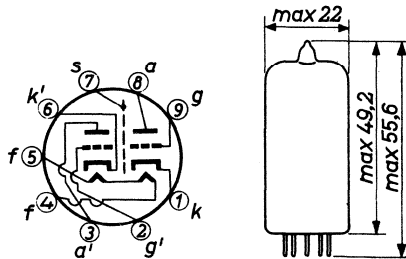

## CHARACTERISTICS

- Column I Nominal value or setting of the tube  
 II Range values for equipment design: Initial spread  
 III Range values for equipment design: End of life

		I	II	III	
Heater voltage	$V_f$	6.3			V
Heater current	$I_f$	330	313 - 347		mA
Anode voltage	$V_a$	250			V
Cathode resistor	$R_k$	1.6			$k\Omega$
Anode current	$I_a$	1.25	1.1 - 1.4	min. 0.8	mA
Mutual conductance	S	1.6	1.3 - 1.95	min. 1.05	mA/V
Amplification factor	$\mu$	100			
Internal resistance	$R_i$	62.5			$k\Omega$
<u>Negative grid current</u>	$-I_g$		max. 0.2	max. 0.5	$\mu A$
Anode voltage	$V_a$	100			V
Cathode resistor	$R_k$	2			$k\Omega$
Anode current	$I_a$	0.5			mA
Mutual conductance	S	1.25			mA/V
Amplification factor	$\mu$	100			
Internal resistance	$R_i$	80			$k\Omega$
<u>Cut-off voltage</u>	$-V_g$		max. 4		V
Anode voltage	$V_a$	250			V
Anode current	$I_a$	20			$\mu A$
<u>Grid current starting voltage</u>	$-V_g$		max. 1		V
Grid current $+I_g = 0.3 \mu A$					
<u>Leakage current between cathode and heater</u>	$I_{kf}$		max. 5		$\mu A$
Voltage between cathode and heater $V_{kf} = 100 V$					



**CHARACTERISTICS** (continued)

Insulation resistance between electrodes

Anode to all other electrodes  
(Voltage between electrodes 300 V)

Grid to all other electrodes  
(Voltage between electrodes 100 V)

Hum voltage Section 1  
Section 2

Anode supply voltage  $V_{ba} = 250$  V  
Anode resistor  $R_a = 100$  k $\Omega$   
Grid resistor  $R_g = 1$  M $\Omega$

Vibrational noise

Anode voltage  $V_a = 250$  V  
Grid voltage  $-V_g = 2$  V  
Anode resistor  $R_a = 5$  k $\Omega$   
Frequency  $f = 25$  Hz  
Acceleration = 2.5 g

Microphony

The sensitivity of the amplifier circuit for 50 mW should not exceed 0.5 mV.

**CAPACITANCES** Each system if applicable

Grid to cathode heater and screen	$C_{g/kfs}$	2.0	pF
Anode to cathode and screen	$C_{a/kfs}$	2.0	pF
Anode to grid	$C_{ag}$	1.2	pF
Grid to heater	$C_{gf}$	max. 0.01	pF
	$C_{g'f}$	max. 0.02	pF
Grid to grid other section	$C_{gg'}$	max. 0.01	pF
Anode to anode other section	$C_{aa'}$	max. 0.1	pF
Anode to grid other section	$C_{ag'}$	max. 0.06	pF
	$C_{a'g}$	max. 0.01	pF

		II	
R	min. 300	M $\Omega$	
R	min. 300	M $\Omega$	
$V_g$	max. 5	$\mu$ V <sub>RMS</sub>	
$V_{g'}$	max. 15	$\mu$ V <sub>RMS</sub>	
$V_g$	max. 10	mV	



**SHOCK AND VIBRATION RESISTANCE**

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

**LIFE**

Production samples are tested to be within the end of life values (column III) during 10 000 hours.

**LIMITING VALUES** (Absolute max. rating system)

Anode voltage	$V_{a_0}$	max.	600 V
	$V_a$	max.	300 V
Anode dissipation	$W_a$	max.	1.2 W
Grid voltage	$-V_g$	max.	55 V
	$+V_g$	max.	0.5 V
Grid resistor with fixed bias	$R_g$	max.	1.2 MΩ
	with autom. bias	$R_g$	max.
Cathode current	$I_k$	max.	9 mA
Voltage between cathode and heater	$V_{kf}$	max.	200 V
Bulb temperature	$t_{bulb}$	max.	170 °C
Resistance of cathode to heater circuit in case of phase inverter circuit	$R_{kf}$	max.	135 kΩ

Heater voltage: The average heater voltage should be 6.3 V. Variations of the heater voltage exceeding the range of 6.0 V to 6.6 V will shorten the tube life. The tolerance of heater current (column II) should be taken into account.

**OPERATING CHARACTERISTICS**

A.F. amplifier Fig.1 see page 8

Anode supply voltage	$V_{ba}$	200	250	300	350	400	V
Anode resistor	$R_a$	47	47	47	47	47	k $\Omega$
Cathode resistor	$R_k$	1500	1200	1000	820	680	$\Omega$
Grid resistor next stage	$R_o$	150	150	150	150	150	k $\Omega$
Anode current	$I_a$	0.86	1.18	1.55	1.98	2.45	mA
Output voltage at $+H_g = 0.3 \mu A$	$V_o$	18	23	26	33	37	V <sub>RMS</sub>
Voltage gain	$V_o/V_i$	34	37.5	40	42.5	44	
Total distortion 1)	$d_{tot}$	8.5	7.0	5.0	4.4	3.6	%
<hr/>							
Anode voltage	$V_{ba}$	200	250	300	350	400	V
Anode resistor	$R_a$	100	100	100	100	100	k $\Omega$
Cathode resistor	$R_k$	1800	1500	1200	1000	820	$\Omega$
Grid resistor next stage	$R_o$	330	330	330	330	330	k $\Omega$
Anode current	$I_a$	0.65	0.86	1.11	1.40	1.72	mA
Output voltage at $+H_g = 0.3 \mu A$	$V_o$	20	26	30	36	38	V <sub>RMS</sub>
Voltage gain	$V_o/V_i$	50	54.5	57	61	63	
Total distortion 1)	$d_{tot}$	4.8	3.9	2.7	2.2	1.7	%
<hr/>							
Anode supply voltage	$V_{ba}$	200	250	300	350	400	V
Anode resistor	$R_a$	220	220	220	220	220	k $\Omega$
Cathode resistor	$R_k$	3300	2700	2200	1500	1200	$\Omega$
Grid resistor next stage	$R_o$	680	680	680	680	680	k $\Omega$
Anode current	$I_a$	0.36	0.48	0.63	0.85	1.02	mA
Output voltage at $+H_g = 0.3 \mu A$	$V_o$	24	28	36	37	38	V <sub>RMS</sub>
Voltage gain	$V_o/V_i$	56	66.5	72	75.5	76.5	
Total distortion 1)	$d_{tot}$	4.6	3.4	2.6	1.6	1.1	%

1) The distortion is about proportional to the output voltage.

## OPERATING CHARACTERISTICS (continued)

A. F. amplifier Fig. 2 see page 9 Input source resistance = 100  $\Omega$

Anode supply voltage	$V_{ba}$	200	250	300	350	400	V
Anode resistor	$R_a$	47	47	47	47	47	$k\Omega$
Grid resistor next stage	$R_o$	150	150	150	150	150	$k\Omega$
Anode current	$I_a$	1.02	1.45	2.02	2.50	3.10	mA
Output voltage	$V_o$	18	23	26	33	37	$V_{RMS}$
Voltage gain	$V_o/V_i$	37	39	41	44	45	
Total distortion <sup>1)</sup>	$d_{tot}$	5.6	4.2	2.9	2.7	2.5	%
<hr/>							
Anode supply voltage	$V_{ba}$	200	250	300	350	400	V
Anode resistor	$R_a$	100	100	100	100	100	$k\Omega$
Grid resistor next stage	$R_o$	330	330	330	330	330	$k\Omega$
Anode current	$I_a$	0.7	1.00	1.29	1.62	1.95	mA
Output voltage	$V_o$	20	26	30	36	38	$V_{RMS}$
Voltage gain	$V_o/V_i$	50	51	54	56	58	
Total distortion <sup>1)</sup>	$d_{tot}$	3.9	2.6	2.0	1.8	1.6	%
<hr/>							
Anode supply voltage	$V_{ba}$	200	250	300	350	400	V
Anode resistor	$R_a$	220	220	220	220	220	$k\Omega$
Grid resistor next stage	$R_o$	680	680	680	680	680	$k\Omega$
Anode current	$I_a$	0.39	0.56	0.74	0.88	1.09	mA
Output voltage	$V_o$	24	28	36	37	38	$V_{RMS}$
Voltage gain	$V_o/V_i$	58	62	66	67	68	
Total distortion <sup>1)</sup>	$d_{tot}$	4.6	2.7	2.2	1.7	1.4	%

<sup>1)</sup> The distortion is about proportional to the output voltage.

OPERATING CHARACTERISTICS (continued)

A. F. amplifier Fig. 3 see page 9 Input source resistance = 330 kΩ

Anode supply voltage	$V_{ba}$	100	150	200	250	300	350	400	V
Anode resistor	$R_a$	47	47	47	47	47	47	47	kΩ
Grid resistor next stage	$R_o$	150	150	150	150	150	150	150	kΩ
Anode current	$I_a$	0.35	0.84	1.40	1.95	2.52	3.19	3.80	mA
Voltage gain	$V_o/V_i$	25	33	34	36	38	40	41	

Total distortion at:

$V_o = 2$ V	$d_{tot}$	1.7	2.5	2.4	2.3	2.2	2.2	2.1	%
$V_o = 4$ V	$d_{tot}$	2.1	4.6	4.7	4.6	4.5	4.2	4.2	%
$V_o = 6$ V	$d_{tot}$	6.0	5.2	5.6	5.6	5.5	5.5	5.4	%

Anode supply voltage	$V_{ba}$	100	150	200	250	300	350	400	V
Anode resistor	$R_a$	100	100	100	100	100	100	100	kΩ
Grid resistor next stage	$R_o$	330	330	330	330	330	330	330	kΩ
Anode current	$I_a$	0.24	0.56	0.88	1.23	1.58	1.92	2.29	mA
Voltage gain	$V_o/V_i$	34	43	46	48	50	51	52	

Total distortion at:

$V_o = 2$ V	$d_{tot}$	1.6	1.9	1.9	1.8	1.8	1.8	1.7	%
$V_o = 4$ V	$d_{tot}$	2.3	3.0	3.8	3.8	3.6	3.6	3.5	%
$V_o = 6$ V	$d_{tot}$	2.5	4.7	5.1	5.1	5.0	4.9	4.8	%

Anode supply voltage	$V_{ba}$	100	150	200	250	300	350	400	V
Anode resistor	$R_a$	220	220	220	220	220	220	220	kΩ
Grid resistor next stage	$R_o$	680	680	680	680	680	680	680	kΩ
Anode current	$I_a$	0.14	0.32	0.49	0.67	0.85	1.05	1.23	mA
Voltage gain	$V_o/V_i$	42	51	54	57	58	59	60	

Total distortion at:

$V_o = 2$ V	$d_{tot}$	1.6	1.7	1.7	1.6	1.6	1.6	1.6	%
$V_o = 4$ V	$d_{tot}$	2.5	3.0	3.0	2.9	2.9	2.8	2.7	%
$V_o = 6$ V	$d_{tot}$	3.2	4.4	4.4	4.4	4.4	4.3	4.2	%

## OPERATING CHARACTERISTICS (continued)

Phase inverter Fig. 4 see page 9

Anode supply voltage	$V_{ba}$	250	350	V		
Anode voltage	$V_a$	65	90	V		
Cathode resistor	$R_k$	68	82	$k\Omega$		
Anode resistor	$R_a; R_a'$	100	150	$k\Omega$		
Anode current	$I_a + I_a'$	1.0	1.2	mA		
Voltage gain	$V_o/V_i$	25	27			
Output voltage ( $I_g = 0.3 \mu A$ )	$V_o$	7	20	10	35	$V_{RMS}$
Total distortion <sup>1)</sup>	$d_{tot}$	0.6	1.8	0.5	1.8	%

$V_a$  should be adjusted to the specified value of  $I_a + I_a'$

Phase inverter Fig. 5 see page 9

Anode supply voltage	$V_{ba}$	250	350	V		
Cathode resistor	$R_k$	1200	820	$\Omega$		
Anode current	$I_a + I_a'$	1.08	1.7	mA		
Voltage gain	$V_o/V_i$	58	62			
Output voltage ( $I_g = 0.3 \mu A$ )	$V_o$	7.0	35	9	45	$V_{RMS}$
Total distortion <sup>1)</sup>	$d_{tot}$	1.1	5.5	0.7	3.5	%

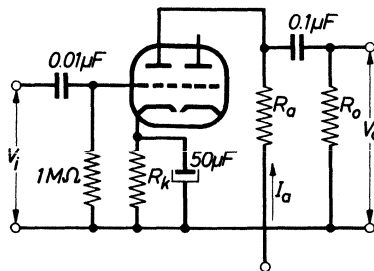


Fig. 1

<sup>1)</sup> The distortion is about proportional to the output voltage.

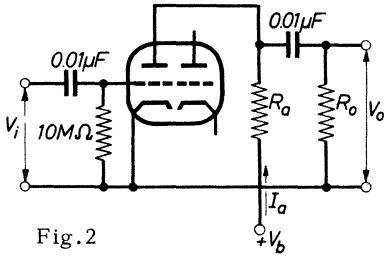


Fig. 2

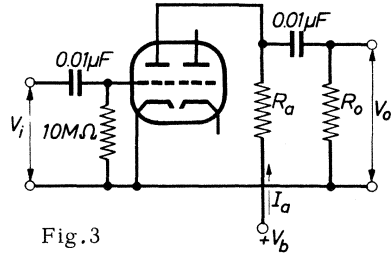


Fig. 3

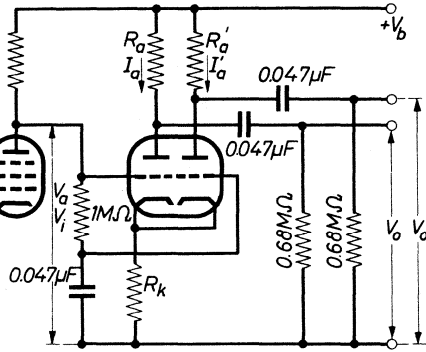


Fig. 4



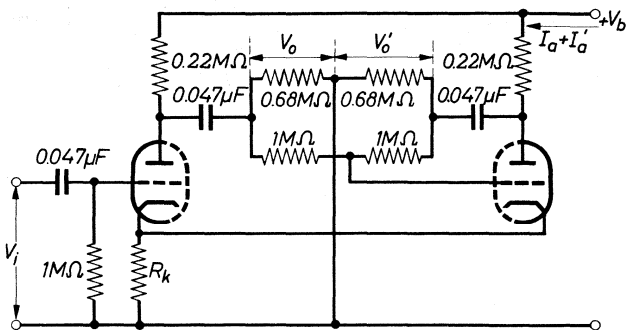



Fig. 5

7201166  
E283CC



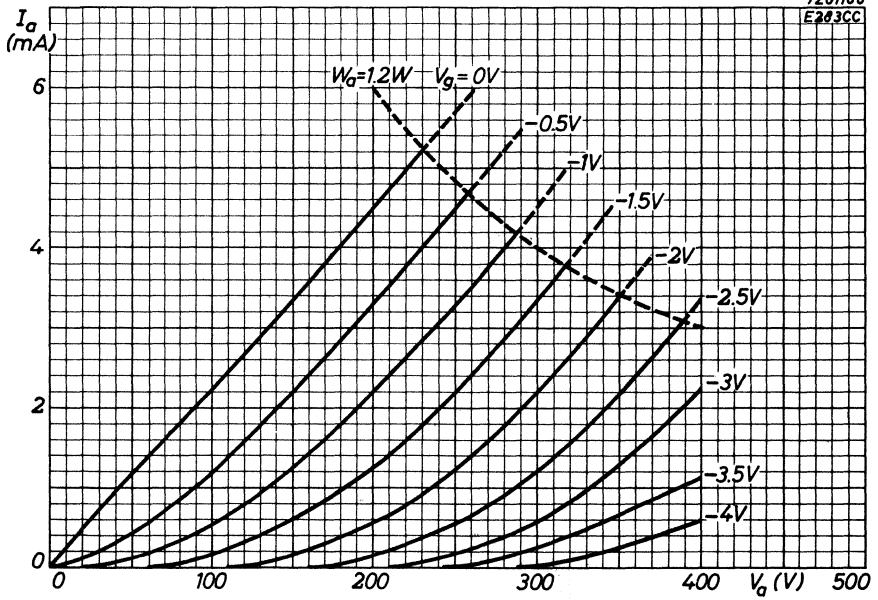

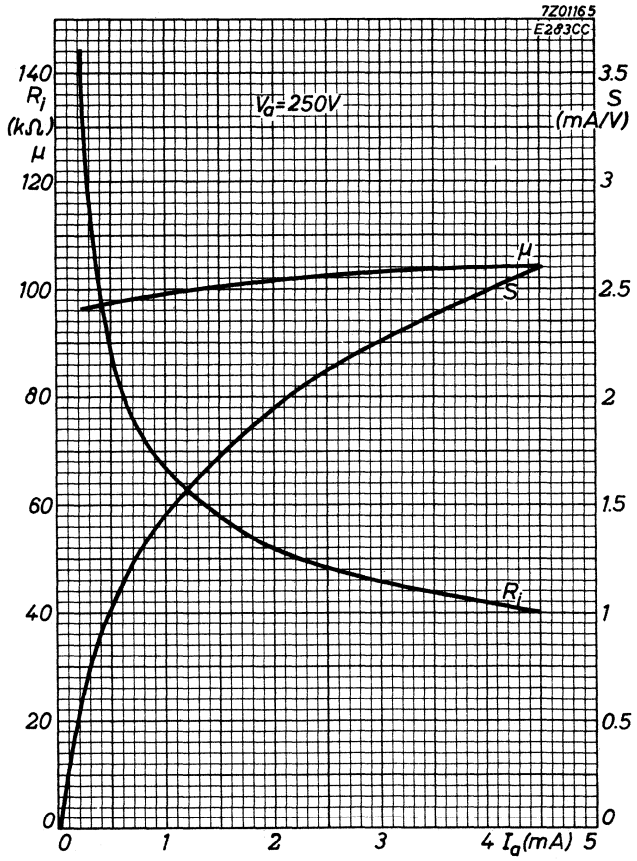

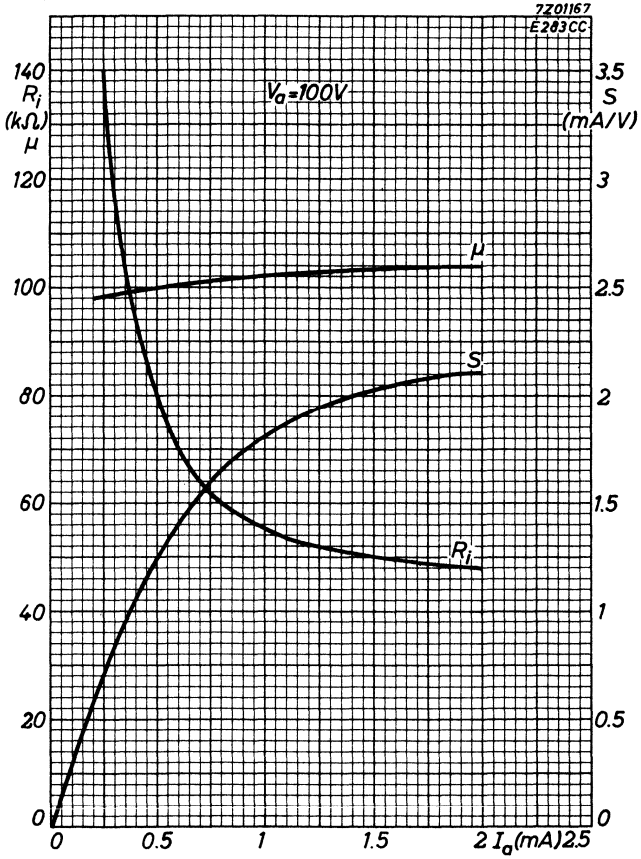

## S.Q. TUBE

Special quality double triode designed for use in cascode circuits and as R.F. or I.F. amplifier.


### QUICK REFERENCE DATA

Life test	10 000 hours	
Low interface resistance		
Mechanical quality	Shock and vibration resistant	
Base	Noval. Gold plated pins	
Heating	Indirect A.C. or D.C.; parallel supply	
Heater voltage	$V_f$	6.3 V
Heater current	$I_f$	475 mA
Anode current	$I_a$	30 mA
Mutual conductance	S	20 mA/V
Equivalent noise resistance (R.F.)	$R_{eq}$	200 $\Omega$
Noise figure	F	5.7 dB

### DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval

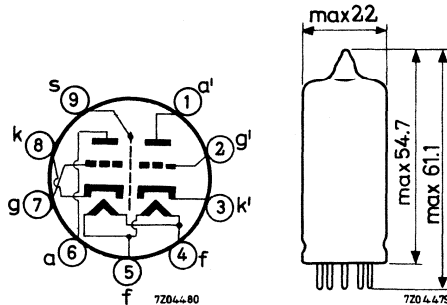

## CHARACTERISTICS

- Column I Nominal value or setting of the tube  
 II Range values for equipment design: Initial spread  
 III Range values for equipment design: End of life

		I	II	III	
Heater voltage	$V_f$	6.3			V
Heater current	$I_f$	475	450 - 500		mA
Anode supply voltage	$V_{ba}$	100			V
Grid supply voltage	$+V_{bg}$	9			V
Cathode resistor	$R_k$	350			$\Omega$
Anode current	$I_a$	30	28 - 32	min. 26.5	mA
Mutual conductance	S	20	17 - 22.5	min. 14.5	mA/V
Amplification factor	$\mu$	25			
Internal resistance	$R_i$	1.25			k $\Omega$
Equivalent noise resistance	$R_{eq}$	200			$\Omega$
Noise figure in cascode circuit	F	5.7			dB
Adapted to minimum noise					
Negative grid current	$-I_g$		max. 0.2	max. 1	$\mu A$
Anode supply voltage	$V_{ba}$	60			V
Cathode resistor	$R_k$	80			$\Omega$
Anode current	$I_a$	1.5			mA
Mutual conductance	S	15.5			mA/V
Amplification factor	$\mu$	25			
Internal resistance	$R_i$	1.85			k $\Omega$
Noise figure in cascode circuit	F	5			dB
Adapted to minimum noise					

**CAPACITANCES** Each system if applicable

Grid to cathode heater and screen	$C_{g/kfs}$	4.7 pF
Anode to cathode heater and screen	$C_{a/kfs}$	1.9 pF
	$C_{a' / k' fs}$	1.8 pF
Anode to grid	$C_{ag}$	1.8 pF
Cathode to grid heater and screen	$C_{k/gfs}$	7.8 pF
Anode to grid heater and screen	$C_{a/gfs}$	3.5 pF
	$C_{a' / gfs}$	3.4 pF
Anode to cathode	$C_{ak}$	0.25 pF
Anode to anode other section	$C_{aa'}$	max. 0.05 pF
Grid to grid other section	$C_{gg'}$	max. 0.005 pF

**SHOCK AND VIBRATION RESISTANCE**

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

**LIFE**

Production samples are tested during 10 000 hours.


## LIMITING VALUES (Absolute max. rating system)



Anode voltage	$V_{a0}$	max. 400 V
	$V_a$	max. 250 V
Anode dissipation	$W_a$	max. 3 W
Grid voltage	$-V_g$	max. 50 V
Grid peak voltage	$-V_{gp}$	max. 150 V
Max. pulse duration		10 $\mu$ sec
Max. duty factor		0.01
Grid resistor with automatic bias	$R_g$	max. 1 $M\Omega$
Cathode current	$I_k$	max. 40 mA
Cathode peak current	$I_{kp}$	max. 400 mA
Max. pulse duration		10 $\mu$ sec
Max. duty factor		0.01
Voltage between cathode and heater	$V_{kf}$	max. 150 V
Bulb temperature	$t_{bulb}$	max. 190 $^{\circ}C$


Heater voltage: The average heater voltage should be 6.3 V.

Variations of the heater voltage exceeding the range of 6.0 V to 6.6 V will shorten the tube life.

The tolerance of heater current (column II) should be taken into account.

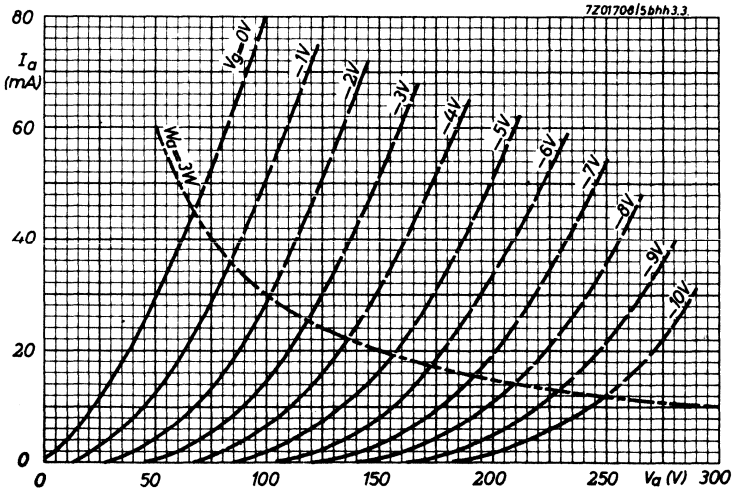

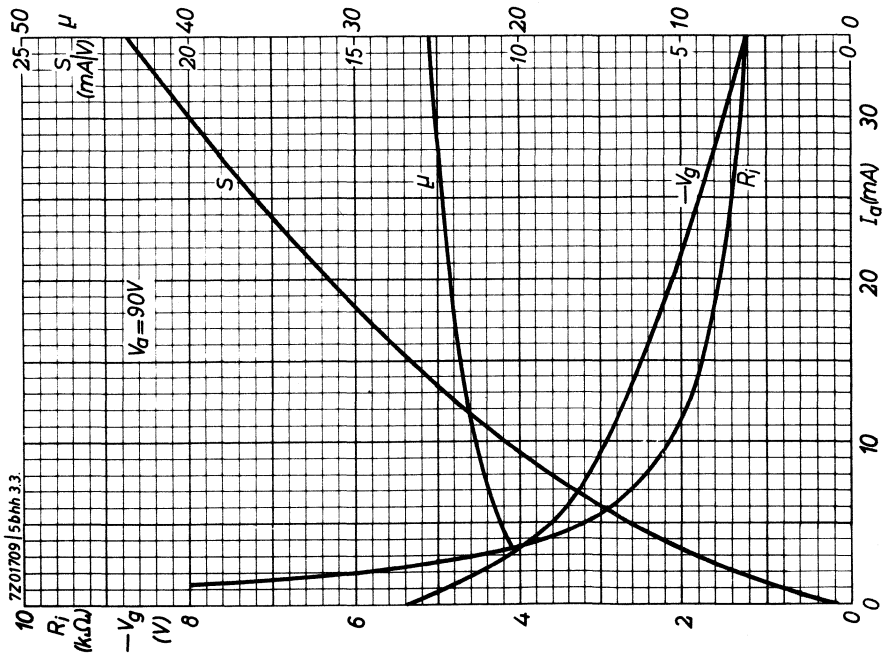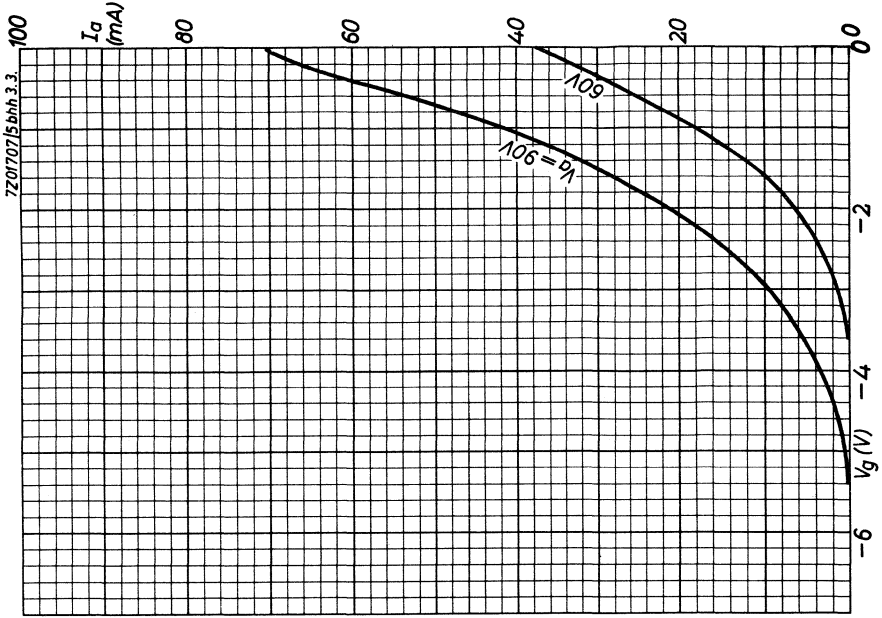

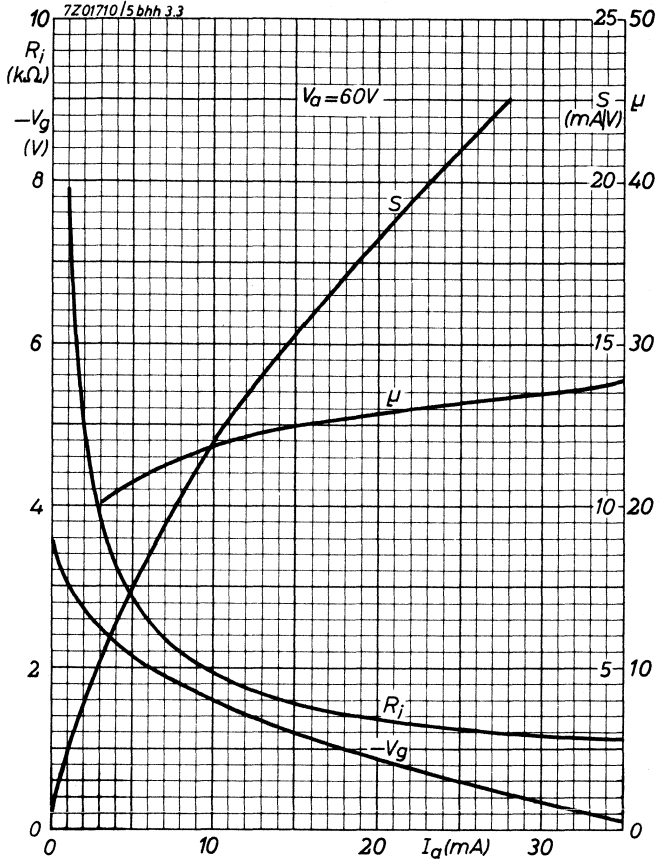



**S.Q. TUBE**

Special quality pentode designed for use as wide band amplifier.





QUICK REFERENCE DATA		
Life test	10 000 hours	
Low interface resistance		
Mechanical quality	Shock and vibration resistant	
Base	Noval. Gold plated pins	
Heating	Indirect A.C. or D.C. ; Parallel supply	
Heater voltage	$V_f$	6.3 V
Heater current	$I_f$	340 mA
Anode current	$I_a$	35 mA
Mutual conductance	S	50 mA/V
Equivalent noise resistance	$R_{eq}$	110 $\Omega$
Quality factor	$\frac{S}{2\pi(C_{g1}+C_a+5)}$	250 MHz

**DIMENSIONS AND CONNECTIONS**

Dimensions in mm

Base: Noval



## CHARACTERISTICS

Column I Nominal value or setting of the tube  
 II Range values for equipment design: Initial spread  
 III Range values for equipment design: End of life

		I	II	III	
Heater voltage	$V_f$	6.3			V
Heater current	$I_f$	340	320 - 360		mA
Anode supply voltage	$V_{ba}$	135			V
Grid No.3 voltage	$V_{g3}$	0			V
Grid No.2 supply voltage	$V_{bg2}$	165			V
Grid No.1 supply voltage	$+V_{bg1}$	12.5			V
Cathode resistor	$R_k$	360			$\Omega$
Anode current	$I_a$	35	(negligible spread)		mA
Grid No.2 current	$I_{g2}$	5.0	4.4 - 5.6		mA
Mutual conductance	S	50	42 - 58	min. 35	mA/V
Internal resistance	$R_i$	42			k $\Omega$
Amplification factor of grid No.2 to grid No.1	$\mu_{g2g1}$	57			
Negative grid current	$-I_{g1}$		max. 0.1	max. 0.2	$\mu A$
Equivalent noise resistance	$R_{eq}$	110			$\Omega$
Frequency = 45 MHz					
Input resistance	$r_{g1}$	415			$\Omega$
Frequency = 100 MHz					
Quality factor	$\frac{S}{2\pi(C_{g1}+C_a+5)}$				
a) without shield		250			MHz
b) with shield		245			MHz
Anode supply voltage	$V_{ba}$	120			V
Grid No.3 voltage	$V_{g3}$	0			V
Grid No 2 supply voltage	$V_{bg3}$	150			V
Cathode resistor	$R_k$	47			$\Omega$
Anode current	$I_a$	35	31 - 39		mA

**CHARACTERISTICS (continued)**

		II	III	
<u>Hum voltage</u>	$V_{g1}$	max. 150		$\mu V$
Grid No.1 resistor $R_{g1} = 0.5 M\Omega$				
Midtap heater transformer grounded				
Cathode resistor decoupled				
<u>Leakage current between cathode and heater</u>	$I_{kf}$	max. 10	max. 20	$\mu A$
Voltage between cathode and heater $V_{kf} = 100 V$				
<u>Insulation resistance between anode and other electrodes</u>	R	min. 100	min. 40	$M\Omega$
Measured with $V = 250 V$				

**CAPACITANCES**

		Without external shield		With external shield		
		I	II	I	II	
Anode to grid No.3, grid No.2, cathode, heater and screen	$C_{a/g_3g_2kfs}$	3.5	3.2-3.8	4.1	3.9-4.3	pF
Grid No.1 to grid No.3, grid No.2, cathode, heater and screen						
( $I_k = 0 mA$ )	$C_{g_1/g_3g_2kfs}$	14.5	13- 16	14.5	13- 16	pF
( $I_k = 40 mA; f = 100 Mc/s$ )	$C_{g_1/g_3g_3kfs}$	24	22- 26	24	22- 26	pF
Anode to grid No.1	$C_{ag_1}$		max. 36		max. 32	mpF
Anode to cathode	$C_{ak}$	60	53- 67	33	26- 40	mpF
Anode to heater	$C_{af}$	31	26- 36	20	12- 28	mpF
Grid No.1 to heater	$C_{g_1f}$	60	40- 80	55	35- 75	mpF
Cathode to heater	$C_{kf}$			5.2	4.2-6.2	pF

**SHOCK AND VIBRATION RESISTANCE**

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

**LIFE**

Production samples are tested to be within the end of life values (column III) under the following conditions during 10 000 hours.

Anode supply voltage	$V_{ba}$	165 V
Anode resistor	$R_a$	820 $\Omega$
Grid No.3 voltage	$V_{g3}$	0 V
Grid No.2 supply voltage	$V_{bg2}$	165 V
Grid No.1 supply voltage	$+V_{bg1}$	12.5 V
Cathode resistor	$R_k$	360 $\Omega$
Anode current	$I_a$	35 mA
Voltage between cathode and heater	$V_{kf}$	100 V

**LIMITING VALUES** (Absolute max. rating system)

Anode voltage	$V_{a0}$	max. 400 V
	$V_a$	max. 250 V
Anode dissipation	$W_a$	max. 5 W
Grid No.2 voltage	$V_{g20}$	max. 400 V
	$V_{g2}$	max. 200 V
Grid No.2 dissipation	$W_{g2}$	max. 1 W <sup>1)</sup>
Grid No.1 voltage	$-V_{g1}$	max. 25 V
Grid No.1 peak voltage	$-V_{g1p}$	max. 50 V
	$+V_{g1p}$	max. 50 V
Grid No.1 dissipation	$W_{g1}$	max. 10 mW

Maximum averaging time = 1 s

1) Care should be taken not to exceed the rated  $W_{g2}$  value due to switching of positive supply voltages.

**LIMITING VALUES** (Absolute max. rating system) (continued)

Grid No.1 resistor

With fixed bias	$R_{g_1}$	max. 0.2 M $\Omega$
With automatic bias $R_k = 47 \Omega$	$R_{g_1}$	max. 0.6 M $\Omega$
$R_k = 360 \Omega$	$R_{g_1}$	max. 3.5 M $\Omega$
Cathode current	$I_k$	max. 50 mA
Cathode current (Life expectancy 1000 hours)	$I_k$	max. 65 mA
Voltage between cathode and heater	$V_{kf}$	max. 100 V
Bulb temperature	$t_{bulb}$	max. 200 °C
Bulb temperature (Life expectancy 1000 hours)	$t_{bulb}$	max. 220 °C

Heater voltage: The average heater voltage should be 6.3 V.



Variations of the heater voltage exceeding the range of 6.0 V to 6.6 V will shorten the tube life.


The tolerance of heater current (column II) should be taken into account.



**OPERATING CHARACTERISTICS**Output tube class A

Anode supply voltage	$V_{ba}$	155 V
Grid No.3 voltage	$V_{g_3}$	0 V
Grid No.2 supply voltage	$V_{bg_2}$	165 V
Grid No.1 supply voltage	$+V_{bg_1}$	12.5 V
Cathode resistor	$R_k$	360 $\Omega$
Cathode capacitor	$C_k$	1000 $\mu$ F
Anode resistor	$R_{a\sim}$	560 $\Omega$
Anode current	$I_a$	35 mA
Anode current, peak to peak	$I_{ap}$	40 mA
Total distortion	$d_{tot}$	7.5 %

# E810F

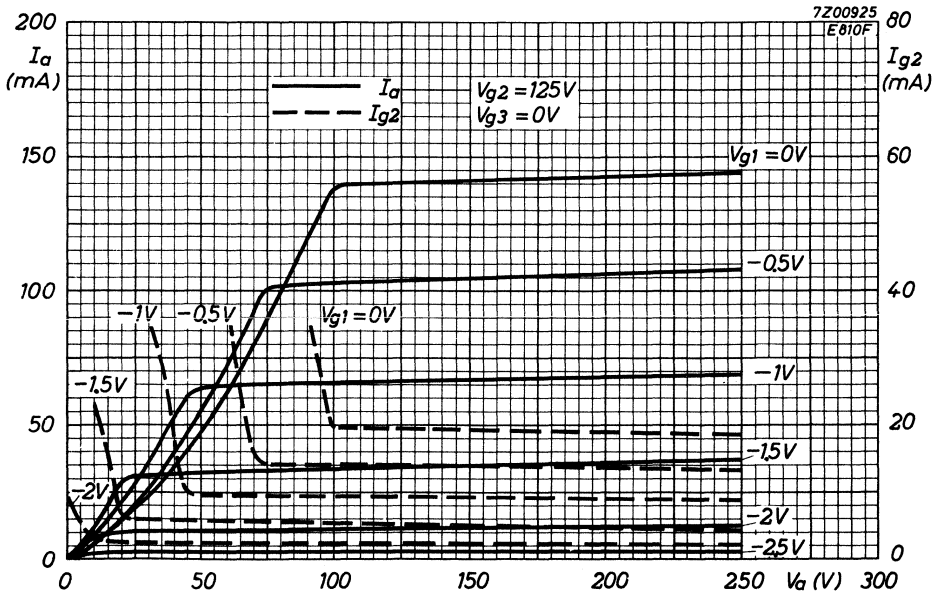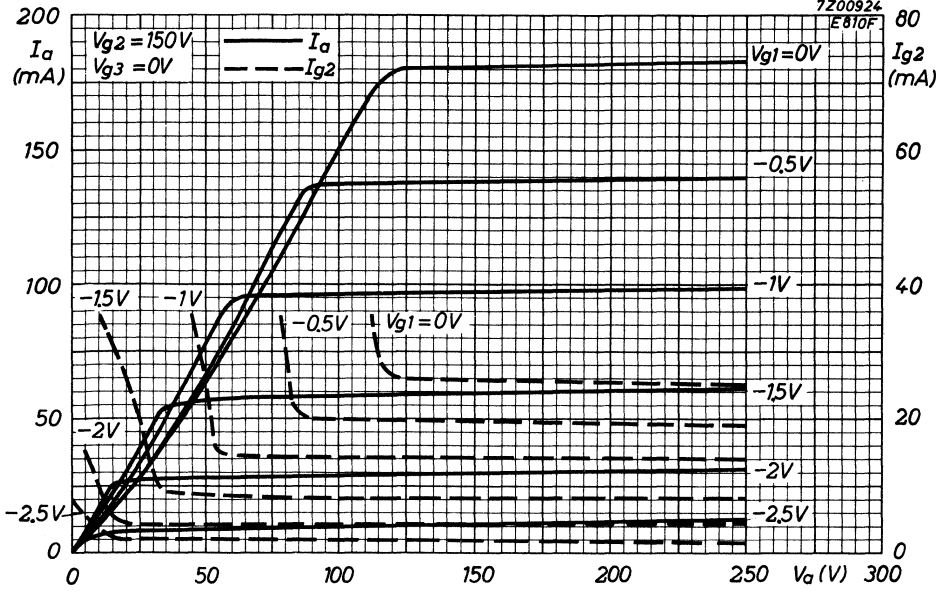

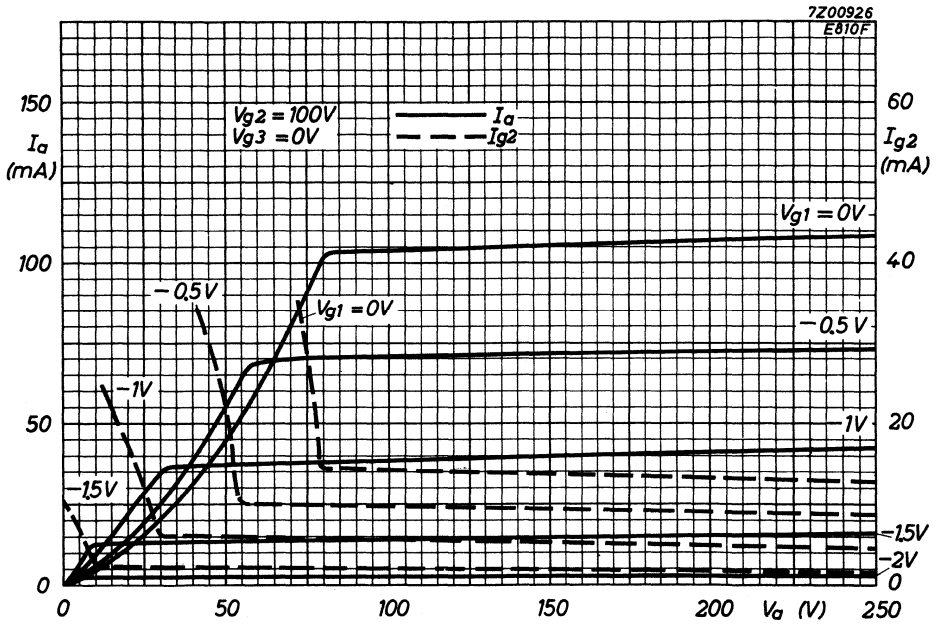

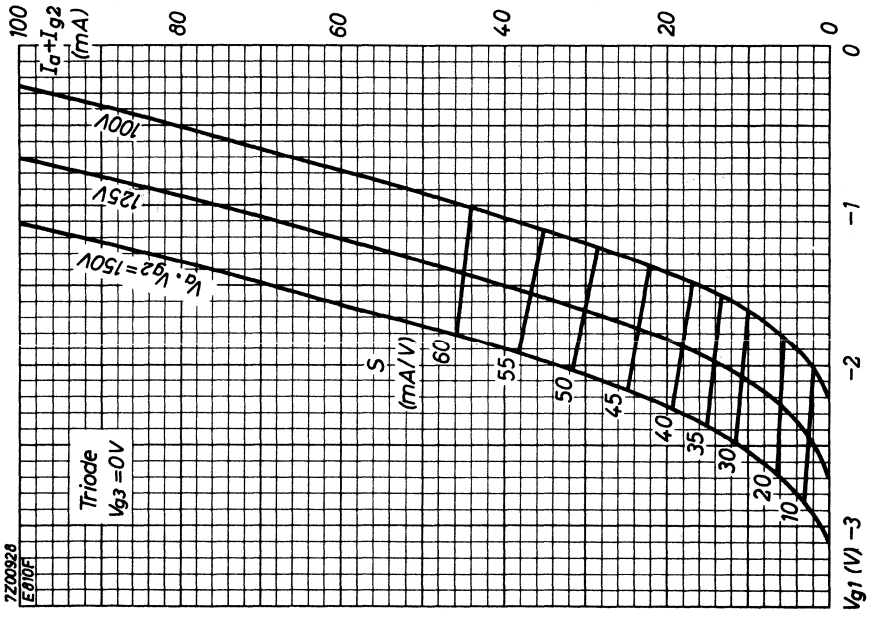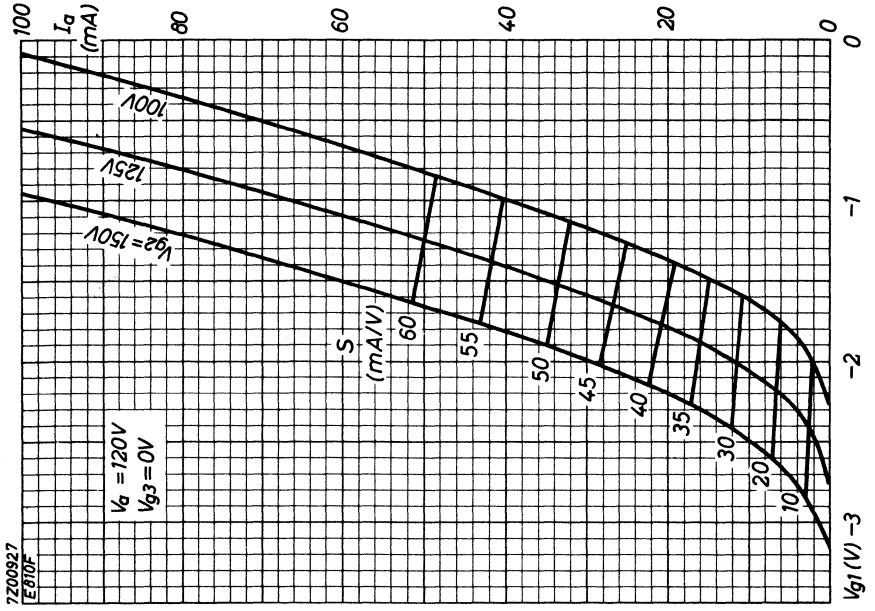



## S.Q. TUBE

Triode designed for use as grounded grid U.H.F. amplifier for frequencies up to 500 MHz.


### QUICK REFERENCE DATA

Life test	500 hours	
Base	Noval. Gold plated pins	
Heating	Indirect A.C. or D.C.; parallel supply	
Heater voltage	$V_f$	6.3 V
Heater current	$I_f$	430 mA
Mutual conductance	$S$	12 mA/V

### DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval

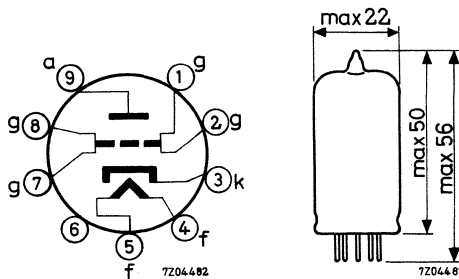

## CHARACTERISTICS

Anode voltage	$V_a$	250 V
Grid voltage	$-V_g$	1.5 V
Anode current	$I_a$	15 mA
Mutual conductance	$S$	12 mA/V
Amplification factor	$\mu$	80

## CAPACITANCES


Grid and pin No.6 to cathode and heater	$C_{gp6/kf}$	5.1 pF
Grid, heater and pin No.6 to cathode	$C_{gfp6/k}$	9.3 pF
Anode to cathode	$C_{ak}$	max. 0.075 pF
Anode to cathode and heater	$C_{a/kf}$	max. 0.08 pF
Anode to grid and pin No.6	$C_{a/gp6}$	3.4 pF
Anode to grid, heater and pin No.6	$C_{a/gfp6}$	3.4 pF
Cathode to heater	$C_{kf}$	max. 8 pF

## LIFE


Production samples are tested during 500 hours.

## LIMITING VALUES (Design centre rating system)


Anode voltage	$V_{a0}$	max. 550 V
	$V_a$	max. 300 V
Anode dissipation	$W_a$	max. 4 W
Cathode current	$I_k$	max. 15 mA
Voltage between cathode and heater	$V_{kf}$	max. 100 V
Grid resistor	$R_g$	max. 0.3 M $\Omega$

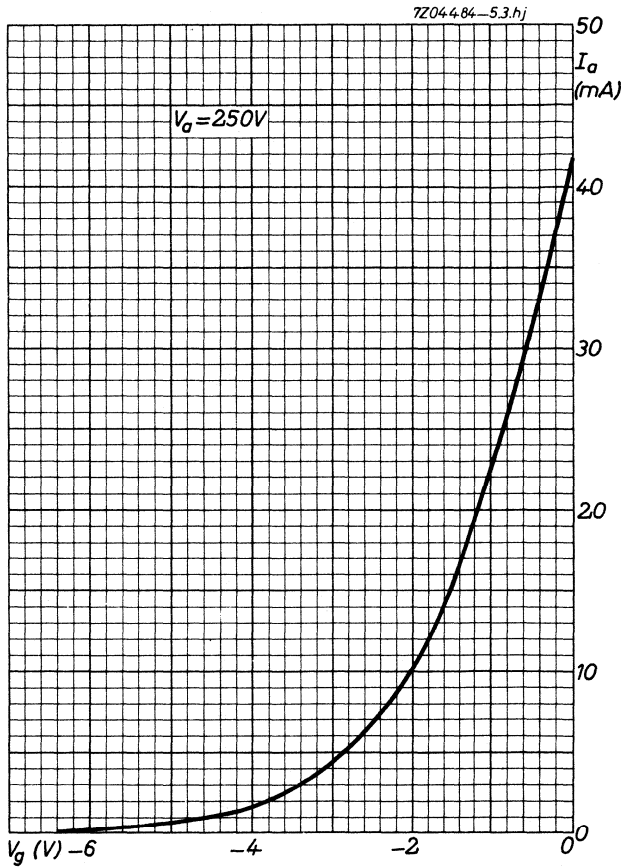

7204483-5.3.hj

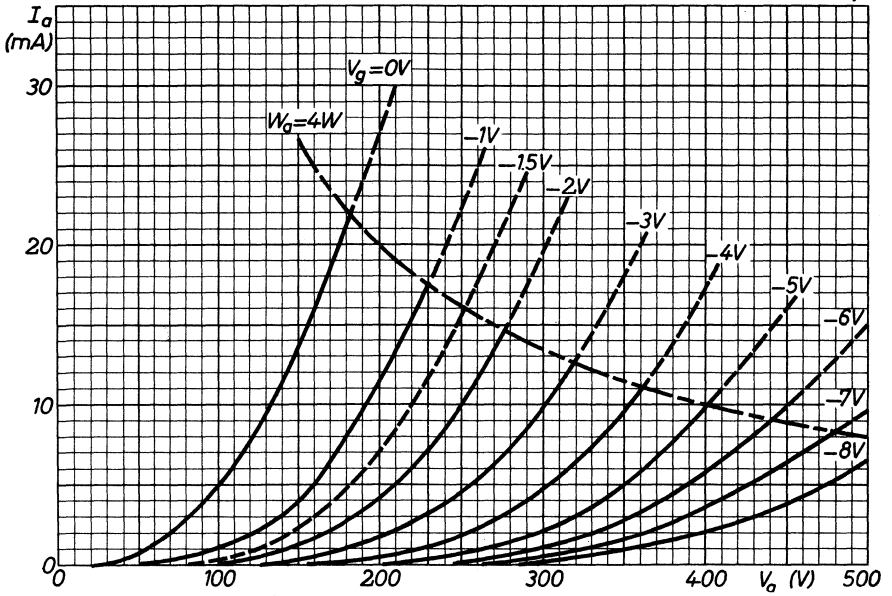

7204485-5.3.hj

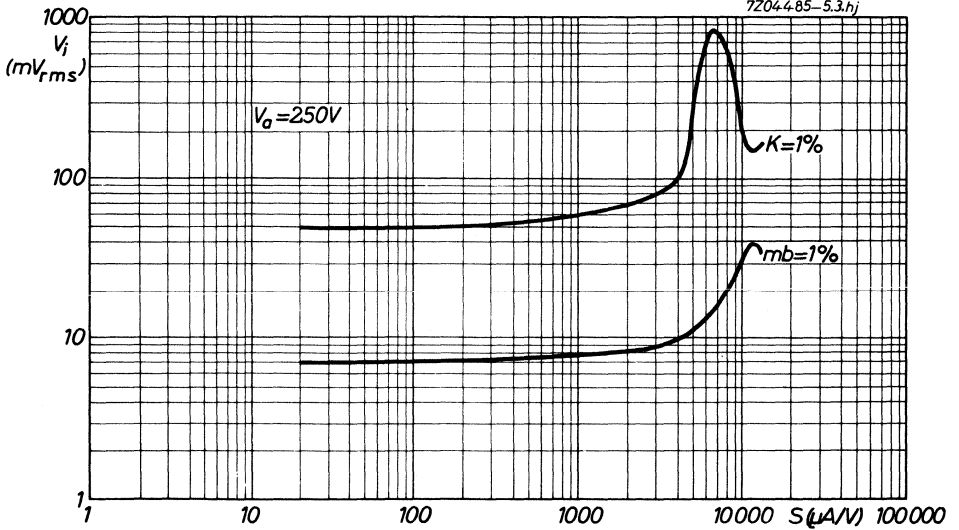

## S.Q. TUBE

U.H.F. oscillator triode for frequencies up to 750 MHz.



### QUICK REFERENCE DATA

Base	Noval. Gold plated pins	
Heating	Indirect A.C. or D.C.; parallel supply	
Heater voltage	$V_f$	6.3 V
Heater current	$I_f$	175 mA
Anode current	$I_a$	30 mA
Mutual conductance	$S$	5.5 mA/V

### DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval



### CAPACITANCES

Grid to all except anode	$C_{g(a)}$	1.8 pF
Anode to all except grid	$C_{a(g)}$	0.7 pF
Anode to grid	$C_{ag}$	1.6 pF
Grid to heater	$C_{gf}$	max. 0.25 pF
Cathode to heater	$C_{kf}$	2.3 pF

### CHARACTERISTICS

Heater voltage	$V_f$	6.3	V
Heater current	$I_f$	175	mA
Anode voltage	$V_a$	120	150 V
Grid voltage	$-V_g$	2	2 V
Anode current	$I_a$	20	30 mA
Mutual conductance	$S$	4	5.5 mA/V
Amplification factor	$\mu$	16	16

**OPERATING CHARACTERISTICS AND LIMITING VALUES**

Operation as U.H.F. oscillator

A) Heater supply voltage	$V_f$	6.3	V
Series resistor in heater circuit	R	3	$\Omega$
Wave length	$\lambda$	40 — 80	cm
Anode voltage	$V_a$	220 — 275	V
Anode current	$I_a$	18.6 — 17.2	mA
Grid current	$+I_g$	1.5 — 2.8	mA
Output power	$W_o$	0.6 — 2.1	W

LIMITING VALUES Design centre rating system

Anode voltage	$V_{a0}$	max. 550	V
Anode voltage	$V_a$	max. 275	V
Anode dissipation	$W_a$	max. 3.5	W
Cathode current	$I_k$	max. 20	mA
Grid current	$I_g$	max. 7.5	mA
Negative grid voltage	$-V_g$	max. 100	V
Voltage between cathode and heater	$V_{kf}$	max. 100	V
Grid resistor	$R_g$	max. 1	$M\Omega$

B) Heater supply voltage	$V_f$	6.3	V
Series resistor in heater circuit	R	3	$\Omega$
Wave length	$\lambda$	40 — 80	cm
Anode voltage	$V_a$	290 — 300	V
Anode current	$I_a$	19.6 — 18.6	mA
Grid current	$+I_g$	0.4 — 1.5	mA
Output power	$W_o$	0.7 — 2.2	W

With these operating conditions the following limiting values should be strictly adhered to

LIMITING VALUES Design centre rating system unless otherwise specified.

Anode voltage	$V_{a_0}$	max.	550	V
Anode voltage (stabilized $\pm 1\%$ )	$V_a$	max.	300	V
Anode dissipation (Abs.max.)	$W_a$	max.	5	W
Cathode current	$I_k$	max.	20	mA
Grid current	$I_g$	max.	7.5	mA
Negative grid voltage	$-V_g$	max.	100	V
Voltage between cathode and heater	$V_{kf}$	max.	100	V
Grid resistor	$R_g$	max.	1	$M\Omega$


C) Heater voltage	$V_f$	6.3		V
Wave length	$\lambda$	40	80	cm
Anode voltage	$V_a$	220	300	V
Anode current	$I_a$	27.7	26.3	mA
Grid current	$I_g$	2.3	4	mA
Output power	$W_o$	1.1	3.8	W

LIMITING VALUES Design centre rating system unless otherwise specified.


Anode voltage	$V_{a_0}$	max.	550	V
Anode voltage (stabilized $\pm 1\%$ )	$V_a$	max.	300	V
Anode dissipation (Abs.max.)	$W_a$	max.	5	W
Cathode current (Abs.max.)	$I_k$	max.	30	mA
Grid current	$+I_g$	max.	7.5	mA
Grid voltage	$-V_g$	max.	100	V
Voltage between cathode and heater	$V_{kf}$	max.	100	V
Grid resistor	$R_g$	max.	1	$M\Omega$



Heater voltage: The average heater voltage should be 6.3 V


Variation of the heater voltage should not exceed the range the range of  $6.3\text{ V} \pm 3\%$ .


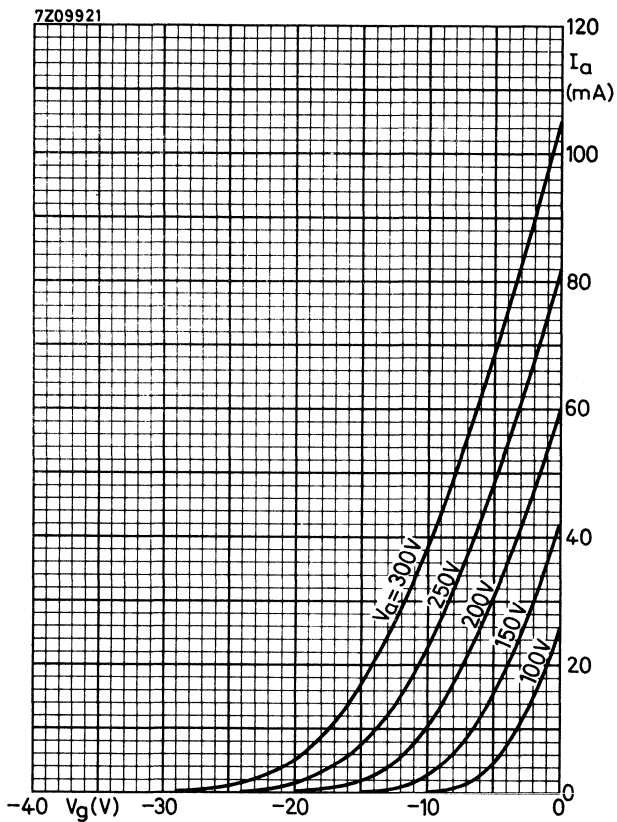




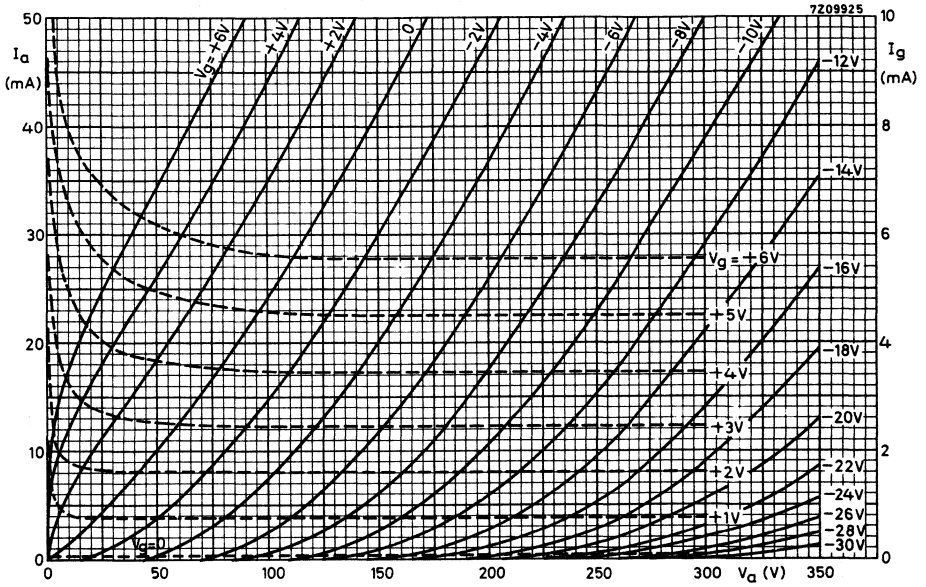

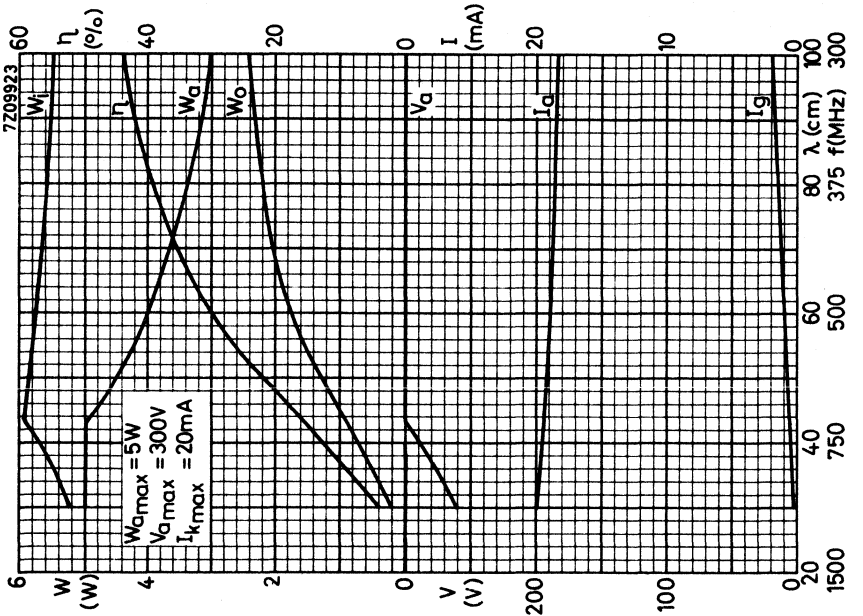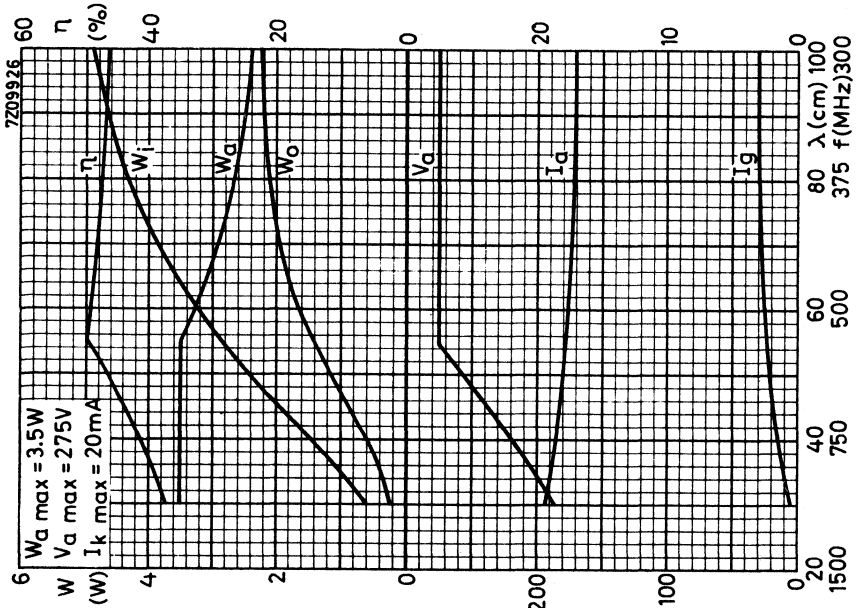

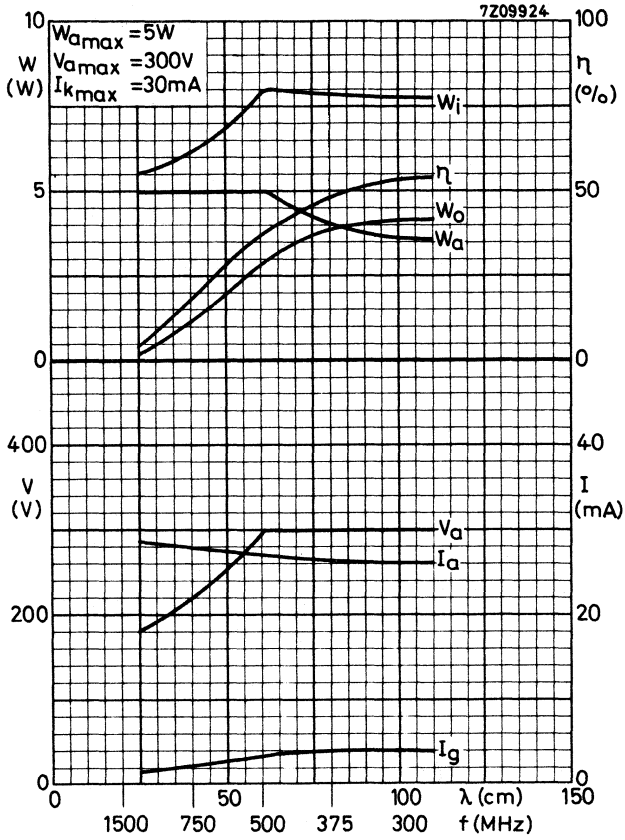

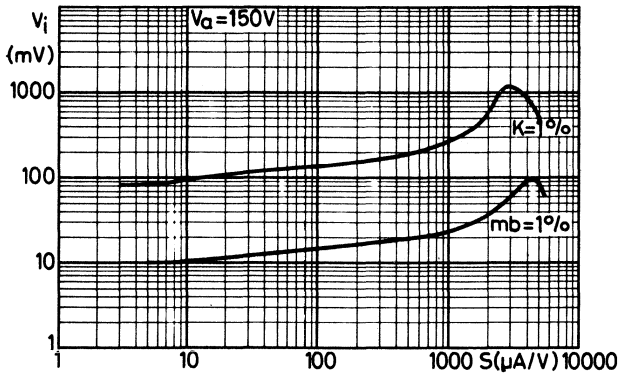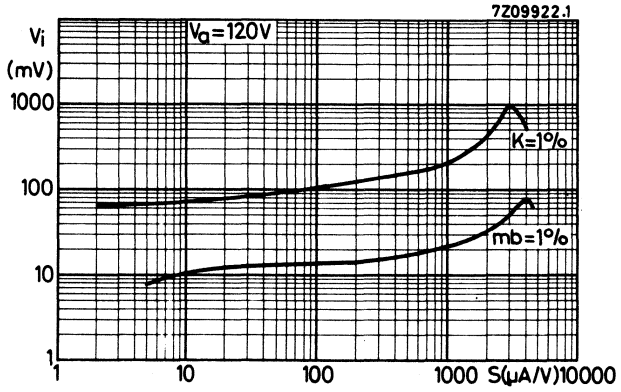

## S.Q. TUBE

Triode designed for use as R.F. power amplifier or oscillator for frequencies up to 150 MHz.


### QUICK REFERENCE DATA

Life test	500 hours
Base	Miniature
Heating	Indirect A.C. or D.C.
Heater voltage	$V_f$ 6.3 V
Heater current	$I_f$ 150 mA
Output power $f = 50$ MHz	$W_o$ 3.6 W
$f = 100$ MHz	$W_o$ 3.3 W

### DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Miniature

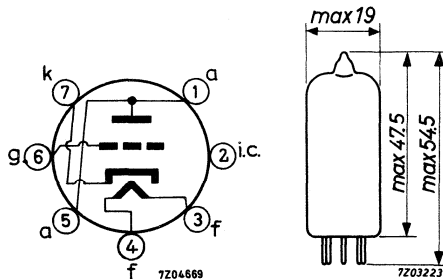

**CHARACTERISTICS**

Heater voltage	$V_f$	6.3	V
Heater current	$I_f$	150	mA
Anode voltage	$V_a$	100	250 V
Grid voltage	$-V_g$	0	8.5 V
Anode current	$I_a$	11.8	10.5 mA
Mutual conductance	S	3.25	2.2 mA/V
Amplification factor	$\mu$	21.5	17
Internal resistance	$R_i$	6.6	7.7 $k\Omega$

**CAPACITANCES**

		Without shield	With shield	
Anode to grid	$C_{ag}$	1.4	1.3	pF
Grid to cathode and heater	$C_{a/kf}$	1.5	1.7	pF
Anode to cathode and heater	$C_{g/kf}$	1.2	2.6	pF

**LIMITING VALUES** (Design centre rating system)


Anode voltage	$V_{a_0}$	max.	550 V
	$V_a$	max.	300 V
Anode dissipation	$W_a$	max.	3.5 W
Cathode current:			
(as R. F. oscillator or amplifier)	$I_k$	max.	30 mA
(as R. F. doubler or trebler)	$I_k$	max.	20 mA
Grid voltage	$-V_g$	max.	100 V
Grid current	$+I_g$	max.	5.0 mA
Grid resistor	$R_g$	max.	250 $k\Omega$
Voltage between cathode and heater	$V_{kf}$	max.	150 V
Bulb temperature	$t_{bulb}$	max.	180 $^{\circ}C$


**OPERATING CHARACTERISTICS**

As R.F. amplifier or oscillator

Class C telegraphy or F.M.

Frequency	f	50	100	MHz
Anode voltage	$V_a$	300	300	V
Grid voltage	$-V_g$	27	27	V
Anode current	$I_a$	16.2	17.1	mA
Grid current	$+I_g$	3.8	2.9	mA
Output power	$W_o$	3.6	3.3	W
Efficiency	$\eta$	67	55	%

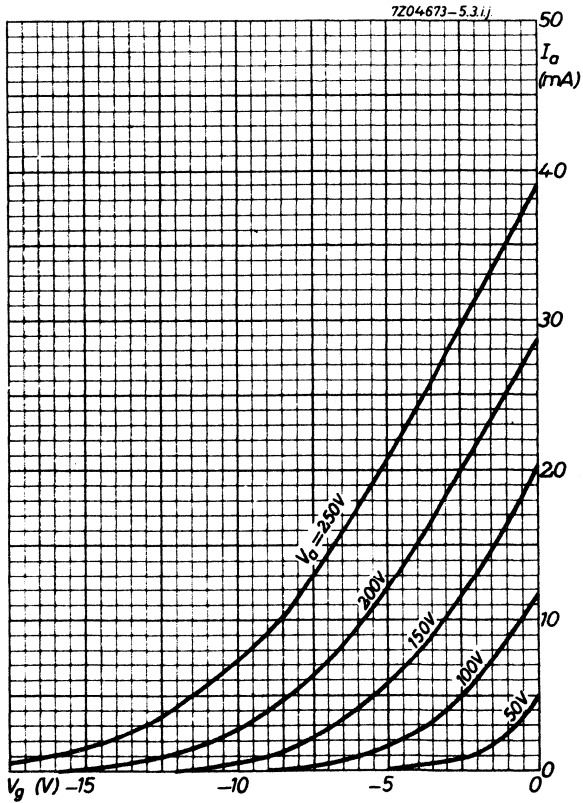

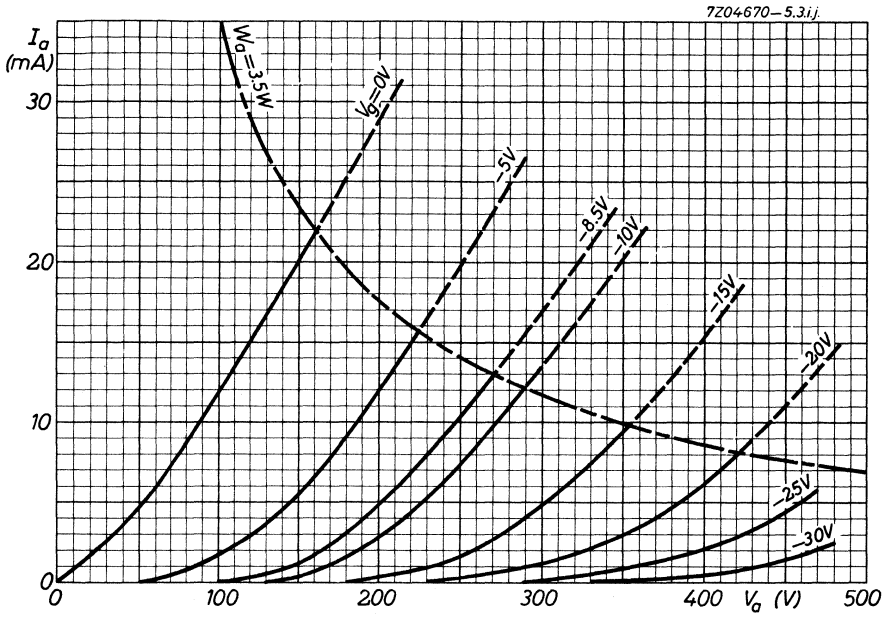



## S.Q. TUBE

Triode designed for use as grounded grid U.H.F. amplifier for frequencies up to 250 MHz.


### QUICK REFERENCE DATA

Life test	500 hours	
Base	Miniature 7 pin	
Heating	Indirect A.C. or D.C. Series or parallel supply	
Heater voltage	$V_f$	6.3 V
Heater current	$I_f$	300 mA
Mutual conductance	S	8.5 mA/V

### DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Miniature 7 pin

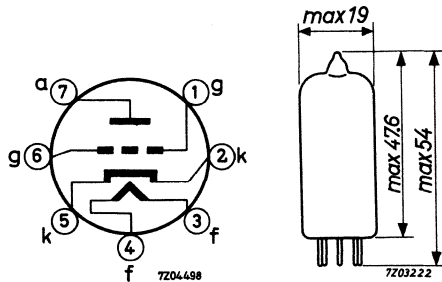

**CHARACTERISTICS**

Anode voltage	$V_a$	250 V
Grid voltage	$-V_g$	1.5 V
Cathode resistor	$R_k$	150 $\Omega$
Anode current	$I_a$	10 mA
Mutual conductance	S	8.5 mA/V
Amplification factor	$\mu$	100
Internal resistance	$R_i$	12 k $\Omega$
Equivalent noise resistance	$R_{eq}$	400 $\Omega$

**CAPACITANCES**


Grid to cathode and heater	$C_{g/kf}$	8.5 pF
Anode to cathode and heater	$C_{a/kf}$	max. 0.2 pF
Anode to grid	$C_{ag}$	2.5 pF


**LIFE**

Production samples are tested during 500 hours.

**LIMITING VALUES** (Absolute max. rating system)

Anode voltage	$V_{a0}$	max. 550 V
	$V_a$	max. 250 V
Cathode current	$I_k$	max. 15 mA
Grid voltage	$-V_g$	max. 100 V
Voltage between cathode and heater	$V_{kf}$	max. 150 V
Anode dissipation	$W_a$	max. 2.5 W

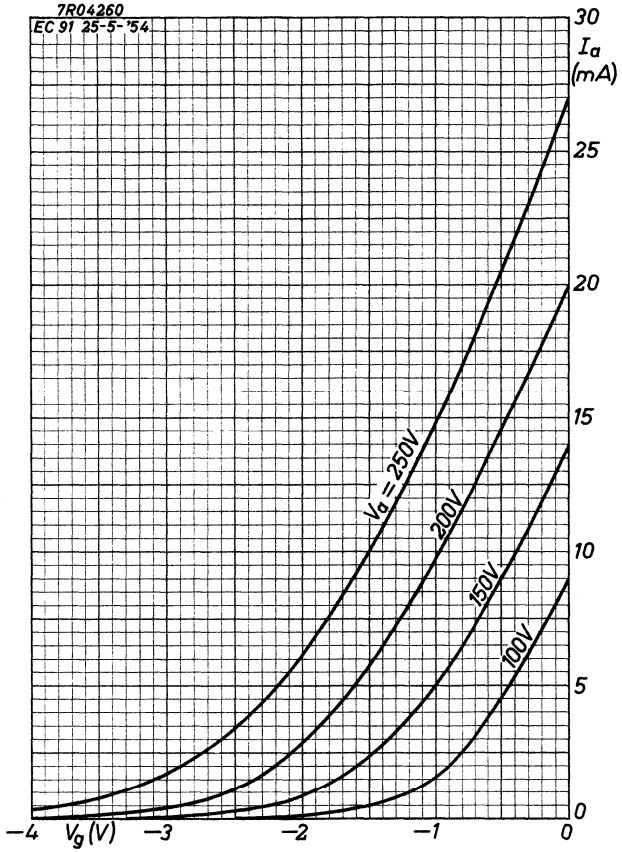

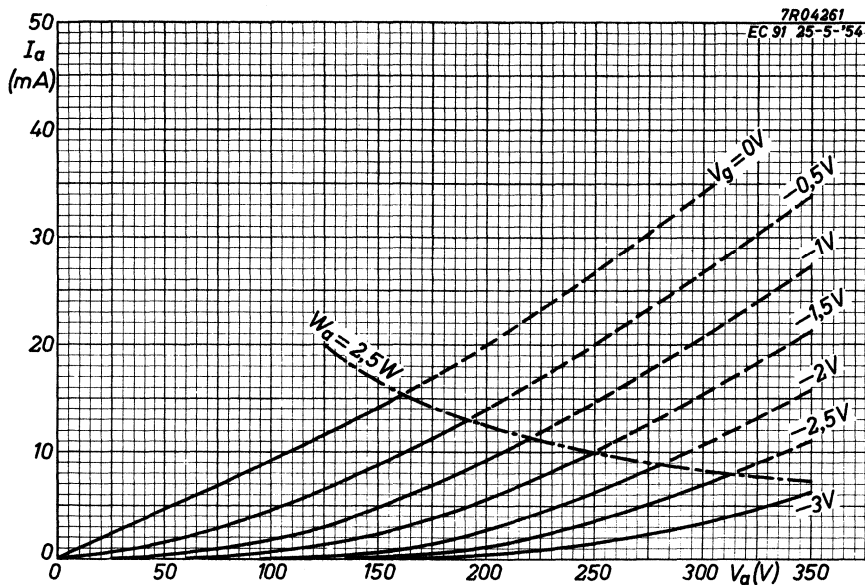

## S.Q. TUBE

Special quality triode, designed for use as amplifier in measuring probes.


### QUICK REFERENCE DATA

Life test	1000 hours	
Envelope	Subminiature	
Low interface resistance		
Mechanical quality	Shock and vibration resistant	
Heating	Indirect A. C. or D. C. ; parallel supply	
Heater voltage	$V_f$	6.3 V
Heater current	$I_f$	185 mA
Equivalent grid noise voltage	$V_n$	max. 1 mV
Anode current	$I_a$	14 mA
Mutual conductance	S	14.5 mA/V

### DIMENSIONS AND CONNECTIONS

Dimensions in mm

Envelope: Subminiature

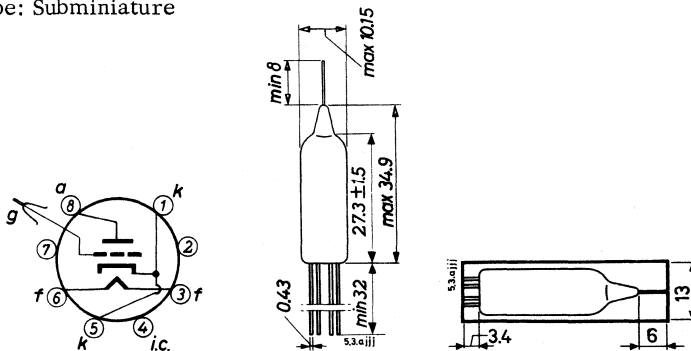

Leads should not be soldered nearer than 5 mm to the seal.

Leads should not be bent nearer than 2 mm to the seal.

Method of shielding. See fig. 1.

## CHARACTERISTICS

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage	$V_f$	6.3			V
Heater current	$I_f$	185	175- 195		mA
Anode voltage	$V_a$	80			V
Grid voltage	$-V_g$	2			V
Anode current	$I_a$	14			mA
Mutual conductance	S	14.5			mA/V
Amplification factor	$\mu$	27.5			
Input resistance	$r_g$	300			$\Omega$
Frequency = 250 MHz					
Input resonance frequency	f	400			MHz
Anode supply voltage	$V_{ba}$	82			V
Cathode resistor	$R_k$	143			$\Omega$
Anode current	$I_a$	14.0	11.2-16.8	min. 8.2	mA
Mutual conductance	S	14.5			mA/V
Anode supply voltage	$V_{ba}$	90			V
Cathode resistor	$R_k$	680			$\Omega$
Grid supply voltage	$+V_{bg}$	7.5			V
Anode current	$I_a$	14			mA
Mutual conductance	S	14.5	12.9-16.1	min. 9.2	mA/V
<u>Negative grid current</u>	$-I_g$		max. 0.01	max. 0.01	$\mu A$
<u>Leakage current between cathode and heater</u>	$I_{kf}$		max. 5	max. 10	$\mu A$

Voltage between cathode and heater = 55 V. Cath. positive

**CHARACTERISTICS** (continued)

Equivalent grid microphony voltage

Peak acceleration = 4 g  
 Frequency = 50 Hz

	I	II	
$V_g$		max. 1.0	mVRMS

Equivalent grid hum voltage

Grid resistor = 0.5 MΩ  
 Cathode resistor = 100 Ω  
 Heater centre grounded

$V_g$		max. 1.0	mVRMS
-------	--	----------	-------

**CAPACITANCES**

Grid to cathode

$C_{gk}$	3.5	2.9 - 4.1	pF
----------	-----	-----------	----

Anode to grid

$C_{ag}$	1.7	1.4 - 2.0	pF
----------	-----	-----------	----

Grid to heater

$C_{gf}$	33	23 - 43	mpF
----------	----	---------	-----

Anode to cathode

$C_{ak}$	450	325 - 575	mpF
----------	-----	-----------	-----

Anode to heater

$C_{af}$	270	185 - 355	mpF
----------	-----	-----------	-----

**SHOCK AND VIBRATION RESISTANCE**

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

**LIFE**

Production samples are tested to be within the end of life values during 1000 hours.

**LIMITING VALUES** (Absolute max. rating system)

Anode voltage	$V_{aO}$	max. 275 V
	$V_a$	max. 110 V
Anode dissipation	$W_a$	max. 1.5 W
Grid voltage	$-V_g$	max. 55 V
Cathode current	$I_K$	max. 22 mA
Voltage between cathode and heater	$V_{kf}$	max. 55 V
Bulb temperature	$t_{bulb}$	max. 170 °C

Grid resistor: The grid resistance should be restricted to a value such that no limiting values are exceeded at  $-I_g = 0.01 \mu A$ .

The D.C. feed back factor of the operating circuit may be taken into account.


The  $R_g$  value will also be limited by the required current stability and the permissible hum level.


Heater voltage: The average heater voltage should be 6.3 V.

Variations of the heater voltage exceeding the range of 6.0 V to 6.6 V will shorten the tube life.



7Z02973-5.3.ajjj

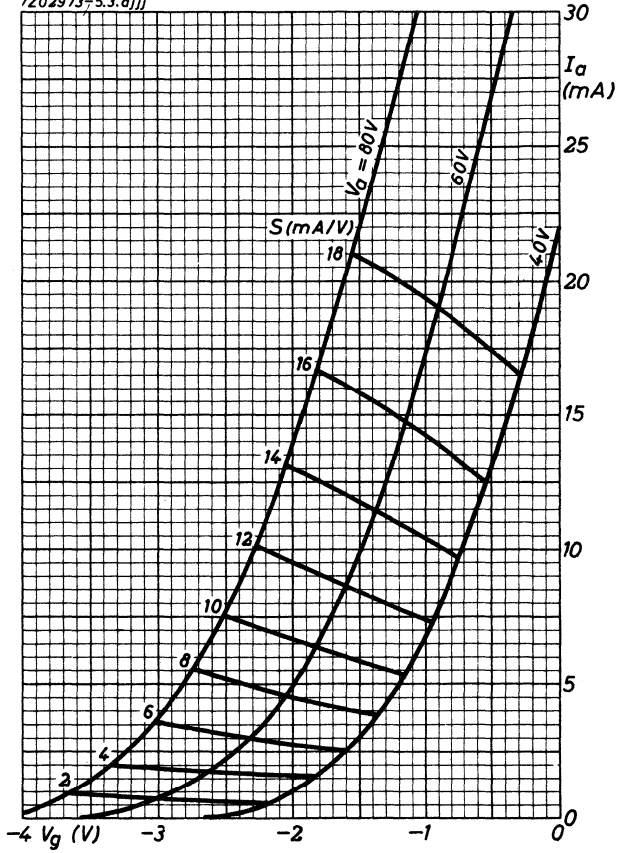

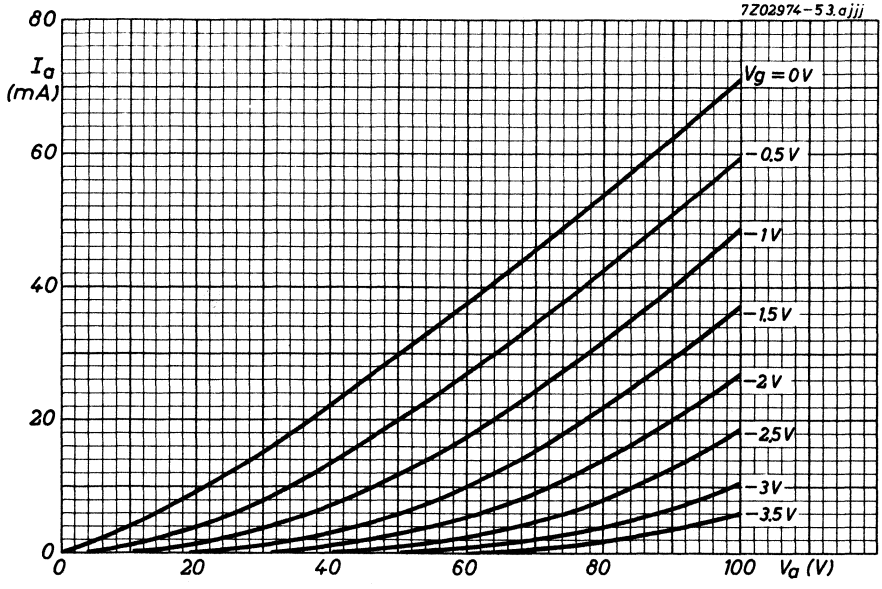

**S.Q. TUBE**

Special quality U.H.F. triode designed for use as R.F. amplifier and oscillator (max. frequency 1000 MHz).




QUICK REFERENCE DATA	
Life test	10 000 hours
Low interface resistance	
Mechanical quality	Shock and vibration resistant
Base	Noval
Heating	Indirect A.C. or D.C.; parallel supply
Heater voltage	$V_f$ 6.3 V
Heater current	$I_f$ 280 mA
Anode current	$I_a$ 25 mA
Mutual conductance	S 28 mA/V

**DIMENSIONS AND CONNECTIONS**

Dimensions in mm

Base: Noval

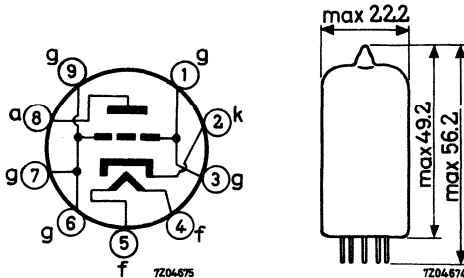

**CHARACTERISTICS**

Anode supply voltage	$V_{ba}$	200 V
Anode resistor	$R_a$	2.4 k $\Omega$
Cathode resistor	$R_k$	47 $\Omega$
Anode current	$I_a$	25 mA
Mutual conductance	S	28 mA/V
Amplification factor	$\mu$	60

**CAPACITANCES**

Without shield

Anode to cathode and heater	$C_{a/kf}$	0.1 pF
Grid to cathode and heater	$C_{g/kf}$	7 pF
Anode to grid	$C_{ag}$	1.4 pF

With external shield

Anode to cathode and heater	$C_{a/kf}$	0.09 pF
Grid and screen to cathode and heater	$C_{gs/kf}$	7.5 pF
Anode to grid and shield	$C_{a/gS}$	1.9 pF

**SHOCK AND VIBRATION RESISTANCE**

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.



Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

**LIMITING VALUES** (Absolute max. rating system)

Anode voltage	$V_{a0}$	max. 400 V
	$V_a$	max. 200 V
Anode dissipation	$W_a$	max. 4.5 W
Grid voltage	$-V_g$	max. 20 V
Cathode current	$I_k$	max. 35 mA
Grid resistor	$R_g$	max. 500 $k\Omega$
Voltage between cathode and heater	$V_{kf}$	max. 100 V

Heater voltage: The average heater voltage should be 6.3 V.  
Variations of the heater voltage exceeding the range of 6.0 V to 6.6 V will shorten the tube life.

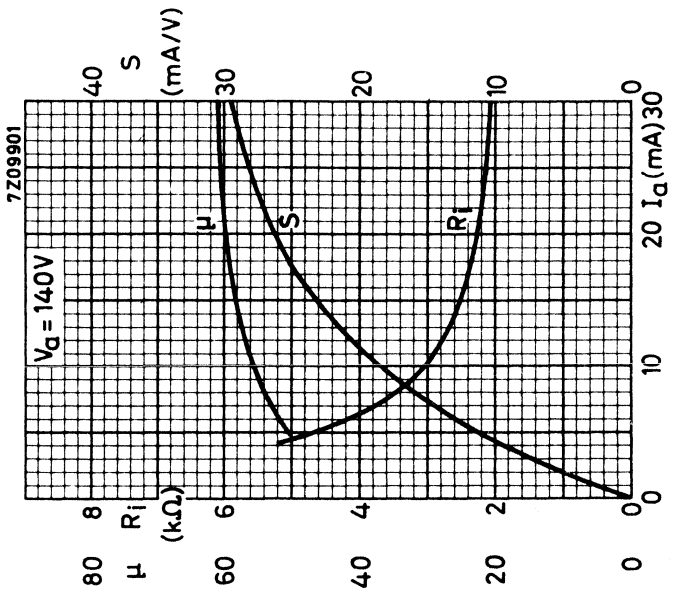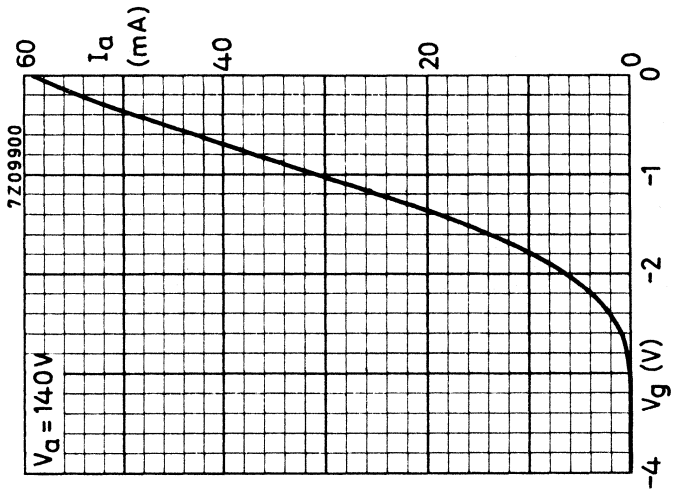

## S.Q. TUBE

Special quality double triode with neutralisation screen, designed for use as V.H.F. amplifier (max. freq. 300 MHz) in a cascode circuit without external neutralisation, e.g. aerial amplifier for band III and frequency multiplier.


### QUICK REFERENCE DATA

Life test	10 000 hours				
Low interface resistance					
Mechanical quality	Shock and vibration resistant				
Base	10 pin miniature with gold plated pins				
Heating	Indirect A.C. or D.C.; parallel supply				
Heater voltage	$V_f$	6.3			V
Heater current	$I_f$	335			mA
	Input section		Output section		
Anode voltage	90	90	90	90	V
Anode current	15	27	15	27	mA
Mutual conductance	13	17.5	17	22	mA/V

### DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: 10 pin miniature

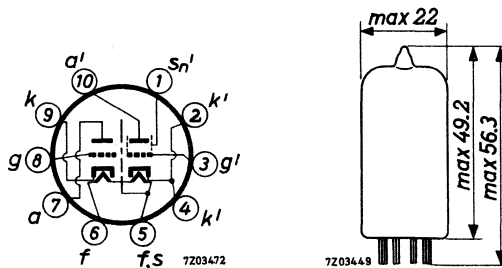

## CHARACTERISTICS

Heater voltage	$V_f$	6.3		V
Heater current	$I_f$	335		mA
<u>Input section (unit a', g', k')</u>				
Anode voltage	$V_{a'}$	90	90	V
Neutralization screen voltage	$V_{Sn'}$	0	0	V
Grid voltage	$-V_{g'}$	2.1	1.4	V
Anode current	$I_{a'}$	15	27	mA
Mutual conductance	S	13	17.5	mA/V
Amplification factor	$\mu$	27	27	
Equivalent noise resistance	$R_{eq}$	250	200	$\Omega$
<u>Output section (unit a, g, k)</u>				
Anode voltage	$V_a$	90	90	V
Grid voltage	$-V_g$	2.0	1.4	V
Anode current	$I_a$	15	27	mA
Mutual conductance	S	17	22	mA/V
Amplification factor	$\mu$	28	28	
Equivalent noise resistance	$R_{eq}$	200	150	$\Omega$
<u>Insulation resistance between electrodes</u>	$R_{ins}$	Initial	min. 100	$M\Omega$
		End of life	min. 20	$M\Omega$
<u>Leakage current between cathode and heater</u>				
Voltage between cathode and heater V = 150 V				
Cathode positive	$I_{kf}$	Initial	max. 15	$\mu A$
		End of life	max. 20	$\mu A$
Voltage between cathode and heater V = 50 V				
Cathode negative	$I_{kf}$	Initial	max. 15	$\mu A$
		End of life	max. 20	$\mu A$



**CAPACITANCES**Input system (unit a', g', k')

Grid to cathode, filament and neutralisation screen	$C_{g' / k' f s n'}$	5.1 pF
Anode to cathode, filament and neutralisation screen	$C_{a' / k' f s n'}$	5.0 pF
Grid to neutralisation screen	$C_{g' s n'}$	1.4 pF
Anode to grid	$C_{a' g'}$	0.45 pF
Anode to neutralisation screen	$C_{a' s n'}$	3.4 pF

Output system (unit a, g, k)

Cathode to grid and filament	$C_{k / g f}$	6.5 pF
Anode to grid and filament	$C_{a / g f}$	3.2 pF
Anode to cathode	$C_{a k}$	180 mpF
Anode to grid	$C_{a g}$	1.5 pF

**SHOCK AND VIBRATION RESISTANCE**

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

**LIFE**

Production samples are tested under the following conditions during 10000 hours: (each unit)

Heater voltage	$V_f$	6.3 V
Anode supply voltage	$V_{ba}$	110 V
Grid supply voltage	$V_{bg}$	17 V
Cathode resistor	$R_k$	680 $\Omega$

**LIMITING VALUES** (Absolute max. rating system)

(Each unit)

Anode voltage	$V_{a0}$	max. 450 V
	$V_a$	max. 250 V
Anode dissipation	$W_a$	max. 2.7 W
Grid voltage	$-V_g$	max. 50 V
Grid peak voltage	$-V_{gp}$	max. 150 V
Duty factor max. 1%		
Pulse duration max. 10 $\mu$ s		
Cathode current	$I_k$	max. 40 mA
Cathode peak current	$I_{kp}$	max. 400 mA
Duty factor max. 10%		
Pulse duration max. 200 $\mu$ s		
Grid resistor	$R_g$	max. 1 M $\Omega$
Automatic bias		
Voltage between cathode and heater		
Cathode positive	$V_{kf}(k+)$	max. 150 V
Cathode negative	$V_{kf}(k-)$	max. 50 V
Bulb temperature		max. 225 $^{\circ}$ C


OPERATING CHARACTERISTICS

Cascode circuit, Frequency 200 MHz

Supply voltage	$V_b$	200	200 V
Cathode resistor	$R_{k'}$	1200	680 $\Omega$
Anode current	$I_a$	15.5	26.5 mA
Input resistance	$r_{g'}$	910	670 $\Omega$
Input capacitance	$C_i$	11	12 pF
Noise figure	F	2.5	2.5 $kT_o$



Adapted to minimum noise

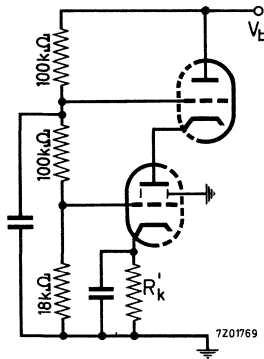



### S.Q. TUBE

Special quality double triode designed for use as A.F. amplifier, oscillator and multivibrator.




#### QUICK REFERENCE DATA

Life test	1000 hours	
Low interface resistance		
Mechanical quality	Shock and vibration resistant	
Base	Noval	
Heating	Indirect A.C. or D.C.; Parallel supply	
Heater voltage	$V_f$	6.3 or 12.6 V
Heater current	$I_f$	300 or 150 mA
Anode current	$I_a$	1.2 mA
Mutual conductance	S	1.6 mA/V
Amplification factor	$\mu$	100

#### DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval

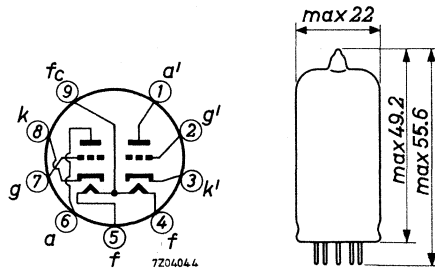

## CHARACTERISTICS Each system if applicable.

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage	$V_f$	6.3			V
Heater current	$I_f$	300	276- 324		mA
Anode voltage	$V_a$	250			V
Grid voltage	$-V_g$	2			V
Anode current	$I_a$	1.2	0.75-1.75		mA
Mutual conductance	S	1.6	1.25-2.05	min. 1.12	mA/V
Amplification factor	$\mu$	100			
Internal resistance	$R_i$	62.5			k $\Omega$
Difference in anode current of both systems	$ I_a - I_a' $		max. 0.6		mA
Negative grid current	$-I_g$		max. 0.5	max. 0.5	$\mu$ A
<u>Vibrational noise output</u> (units connected parallel)	$V_o$		max. 25		mVRMS
Anode supply voltage $V_{ba} = 250$ V					
Grid voltage $-V_g = 2$ V					
Frequency $f = 25$ Hz					
Acceleration 2.5 g					
Anode resistor $R_a = 2$ k $\Omega$					
<u>Amplification</u>					
Anode supply voltage	$V_{ba}$	100			V
Grid voltage	$V_g$	0			V
Anode resistor	$R_a$	0.5			M $\Omega$
Grid resistor	$R_g$	10			M $\Omega$
Input voltage	$V_i$	0.2			VRMS
Output voltage	$V_o$		min. 8.4		VRMS

**CHARACTERISTICS** (continued)

		I	II	III	
Anode voltage	$V_a$	100			V
Grid voltage	$-V_g$	1			V
Anode current	$I_a$	0.5			mA
Mutual conductance	S	1.25			mA/V
Amplification factor	$\mu$	100			
Internal resistance	$R_i$	80			k $\Omega$
<hr/>					
<u>Insulation resistance between electrodes</u>	$R_{ins}$		min. 100	min. 50	M $\Omega$
Voltage between electrodes $V = 100$ V					
<hr/>					
<u>Leakage current between cathode and heater</u>	$I_{kf}$		max. 10	max. 20	$\mu$ A
Voltage between cathode and heater $V_{kf} = 100$ V					



**CAPACITANCES.** Without external screen.  
Each system if applicable.

Anode to grid, cathode and heater	$C_{a/gkf}$	3.9 pF
Anode to cathode and heater	$C_{a/kf}$	0.4 pF
	$C_{a'/'kf}$	0.3 pF
Grid to anode, cathode and heater	$C_{g/akf}$	3.7 pF
Grid to cathode and heater	$C_{g/kf}$	1.6 pF
Anode to grid	$C_{ag}$	1.7 pF

**SHOCK AND VIBRATION RESISTANCE**

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

## SHOCK AND VIBRATION RESISTANCE (continued)

### Vibration


The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

### LIFE

Production samples are tested to be within the end of life values (column III)


### LIMITING VALUES (Absolute max. rating system)

Anode voltage	$V_a$	max. 330 V
Anode dissipation	$W_a$	max. 1.1 W
Cathode current	$I_k$	max. 20 mA
Grid resistor with fixed bias	$R_g$	max. 1 M $\Omega$
Voltage between cathode and heater	$V_{kf}$	max. 100 V
Bulb temperature	$t_{bulb}$	max. 165 $^{\circ}C$

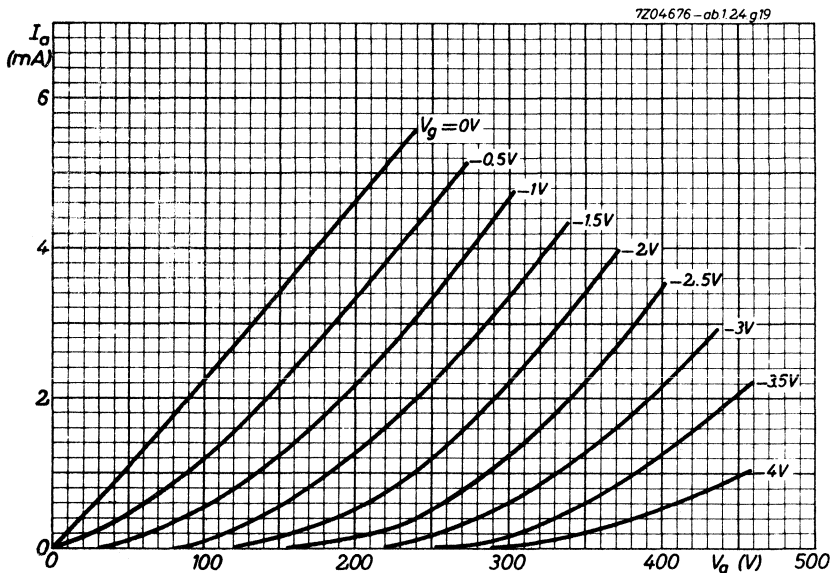




7Z04-677-ab 2.4.g19

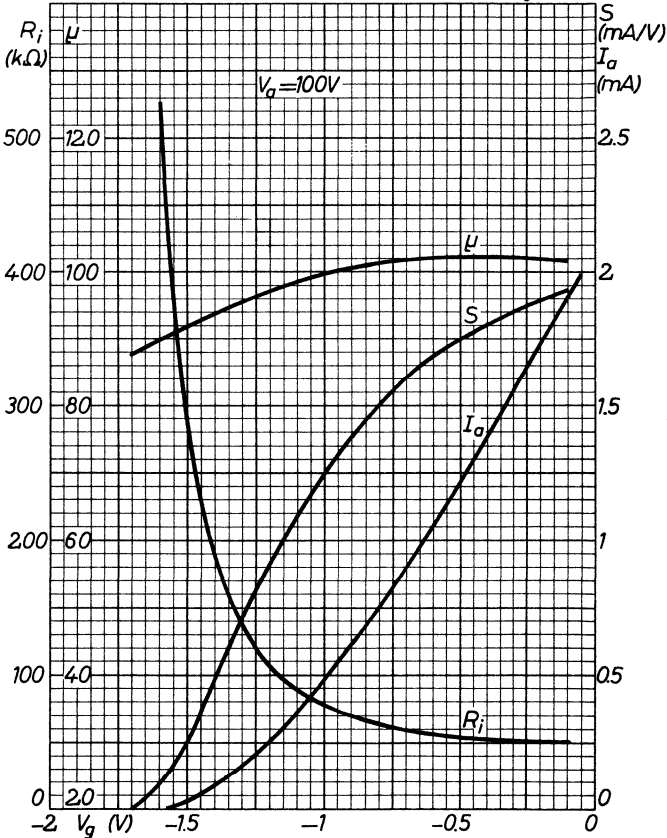

# 12AX7S

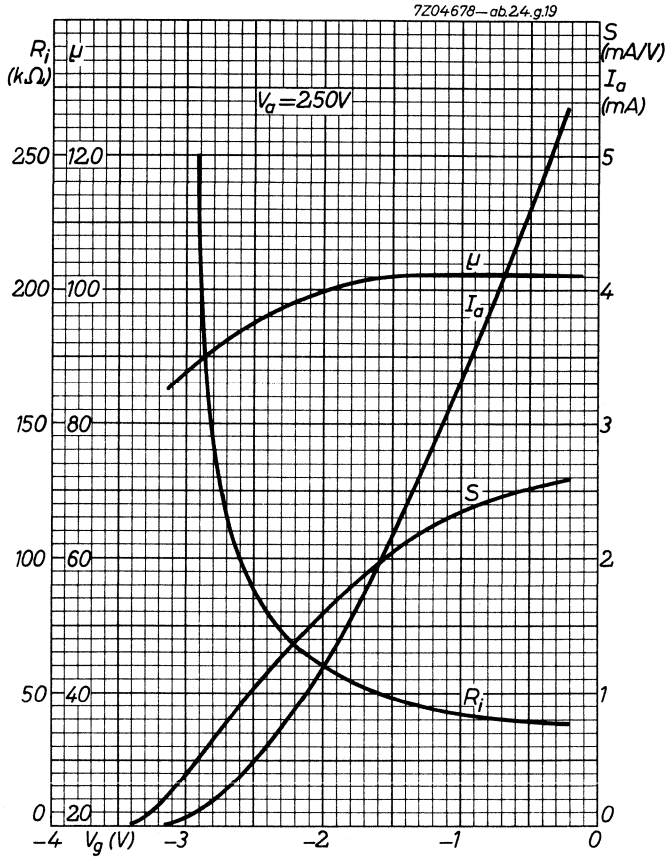

## S.Q. DUAL CONTROL PENTODE

Special quality dual control pentode designed for use as amplifier and mixer.




QUICK REFERENCE DATA		
Life test	1000 hours	
Mechanical quality	Shock and vibration resistant	
Base	Subminiature	
Heating	Indirect	
	A. C. or D. C. ; Parallel supply	
Heater voltage	$V_f$	6.3 V
Heater current	$I_f$	150 mA
Mutual conductance anode to grid No. 1	$S_{ag1}$	3.2 mA/V
Mutual conductance anode to grid No. 3	$S_{ag3}$	0.5 mA/V

### DIMENSIONS AND CONNECTIONS

Base: Subminiature

Dimensions in mm

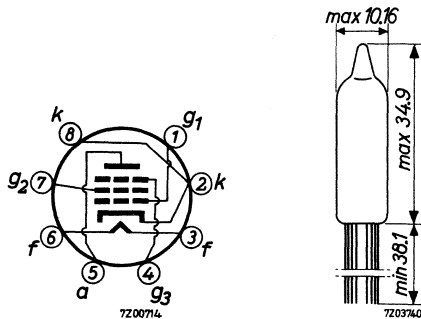

Connections should not be soldered nearer than 5 mm to the seal.

Leads should not be bent nearer than 1.5 mm to the seal.

## CHARACTERISTICS

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage	$V_f$	6.3			V
Heater current	$I_f$	150	140 - 160		mA
Anode voltage	$V_a$	100			V
Grid No. 2 voltage	$V_{g2}$	100			V
Grid No. 3 voltage	$V_{g3}$	0			V
Cathode resistor	$R_k$	150			$\Omega$
Anode current	$I_a$	5.3	3.7 - 6.9		mA
Grid No. 2 current	$I_{g2}$	4.0	2.8 - 5.4		mA
Mutual conductance;					
anode to grid No. 1	$S_{ag1}$	3.2	2.7 - 4.0	$\Delta S$ : max. 20 %	mA/V
anode to grid No. 3	$S_{ag3}$	0.5			mA/V
Internal resistance	$R_i$	110			k $\Omega$
<u>Negative grid No. 1 current</u>	$-I_{g1}$		max. 0.3	max. 1.0	$\mu A$
Grid No. 1 resistor $R_{g1} = 1 M\Omega$					
Anode voltage	$V_a$	100			V
Grid No. 2 voltage	$V_{g2}$	100			V
Grid No. 3 voltage	$V_{g3}$	-1			V
Cathode resistor	$R_k$	150			$\Omega$
Anode current	$I_a$	4.0			mA
Grid No. 2 current	$I_{g2}$	5.8			mA
Mutual conductance;					
anode to grid No. 1	$S_{ag1}$	1.95			mA/V
anode to grid No. 3	$S_{ag3}$		0.5 - 1.8		mA/V
Internal resistance	$R_i$	50			k $\Omega$

## CHARACTERISTICS (continued)

		I	II	III	
<u>Grid No. 1 cut-off voltage</u>	$-V_{g1}$		max. 7.5		V
Anode voltage	$V_a$	100			V
Grid No. 2 voltage	$V_{g2}$	100			V
Anode current	$I_a$	100			$\mu A$
<u>Grid No. 3 cut-off voltage</u>	$-V_{g3}$		max. 8.0		V
Anode voltage	$V_a$	100			V
Grid No. 2 voltage	$V_{g2}$	100			V
Anode current	$I_a$	100			$\mu A$
<u>Leakage current between cathode and heater</u>	$I_{kf}$		max. 5	max. 10	$\mu A$
Voltage between cathode and heater $V_{kf} = 100$ V					
<u>Insulation resistance between two electrodes</u>	$R_{ins}$		min. 100	min. 50	$M\Omega$
Voltage between electrodes = 100 V					
<u>Vibrational noise output</u>	$V_o$		max. 40		mV
Anode supply voltage	$V_{ba}$	100			V
Anode resistor	$R_a$	10			$k\Omega$
Grid No. 2 voltage	$V_{g2}$	100			V
Grid No. 3 voltage	$V_{g3}$	0			V
Cathode by pass capacitor $C = 1000 \mu F$					
Cathode resistor $R_k = 150 \Omega$					
Vibration frequency 40 Hz					
Acceleration 15 g					

**CAPACITANCES;** With external shield

		I	II	
Grid No. 1 to grid No. 2, grid No. 3, cathode and heater	$C_{g_1/g_2g_3}$ kf	4.0	3.5 - 4.5	pF
Grid No. 3 to grid No. 1, grid No. 2, cathode and heater	$C_{g_3/g_2g_1}$ kf	4.0	3.5 - 4.5	pF
Anode to grid No. 2, grid No. 3, cathode and heater	$C_{a/g_2g_3}$ kf	3.4	2.9 - 3.9	pF
Anode to grid No. 1	$C_{ag_1}$		max. 0.02	pF
Anode to grid No. 3	$C_{ag_3}$		max. 1.1	pF
Grid No. 1 to grid No. 3	$C_{g_1g_3}$		max. 0.15	pF

**SHOCK AND VIBRATION RESISTANCE**

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 25 Hz with an acceleration of 2.5 g.

**LIFE**

Production samples are tested to be within the end of life values (column III) during 1000 hours.



**LIMITING VALUES** (Absolute max. rating system)

Anode voltage	$V_{a_0}$	max.	330 V
Anode voltage	$V_a$	max.	165 V
Anode dissipation	$W_a$	max.	1.1 W
Grid No.3 voltage	$V_{g_3}$	max.	30 V
Grid No.3 negative voltage	$-V_{g_3}$	max.	55 V
Grid No.2 voltage	$V_{g_2}$	max.	155 V
Grid No.2 dissipation	$W_{g_2}$	max.	0.7 W
Grid No.1 voltage	$V_{g_1}$	max.	0 V
Grid No.1 negative voltage	$-V_{g_1}$	max.	55 V
Grid No.1 resistor	$R_{g_1}$	max.	1.2 $M\Omega$
Cathode current	$I_k$	max.	16 mA
Voltage between cathode and heater;			
D.C. component	$V_{kf}$	max.	200 V
peak value	$V_{kf_p}$	max.	200 V
Bulb temperature	$t_{bulb}$	max.	220 °C

Heater voltage: The average heater voltage should be 6.3 V.

Variations of the heater voltage exceeding the range of 6.0 V to 6.6 V will shorten the tube life.

The tolerance of heater current (column II) should be taken into account.

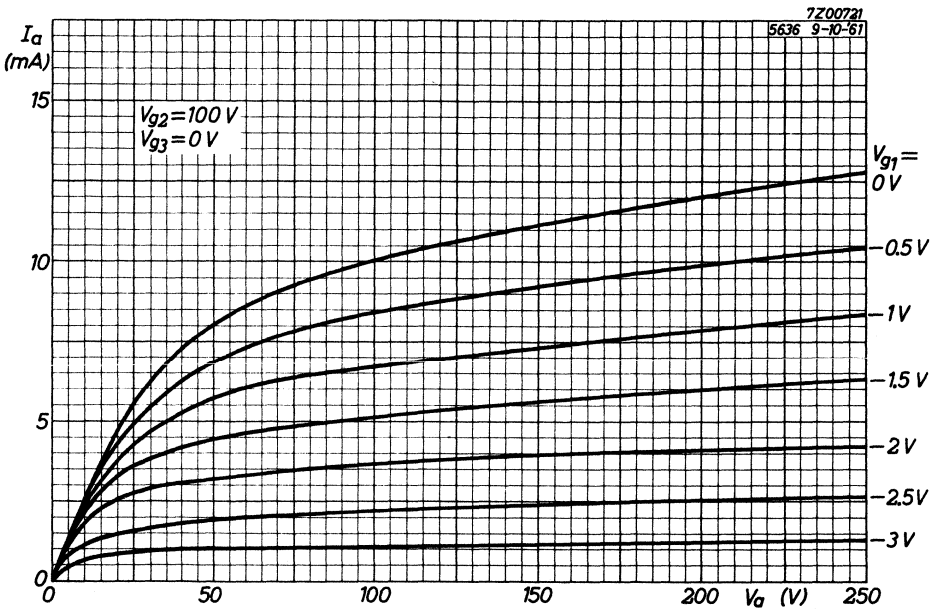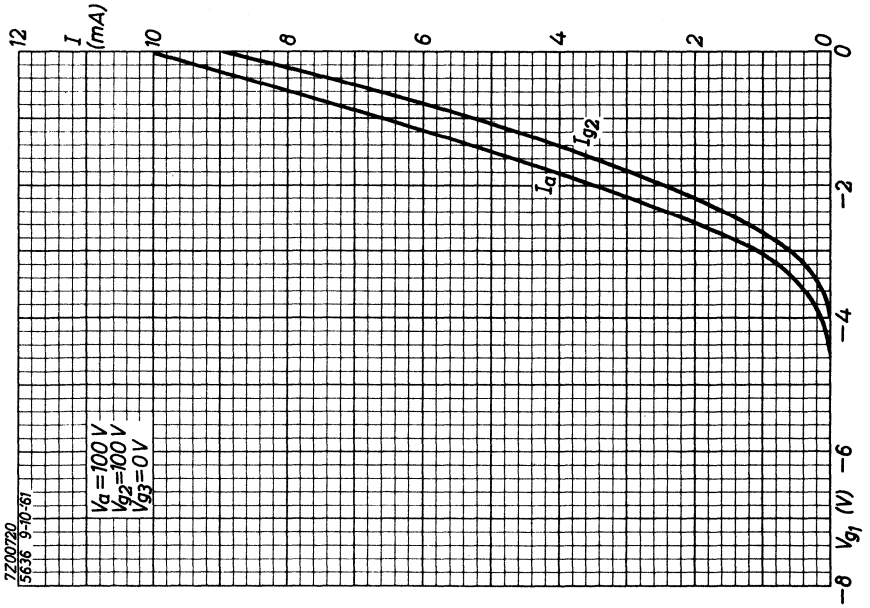



### S.Q. OUTPUT PENTODE





Special quality pentode designed for use as output tube and video amplifier.

QUICK REFERENCE DATA	
Life test	1000 hours
Mechanical quality	Shock and vibration resistant
Base	Subminiature
Heating	Indirect A.C. or D.C., parallel supply
Heater voltage	$V_f$ 6.3 V
Heater current	$I_f$ 450 mA
Mutual conductance	S 9 mA/V
Anode current	$I_a$ 21 mA

#### DIMENSIONS AND CONNECTIONS

Base: Subminiature

Dimensions in mm



Connections should not be soldered nearer than 5 mm to the seal.  
Leads should not be bent nearer than 1.5 mm to the seal.

**CHARACTERISTICS**

- Column I Nominal value or setting of the tube
- II Range values for equipment design: Initial spread
- III Range values for equipment design: End of life value

		I	II	III	
Heater voltage	$V_f$	6.3			V
Heater current	$I_f$	450	420-480		mA
Anode voltage	$V_a$	150			V
Grid No.2 voltage	$V_{g2}$	100			V
Cathode resistor	$R_k$	100			$\Omega$
Anode current	$I_a$	21	14-28		mA
Grid No.2 current	$I_{g2}$	4.0	2-6		mA
Mutual conductance	S	9.0	7.5-10.5	$\Delta S$ : max. 20%	mA/V
Internal resistance	$R_i$	50			k $\Omega$
<u>Negative grid No.1 current</u>	$-I_{g1}$		max. 1.0	max. 2.0	$\mu A$
Grid No.1 resistor $R_{g1} = 1 M\Omega$					
<u>Grid No.1 cut-off voltage</u>	$-V_{g1}$	14			
Anode voltage	$V_a$	150			V
Grid No.2 voltage	$V_{g2}$	100			V
Anode current	$I_a$		max. 75		$\mu A$
<u>Leakage current between cathode and heater</u>	$I_{kf}$		max. 15	max. 60	$\mu A$
Voltage between cathode and heater $V_{kf} = 100 V$					
<u>Insulation resistance between two electrodes</u>	$R_{ins}$		min. 100	min. 50	M $\Omega$
Voltage between electrodes $V = 100 V$					

**CHARACTERISTICS** (continued)

	I	II	III	
<u>Vibrational noise output</u>	$V_o$	max. 100		$mV_{eff}$
Anode supply voltage	$V_{ba}$	150		V
Anode resistor	$R_a$	2		$k\Omega$
Grid No.2 voltage	$V_{g2}$	100		V
Cathode resistor	$R_k$	100		$\Omega$
Cathode by pass capacitor $C_k = 1000 \mu F$				
Grid No.1 resistor $R_{g1} = 0.1 M\Omega$				
Vibration frequency = 40 Hz				
Acceleration = 15 g				

**CAPACITANCES** With external shield, inside diameter 10.3 mm

	I	II	
Grid No.1 to grid No.2, grid No.3, cathode and heater	$C_{g1/g2} k_{g3f}$	9	8-10 pF
Anode to grid No.2, grid No.3, cathode and heater	$C_a/g2 k_{g3f}$	8	7-9 pF
Anode to grid No.1	$C_{ag1}$		max.0.13 pF

**SHOCK AND VIBRATION RESISTANCE**

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of  $30^\circ$ .

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

**LIFE**

Production samples are tested to be within the end of life values (column III) during 1.000 hours.

**LIMITING VALUES** (Absolute max. rating system)


Anode voltage	$V_{a_0}$	max.	330 V
Anode voltage	$V_a$	max.	165 V
Anode dissipation	$W_a$	max.	4 W
Grid No.2 voltage	$V_{g_2}$	max.	155 V
Grid No.2 dissipation	$W_{g_2}$	max.	1 W
Grid No.1 voltage	$V_{g_1}$	max.	0 V
Grid No.1 negative voltage	$-V_{g_1}$	max.	55 V
Grid No.1 resistor with fixed bias	$R_{g_1}$	max.	100 k $\Omega$
with automatic bias	$R_{g_1}$	max.	500 k $\Omega$
Cathode current	$I_k$	max.	40 mA
Voltage between cathode and heater, d.c. component	$V_{kf}$	max.	200 V
peak value	$V_{kfp}$	max.	200 V
Bulb temperature	$t_{bulb}$	max.	220 $^{\circ}\text{C}$


Heater voltage: The average heater voltage should be 6.3 V

Variations of the heater voltage exceeding the range of 6.0 to 6.6 V will shorten the tube life.

**OPERATING CHARACTERISTICS**Output tube class A

Anode voltage	$V_a$	150 V
Grid No.2 voltage	$V_{g_2}$	100 V
Cathode resistor	$R_k$	100 $\Omega$
Load resistance	$R_{a\sim}$	9 k $\Omega$
Input voltage	$V_i$	2 $V_{\text{RMS}}$
Output power	$W_o$	1 W

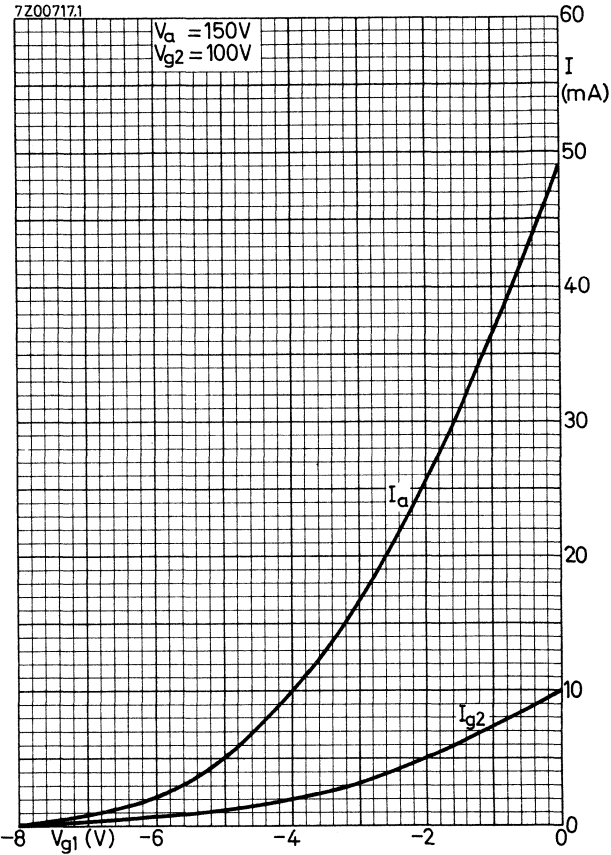

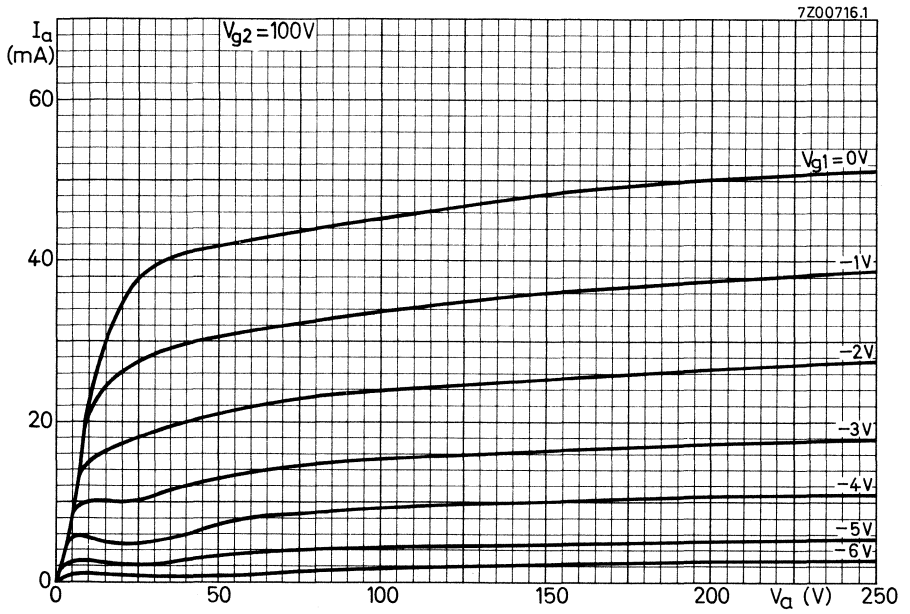

## S.Q. TUBE

Single anode rectifier for use in the E.H.T. supply of oscilloscopes.


### QUICK REFERENCE DATA

Life test	500 hours
Heater voltage	$V_f$ 1.25 V
Heater current	$I_f$ 200 mA
Heating	Direct A.C. or D.C.
Peak inverse voltage	$V_{a\text{inv}p}$ 10 kV
Anode current	$I_a$ 250 $\mu\text{A}$

### DIMENSIONS AND CONNECTIONS

Dimensions in mm

Connections: Flying leads

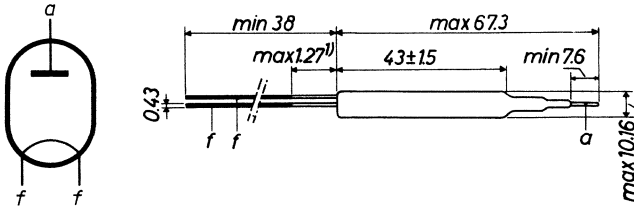


### CAPACITANCES

Anode to filament

$C_{af}$

0.6 pF

<sup>1)</sup> Not tinned

**LIMITING VALUES** Design centre rating system

Anode peak inverse voltage	$V_{a_{invp}}$	max.	10 kV
Anode current	$I_a$	max.	250 $\mu$ A
Anode peak current	$I_{ap}$	max.	5 mA
Pulse duration max. 10 $\mu$ sec			
Duty factor max. 0.15			
Anode peak current	$I_{ap}$	max.	1.5 mA
Sine wave input			
Frequency min. 5 kHz			



## S.Q. TUBE

Special quality pentode designed for use as wide-band amplifier.




### QUICK REFERENCE DATA

Life test	1000 hours	
Mechanical quality	Shock and vibration resistant	
Base	Miniature 7 pin	
Heating	Indirect A.C. or D.C.; parallel supply	
Heater voltage	$V_f$	6.3 V
Heater current	$I_f$	175 mA
Mutual conductance	S	5 mA/V
Sharp cut off		

### DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Miniature 7 pin

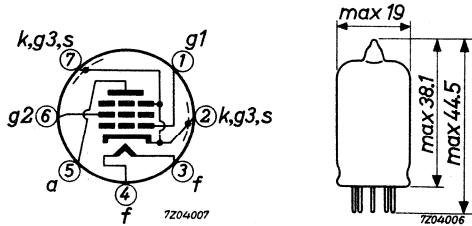

## CHARACTERISTICS

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

		I	II	
Heater voltage	$V_f$	6.3		V
Heater current	$I_f$	175	160 - 190	mA
Anode voltage	$V_a$	120		V
Grid No.2 voltage	$V_{g2}$	120		V
Grid No.1 voltage	$-V_{g1}$	2		V
Anode current	$I_a$	7.5	5 - 11	mA
Grid No.2 current	$I_{g2}$	2.5	0.8 - 4.0	mA
Mutual conductance	S	5	3.8 - 6.2	mA/V
Internal resistance	$R_i$	0.34		$M\Omega$
Negative grid current	$-I_{g1}$		max. 0.1	$\mu A$
Anode supply voltage	$V_{ba}$	120		V
Grid No.2 voltage	$V_{g2}$	120		V
Anode resistor	$R_a$	0.1		$M\Omega$
Grid No.1 voltage	$-V_{g1}$	10		V
Anode current	$I_a$		max. 200	$\mu A$
<u>Grid No.1 cut off voltage</u>	$-V_{g1}$	8.5		V
Anode voltage	$V_a$	120		V
Grid No.2 voltage	$V_{g2}$	120		V
Anode current	$I_a$	10		$\mu A$
<u>Leakage current between cathode and heater</u>	$I_{kf}$		max. 10	$\mu A$
Voltage between cathode and heater $V_{kf} = 100$ V				
<u>Insulation resistance between two electrodes</u>	R		min. 100	$M\Omega$

**CAPACITANCES.** With external shield

	I	II	
Grid No.1 to grid No.2, grid No.3 cathode and heater	$C_{g_1/g_2g_3kf}$ 4.0	3.4 - 4.6	pF
Anode to grid No.2, grid No.3 cathode and heater	$C_{a/g_2g_3kf}$ 2.85	2.45 - 3.25	pF
Anode to grid No.1	$C_{ag_1}$	max. 0.02	pF
Grid No.1 to grid No.2	$C_{g_1g_2}$ 1.4		pF

**SHOCK AND VIBRATION RESISTANCE**

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

**LIFE**

Production samples are tested to be within the end of life values (column III) during 1000 hours.

**LIMITING VALUES** (Absolute max. rating system)


Anode voltage	$V_{a_0}$	max. 600 V
	$V_a$	max. 200 V
Grid No.2 voltage	$V_{g_{2_0}}$	max. 600 V
	$V_{g_2}$	max. 155 V
Grid No.1 voltage	$-V_{g_1}$	max. 50 V
	$+V_{g_1}$	max. 0 V
Anode dissipation	$W_a$	max. 1.65 W
Grid No.2 dissipation	$W_{g_2}$	max. 0.55 W
Cathode current	$I_k$	max. 20 mA
Grid No.1 current	$I_{g_1}$	max. 1 mA
Grid No.1 resistor	$R_{g_1}$	max. 0.1 M $\Omega$
Voltage between cathode and heater	$V_{kf}$	max. 135 V
Bulb temperature	$t_{bulb}$	max. 165 °C <sup>1)</sup>

Heater voltage: The average heater voltage should be 6.3 V.

Variations of the heater voltage exceeding the range of 5.7 V to 7.0 V will shorten the tube life.

The tolerance of heater current (column II) should be taken into account.

<sup>1)</sup> Tube life and reliability of performance will be enhanced by operation at lower temperatures.

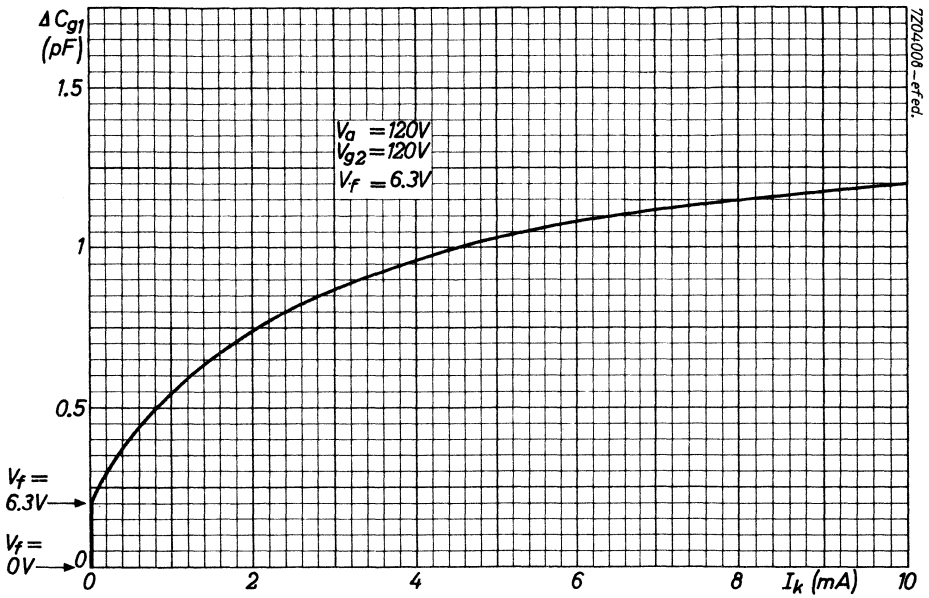



**S.Q. TRIODE**

Special quality triode designed for use as R.F. amplifier, oscillator (max. frequency 1000 MHz), and AF amplifier.

**QUICK REFERENCE DATA**



Life test	500 hours	
Mechanical quality	Shock and vibration resistant	
Base	Subminiature	
Heating	Indirect	
	A.C. or D.C., Parallel supply	
Heater voltage	$V_f$	6.3 V
Heater current	$I_f$	150 mA
Anode current	$I_a$	13 mA
Mutual conductance	S	6.5 mA/V

**DIMENSIONS AND CONNECTIONS**

Base : Subminiature

Dimensions in mm

Socket: B1 506 81



Connections should not be soldered nearer than 5 mm to the seal.

Leads should not be bent nearer than 1.5 mm to the seal.

On request the tube can also be delivered with shortened leads of 4.7-5.4 mm.

## CHARACTERISTICS

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage	$V_f$	6.3			V
Heater current	$I_f$	150	138 - 162		mA
Anode voltage	$V_a$	100			V
Cathode resistor	$R_k$	150			$\Omega$
Anode current	$I_a$	8.5	6 - 11		mA
Mutual conductance	S	5.8	4.8 - 6.8	$\Delta S: \text{max. } 20\%$	mA/V
Internal resistance	$R_i$	4.65			k $\Omega$
Amplification factor	$\mu$	27	23 - 31		-
Anode voltage	$V_a$	100			V
Negative grid voltage	$-V_g$		max. 7		V
Anode current	$I_a$	100			$\mu A$
<u>Cut off voltage</u>	$-V_g$	7			V
Anode voltage	$V_a$	100			V
Anode current	$I_a$	10			$\mu A$
Anode voltage	$V_a$	150			V
Cathode resistor	$R_k$	180			$\Omega$
Anode current	$I_a$	13			mA
Mutual conductance	S	6.5			mA/V
Internal resistance	$R_i$	4.15			k $\Omega$
Amplification factor	$\mu$	27			-
Negative grid current ( $R_k = 380 \Omega$ )	$-I_g$		max. 0.4	max. 0.6	$\mu A$
<u>Cut off voltage</u>	$-V_g$	11			V
Anode voltage	$V_a$	150			V
Anode current	$I_a$	10			$\mu A$



**CHARACTERISTICS** (continued)

	I	II	III	
<u>Leakage current between cathode and heater</u>				
$I_{kf}$			max. 10	$\mu A$
Voltage between cathode and heater = 100 V				
<u>Insulation between two electrodes</u>				
$R_{ins}$			min. 50	$M\Omega$

**CAPACITANCES**

		With external shield		Without shield		
		I		I	II	
Anode to cathode and heater	$C_{a/kf}$	2.4		0.7	0.5 - 0.9	pF
Grid to cathode and heater	$C_{g/kf}$	2.4		2.2	1.6 - 2.8	pF
Anode to grid	$C_{ag}$	1.3		1.45	1.1 - 1.8	pF

**SHOCK AND VIBRATION RESISTANCE**

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of  $30^\circ$ .

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

**LIFE**

Production samples are tested to be within the end of life values (column III) under the following conditions during 500 hours:

Anode voltage	$V_a$	=	100 V
Cathode resistor	$R_k$	=	150 $\Omega$
Grid resistor	$R_g$	=	1 $M\Omega$
Voltage between cathode and heater (cath. neg.)	$V_{kf}$	=	200 V

**LIMITING VALUES** (Absolute max. rating system)

Anode voltage	$V_a$	max.	165 V
Grid voltage	$-V_g$	max.	55 V
Anode dissipation	$W_a$	max.	3.3 W
Anode current	$I_a$	max.	22 mA
Grid current	$I_g$	max.	5.5 mA
Grid resistor	$R_g$	max.	1.2 M $\Omega$
Voltage between cathode and heater	$V_{kf}$	max.	200 V
Bulb temperature <sup>1)</sup>	$t_{bulb}$	max.	250 °C

Heater voltage: The average heater voltage should be 6.3 V.

Variations of the heater voltage exceeding the range of 6.0 V to 6.6 V will shorten the tube life.

The tolerance of heater current (column II) should be taken into account.

**OPERATING CHARACTERISTICS**As R.F. amplifier

Anode voltage	$V_a$	100	150 V
Cathode resistor	$R_k$	150	180 $\Omega$
Anode current	$I_a$	8.5	13 mA
Mutual conductance	$S$	5.8	6.5 mA/V

As oscillator

Anode voltage	$V_a$	150	V
Anode current	$I_a$	20	mA
Output power	$W_o$	0.9	W
Frequency	$f$	500	MHz

<sup>1)</sup> In the interest of optimum life performance it is recommended to reduce the bulb temperature by fixing the bulb directly to the chassis with a metal clamp. (ZE1100)

**OPERATING CHARACTERISTICS (continued)**

As A.F. amplifier Fig.1

Anode supply voltage	$V_b$	100	200	100	200	100	200	V
Anode resistor	$R_a$	47	47	100	100	270	270	$k\Omega$
Grid resistor	$R_g$	270	270	270	270	270	270	$k\Omega$
Grid resistor next stage	$R_g$	100	100	270	270	470	470	$k\Omega$
Cathode resistor	$R_k$	1.0	0.82	2.2	1.8	8.2	5.6	$k\Omega$
Input voltage	$V_i$	0.5	1.0	0.5	1.0	0.5	1.0	$V_{RMS}$
Voltage gain	$V_o/V_i$	16.4	19.0	16.4	18.6	14.8	16.2	-
Total distortion	$d_{tot}$	3.9	4.0	3.0	3.2	2.8	3.2	%





Fig.1



**S.Q. TUBE**

Special quality triode designed for use as A.F. amplifier


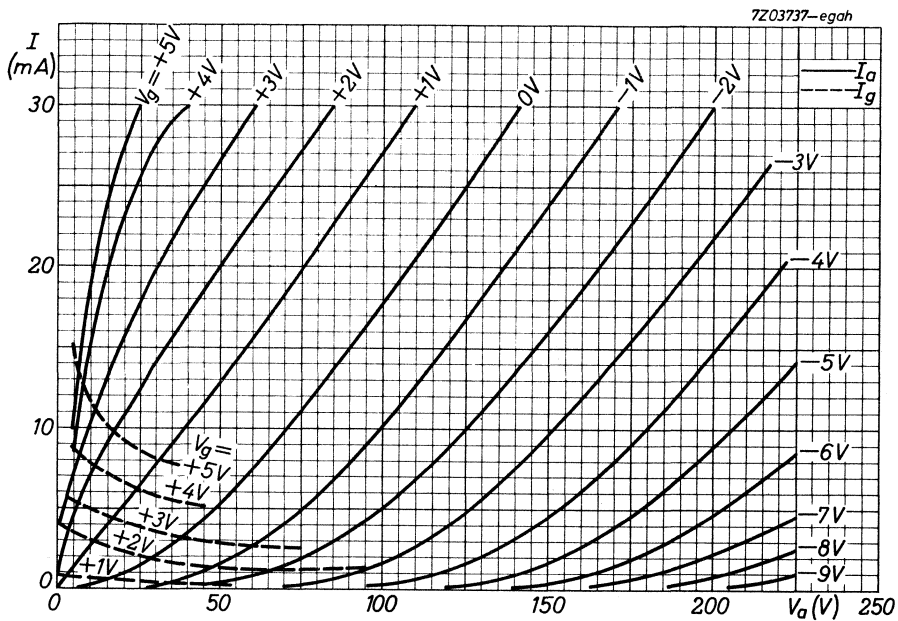


QUICK REFERENCE DATA		
Life test	1000 hours	
Mechanical quality	Shock and vibration resistant	
Base	Subminiature	
Heating	Indirect A.C. or D.C.; parallel supply	
Heater voltage	$V_f$	6.3 V
Heater current	$I_f$	150 mA
Mutual conductance	S	2.3 mA/V
Amplification factor	$\mu$	70

**DIMENSIONS AND CONNECTIONS**

Dimensions in mm

Base: Subminiature



Leads should not be soldered nearer than 5 mm to the seal.  
 Leads should not be bent nearer than 2 mm to the seal.

## CHARACTERISTICS

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage	$V_f$	6.3			V
Heater current	$I_f$	150	140 - 160		mA
Anode supply voltage	$V_{ba}$	100			V
Cathode resistor	$R_k$	1500			$\Omega$
Anode current	$I_a$	0.73	0.5 - 0.9		mA
Mutual conductance	S	1.7	1.4 - 2.0	min. 1.1	mA/V
Internal resistance	$R_i$	41			k $\Omega$
Amplification factor	$\mu$	70	60 - 80		
<u>Cut-off voltage</u>	$-V_g$	2.5			V
Anode current	$I_a$		max. 50		$\mu A$
Grid voltage	$-V_g$	1.8			V
Anode current	$I_a$		min. 5		$\mu A$
<u>Negative grid current</u>	$-I_g$		max. 0.3	max. 0.6	$\mu A$
Anode supply voltage					
$V_{ba} = 150$ V					
Cathode resistor $R_k = 2700$ $\Omega$					
Anode supply voltage	$V_{ba}$	150			V
Cathode resistor	$R_k$	680			$\Omega$
Anode current	$I_a$	1.85			mA
Mutual conductance	S	2.3			mA/V
Amplification factor	$\mu$	70			
Internal resistance	$R_i$	30.5			k $\Omega$
<u>Leakage current between cathode and heater</u>	$I_{kf}$		max. 5		$\mu A$
Voltage between cathode and heater $V_{kf} = 100$ V					

**CHARACTERISTICS** (continued)Insulation resistance  
between electrodes

	I	II	III	
$R_{ins}$		min. 100	min. 25	$M\Omega$

Voltage between electrodes  
= 100 V

Vibrational noise output

$V_o$		max. 25		mV
-------	--	---------	--	----

Anode supply voltage  $V_{ba} = 100$  V

Anode resistor  $R_a = 10$  k $\Omega$

Cathode by-pass capacitor  $C_k = 1000$  pF

Vibration frequency = 40 Hz

Acceleration = 15 g

**CAPACITANCES**

Anode to cathode and heater

	I	II	
$C_{a/kf}$	0.6	0.4 - 0.8	pF
$C_{g/kf}$	1.7	1.2 - 2.2	pF
$C_{ag}$	0.8	0.6 - 1.0	pF

Grid to cathode and heater

Anode to grid

**SHOCK AND VIBRATION RESISTANCE**

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

**LIFE**

Production samples are tested to be within the end of life values (column III) under the following conditions during 1000 hours.

Anode supply voltage	$V_{ba}$	150 V
Cathode resistor	$R_k$	680 $\Omega$
Grid resistor	$R_g$	1 M $\Omega$
Voltage between cathode and heater (k pos)	$V_{kf}$	200 V

**LIMITING VALUES** (Absolute max. rating system)

Anode voltage	$V_{a0}$	max. 330 V
	$V_a$	max. 165 V
Grid voltage	$-V_g$	max. 55 V
	$+V_g$	max. 0 V
Anode dissipation	$W_a$	max. 0.55 W
Anode current	$I_a$	max. 3.3 mA
Peak voltage between cathode and heater	$V_{kfp}$	max. 200 V
Bulb temperature	$t_{bulb}$	max. 220 $^{\circ}\text{C}$
Heater voltage	$V_f$	min. 6.0 V
		max. 6.6 V



**OPERATING CHARACTERISTICS**

Anode supply voltage	$V_{ba}$	100	100	100	100	100	100	V
Cathode resistor	$R_k$	2.7	2.7	5.6	6.8	10	10	k $\Omega$
Anode resistor	$R_a$	0.1	0.1	0.27	0.27	0.47	0.47	M $\Omega$
Grid resistor	$R_g$	1.0	1.0	1.0	1.0	1.0	1.0	M $\Omega$
Grid resistor next stage	$R_g^*$	0.27	0.47	0.47	1.0	0.47	1.0	M $\Omega$
Voltage gain	$V_o/V_i$	37	39	41	42	40	43	
Total distortion	$dt_{tot}$	2.4	2.1	2.1	1.8	2.4	1.7	%



## OPERATING CHARACTERISTICS

Anode supply voltage	$V_{ba}$	200	200	200	200	200	200	V
Cathode resistor	$R_k$	1.5	1.8	3.3	3.9	5.6	6.8	$k\Omega$
Anode resistor	$R_a$	0.1	0.1	0.27	0.27	0.47	0.47	$M\Omega$
Grid resistor	$R_g$	1.0	1.0	1.0	1.0	1.0	1.0	$M\Omega$
Grid resistor next stage	$R_{g'}$	0.27	0.47	0.47	1.0	0.47	1.0	$M\Omega$
Voltage gain	$V_o/V_i$	44	46	49	50	48	50	
Total distortion	$d_{tot}$	0.7	0.7	0.9	0.7	0.9	0.7	%

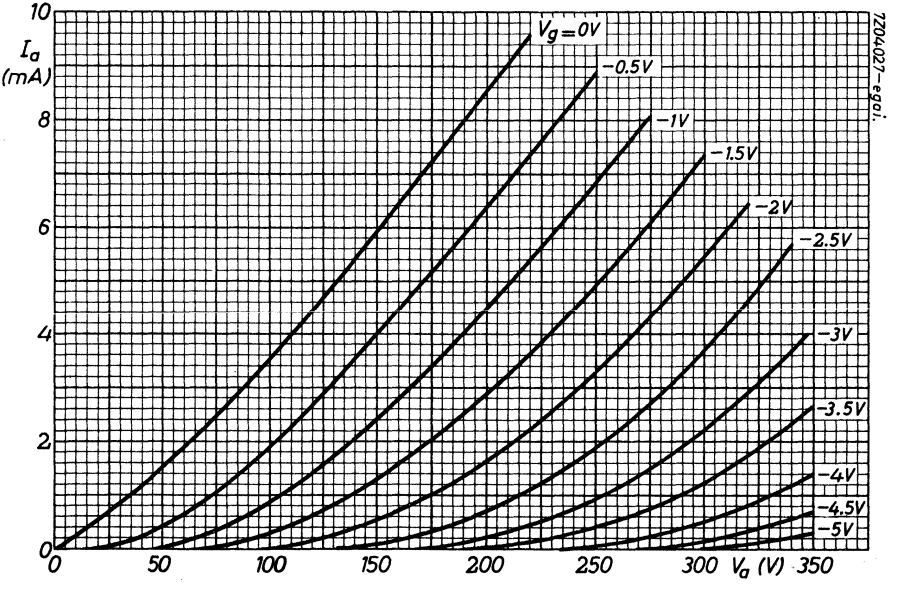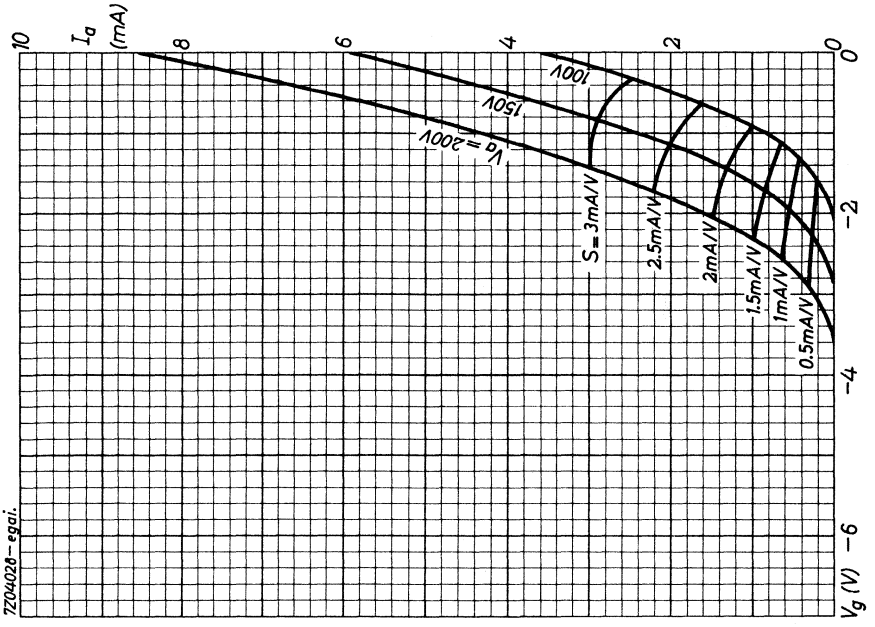

## S.Q. TUBE

Special quality pentode designed for use as R.F. amplifier.



### QUICK REFERENCE DATA

Life test	1000 hours	
Mechanical quality	Shock and vibration resistant	
Base	Miniature 7 pin	
Heating	Indirect A.C. or D.C.; parallel supply	
Heater voltage	$V_f$	6.3 V
Heater current	$I_f$	175 mA
Sharp cut-off		
Double control		

### DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Miniature 7 pin



CHARACTERISTICS

Column I Nominal value or setting of the tube  
 II Range values for equipment design: Initial spread  
 III Range values for equipment design: End of life

		I	II	III	
Heater voltage	$V_f$	6.3			V
Heater current	$I_f$	175	160 - 190		mA
Anode voltage	$V_a$	120			V
Grid No.2 voltage	$V_{g2}$	120			V
Grid No.3 voltage	$V_{g3}$	0			V
Grid No.1 voltage	$-V_{g1}$	2			V
Anode current	$I_a$	5.2	2.5 - 9.0		mA
Grid No.2 current	$I_{g2}$	3.5	max.5.5		mA
Mutual conductance, grid No.1	$S_{g1}$	3.2	2.5 - 4.5	$\Delta S$ max.20%	mA/V
Mutual conductance, grid No.3	$S_{g3}$	0.47			mA/V
Internal resistance	$R_i$	150			k $\Omega$
Negative grid No.1 current	$-I_{g1}$		max.0.1	max. 0.2	$\mu A$
Anode voltage	$V_a$	120			V
Grid No.2 voltage	$V_{g2}$	120			V
Grid No.3 voltage	$-V_{g3}$	3			V
Grid No.1 voltage	$-V_{g1}$	2			V
Anode current	$I_a$	3.6			mA
Grid No.2 current	$I_{g2}$	4.8			mA
Mutual conductance, grid No.1	$S_{g1}$	1.85			mA/V
Mutual conductance, grid No.3	$S_{g3}$	0.7			mA/V
Anode voltage	$V_a$	120			V
Grid No.2 voltage	$V_{g2}$	120			V
Grid No.3 voltage	$-V_{g3}$	5			V
Grid No.1 voltage	$-V_{g1}$	2			V
Mutual conductance, grid No.3	$S_{g3}$	1.2	0.7 - 1.7		mA/V

## CHARACTERISTICS (continued)

		I	II	III	
<u>Cut-off voltage</u>	$-V_{g1}$	8			V
Anode voltage	$V_a$	120			V
Grid No.2 voltage	$V_{g2}$	120			V
Grid No.3 voltage	$V_{g3}$	0			V
Anode current	$I_a$		max. 50		$\mu A$
<u>Cut-off voltage</u>	$-V_{g1}$	6			V
Anode voltage	$V_a$	120			V
Grid No.2 voltage	$V_{g2}$	120			V
Grid No.3 voltage	$V_{g3}$	0			V
Anode current	$I_a$		min. 5		$\mu A$
<u>Cut-off voltage</u>	$-V_{g1}$	3			V
	$-V_{g3}$	5.5			V
Anode voltage	$V_a$	120			V
Grid No.2 voltage	$V_{g2}$	120			V
Anode current	$I_a$		min. 5		$\mu A$
<u>Cut-off voltage</u>	$-V_{g1}$	3			V
	$-V_{g3}$	10			V
Anode voltage	$V_a$	120			V
Grid No.2 voltage	$V_{g2}$	120			V
Anode current	$I_a$		max. 50		$\mu A$
<u>Cut-off voltage</u>	$-V_{g1}$	2			V
	$-V_{g2}$	15			V
Anode voltage	$V_a$	120			V
Grid No.2 voltage	$V_{g2}$	120			V
Anode current	$I_a$	10			$\mu A$
<u>Leakage current between cathode and heater</u>	$I_{kf}$		max. 10	max. 10	$\mu A$
Voltage between cathode and heater $V_{kf} = 100$ V					
Cathode negative					

**CHARACTERISTICS** (continued)

Vibrational noise

$V_o$

- Anode voltage  $V_a = 120$  V
- Grid No.2 voltage  $V_{g_2} = 120$  V
- Grid No.1 voltage  $-V_{g_1} = 2$  V
- Grid No.3 voltage  $V_{g_3} = 0$  V
- Anode resistor  $R_a = 10$  k $\Omega$
- Vibration frequency = 50 Hz
- Acceleration = 10 g

	I	II	
		max.150	mV

**CAPACITANCES** With external screen

- Anode to grid No.3, grid No.2, cathode, heater and screen
- Grid No.1 to grid No.3, grid No.2, cathode, heater and screen
- Grid No.1 to grid No.3
- Anode to grid No.1
- Grid No.1 to grid No.3, grid No.2, cathode, heater and screen
- Cathode current  $I_k = 12$  mA
- Frequency = 100 MHz

$C_{a/g_3g_2}$ kfs	3.0	2.6 - 3.4	pF
$C_{g_1/g_3g_2}$ kfs	4.0	3.5 - 4.5	pF
$C_{g_1g_3}$		max.150	mpF
$C_{ag_1}$		max. 20	mpF
$C_{g_1/g_3g_2}$ kfs	5.5		pF

**SHOCK AND VIBRATION RESISTANCE**

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.



**LIFE**

Production samples are tested to be within the end of life values (column III) during 1000 hours.


**LIMITING VALUES** (Absolute max. rating system)



Anode voltage	$V_a$	max.	200	V
Grid No.2 voltage	$V_{g_2}$	max.	155	V
Grid No.3 voltage	$V_{g_3}$	max.	30	V
Anode dissipation	$W_a$	max.	1.85	W
Grid No.2 dissipation	$W_{g_2}$	max.	0.85	W
Cathode current	$I_k$	max.	20	mA
Voltage between cathode and heater	$V_{kf}$	max.	100	V
Grid resistor with fixed bias	$R_{g_1}$	max.	1	M $\Omega$
Bulb temperature	$t_{bulb}$	max.	165	$^{\circ}\text{C}$



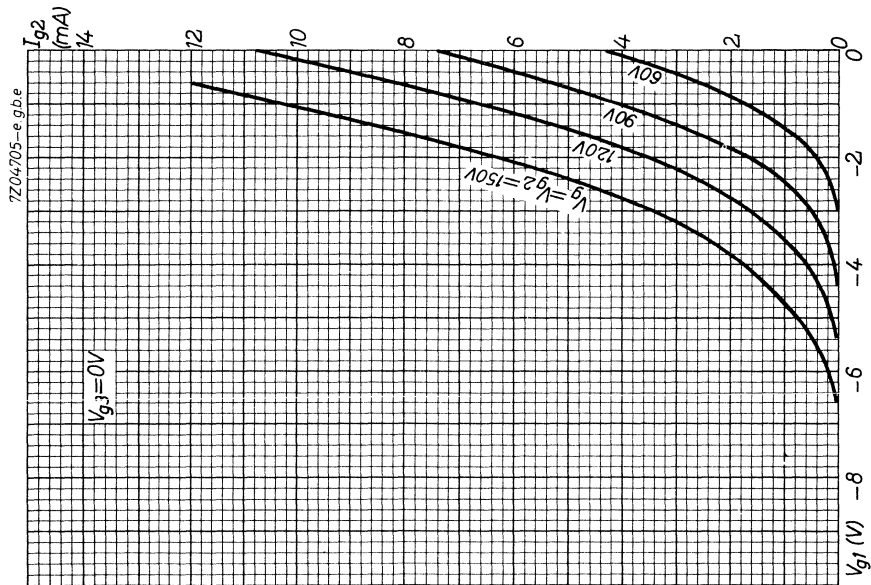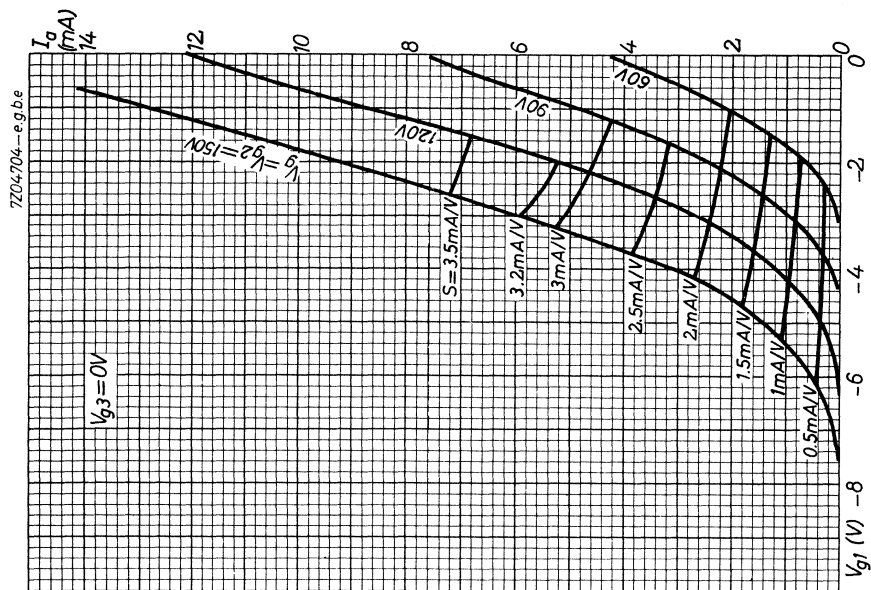



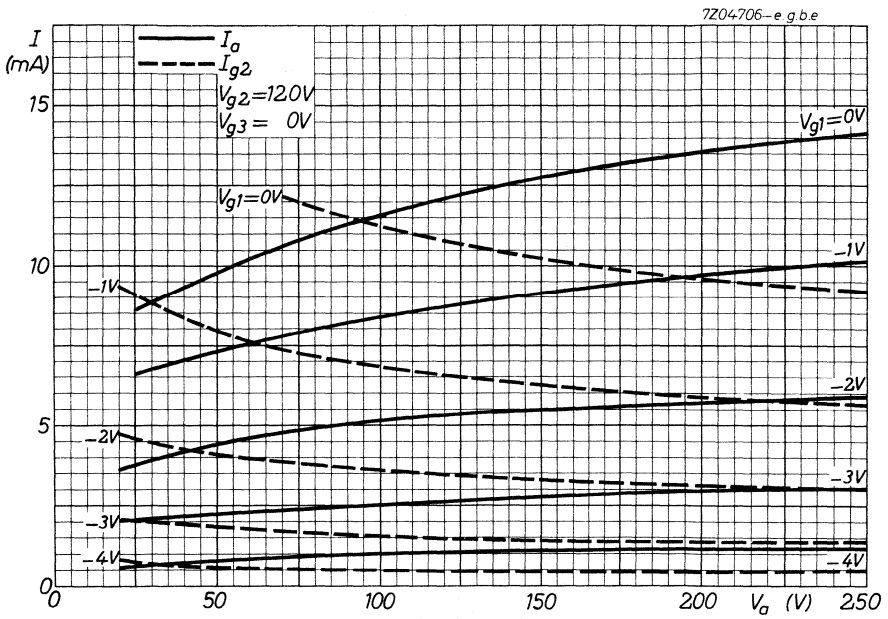

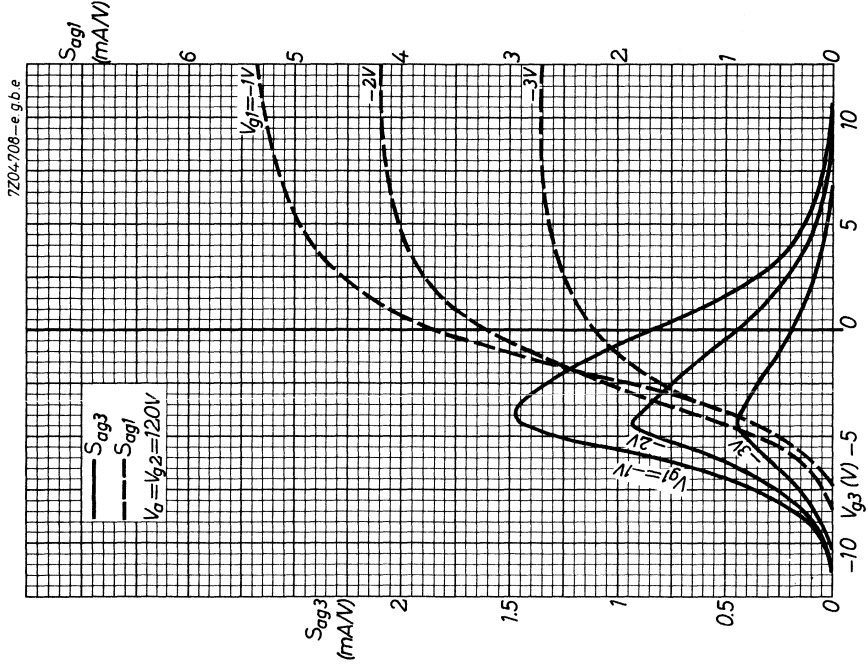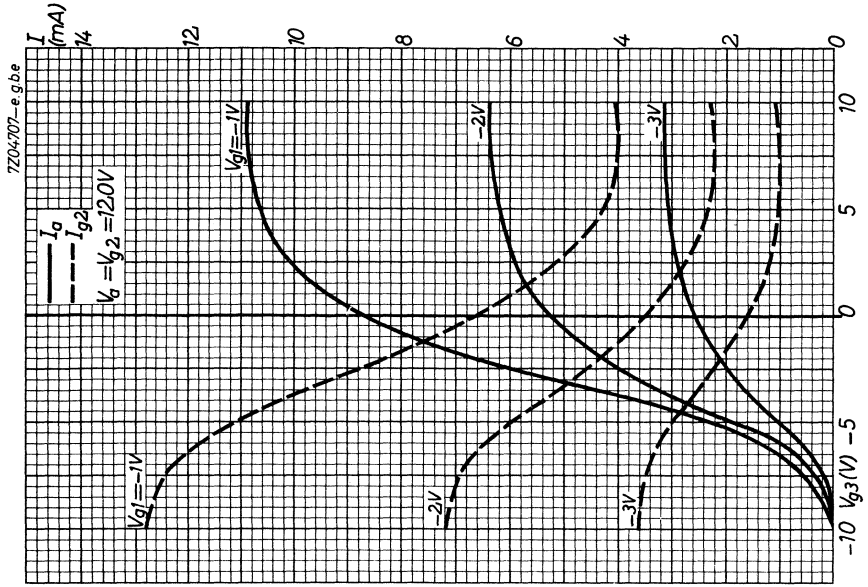

## S.Q. DOUBLE DIODE

Special quality double diode designed for use as detector or low-current power rectifier.


### QUICK REFERENCE DATA

Life test	1000 hours	
Mechanical quality	Shock and vibration resistant	
Base	Miniature 7 pin	
Heating	Indirect	
	A.C. or D.C.	
	Series or parallel supply	
Heater voltage	$V_f$	6.3 V
Heater current	$I_f$	300 mA
Diode current	$I_d$	10 mA
Inverse peak voltage	$V_{invp}$	360 V

### DIMENSIONS AND CONNECTIONS

Base: Miniature 7 pin

Dimensions in mm

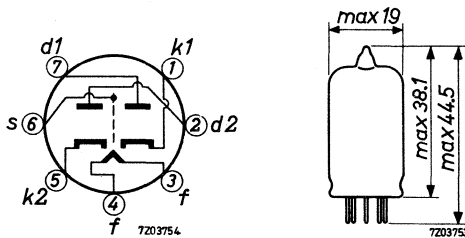

**CHARACTERISTICS** (both systems if applicable)

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

		I	II	
Heater voltage	$V_f$	6.3		V
Heater current	$I_f$	300	275 - 325	mA
<u>Diode current</u>	$I_d$		min. 40	mA
Diode voltage	$V_d$	10		V
<u>Diode current</u>	$I_{do}$		2 - 20	$\mu$ A
Diode voltage	$V_d$	0		V
Series resistor	R	40		k $\Omega$
<u>Difference in diode current</u>	$ I_d - I_d' $		max. 5	$\mu$ A
Diode voltage	$V_d$	0		V
Series resistor	R	40		k $\Omega$
<u>Leakage current between cathode and heater</u>	$I_{kf}$		max. 10	$\mu$ A
Voltage between cathode and heater $V_{kf} = 100$ V				
<u>Insulation resistance between two electrodes</u>	$R_{ins}$		min. 100	M $\Omega$
Voltage between electrodes = 300 V				
<u>Resonant frequency</u>		700		MHz
<b>CAPACITANCES</b>				
Diode to cathode heater and screen	$C_d/kfs$	3.2	2.4 - 4	pF
Cathode to diode heater and screen	$C_k/dfs$	3.9	3.1 - 4.7	pF
Diode No. 1 to diode No. 2	$C_{d_1d_2}$		max. 0.026	pF

**SHOCK AND VIBRATION RESISTANCE**

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 700 g supplied by an NRL shock machine with the hammer lifted over an angle of 45°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

**LIFE**

Production samples are tested during 1000 hours.

**LIMITING VALUES** (Absolute max. rating system) (Per system if applicable)

Inverse peak voltage	$V_{invp}$	max.	360 V
Diode current	$I_d$	max.	10 mA
Diode peak current	$I_{dp}$	max.	60 mA
Peak voltage between cathode and heater	$V_{kfp}$	max.	360 V
Bulb temperature	$t_{bulb}$	max.	165 °C

Heater voltage: The average heater voltage should be 6.3 V.


Variations of the heater voltage exceeding the range of 5.7 V to 7.0 V will shorten the tube life.


**OPERATING CHARACTERISTICS**As full wave power rectifier


A.C. supply voltage	$V_{tr}$	2 x 165	$V_{RMS}$
Capacitance	C	8	$\mu F$
Series resistor per diode	$R_s$	300	$\Omega$
Load resistor	$R_l$	11	$k\Omega$
D.C. current	$I_o$	min. 16	mA

As half wave rectifier (per system)

A.C. supply voltage	$V_{tr}$	117	$V_{RMS}$
Capacitance	C	8	$\mu F$
Series resistor	$R_s$	300	$\Omega$
D.C. current	$I_o$	9	mA

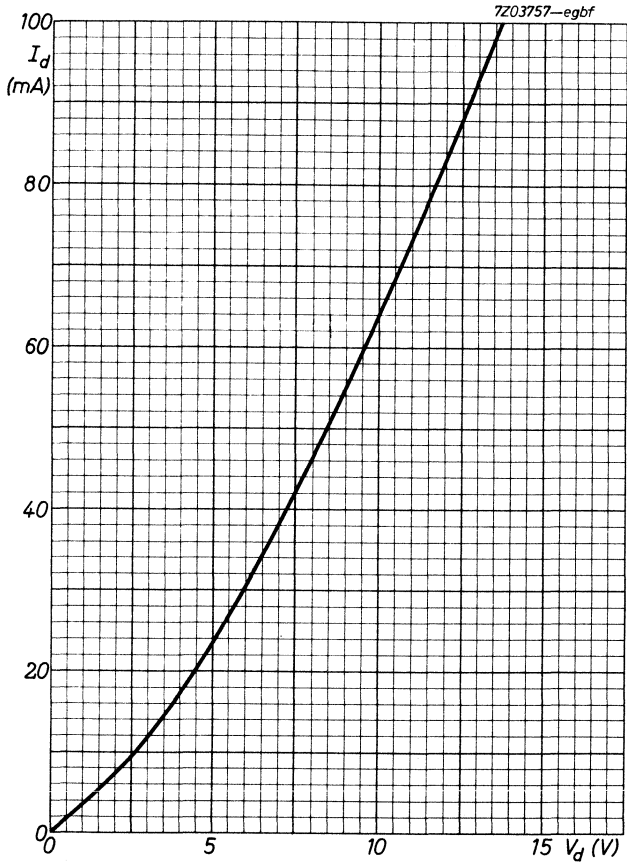

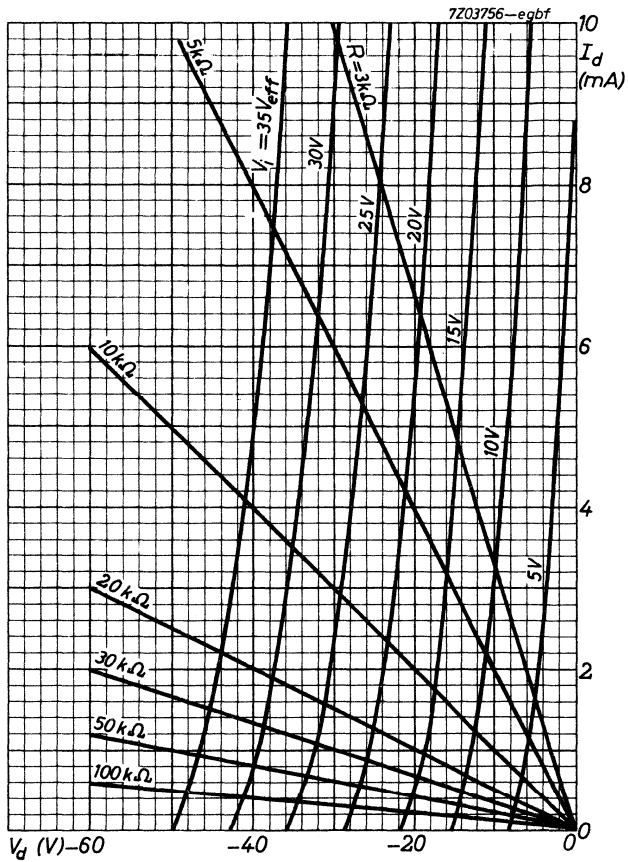

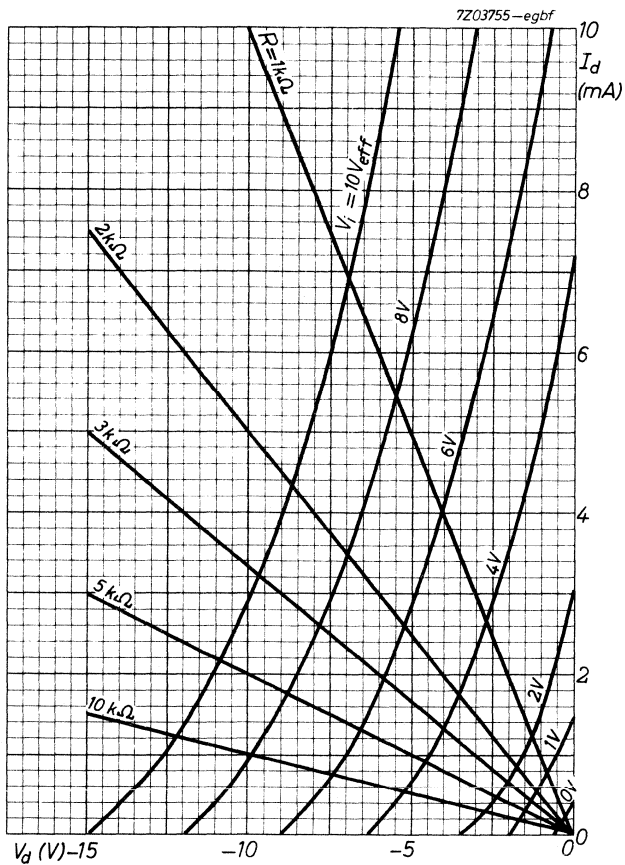



**S.Q. TUBE**





Special quality pentode designed for use A.F. and R.F. amplifier (max. frequency 400 MHz)

QUICK REFERENCE DATA		
Life test	1000 hours	
Mechanical quality	Shock and vibration resistant	
Base	Subminiature	
Heating	Indirect	
	A.C. or D.C.; parallel supply	
Heater voltage	$V_f$	6.3 V
Heater current	$I_f$	150 mA
Mutual conductance	S	5 mA/V
Anode current	$I_a$	7.5 mA

**DIMENSIONS AND CONNECTIONS**

Dimensions in mm

Base: Subminiature



Leads should not be soldered nearer than 5 mm to the seal

Leads should not be bent nearer than 2 mm to the seal.

## CHARACTERISTICS

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage	$V_f$	6.3			V
Heater current	$I_f$	150	140 - 160		mA
Anode supply voltage	$V_{ba}$	100			V
Grid No.2 supply voltage	$V_{bg_2}$	100			V
Cathode resistor	$R_k$	150			$\Omega$
Anode current	$I_a$	7.5	5.5 - 9.5		mA
Grid No.2 current	$I_{g_2}$	2.4	1.5 - 3.3		mA
Mutual conductance	S	5	4.2 - 5.8	min. 3.5	mA/V
Internal resistance	$R_i$	260	min. 175		k $\Omega$
Negative grid No.1 current	$-I_{g_1}$		max. 0.3	max. 0.8	$\mu$ A
<u>Cut-off voltage</u>	$-V_{g_1}$	9			V
Anode voltage	$V_a$	100			V
Grid No.2 voltage	$V_{g_2}$	100			V
Anode current	$I_a$	10	max. 50		$\mu$ A
<u>Leakage current between cathode and heater</u>	$I_{kf}$		max. 5	max. 10	$\mu$ A
Voltage between cathode and heater $V_{kf} = 100$ V					
<u>Vibrational noise output</u>	$V_o$		max. 60		mV <sub>RMS</sub>
Anode supply voltage $V_{ba} = 100$ V					
Grid No.2 supply voltage $V_{bg_2} = 100$ V					
Cathode resistor $R_k = 150$ $\Omega$					
Anode resistor $R_a = 10$ k $\Omega$					
Cathode by-pass capacitor $C_k = 1000$ $\mu$ F					
Vibration frequency = 50 Hz					
Acceleration = 15 g					
Insulation resistance					
a to all at V = 300 V	$R_{ins}$		min. 100		M $\Omega$
g <sub>1</sub> to all at V = 100 V	$R_{ins}$		min. 100		M $\Omega$

**CAPACITANCES**

		With external screen		Without external shield		
		I	II	I	II	
Anode to grid No. 2, cathode, heater and screen	$C_{a/g_2}$ kfs	3.4	2.9-3.9	1.9		pF
Grid No. 1 to grid No. 2, cathode, heater and screen	$C_{g_1/g_2}$ kfs	4.2	3.5-4.9	4.0		pF
Anode to grid No. 1	$C_{ag_1}$		max. 15		max. 30	mpF

**SHOCK AND VIBRATION RESISTANCE**

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

**LIFE**

Production samples are tested to be within the end of life values (column III) under the following conditions during 1000 hours.

Anode supply voltage	$V_{ba}$	100 V
Grid No. 2 supply voltage	$V_{bg_2}$	100 V
Cathode resistor	$R_k$	150 $\Omega$

**LIMITING VALUES** (Absolute max. rating system)

Anode voltage	$V_{a_0}$	max. 330 V
	$V_a$	max. 165 V
Grid No. 2 voltage	$V_{g_{20}}$	max. 330 V
	$V_{g_2}$	max. 155 V
Anode dissipation	$W_a$	max. 1.1 W
Grid No. 2 dissipation	$W_{g_2}$	max. 0.55 W

**LIMITING VALUES** (continued)

Cathode current	$I_k$	max. 16.5 mA
Grid No. 1 voltage	$-V_{g1}$	max. 55 V
Voltage between cathode and heater	$V_{kf}$	max. 200 V
Grid No. 1 resistor	$R_{g1}$	max. 1.1 M $\Omega$
Bulb temperature	$t_{bulb}$	max. 220 °C

**OPERATING CHARACTERISTICS** Fig. 1

Supply voltage	V	100	150	100	150	100	150	V
Anode resistor	$R_a$	100	100	270	270	470	470	k $\Omega$
Grid No. 2 resistor	$R_{g2}$	0.22	0.27	0.68	0.82	1.2	1.5	k $\Omega$
Grid No. 1 resistor	$R_{g1}$	0.27	0.27	0.47	0.47	1.0	1.0	M $\Omega$
Total distortion ( $V_i = 0.1 V_{RMS}$ )	$d_{tot}$	2.8	1.5	2.5	2.4	2.3	3.0	%
Voltage gain ( $V_i = 0.1 V_{RMS}$ )	$V_o/V_i$	82	115	95	132	117	167	
Total distortion ( $I_{g1} = 0.3 \mu A$ )	$d_{tot}$	4.9	4.8	4.7	4.9	5.0	4.8	%
Voltage gain ( $I_{g1} = 0.3 \mu A$ )	$V_o/V_i$	77	109	91	128	114	159	
Input voltage ( $I_{g1} = 0.3 \mu A$ )	$V_i$	0.23	0.2	0.15	0.16	0.14	0.14	$V_{RMS}$



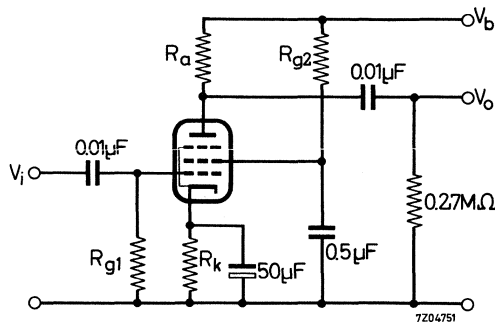


Fig. 1

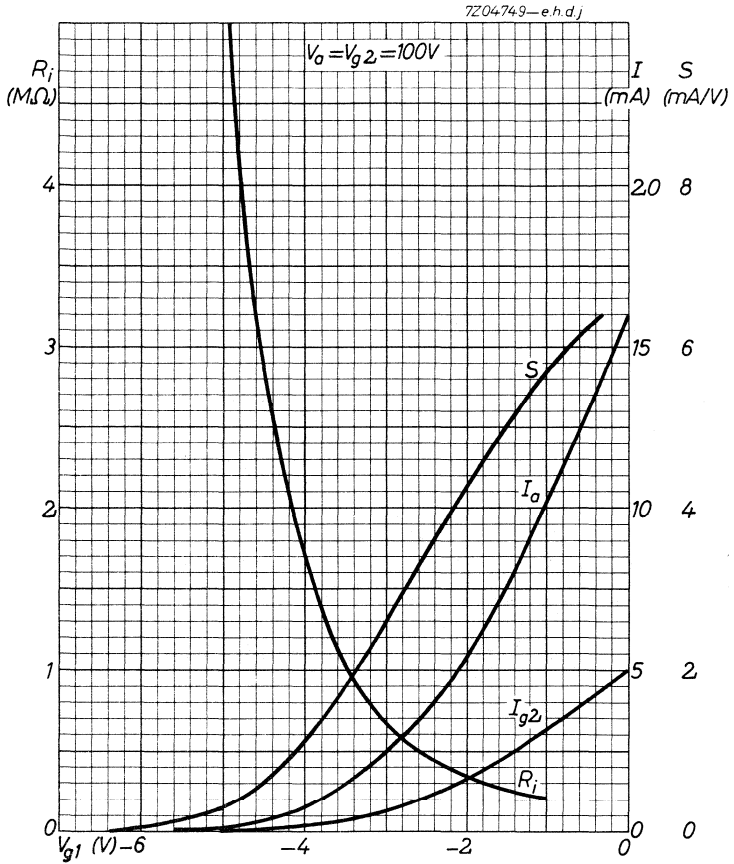

7204750-e h.d.j

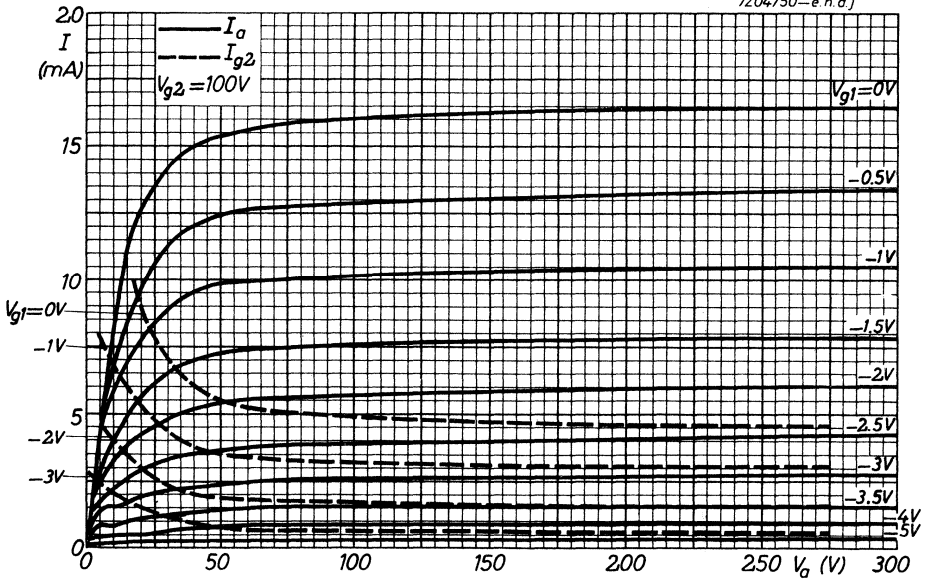

**S.Q. TUBE**

Special quality triode designed for use as grounded grid H.F. and I.F. wide band amplifier.




QUICK REFERENCE DATA	
Life test	1000 hours
Low interface resistance	
Mechanical quality	Shock and vibration resistant
Base	Noval
Heating	Indirect A.C. or D.C.; Parallel supply
Heater voltage	$V_f$ 6.3 V
Heater current	$I_f$ 300 mA
Anode current	$I_a$ 26 mA
Transconductance	S 24 mA/V

**DIMENSIONS AND CONNECTIONS**

Dimensions in mm

Base: Noval

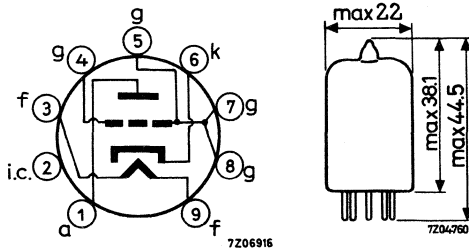

**CHARACTERISTICS**

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

		I	II	
Heater voltage	$V_f$	6.3		V
Heater current	$I_f$	300	280 - 320	mA
Anode supply voltage	$V_a$	150		V
Cathode resistor	$R_k$	60		$\Omega$
Anode current	$I_a$	26	19 - 33	mA
Mutual conductance	S	24	19 - 29	mA/V
Amplification factor	$\mu$	50		
Negative grid current	$-I_g$		max. 0.2	$\mu A$
Cut-off voltage	$-V_g$	10		V
Anode current $I_a = \text{max. } 100 \mu A$				
<u>Leakage current between cathode and heater</u>	$I_{kf}$		max. 15	$\mu A$
Voltage between cathode and heater $V_{kf}(\text{cath. pos.}) = 100 \text{ V}$				
<u>Insulation resistance between electrodes</u>	$R_{ins}$		min. 100	$M\Omega$
Voltage between electrodes = 300 V				
<u>Vibrational noise output</u>	$V_o$		max. 100	mV
Anode supply voltage $V_{ba} = 150 \text{ V}$				
Anode resistor $R_a = 2 \text{ k}\Omega$				
Negative grid voltage $-V_g = 2 \text{ V}$				
Vibration frequency = 20-2000 Hz				
Acceleration = 4 g				



**CAPACITANCES**

	I	II	
Anode to cathode and heater	$C_{a/kf}$	max. 0.55	pF
Cathode to grid and heater	$C_{k/gf}$	8 - 10	pF
Anode to grid and heater	$C_{a/gf}$	1.5 - 1.95	pF

**SHOCK AND VIBRATION RESISTANCE**

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

**LIFE**

Production samples are tested during 1000 hours.

**LIMITING VALUES** Absolute maximum rating system

Anode voltage	$V_{a_0}$	max.	400 V
	$V_a$	max.	200 V
Anode dissipation	$W_a$	max.	4.5 W
Grid voltage	$-V_g$	max.	50 V
Grid peak voltage	$-V_{gp}$	max.	100 V
Cathode current	$I_k$	max.	38 mA
Voltage between cathode and heater	$V_{kf}$	max.	60 V
Bulb temperature	$t_{bulb}$	max.	160 °C
Grid resistor: fixed bias	$R_g$	max.	0.15 MΩ
	$R_g$	max.	0.3 MΩ

Heater voltage: The average heater voltage should be 6.3 V.

Variations of the heater voltage exceeding the range of 6.0 to 6.6 V will shorten the tube life.

The tolerance of heater current (column II) should be taken into account.



**S.Q. TUBE**

Special quality pentode designed for use as controlled R.F. or I.F. amplifier (max. freq. 400 MHz).


**QUICK REFERENCE DATA**

Life test	1000 hours	
Mechanical quality	Shock and vibration resistant	
Base	Subminiature	
Heating	Indirect A.C. or D.C.; parallel supply	
Heater voltage	$V_f$	6.3 V
Heater current	$I_f$	150 mA
Anode current	$I_a$	7.2 mA
Mutual conductance	S	4.5 mA/V

**DIMENSIONS AND CONNECTIONS**

Dimensions in mm

Base: Subminiature

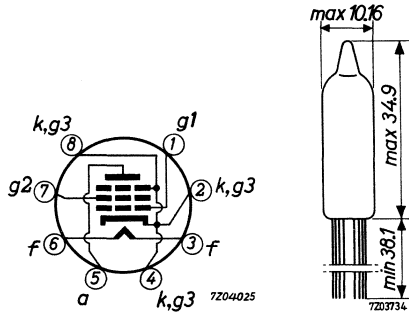

Leads should not be soldered nearer than 5 mm to the seal  
 Leads should not be bent nearer than 2 mm to the seal

## CHARACTERISTICS

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage	$V_f$	6.3			V
Heater current	$I_f$	150	140-160		mA
Anode voltage	$V_a$	100			V
Grid No.2 voltage	$V_{g2}$	100			V
Cathode resistor	$R_k$	120			$\Omega$
Anode current	$I_a$	7.2	5.2-9.2		mA
Grid No.2 current	$I_{g2}$	2.0	1.0-3.0		mA
Mutual conductance	S	4.5	3.8-5.2	$\Delta S$ max. 25%	mA/V
Internal resistance	$R_i$	260	min.175		k $\Omega$
Negative grid No.1 current	$-I_{g1}$		max.0.3	max. 0.8	$\mu A$
Mutual conductance	S	25	1 - 75		$\mu A/V$
Grid No.1 voltage	$-V_{g1}$	14			V
<u>Leakage current between cathode and heater</u>	$I_{kf}$		max. 5	max. 10	$\mu A$
Voltage between cathode and heater $V_{kf} = 100$ V					
Insulation resistance between electrodes	$R_{ins}$		min.100		M $\Omega$

## CHARACTERISTICS (continued)

		I	II	
<u>Vibrational noise output</u>	$V_o$		max. 60	$mV_{RMS}$
Anode supply voltage				
$V_{ba} = 100$ V				
Grid No.2 supply voltage				
$V_{bg_2} = 100$ V				
Cathode resistor $R_k = 120$ $\Omega$				
Anode resistor $R_a = 10$ $k\Omega$				
Grid No.1 resistor $R_{g_1} = 1$ $M\Omega$				
Cathode bypass capacitor				
$C_k = 1000$ $\mu F$				
Vibration frequency = 50 Hz				
Acceleration = 15 g				
<b>CAPACITANCES</b> With external shield				
Anode to grid No.2, cathode heater and screen	$C_{a/g_2kfs}$	3.4	2.9 - 3.9	pF
Grid No.1 to grid No.2, cathode heater and screen	$C_{g_1/g_2kfs}$	4.2	3.8 - 4.8	pF
Anode to grid No.1	$C_{ag_1}$		max. 15	mpF

**SHOCK AND VIBRATION RESISTANCE**

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of  $30^\circ$ .

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.


**LIFE**


Production samples are tested to be within the end of life values (column III) under the following conditions during 1000 hours.

Anode voltage	$V_a$	100 V
Grid No.2 voltage	$V_{g2}$	100 V
Cathode resistor	$R_k$	120 $\Omega$

**LIMITING VALUES** (Absolute max. rating system)

Anode voltage	$V_a$	max.	165 V
Grid No.2 voltage	$V_{g2}$	max.	155 V
Anode dissipation	$W_a$	max.	1.1 W
Grid No.2 dissipation	$W_{g2}$	max.	0.55 W
Cathode current	$I_k$	max.	16.5 mA
Voltage between cathode and heater	$V_{kf}$	max.	200 V
Grid No.1 resistor	$R_{g1}$	max.	1.2 $M\Omega$
Bulb temperature	$t_{bulb}$	max.	220 $^{\circ}C$

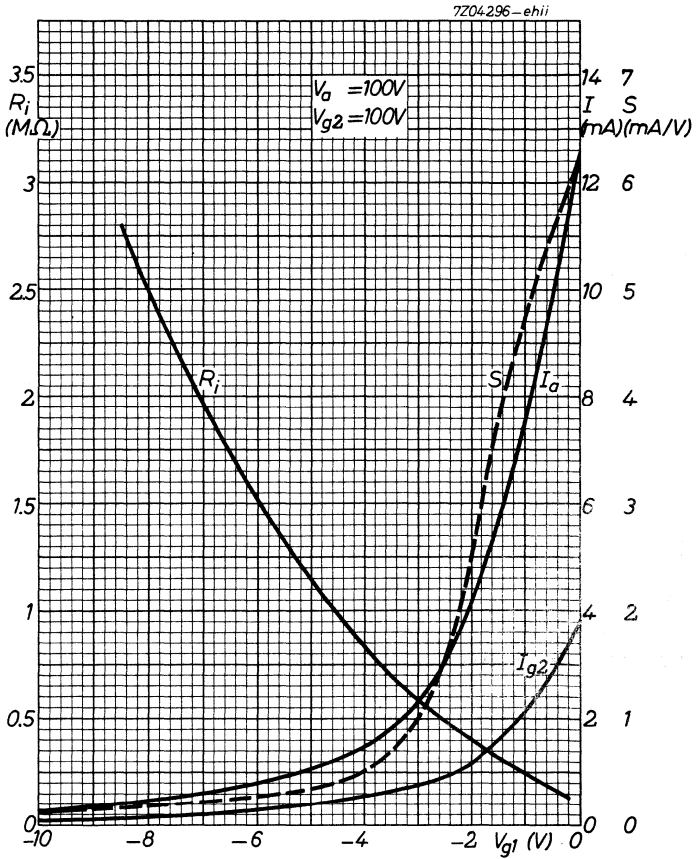

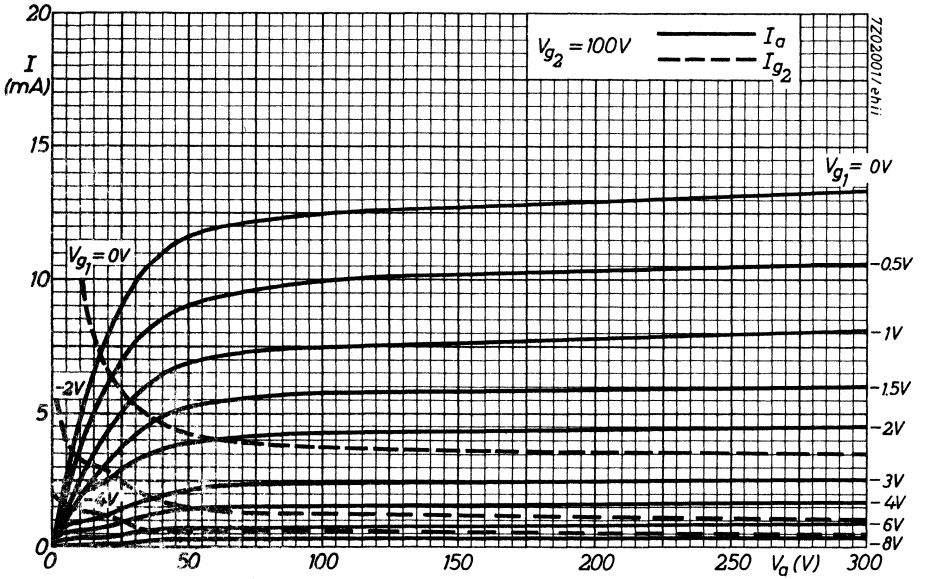



### S.Q. TUBE

Special quality pentode designed for use as A.F. power output tube.




QUICK REFERENCE DATA	
Life test	1000 hours
Mechanical quality	Shock and vibration resistant
Base	Subminiature
Heating	Indirect A.C. or D.C.; parallel supply
Heater voltage	$V_f$ 6.3 V
Heater current	$I_f$ 450 mA
Anode current	$I_a$ 30 mA
Output power	$W_o$ 1.0 W

#### DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Subminiature

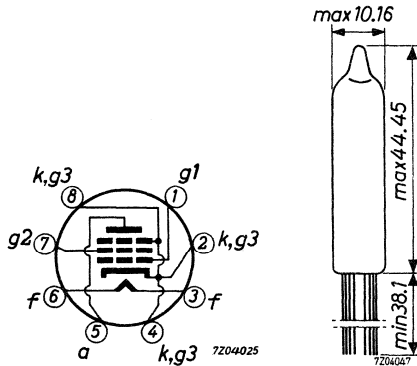

The leads should not be soldered nearer than 5 mm to the seal and should not be bent nearer than 1.5 mm to the seal.

CHARACTERISTICS

- Column I Nominal value or setting of the tube
- II Range values for equipment design: Initial spread
- III Range values for equipment design: End of life

		I	II	III	
Heater voltage	$V_f$	6.3			V
Heater current	$I_f$	450	420 - 480		mA
Anode voltage	$V_a$	100			V
Grid No. 2 voltage	$V_{g2}$	100			V
Grid No. 1 voltage	$-V_{g1}$	9			V
Anode current	$I_a$	30			mA
Grid No. 2 current	$I_{g2}$	2.2			mA
Mutual conductance	S	4.2			mA/V
Anode supply voltage	$V_{ba}$	109			V
Grid No. 2 supply voltage	$V_{bg2}$	109			V
Cathode resistor	$R_k$	270			$\Omega$
Anode current	$I_a$	30	23 - 37		mA
Grid No. 2 current	$I_{g2}$	2.2	max. 4.0		mA
Mutual conductance	S	4.2	3.5 - 4.9		mA/V
Internal resistance	$R_i$	15	min. 10		$k\Omega$
<u>Negative grid No. 1 current</u>	$-I_{g1}$	1		2	$\mu A$
<u>Output power</u>	$W_o$	1.0	min. 0.75	$\Delta W_o$ : max. 25%	W
Load resistance $R_{a\sim} = 3 k\Omega$					
<u>Leakage current between cathode and heater</u>	$I_{kf}$		max. 15	max. 60	$\mu A$
Voltage between cathode and heater $V_{kf} = 100 V$					

**CHARACTERISTICS** (continued)Vibrational noise output

	II	
$V_o$	max. 100	mVRMS

Anode supply voltage  $V_{ba} = 110$  V

Grid No. 2 supply voltage  $V_{bg_2} = 110$  V

Cathode resistor  $R_k = 270 \Omega$

Cathode by-pass capacitor  $C_k = 1000$  pF

Anode resistor  $R_a = 2$  k $\Omega$

Vibration frequency = 50 Hz

Acceleration = 15 g

**CAPACITANCES**

Anode to grid No. 2, cathode,  
heater and screen

	I	II	
$C_{a/g_2kfs}$	7.2	6.5 - 8.5	pF
$C_{g_1/g_2kfs}$	6.5	5.5 - 7.5	pF
$C_{ag_1}$		max. 0.2	pF

Grid No. 1 to grid No. 2 cathode,  
heater and screen

Anode to grid No. 1

**SHOCK AND VIBRATION RESISTANCE**

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock


The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.



Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.



7Z02101-ejb

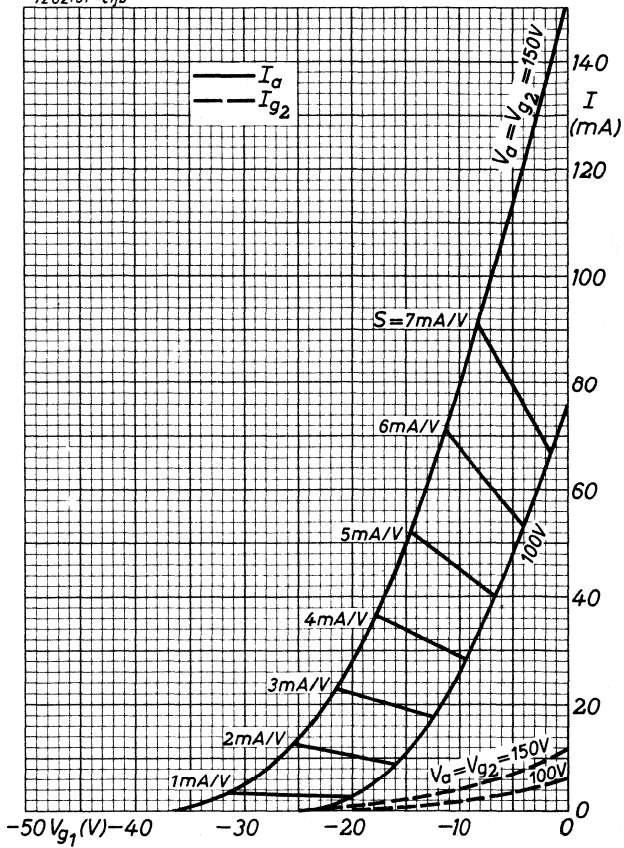

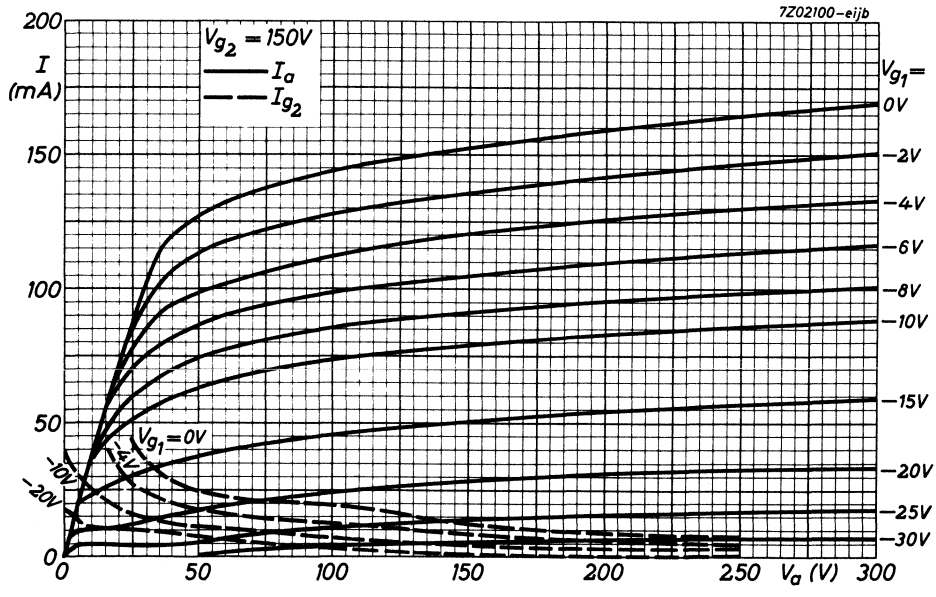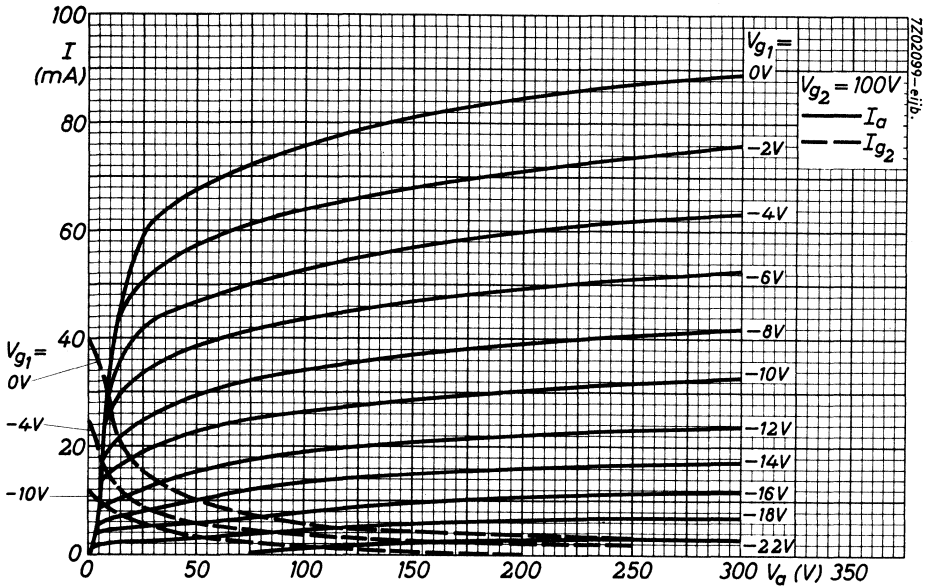


**S.Q. TUBE**

Special quality double triode designed for use as R.F. amplifier and oscillator.

QUICK REFERENCE DATA	
Life test	1000 hours
Mechanical quality	Shock and vibration resistant
Base	Subminiature
Heating	Indirect
	A.C. or D.C.; parallel supply
Heater voltage	$V_f$ 6.3 V
Heater current	$I_f$ 300 mA
Anode current	$I_a$ 6.5 mA
Mutual conductance	S 5.4 mA/V

**DIMENSIONS AND CONNECTIONS**

Dimensions in mm

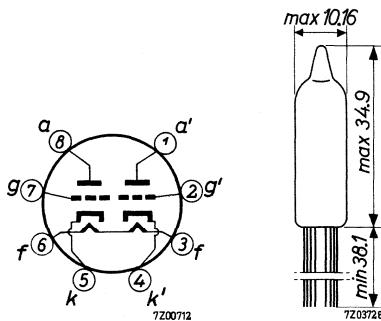

Connections should not be soldered nearer than 5 mm to the seal.

Leads should not be bent nearer than 1.5 mm to the seal.

**CHARACTERISTICS** (both sections if applicable)

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage	$V_f$	6.3			V
Heater current	$I_f$	300	280 - 320		mA
Anode voltage	$V_a$	100			V
Cathode resistor	$R_k$	150			$\Omega$
Anode current	$I_a$	6.5	4.5 - 8.5		mA
Difference in anode current of both systems	$ I_a - I_a' $		max. 1.6		mA
Mutual conductance	S	5.4	4.45 - 6.35	$\Delta S$ : max. 25 %	mA/V
Amplification factor	$\mu$	35	30 - 40		
Internal resistance	$R_i$	6.5			k $\Omega$
<u>Cut-off voltage</u>	$-V_g$		max. 6.5		V
Anode voltage	$V_a$	100			V
Anode current	$I_a$	100			$\mu A$
<u>Negative grid current</u>	$-I_g$		max. 0.3	max. 1.0	$\mu A$
Anode voltage	$V_a$	150			V
Cathode resistor	$R_k$	300			$\Omega$
Grid resistor	$R_g$	1			M $\Omega$
<u>Leakage current between cathode and heater</u>	$I_{kf}$		max. 5	max. 10	$\mu A$
Voltage between cathode and heater $V_{kf} = 100$ V					
<u>Insulation resistance between two electrodes</u>	$R_{ins}$		min. 100	min. 50	M $\Omega$
Voltage between electrodes = 100 V					



## CHARACTERISTICS (continued)

		I	II	III	
<u>Vibrational noise output</u>	$V_o$		max. 35		$mV_{RMS}$
Anode supply voltage $V_{ba} = 100$ V					
Anode resistor $R_a = 10$ k $\Omega$					
Cathode resistor $R_k = 150$ $\Omega$					
Cathode by pass capacitor $C = 1000$ $\mu$ F					
Vibration frequency = 40 Hz					
Acceleration = 15 g					
<b>CAPACITANCES</b>					
Grid to cathode and heater	$C_{g/kf}$	2.4	1.8 - 3.0		pF
Anode to cathode and heater	$C_{a/kf}$	0.28	0.20 - 0.36		pF
	$C_{a'/k'f}$	0.32	0.22 - 0.42		pF
Anode to grid	$C_{ag}$	1.5	1.2 - 1.8		pF
Grid to grid other section	$C_{gg'}$		max. 0.013		pF
Anode to anode other section	$C_{aa'}$		max. 0.52		pF

**SHOCK AND VIBRATION RESISTANCE**

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

**LIFE**

Production samples are tested to be within the end of life values (column III) under the following conditions during 1000 hours:

Anode voltage  $V_a = 100$  V

Cathode resistor  $R_k = 150$   $\Omega$

Voltage between  
cathode and heater  $V_{kf} = 200$  V


**LIMITING VALUES** (Absolute max. rating system)


Anode voltage	$V_{a_0}$	max.	330 V
Anode voltage	$V_a$	max.	165 V
Anode dissipation	$W_a$	max.	0.7 W
Anode current	$I_a$	max.	22 mA
Grid voltage	$-V_g$	max.	55 V
Grid current	$I_g$	max.	5.5 mA
Grid resistor	$R_g$	max.	1.1 $M\Omega$
Voltage between cathode and heater d.c. or peak value	$V_{kf}$	max.	200 V
Bulb temperature	$t_{bulb}$	max.	220 °C

Heater voltage: The average heater voltage should be 6.3 V.

Variations of the heater voltage exceeding the range of 6.0 V to 6.6 V will shorten the tube life.

The tolerance of heater current (column II) should be taken into account.

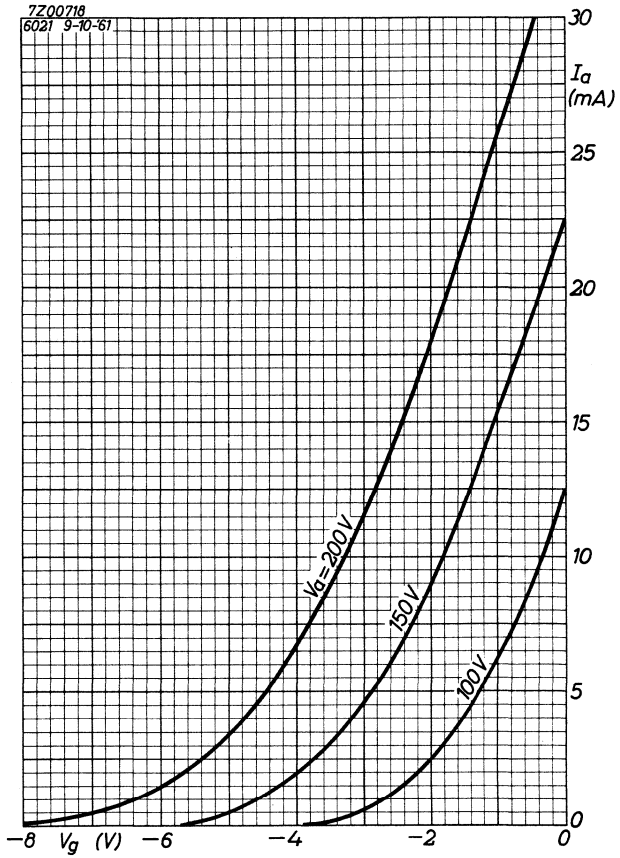

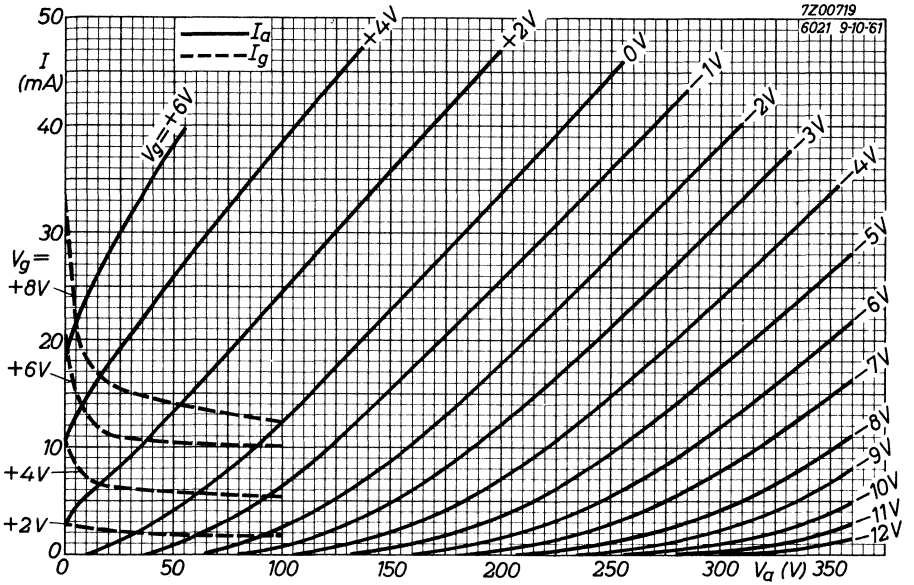

**S.Q. TUBE**

Special quality double triode designed for use as series regulator tube in d.c. power supplies, in servo application and as booster triode.




**QUICK REFERENCE DATA**

Life test	500 hours
Mechanical quality	Shock and vibration resistant
Base	Octal
Heating	Indirect A.C. or D.C.; parallel supply
Heater voltage	$V_f$ 6.3 V
Heater current	$I_f$ 2.5 A
Anode current	$I_a$ 100 mA (each section)
Mutual conductance	S 6.5 mA/V
Internal resistance	$R_i$ 300 $\Omega$

**DIMENSIONS AND CONNECTIONS**

Dimensions in mm

Base: Octal

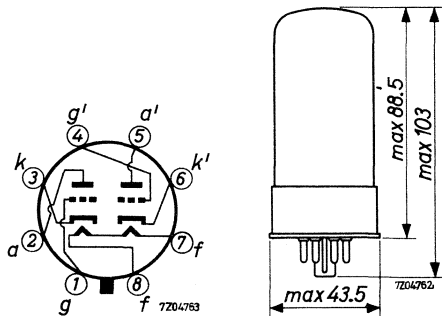

**CHARACTERISTICS**      Each section if applicable

Column I    Nominal value or setting of the tube

II    Range values for equipment design; Initial spread

		I	II	
Heater voltage	$V_f$	6.3		V
Heater current	$I_f$	2.5	2.26 - 2.74	A
Anode voltage	$V_a$	100		V
Cathode resistor	$R_k$	300		$\Omega$
Anode current	$I_a$	100		mA
Mutual conductance	S	6.5		mA/V
Amplification factor	$\mu$	2		
Internal resistance	$R_i$	300		$\Omega$
Anode supply voltage	$V_{ba}$	135		V
Cathode resistor	$R_k$	250		$\Omega$
Anode current      1)	$I_a$	125	100 - 150	mA
Mutual conductance	S	7.0	5.8 - 8.2	mA/V
Amplification factor	$\mu$	2.0	1.4 - 2.6	
Internal resistance	$R_i$	280		$\Omega$
Negative grid current (g connected to g')	$-I_g$		max. 4.0	$\mu A$

1) Max. duration 1 s

 Operation with  $W_a$  and  $I_a$  at the absolute maximum limiting values.

**CHARACTERISTICS** (continued)Vibrational noise output

Two sections in parallel

Anode supply voltage  $V_{ba} = 135$  VGrid voltage  $-V_g = 7$  VAnode resistor  $R_a = 2$  k $\Omega$ 

Vibration frequency = 25 Hz

Acceleration = 2.5 g

	I	II	
$V_o$		max. 0.2	$V_{RMS}$
$C_{ag}$	8.6		pF
$C_{a/kf}$	2.5		pF
$C_{g/kf}$	5.5		pF
$C_{kf}$	7		pF
$C_{aa'}$	2.2		pF
$C_{gg'}$	0.5		pF

**CAPACITANCES** Each system if applicable

Anode to grid

Anode to cathode and heater

Grid to cathode and heater

Cathode to heater

Anode to anode other section

Grid to grid other section

**SHOCK AND VIBRATION RESISTANCE**

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 25 Hz with an acceleration of 2.5 g.

**LIFE**

Production samples are tested during 500 hours.


**LIMITING VALUES** (Absolute max. rating system)

Anode voltage	$V_{a0}$	max. 550 V
	$V_a$	max. 250 V
Anode inverse peak voltage	$V_a \text{ invp}$	max. 3 kV
Duty factor max. 0.15		
Pulse duration max. 10 $\mu\text{sec}$		
Cathode current	$I_k$	max. 125 mA
Grid peak voltage	$-V_{gp}$	max. 2.3 kV
Duty factor max. 0.15		
Pulse duration max. 10 $\mu\text{sec}$		
Anode dissipation	$W_a$	max. 13 W
Voltage between cathode and heater, peak	$V_{kfp}$	max. 300 V
Grid resistor	Automatic bias	$R_g$ max. 1.0 $M\Omega$
	Fixed bias	$R_g$ max. 0.1 $M\Omega$ <sup>1)</sup>
Bulb temperature	$t_{\text{bulb}}$	max. 260 °C

<sup>1)</sup> With fixed bias the anode circuit should contain a protective resistance to provide a minimum drop of 15 V d.c. at the normal operating conditions. When two or more sections are used in parallel at dissipations approaching the rated maximum, separate anode and cathode resistors must be used to assist load sharing.

When combined fixed and automatic bias is used, the cathode bias portion should have a minimum value of 7.5 V d.c. at the normal operating conditions.  $R_g$  should then not exceed 0.1  $M\Omega$ .



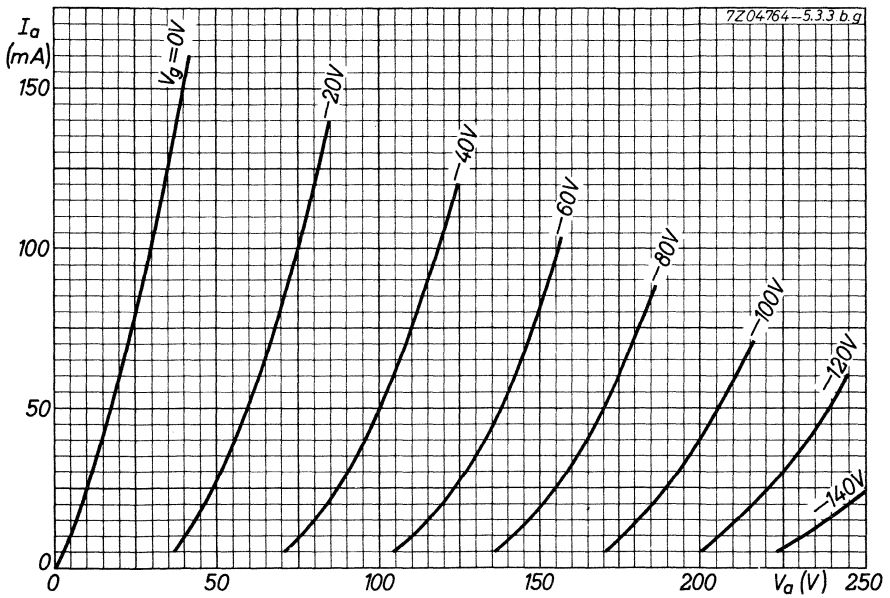



**S.Q. TUBE**

Special quality double triode designed for use as amplifier mixer and oscillator.




**QUICK REFERENCE DATA**

Life test	1000 hours	
Mechanical quality	Shock and vibration resistant	
Base	Subminiature	
Heating	Indirect A.C. or D.C.; parallel supply	
Heater voltage	$V_f$	6.3 V
Heater current	$I_f$	300 mA
Anode current	$I_a$	8.5 mA
Mutual conductance	S	5 mA/V

**DIMENSIONS AND CONNECTIONS**

Dimensions in mm

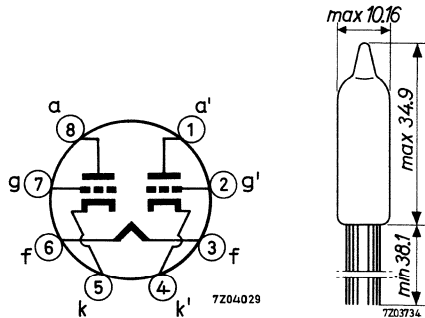

The leads should not be soldered nearer than 5 mm to the seal and should not be bent nearer than 1.5 mm to the seal.

**CHARACTERISTICS** (Each system if applicable)

Column I Nominal values or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage	$V_f$	6.3			V
Heater current	$I_f$	300	280 - 320		mA
Anode voltage	$V_a$	100			V
Grid voltage	$-V_g$	1.9			V
Anode current	$I_a$	8.5			mA
Mutual conductance	S	5			mA/V
Amplification factor	$\mu$	20	17 - 23		
Internal resistance	$R_i$	4			k $\Omega$
Anode voltage	$V_a$	100			V
Cathode resistor	$R_k$	220			$\Omega$
Anode current	$I_a$	8.5	6.0 - 11		mA
Difference in anode current of two sections	$ I_a - I_a' $		max. 2		mA
Mutual conductance	S	5	4.1 - 5.9	min. 3.5	mA/V
<u>Negative grid current</u>	$-I_g$		max. 0.3	max. 1.0	$\mu$ A
<u>Cut-off voltage</u>	$-V_g$	9			V
Anode voltage	$V_a$	100			V
Anode current	$I_a$		max. 100		$\mu$ A
<u>Leakage current between cathode and heater</u>	$I_{kf}$		max. 5	max. 10	$\mu$ A

Voltage between cathode and heater  $V_{kf} = 100$  V

**CHARACTERISTICS** (continued)Vibrational noise output

	I	II	
$V_o$		max. 50	mVRMS
Anode supply voltage $V_{ba} = 100$ V			
Cathode resistor $R_k = 220 \Omega$			
Anode resistor $R_a = 10$ k $\Omega$			
Grid resistor $R_g = 0.1$ M $\Omega$			
Cathode by-pass capacitor $C_k = 1000 \mu$ F			
Vibration frequency = 50 Hz			
Acceleration = 15 g			

**CAPACITANCES**

Anode to cathode and heater	$C_{a/kf}$	0.28	0.2-0.36	pF
	$C_{a'/k'f}$	0.32	0.22-0.42	pF
Grid to cathode and heater	$C_{g/kf}$	1.9	1.4- 2.4	pF
Anode to grid	$C_{ag}$	1.5	1.2- 1.8	pF
Grid to grid other section	$C_{gg'}$		max. 13.0	mpF
Anode to anode other section	$C_{aa'}$		max. 0.5	pF

**SHOCK AND VIBRATION RESISTANCE**

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.


**LIFE**


Production samples are tested to be within the end of life values (column III) under the following conditions during 1000 hours.

Anode voltage	$V_a$	100	V
Cathode resistor	$R_k$	220	$\Omega$

**LIMITING VALUES** (Absolute max. rating system)

Anode voltage	$V_{a_0}$	max. 330 V
	$V_a$	max. 165 V
Grid voltage	$+V_g$	max. 0 V
	$-V_g$	max. 55 V
Grid current	$I_g$	max. 5.5 mA
Anode dissipation	$W_a$	max. 1.1 W
Cathode current	$I_k$	max. 22 mA
Peak voltage between cathode and heater	$V_{kfp}$	max. 200 V
Grid resistor	$R_g$	max. 1 $M\Omega$
Bulb temperature	$t_{bulb}$	max. 220 $^{\circ}C$

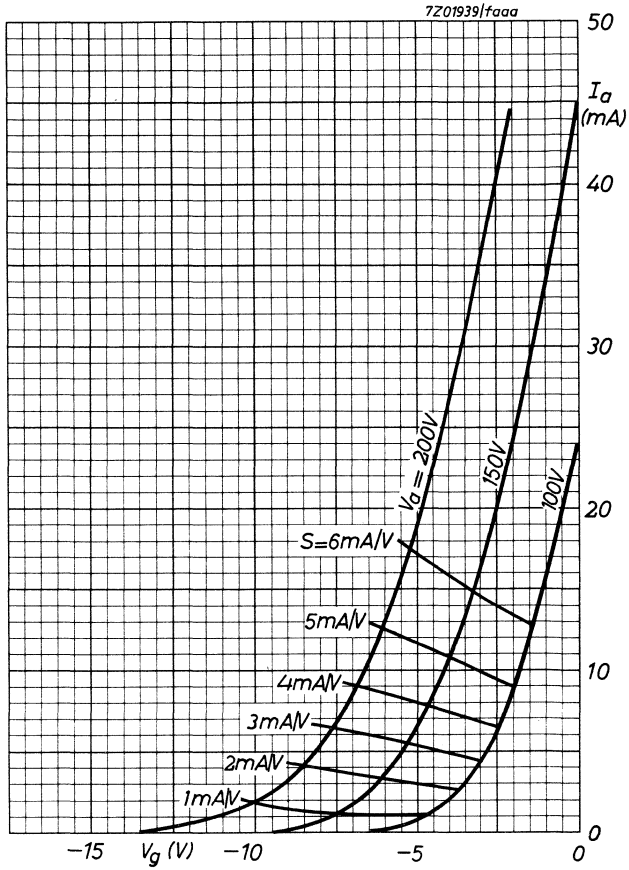

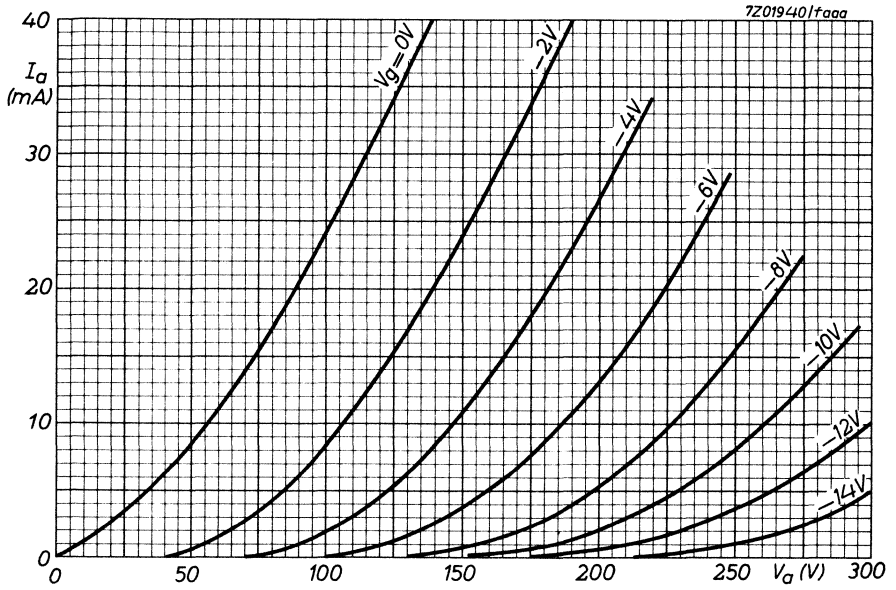



**S.Q. TUBE**

Special quality double triode designed for use as A.F. amplifier and multivibrator.





**QUICK REFERENCE DATA**

Life test	1000 hours	
Mechanical quality	Shock and vibration resistant	
Base	Subminiature	
Heating	Indirect A.C. or D.C.; parallel supply	
Heater voltage	$V_f$	6.3 V
Heater current	$I_f$	300 mA
Anode current	$I_a$	0.8 mA
Mutual conductance	$S$	1.8 mA/V

**DIMENSIONS AND CONNECTIONS**

Dimensions in mm

Base: Subminiature



The leads should not be soldered nearer than 5 mm to the seal and should not be bent nearer than 1.5 mm to the seal.

## CHARACTERISTICS

Column I Nominal values or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage	$V_f$	6.3			V
Heater current	$I_f$	300	280 - 320		mA
Anode voltage	$V_a$	100			V
Grid voltage	$-V_g$	1.2			V
Anode current	$I_a$	0.8			mA
Mutual conductance	S	1.8			mA/V
Amplification factor	$\mu$	70			
Internal resistance	$R_i$	38.8			k $\Omega$
Anode voltage	$V_a$	100			V
Cathode resistor	$R_k$	1500			$\Omega$
Anode current	$I_a$	0.8	0.5 - 1.1		mA
Mutual conductance	S	1.8	1.5 - 2.1		mA/V
Amplification factor	$\mu$	70	60 - 80		
<u>Cut off voltage</u>	$-V_g$	2.8			V
Anode voltage	$V_a$	100			V
Anode current	$I_a$		max. 50		$\mu$ A
<u>Leakage current between cathode and heater</u>	$I_{kf}$		max. 5	max. 10	$\mu$ A
Voltage between cathode and heater $V_{kf} = 100$ V					
<u>Negative grid current</u>	$-I_g$		max. 0.3	max. 0.9	$\mu$ A
Anode voltage	$V_a$	150			V
Cathode resistor	$R_k$	820			$\Omega$

**CHARACTERISTICS** (continued)

		I	II	
<u>Vibrational noise output</u>	$V_o$		max. 25	mV <sub>RMS</sub>
Anode supply voltage $V_{ba} = 100$ V				
Cathode resistor $R_k = 1500$ $\Omega$				
Anode resistor $R_a = 10$ k $\Omega$				
Grid resistor $R_g = 0.1$ M $\Omega$				
Cathode bypass capacitor $C_k = 1000$ $\mu$ F				
Vibration frequency 50 Hz				
Acceleration 15 g				

**CAPACITANCES**

Anode to cathode and heater	$C_{a/kf}$	0.23	0.16 - 0.30	pF
	$C_{a'/k'f}$	0.28	0.21 - 0.35	pF
Grid to cathode and heater	$C_{g/kf}$	1.7	1.3 - 2.1	pF
Anode to anode other section	$C_{aa'}$		max. 0.8	pF
Grid to grid other section	$C_{gg'}$		max. 14.0	mpF
Anode to grid	$C_{ag}$	1.0	0.8 - 1.2	pF

**SHOCK AND VIBRATION RESISTANCE**

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.


**LIFE**

Production samples are tested to be within the end of life values (column III) under the following conditions during 1000 hours.

Anode supply voltage	$V_{ba}$	100	V
Cathode resistor	$R_k$	1500	$\Omega$

**LIMITING VALUES** (Absolute max. rating system)

Anode voltage	$V_{a0}$	max. 330 V
	$V_a$	max. 165 V
Grid voltage	$+V_g$	max. 0 V
	$-V_g$	max. 55 V
Anode dissipation	$W_a$	max. 0.55 W
Anode current	$I_a$	max. 3.3 mA
Peak voltage between cathode and heater	$V_{kfp}$	max. 200 V
Grid resistor	$R_g$	max. 1 M $\Omega$
Bulb temperature	$t_{bulb}$	max. 220 $^{\circ}\text{C}$

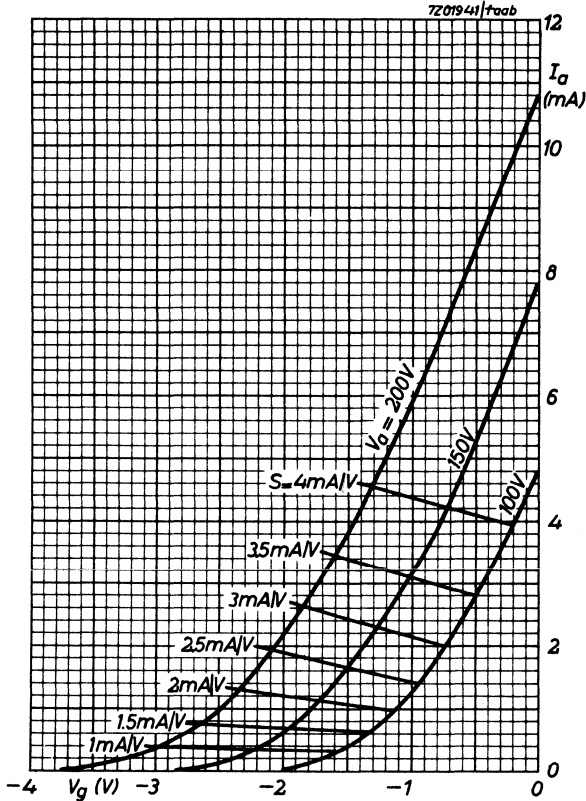

## S.Q. TUBE

Special quality double triode designed for use as A.F. amplifier.


### QUICK REFERENCE DATA

Life test	1000 hours
Mechanical quality	Shock and vibration resistant
Base	Noval
Heating	Indirect A.C. or D.C.; Parallel supply
Heater voltage	$V_f$ 6.3 or 12.6 V
Heater current	$I_f$ 300 or 150 mA
Anode current	$I_a$ 11.8 mA
Mutual conductance	$S$ 3.2 mA/V

### DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval

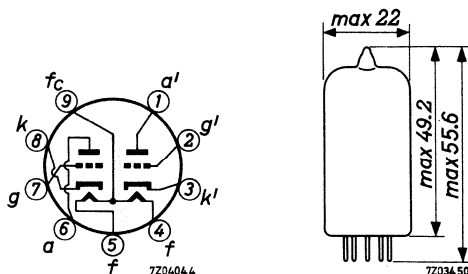

**CHARACTERISTICS** (Both sections if applicable)

Column I Nominal values or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage (pin 9 and 4+5)	$V_f$	6.3			V
Heater current	$I_f$	300	276- 324		mA
Heater voltage (pin 4 and 5)	$V_f$	12.6			V
Heater current	$I_f$	150			mA
Anode voltage	$V_a$	100			V
Grid voltage	$-V_g$	0			V
Anode current	$I_a$	11.8			mA
Mutual conductance	S	3.2	2.5- 4.0		mA/V
Amplification factor	$\mu$	19.5			
Internal resistance	$R_i$	6.25			k $\Omega$
Anode voltage	$V_a$	250			V
Grid voltage	$-V_g$	8.5			V
Anode current	$I_a$	10.5	6.5-14.5		mA
Mutual conductance	S	2.2	1.8- 2.6	min. 1.5	mA/V
Amplification factor	$\mu$	17	15.5-18.5		
Internal resistance	$R_i$	7.7			k $\Omega$
<u>Negative grid current</u>	$-I_g$		max. 0.5	max.0.5	$\mu$ A
<u>Cathode peak current</u>	$I_{kp}$		min. 400		mA
Anode voltage	$V_a$	250			V
Grid voltage	$V_g$	55			V
<u>Cut-off voltage</u>	$-V_g$	25			V
Anode voltage	$V_a$	250			V
Anode current	$I_a$		max. 20		$\mu$ A

**CHARACTERISTICS (continued)**

		I	II	III	
<u>Leakage current between cathode and heater</u>	$I_{kf}$		max. 5	max. 5	$\mu A$
Voltage between cathode and heater $V_{kf} = 100 V$					
<u>Vibrational noise output</u>	$V_o$		max. 100		$mV_{RMS}$
Anode voltage $V_a = 250 V$					
Grid voltage $-V_g = 8.5 V$					
Anode resistor $R_a = 2 k\Omega$					
Grid resistor $R_g = 0.1 M\Omega$					
Vibration frequency = 50 Hz					
Acceleration = 10 g					
<b>CAPACITANCES</b>					
Anode to cathode and heater	$C_{a/kf}$	0.5	0.3- 0.7		pF
	$C_{a' / k' f}$	0.4	0.2- 0.6		pF
Grid to cathode and heater	$C_{g/kf}$	1.6	1.25-1.95		pF
Anode to grid	$C_{ag}$	1.5	1.2- 1.8		pF

**SHOCK AND VIBRATION RESISTANCE**

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

**LIFE**


Production samples are tested to be within the end of life values (column III) under the following conditions during 1000 hours.


Anode voltage	$V_a$	250	V
Grid voltage	$-V_g$	8.5	V

**LIMITING VALUES** (Absolute max. rating system)

Anode voltage	$V_a$	max.	330	V
Anode dissipation	$W_a$	max.	3	W
Cathode current	$I_k$	max.	22	mA
Grid resistor: fixed bias	$R_{g1}$	max.	0.5	$M\Omega$
		automatic bias	$R_{g1}$	max. 1.0 $M\Omega$
Voltage between cathode and heater	$V_{kf}$	max.	110	V
Bulb temperature	$t_{bulb}$	max.	165	$^{\circ}C$



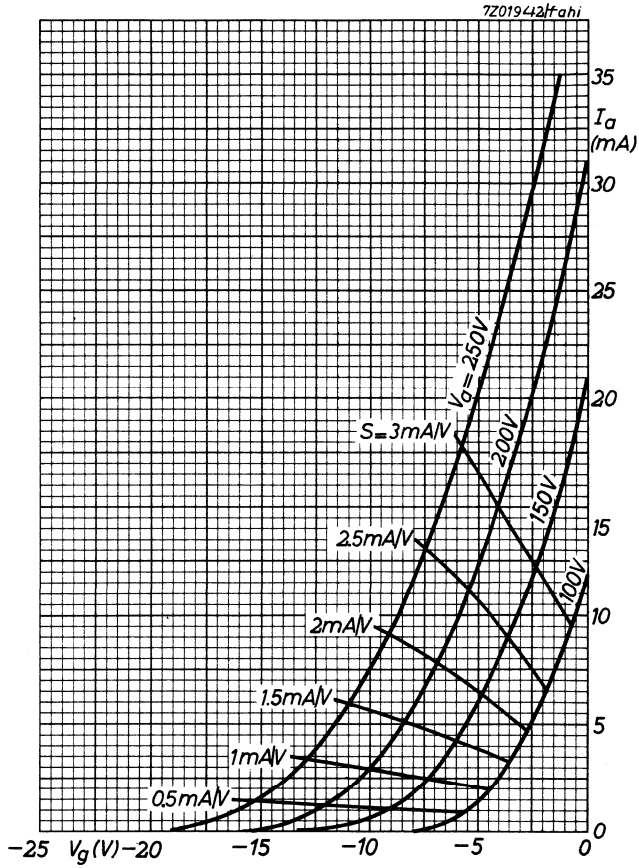

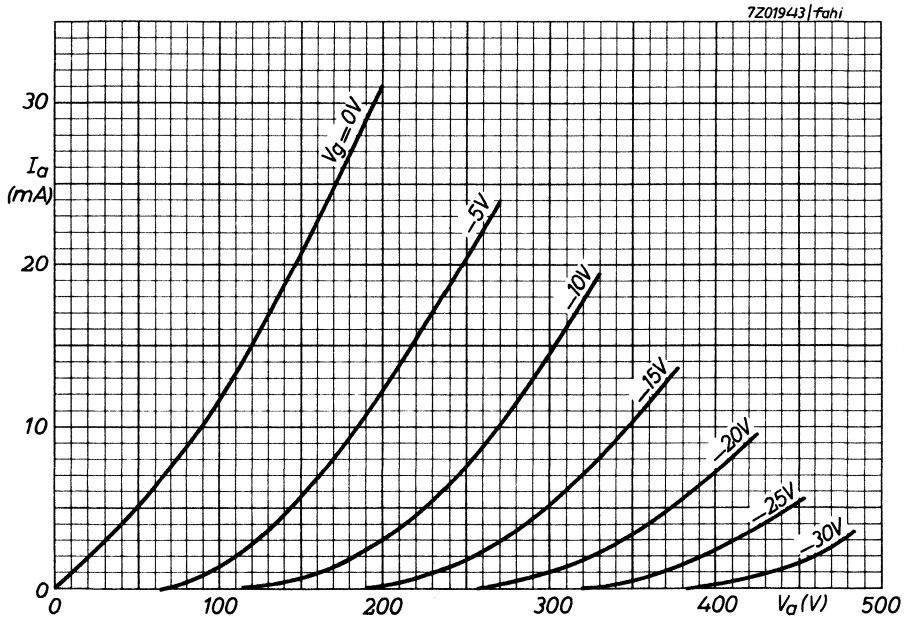

## S.Q. TUBE

Special quality double triode designed for use as R.F. amplifier in grounded grid circuits, frequency changer (max. freq. 300 MHz) in mobile and industrial equipment with intermittent operation, and on-off control applications where operation under cut-off conditions is required.



### QUICK REFERENCE DATA

Life test	500 hours
Low interface resistance	
Mechanical quality	Shock and vibration resistant
Base	Noval. Gold plated pins
Heating	Indirect A. C. or D. C. Parallel or series supply
Heater voltage	$V_f$ 6.3 or 12.6 V
Heater current	$I_f$ 300 or 150 mA
Anode current	$I_a$ 10 mA
Mutual conductance	S 5.5 mA/V

### DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval



## CHARACTERISTICS

- Column I Nominal value or setting of the tube  
 II Range values for equipment design: Initial spread  
 III Range values for equipment design: End of life

		I	II	III	
Heater voltage (pin 9 and 4 + 5)	$V_f$	6.3			V
Heater current	$I_f$	300			mA
Heater voltage (pin 4 and 5)	$V_f$	12.6			V
Heater current	$I_f$	150	138 - 162		mA
Anode voltage	$V_a$	100			V
Cathode resistor	$R_k$	270			$\Omega$
Anode current	$I_a$	3.3			mA
Mutual conductance	S	4.0			mA/V
Internal resistance	$R_i$	14.3			k $\Omega$
Amplification factor	$\mu$	57			
<u>Cut-off voltage</u>	$-V_g$	5			V
Anode voltage	$V_a$	100			V
Anode current	$I_a$	10			$\mu$ A
Anode voltage	$V_a$	250			V
Cathode resistor	$R_k$	200			$\Omega$
Anode current	$I_a$	10	7 - 14		mA
Mutual conductance	S	5.5	4.5 - 6.5	min. 3.8	mA/V
Internal resistance	$R_i$	10.9			k $\Omega$
Amplification factor	$\mu$	60	50 - 70		
Difference in anode current of two systems	$ I_a - I_a' $		max. 3.2		mA
<u>Negative grid current</u>	$-I_g$		max. 0.7	max. 0.7	$\mu$ A
<u>Cut-off voltage</u>	$-V_g$	12			V
Anode voltage	$V_a$	250			V
Anode current	$I_a$	10			$\mu$ A

**CHARACTERISTICS** (continued)

		I	II	III	
<u>Cut-off voltage</u>	$-V_g$	20			V
Anode supply voltage $V_a = 250$ V	$V_a$	250			V
Anode resistor $R_a = 0.1$ M $\Omega$	$R_a$	0.1			M $\Omega$
Anode current $I_a = \text{max. } 100$ $\mu$ A	$I_a$		max. 100		$\mu$ A
<u>Vibrational noise output</u>	$V_o$		max. 100		mVRMS
Anode supply voltage $V_{ba} = 200$ V					
Grid voltage $-V_g = 3$ V					
Anode resistor $R_a = 2$ k $\Omega$ (two sections in parallel)					
Vibration frequency 25 Hz					
Acceleration 2.5 g					
<u>Leakage current between cathode and heater</u>	$I_{kf}$		max. 10	max. 10	$\mu$ A
Voltage between cathode and heater $V_{kf} = 100$ V					
<u>Insulation resistance between grid and cathode (<math>V = 100</math> V)</u>	$R_{ins}$		min. 100	min. 50	M $\Omega$
anode and cathode ( $V = 300$ V)	$R_{ins}$		min. 100	min. 50	M $\Omega$

**CAPACITANCES** (Both sections if applicable)Without external shield

		I	II	
Anode to grid	$C_{ag}$	1.6	1.3 - 1.9	pF
Grid to cathode and heater	$C_{g/kf}$	2.5	2.0 - 3.0	pF
Anode to cathode and heater	$C_{a/kf}$	0.45	0.2 - 0.7	pF
	$C_{a'/k'f}$	0.38	0.16 - 0.60	pF
Cathode to heater	$C_{kf}$	2.8	2.1 - 3.5	pF
Anode to anode other section	$C_{aa'}$	0.24	0.15 - 0.33	pF
Cathode to grid and heater	$C_{k/gf}$	5.0		pF
Anode to grid and heater	$C_{a/gf}$	1.9		pF
	$C_{a'/g'f}$	1.8		pF
Anode to cathode	$C_{ak}$	0.2		pF
	$C_{a'k'}$	0.24		pF

**CAPACITANCES** (Both sections if applicable) (continued)

With external shield connected to the applicable cathode

Anode to grid	$C_{ag}$	1.6 pF
Grid to cathode and heater	$C_{g/kf}$	2.5 pF
Anode to cathode and heater	$C_{a/kf}$	1.2 pF
	$C_{a'/k'f}$	1.3 pF
Cathode to heater	$C_{kf}$	2.8 pF

With external shield connected to the applicable grid

Cathode to grid and heater	$C_{k/gf}$	5.0 pF
Anode to grid and heater	$C_{a/gf}$	2.7 pF
Anode to cathode	$C_{ak}$	0.18 pF
	$C_{a'k'}$	0.2 pF

**SHOCK AND VIBRATION RESISTANCE**

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 600 g supplied by an NRL shock machine with the hammer lifted over an angle of 42°

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 25 Hz with an acceleration of 2.5 g

**LIFE**

Production samples are tested to be within the end of life values (column III) under the following conditions during 500 hours

Anode supply voltage	$V_{ba}$	=	250	V
Cathode resistor	$R_k$	=	200	$\Omega$

**LIMITING VALUES** (Absolute max. rating system)

Anode voltage	$V_{a0}$	max.	600 V
	$V_a$	max.	330 V
Anode dissipation	$W_a$	max.	2.8 W
Grid voltage	$-V_g$	max.	55 V
Grid current	$I_g$	max.	250 $\mu$ A
	Grid resistor, fixed bias	$R_g$	max.
automatic bias		$R_g$	max.
Cathode current	$I_k$	max.	18 mA
Voltage between cathode and heater	$V_{kf}$	max.	100 V
Bulb temperature	$t_{bulb}$	max.	200 $^{\circ}$ C <sup>1)</sup>

Heater voltage: The average heater voltage should be 6.3 V.

Variations of the heater voltage exceeding the range of 5.7 to 7.0 V will shorten the tube life.

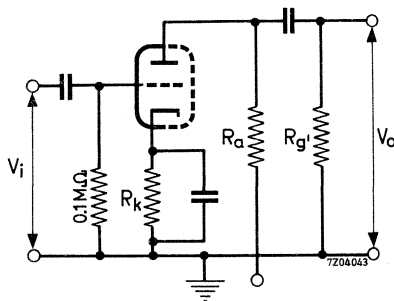
**OPERATING CHARACTERISTICS**

Fig. 1

<sup>1)</sup> Tube life and reliability of performance will be enhanced by operation at lower temperatures.

**OPERATING CHARACTERISTICS**

As A. F. amplifier

Resistance of voltage source = 200 Ω

Anode supply voltage	$V_{ba}$	90	90	90	90	90	90	V
Anode resistor	$R_a$	0.1	0.1	0.24	0.24	0.51	0.51	MΩ
Cathode resistor	$R_k$	1600	1800	3800	4200	8000	9600	Ω
Grid resistor of next stage	$R_{g'}$	0.1	0.24	0.24	0.51	0.51	1.0	MΩ
Output voltage ( $d_{tot} = 5\%$ )	$V_o$	5.3	7.8	7.2	9.4	8.3	10	V <sub>RMS</sub>
Voltage gain ( $V_o = 2 V_{RMS}$ )	$V_o/V_i$	26	29	28	30	28	29	
Anode supply voltage	$V_{ba}$	180	180	180	180	180	180	V
Anode resistor	$R_a$	0.1	0.1	0.24	0.24	0.51	0.51	MΩ
Cathode resistor	$R_k$	1100	1400	2800	3300	5600	6700	Ω
Grid resistor of next stage	$R_{g'}$	0.1	0.24	0.24	0.51	0.51	1.0	MΩ
Output voltage ( $d_{tot} = 5\%$ )	$V_o$	12	17	16	20	18	23	V <sub>RMS</sub>
Voltage gain ( $V_o = 2 V_{RMS}$ )	$V_o/V_i$	31	33	32	33	31	32	
Anode voltage	$V_{ba}$	300	300	300	300	300	300	V
Anode resistor	$R_a$	0.1	0.1	0.24	0.24	0.51	0.51	MΩ
Cathode resistor	$R_k$	1000	1200	3300	2800	4900	6000	Ω
Grid resistor of next stage	$R_{g'}$	0.1	0.24	0.24	0.51	0.51	1.0	MΩ
Output voltage ( $d_{tot} = 5\%$ )	$V_o$	22	30	28	35	31	38	V <sub>RMS</sub>
Voltage gain ( $V_o = 2 V_{RMS}$ )	$V_o/V_i$	32	33	34	33	33	33	






## OPERATING CHARACTERISTICS (continued)



Resistance of voltage source 100 k $\Omega$ 


Anode supply voltage	$V_{ba}$	90	90	90	90	90	90 V
Anode resistor	$R_a$	0.1	0.1	0.24	0.24	0.51	0.51 M $\Omega$
Cathode resistor	$R_k$	2000	2400	4700	5300	9300	11000 $\Omega$
Grid resistor of next stage	$R_{g'}$	0.1	0.24	0.24	0.51	0.51	1.0 M $\Omega$
Output voltage ( $d_{tot} = 5\%$ )	$V_o$	9.9	13	12	15	13	16 V <sub>RMS</sub>
Voltage gain ( $V_o = 2$ V <sub>RMS</sub> )	$V_o/V_i$	25	27	27	28	27	28
Anode supply voltage	$V_{ba}$	180	180	180	180	180	180 V
Anode resistor	$R_a$	0.1	0.1	0.24	0.24	0.51	0.51 M $\Omega$
Cathode resistor	$R_k$	1200	1400	2900	3600	6000	7100 $\Omega$
Grid resistor of next stage	$R_{g'}$	0.1	0.24	0.24	0.51	0.51	1.0 M $\Omega$
Output voltage ( $d_{tot} = 5\%$ )	$V_o$	17	28	25	31	27	33 V <sub>RMS</sub>
Voltage gain ( $V_o = 2$ V <sub>RMS</sub> )	$V_o/V_i$	31	33	32	33	31	32
Anode supply voltage	$V_{ba}$	300	300	300	300	300	300 V
Anode resistor	$R_a$	0.1	0.1	0.24	0.24	0.51	0.51 M $\Omega$
Cathode resistor	$R_k$	900	1200	2300	2900	5000	6400 $\Omega$
Grid resistor of next stage	$R_{g'}$	0.1	0.24	0.24	0.51	0.51	1.0 M $\Omega$
Output voltage ( $d_{tot} = 5\%$ )	$V_o$	35	47	42	52	45	55 V <sub>RMS</sub>
Voltage gain ( $V_o = 2$ V <sub>RMS</sub> )	$V_o/V_i$	33	33	34	34	33	34

7Z04037-fbja.

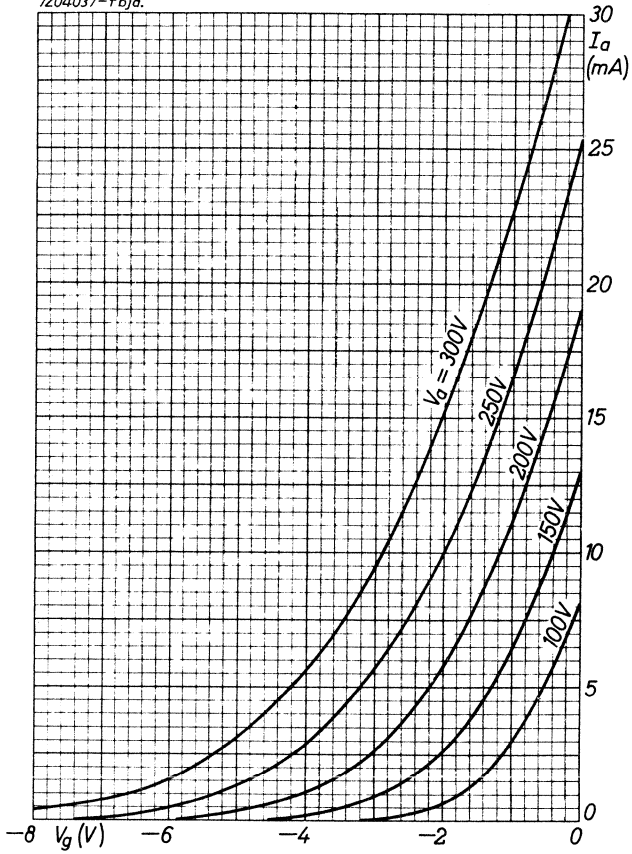

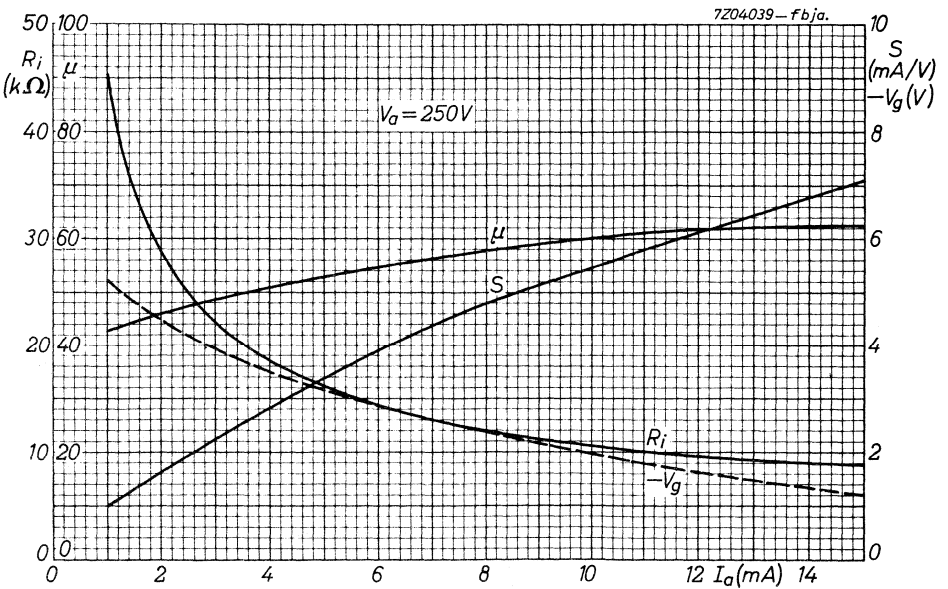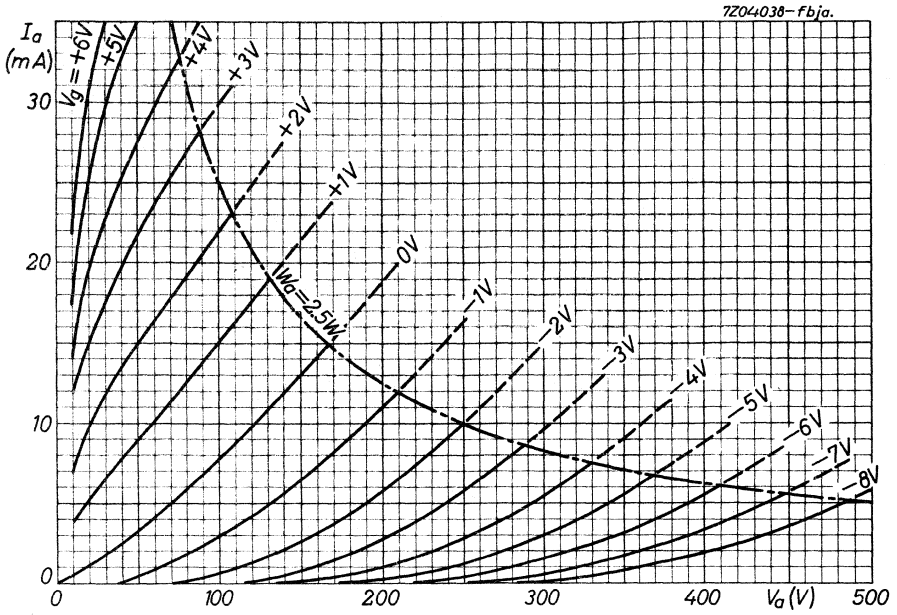

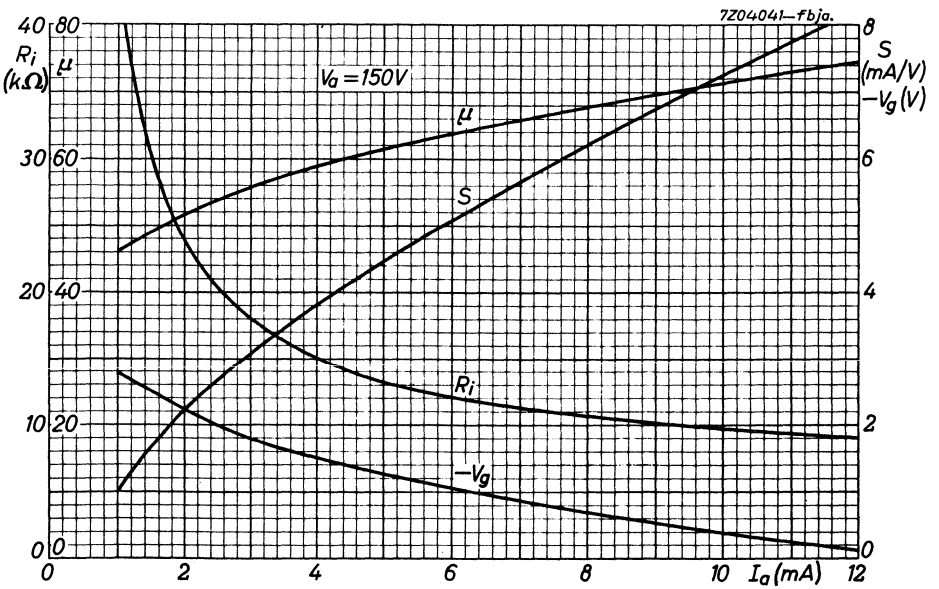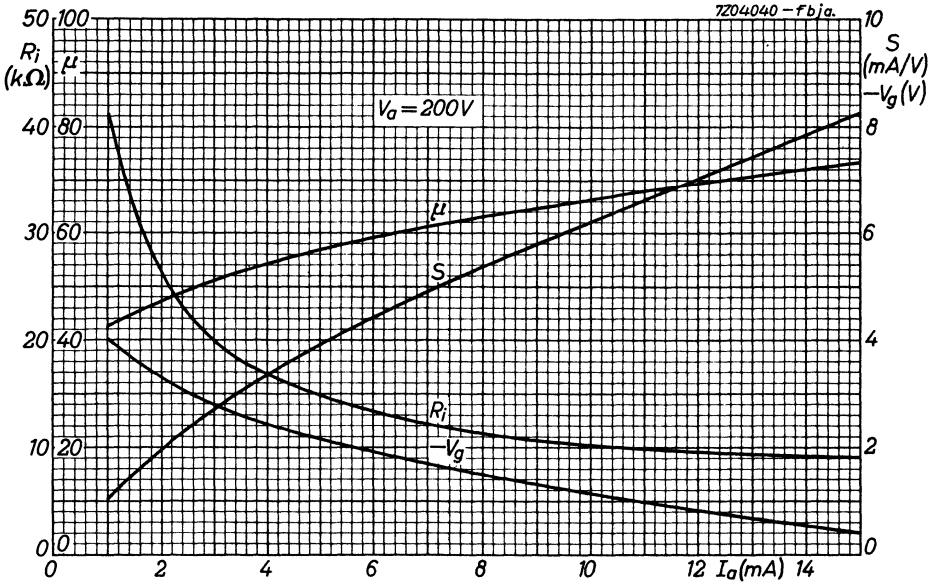

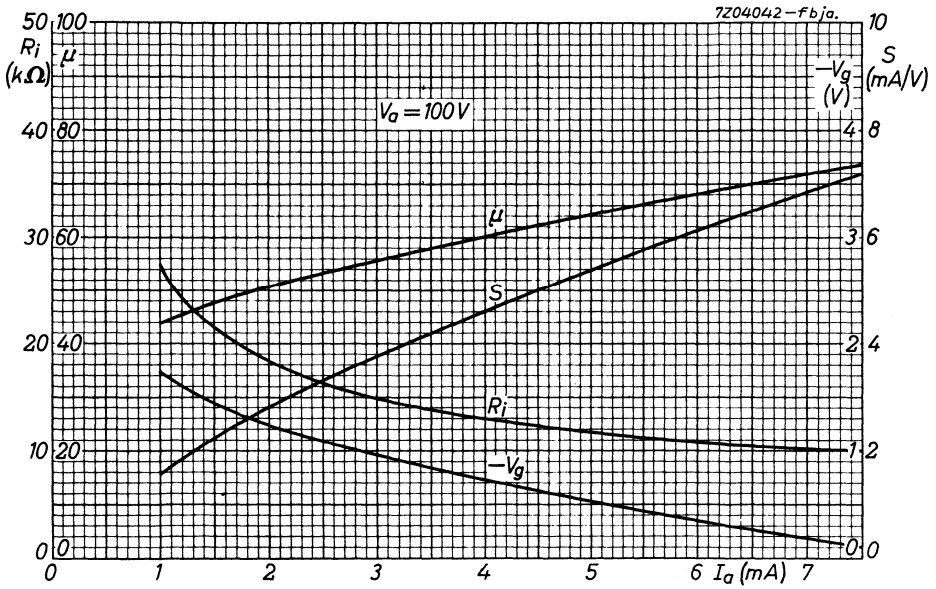



## S.Q. TUBE




Pentode designed for use in telephone equipment.

QUICK REFERENCE DATA	
Life test	10 000 hours
Low interface resistance	
Base	Noval
Heating	Indirect A.C. or D.C. Series or parallel supply
Heater voltage	$V_f$ 18 V
Heater current	$I_f$ 100 mA
Anode current	$I_a$ 10 mA
Mutual conductance	S 9 mA/V

### DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval

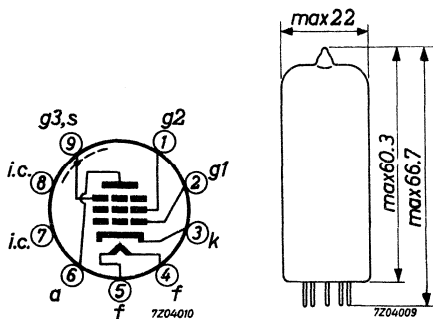

## CHARACTERISTICS

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage	$V_f$	18			V
Heater current	$I_f$	100	95 - 105		mA
Anode voltage	$V_a$	210			V
Grid No.3 voltage	$V_{g3}$	0			V
Grid No.2 voltage	$V_{g2}$	120			V
Cathode resistor	$R_k$	165			$\Omega$
Anode current	$I_a$	10	8.7 - 11.3	min. 7	mA
Grid No.2 current	$I_{g2}$	2.1	1.7 - 2.5	min. 1.25	mA
Mutual conductance	$S$	9	7.8 - 10.2	min. 6.4	mA/V
Internal resistance	$R_i$	0.5	min. 0.3		M $\Omega$
Amplification factor	$\mu_{g2g1}$	38			
Equivalent noise resistance					
R.F.	$R_{eq}$	750	max. 1000		$\Omega$
A.F. (0 - 10 kHz)	$R_{eq}$		max. 36		k $\Omega$
Negative grid current	$-I_{g1}$		max. 0.5	max. 1.0	$\mu A$
<u>Cut-off voltage</u>	$-V_g$		max. 5.25		V
Anode voltage	$V_a$	210			V
Grid No.3 voltage	$V_{g3}$	0			V
Grid No.2 voltage	$V_{g2}$	120			V
Anode current	$I_a$	0.5			mA
<u>Hum voltage</u>	$V_{g1}$		max. 0.5		mV <sub>RMS</sub>
Grid No.1 resistor $R_{g1} = 0.5 M\Omega$					
<u>Leakage current between cathode and heater</u>	$I_{kf}$		max. 20		$\mu A$
Voltage between cathode and heater $V_{kf} = 100 V$					



**CAPACITANCES**

		I	II	
Anode to grid No.2, grid No.3, cathode and heater	$C_{a/g_2g_3kfs}$	3.5	max. 4.1	pF
Grid No.1 to grid No.2, grid No.3, cathode, heater and screen	$C_{g_1/g_2g_3kfs}$	8.0	max. 8.7	pF
Anode to grid No.1	$C_{ag_1}$		max.0.015	pF
Grid No.1 to heater	$C_{g_1f}$		max. 0.15	pF
Cathode to heater	$C_{kf}$	4		pF
Grid No.1 to grid No.2, grid No.3, cathode, heater and screen	$C_{g_1/g_2g_3kfs}$	11.3		pF
Cathode current = 12.1 mA				
Radiation capacitance:				
Anode to surrounding box, inner diam. 52 mm, height 98 mm	$C_{ra}$		max.0.025	pF
Grid No.1 to surrounding box, inner diam. 52 mm, height 98 mm	$C_{rg_1}$		max.0.025	pF

**LIFE**

Production samples are tested to be within the end of life values (column III) during 10 000 hours.

**LIMITING VALUES** Design centre rating system

Anode voltage	$V_{a_0}$	max. 550	V
	$V_a$	max. 210	V
Anode dissipation	$W_a$	max. 2.1	W
Grid No.2 voltage	$V_{g_2_0}$	max. 550	V
	$V_{g_2}$	max. 210	V
Grid No.2 dissipation	$W_{g_2}$	max. 0.35	W
Cathode current	$I_k$	max. 16	mA
Grid No.1 resistor (automatic bias)	$R_{g_1}$	max. 1	MΩ
Voltage between cathode and heater	$V_{kf}$	max. 100	V
Bulb temperature	$t_{bulb}$	max. 170	°C

**LIMITING VALUES** (continued)

Heater voltage: The average heater voltage should be 18 V.


Variations of the heater voltage exceeding the range of 17.1 to 18.9 V will shorten the tube life.



The tolerance of heater current (column II) should be taken into account.


**OPERATING CHARACTERISTICS**



Output tube class A



Anode voltage	$V_a$	120		210		V		
Grid No.3 voltage	$V_{g_3}$	0		0		V		
Grid No.2 supply voltage	$V_{bg_2}$	120		120		V		
Grid No.2 resistor	$R_{g_2}$	5.6		5.6		k $\Omega$		
Cathode resistor	$R_k$	180		180		$\Omega$		
Anode current	$I_a$	8.3		8.3		mA		
Grid No.2 current	$I_{g_2}$	1.7		1.7		mA		
Mutual conductance	S	8.2		8.2		mA/V		
Internal resistance	$R_i$	0.42		0.44		M $\Omega$		
Load resistance	$R_{a\sim}$	10			20			k $\Omega$
Output power	$W_o$	340	400	50	660	870	50	mW
Input voltage	$V_i$	1.1	-	0.35	1.1	-	0.25	V <sub>RMS</sub>
Total distortion	dtot	10	-	-	10	-	-	%
Grid No.1 current	$+I_g$	-	0.3	-	-	0.3	-	$\mu$ A
Grid No.1 resistor	$R_{g_1}$	-	0.33	-	-	0.33	-	M $\Omega$

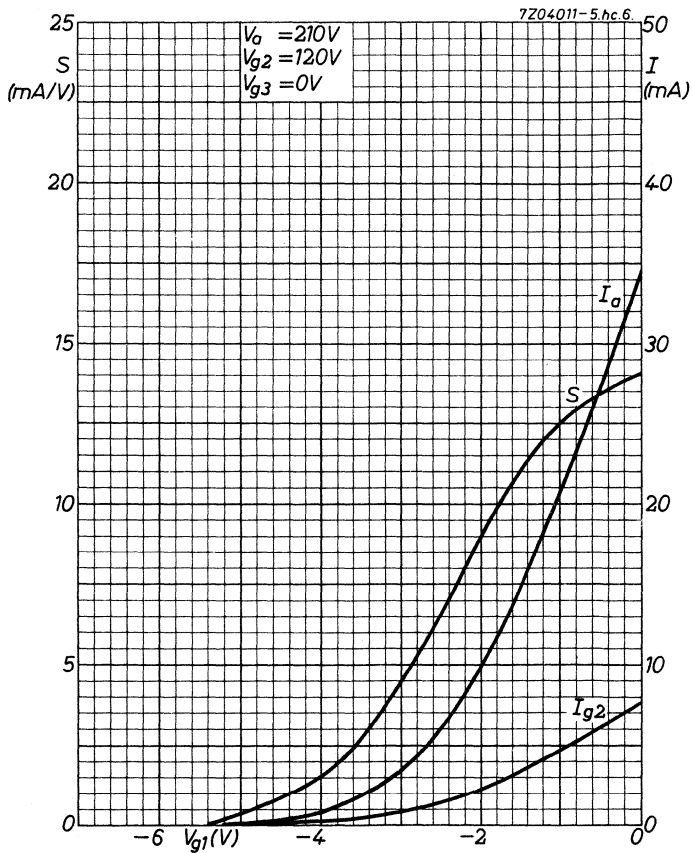


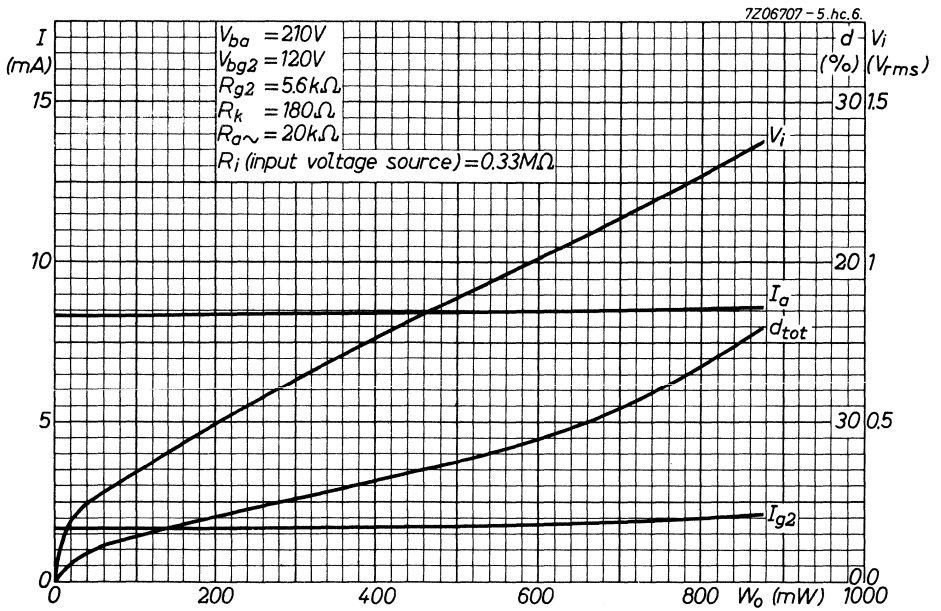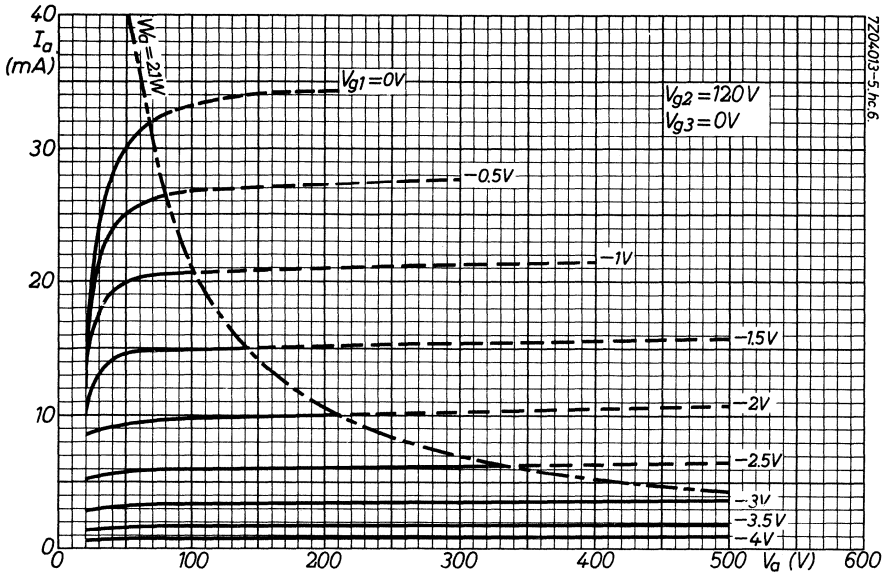

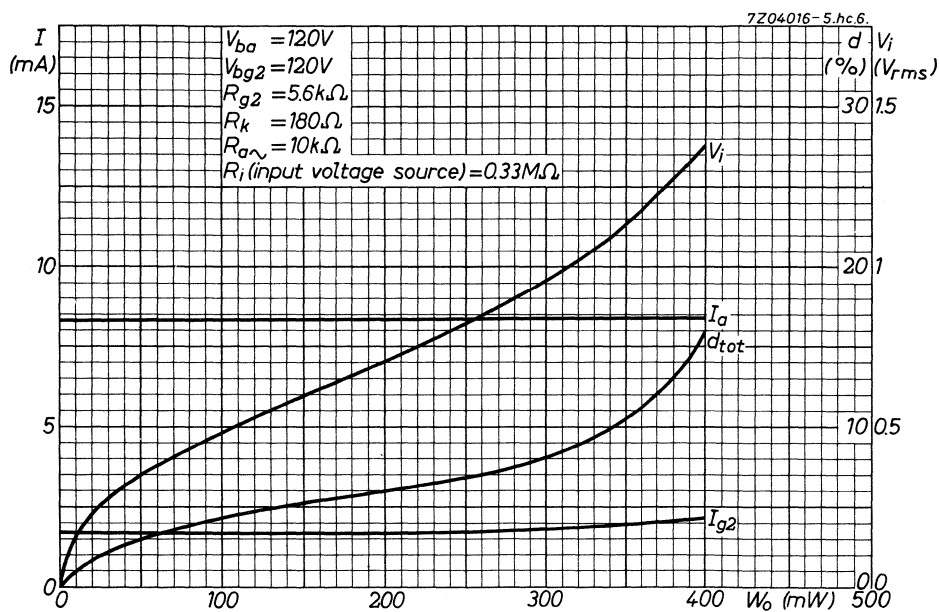

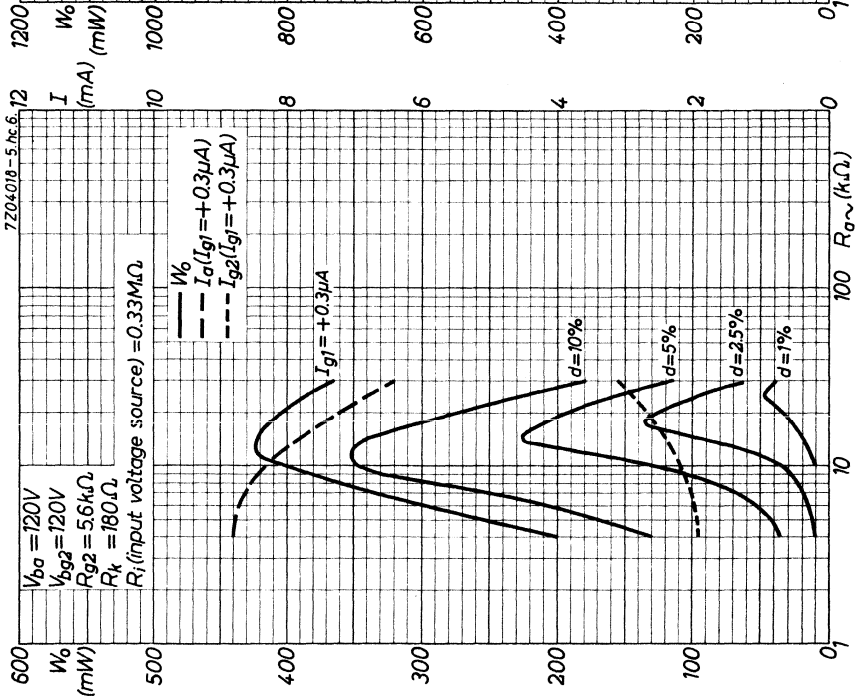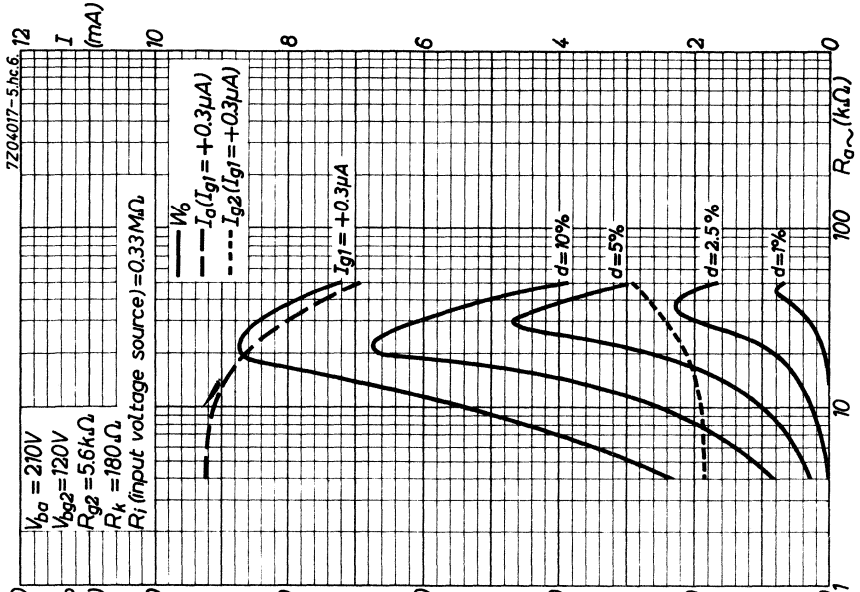

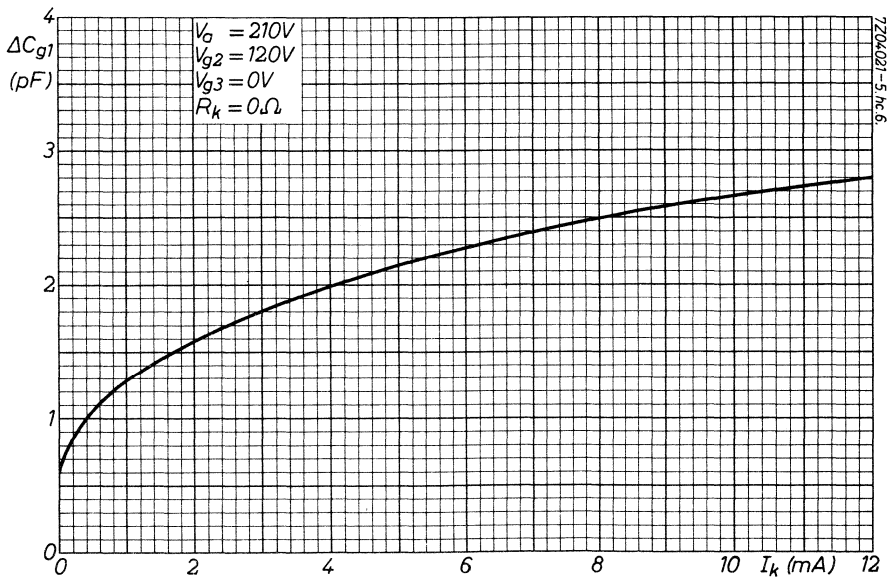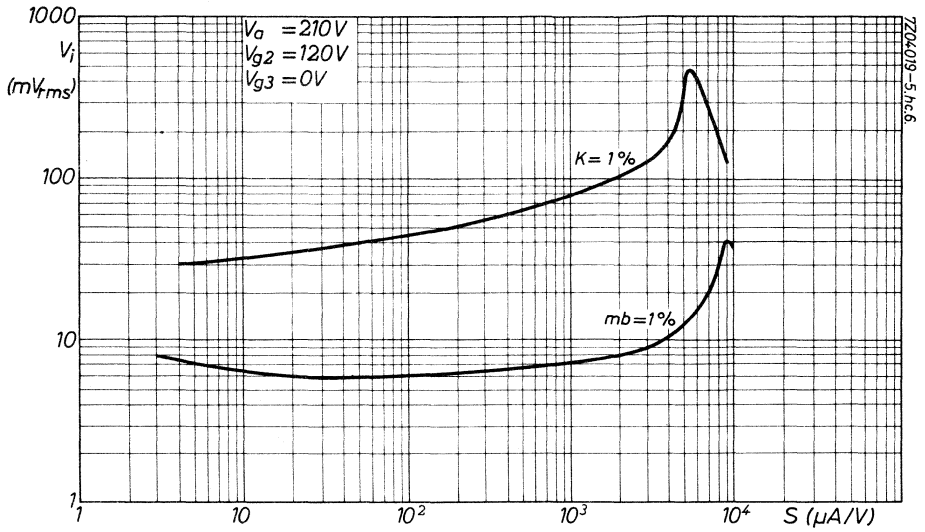

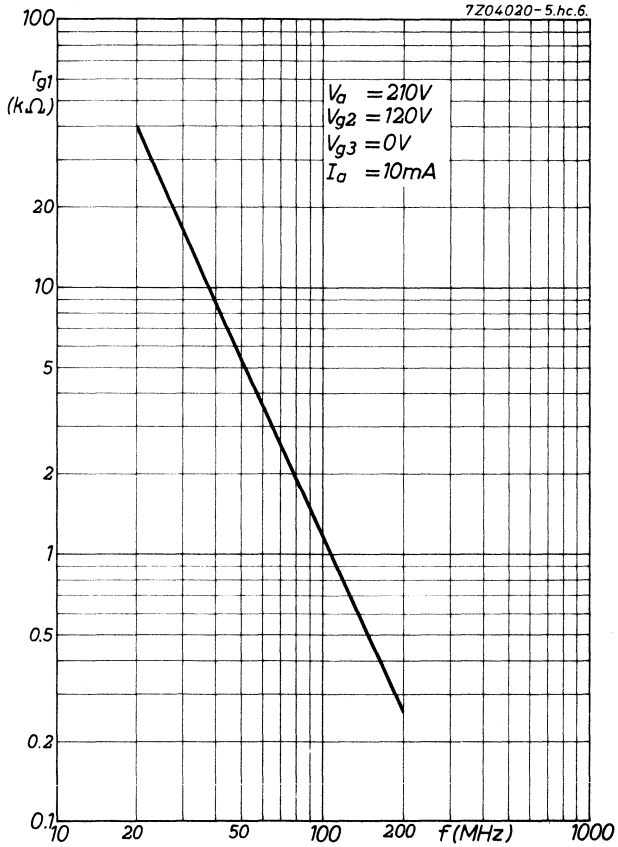



## S.Q. TUBE




Output pentode designed for use in telephone equipment.

QUICK REFERENCE DATA		
Life test	10 000 hours	
Base	Noval	
Heating	Indirect A.C. or D.C. Series or parallel supply	
Heater voltage	$V_f$	18 V
Heater current	$I_f$	130 mA
Anode current	$I_a$	20 mA
Output power, Class A	$W_o$	1 W

### DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval

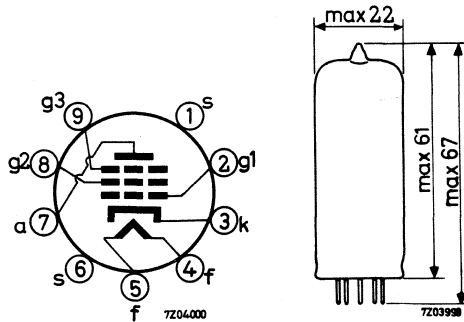

CHARACTERISTICS

Column I Nominal value or setting of the tube  
 II Range values for equipment design: Initial spread  
 III Range values for equipment design: End of life

		I	II	III	
Heater voltage	$V_f$	18			V
Heater current	$I_f$	130	123 - 137		mA
Anode voltage	$V_a$	210			V
Grid No.3 voltage	$V_{g3}$	0			V
Grid No.2 voltage	$V_{g2}$	210			V
Cathode resistor	$R_k$	120			$\Omega$
Anode current	$I_a$	20	17 - 23	min. 13.5	mA
Grid No.2 current	$I_{g2}$	5.3	4.1 - 6.5	min. 3.1	mA
Mutual conductance	S	11	9.5 - 12.5	min. 7.8	mA/V
Internal resistance	$R_i$	0.3	min. 0.2		M $\Omega$
Output power	$W_o$	1.0	min. 0.7		W
Load resistance $R_{a\sim}$					$\approx 15\text{ k}\Omega$
Total distortion $d_{tot}$					$= 5\%$
Total distortion at $W_o = 0.1\text{ W}$	$d_{tot}$	1.2	max. 2		%
Amplification factor	$\mu_{g2g1}$	36			
Equivalent noise resistance (R.F.)	$R_{eq}$	1.2			k $\Omega$
<u>Negative grid current</u>	$-I_{g1}$		max. 0.5	max. 1.0	$\mu\text{A}$
<u>Cut-off voltage</u>	$-V_{g1}$		max. 8.5		V
Anode current	$I_a$	0.5			mA
<u>Hum voltage</u>	$V_{g1}$		max. 0.2		mV <sub>RMS</sub>
$R_{g1} = 0.5\text{ M}\Omega$					
Heater centre earthed					
<u>Insulation resistance between two electrodes</u>	$R_{ins}$		min. 100		M $\Omega$

**CHARACTERISTICS** (continued)

Leakage current between cathode and heater

Voltage between cathode and heater  $V_{kf} = 120$  V

Cathode heating time

Cathode cooling time

	I	II	
$I_{kf}$		max. 24	$\mu A$
	16	max. 22	sec
	15	min. 7	sec

**CAPACITANCES**

Anode to grid No.2, grid No.3, cathode, heater and screen

Grid No.1 to grid No.2, grid No.3, cathode, heater and screen

Grid No.1 to grid No.2, grid No.3, cathode, heater and screen

Cathode current  $I_k = 25$  mA

Anode to grid No.1

Grid No.1 to heater

Cathode to heater

Radiation capacitance: Anode to surrounding box, inner dia. 52 mm, height 98 mm

Radiation capacitance: Grid No.1 to surrounding box, inner dia. 52 mm, height 98 mm

$C_{a/g_2g_3kfs}$	6.5	5.8 - 7.2	pF
$C_{g_1/g_2g_3kfs}$	11.2	10 - 12.4	pF
$C_{g_1/g_2g_3kfs}$	14.3		pF
$C_{ag_1}$		max.0.02	pF
$C_{g_1f}$		max. 0.2	pF
$C_{kf}$	4.2		pF
$C_{ra}$		max.0.06	pF
$C_{rg_1}$		max.0.12	pF

**LIFE**

Production samples are tested to be within the end of life values (column III) during 10 000 hours.

**LIMITING VALUES** (Design centre rating system)

Anode voltage	$V_{a0}$	max. 550 V
	$V_a$	max. 210 V
Anode dissipation	$W_a$	max. 4.5 W
Grid No.2 voltage	$V_{g20}$	max. 550 V
	$V_{g2}$	max. 210 V
Grid No.2 dissipation	$W_{g2}$	max. 1.2 W
Cathode current	$I_k$	max. 30 mA
Voltage between cathode and heater	$V_{kf}$	max. 120 V
Bulb temperature	$t_{bulb}$	max. 170 °C
Grid resistor, automatic bias	$R_{g1}$	max. 0.5 MΩ
fixed bias	$R_{g1}$	max. 0.25 MΩ


**OPERATING CHARACTERISTICS**As pre-amplifier

Anode voltage	$V_a$	210 V
Grid No.3 voltage	$V_{g3}$	0 V
Grid No.2 voltage	$V_{g2}$	210 V
Cathode resistor	$R_k$	180 Ω
Anode resistance	$R_{a\sim}$	20 kΩ
Anode current	$I_a$	15 mA
Grid No.2 current	$I_{g2}$	4 mA
Mutual conductance	$S$	10 mA/V
Internal resistance	$R_i$	0.4 MΩ
Voltage gain	$g$	5.15 Neper


## OPERATING CHARACTERISTICS (continued)

As output tube class A


Anode voltage	$V_a$	210 V
Grid No.3 voltage	$V_{g_3}$	0 V
Grid No.2 voltage	$V_{g_2}$	210 V
Cathode resistor	$R_k$	120 $\Omega$
Anode current	$I_a$	20 mA
Grid No.2 current	$I_{g_2}$	5.3 mA
Mutual conductance	$S$	11 mA/V
Internal resistance	$R_i$	0.3 $M\Omega$
Anode resistance	$R_{a\sim}$	15 $k\Omega$
Input voltage	$V_i$	0.95 $V_{RMS}$
Output power	$W_o$	1 W
Total distortion	$d_{tot}$	5 %

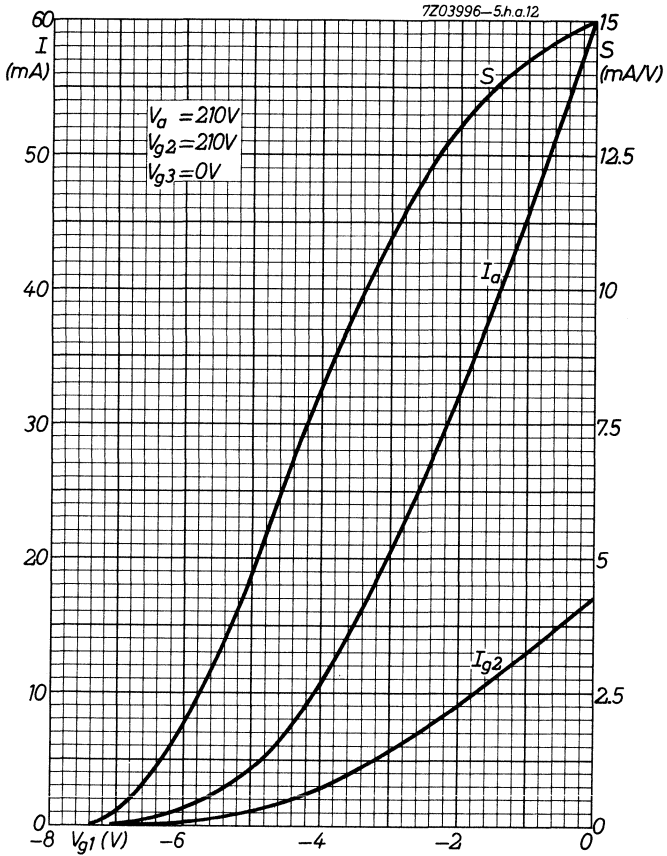


7Z03993-5, h.a.12

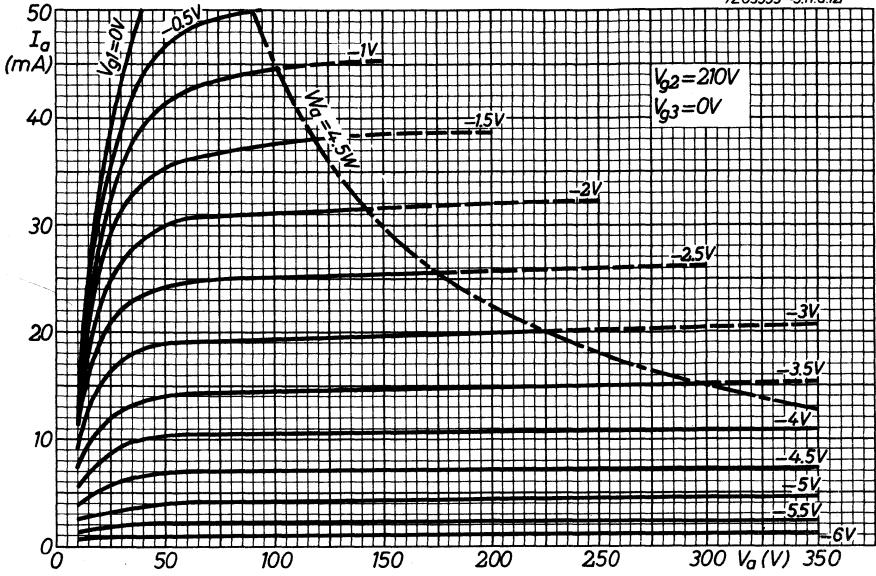


7Z03995-5, h.a.12

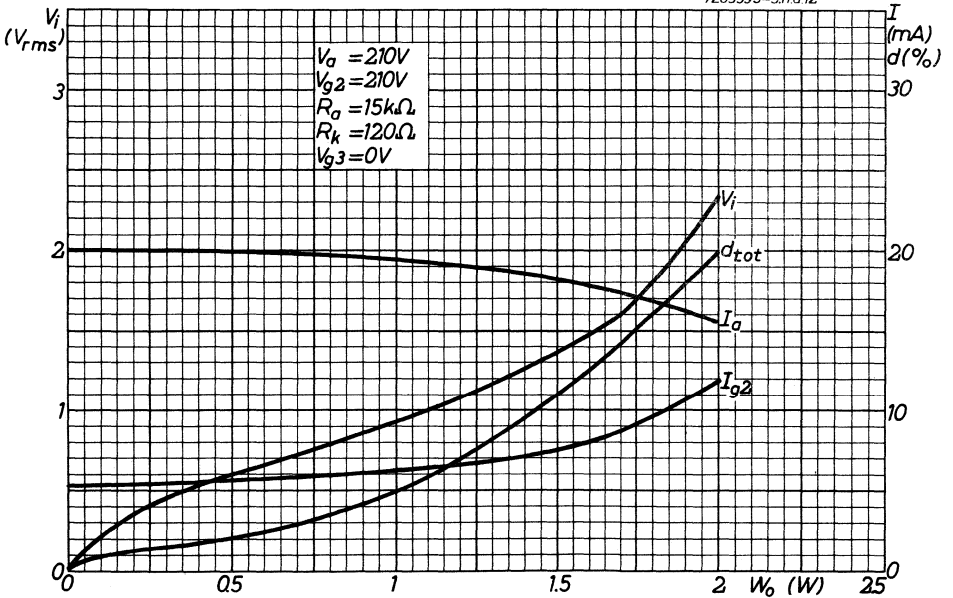

7203994-5.h.a.12

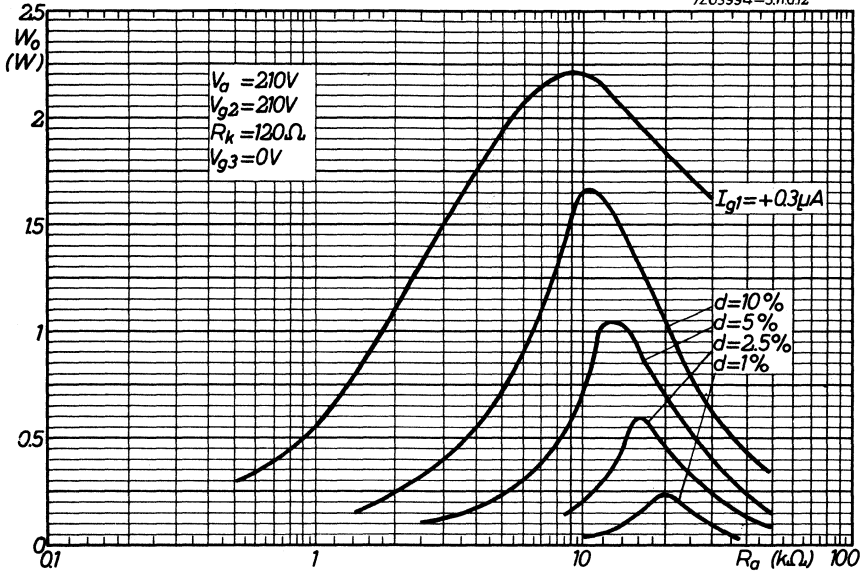

7203997-5.h.a.12

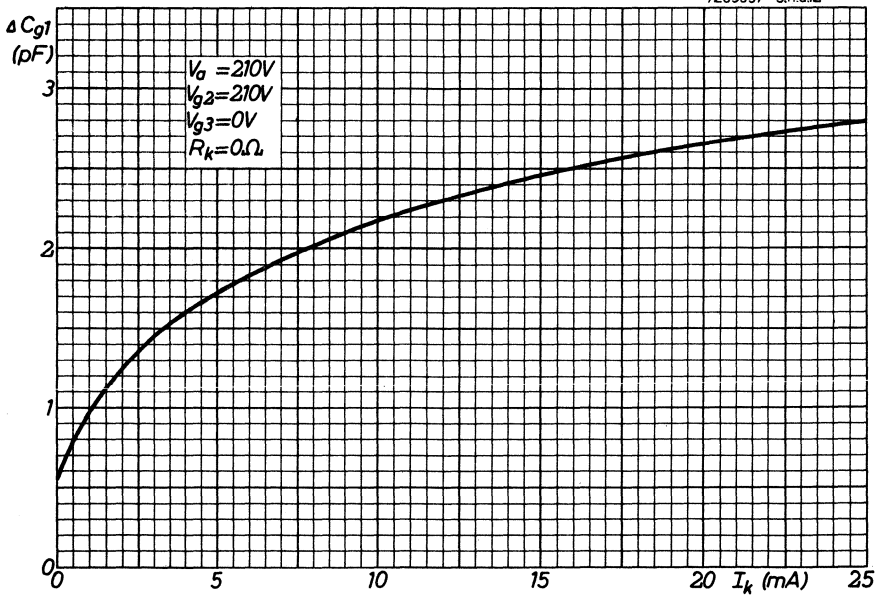



## Miscellaneous devices





## VACUUM GAUGE HEAD, PENNING TYPE

Glass envelope, high vacuum gauge head of the Penning type (cold-cathode, ionisation type). Pressure range  $2 \times 10^{-3}$  torr to  $10^{-5}$  torr.

### CHARACTERISTICS

Pressure range	$2 \times 10^{-3}$ to $10^{-5}$ torr
Sensitivity	see page 3

### Notes:

1. The graph on page 3 is correct within a factor two for air, hydrogen, argon and carbon dioxide. The inaccuracy can be reduced to plus or minus 5% by calibrating for the gas composition in question.
2. Water vapour contamination of the gauge head may cause misreadings; in this case it is advisable to take readings some minutes after application of the anode supply voltage.

### TYPICAL OPERATING CONDITIONS

CIG-22 combined with magnet type 95380

Anode supply voltage	$V_{ba}$	2000	V d.c.
Anode resistor	$R_a$	1	$M\Omega$

### LIMITING VALUES


CIG-22 combined with magnet type 95380

Anode voltage	max.	2500	V
Anode current	max.	2	mA

**MECHANICAL DATA**

Dimensions in mm

Material of tubulation: 01 soft glass

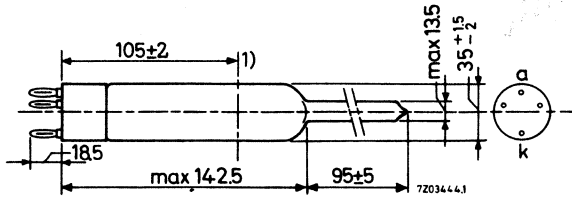


1) Line through the centres of the cathode plates and axis of the magnetic flux lines.

Mounting position: any


Note: When in operation the gauge has a pumping effect; to prevent misreadings due to pressure losses in the connecting tubulation, the connection to the vacuum chamber should be wide and short. Recommended dimensions are: diameter min. 10 mm and length max. 100 mm.

**ASSOCIATED COMPONENTS**

Magnet 95380

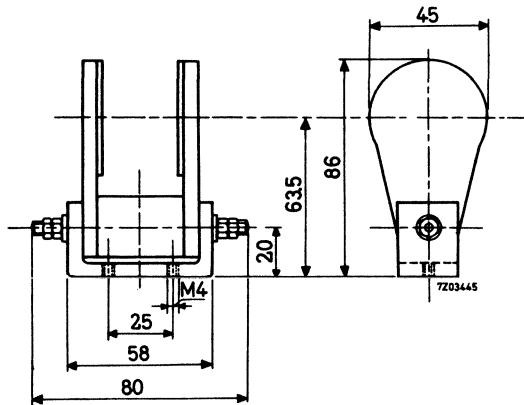

Magnet type 95380

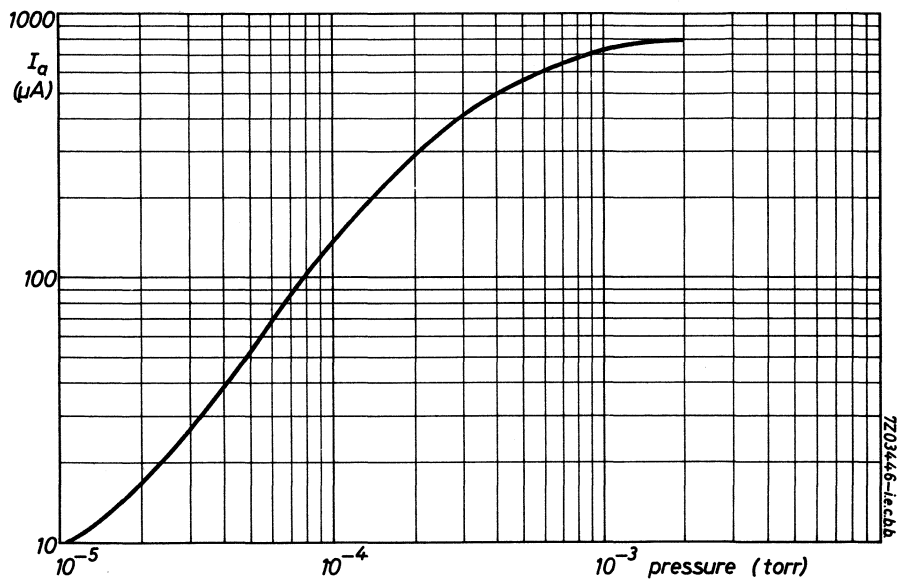



**VACUUM GAUGE HEAD, PENNING TYPE  
EXTRA SENSITIVE**

Glass envelope, high vacuum gauge head of the Penning type (cold-cathode, ionization type). Pressure range  $10^{-4}$  torr to  $5 \times 10^{-8}$  torr.

**CHARACTERISTICS**

Pressure range	$10^{-4}$ to $5 \times 10^{-8}$ torr
Sensitivity	see page 3

Notes:

1. The graph on page 3 is correct within a factor two for air, hydrogen, argon and carbon dioxide. The inaccuracy can be reduced to plus or minus 5 % by calibrating for the gas composition in question.
2. Water vapour contamination of the gauge head may cause misreadings; in this case it is advisable to take readings some minutes after application of the anode supply voltage.

**TYPICAL OPERATING CONDITIONS**

CIG-82 combined with magnet type 95380

Anode voltage	$V_{ba}$	2000	V d.c.
Anode resistor	$R_a$	1	$M\Omega$

**LIMITING VALUES**


CIG-82 combined with magnet type 95380

Anode supply voltage	max.	2500	V
Anode current	max.	2	mA

**MECHANICAL DATA**

Dimensions in mm

Material of tubulation: G28 hard glass

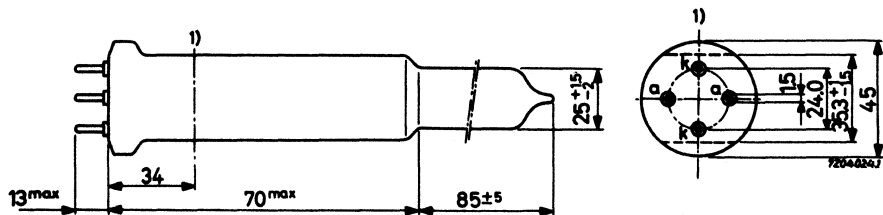


Mounting position: any

Note: When in operation the gauge has a pumping effect; to prevent misreadings due to pressure losses in the connecting tubulation, the connection to the vacuum chamber should be wide and short. Recommended dimensions are diameter min. 10 mm and length max. 100 mm.


**ASSOCIATED COMPONENTS**

Magnet 95380

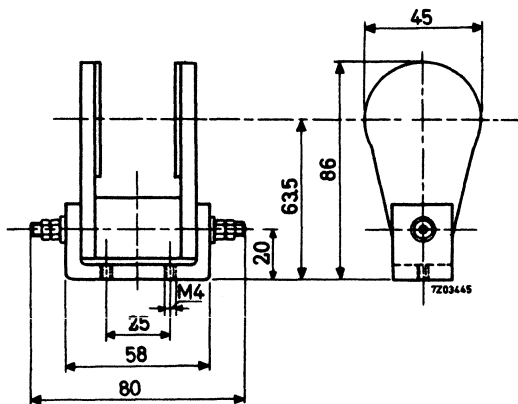

Magnet type 95380



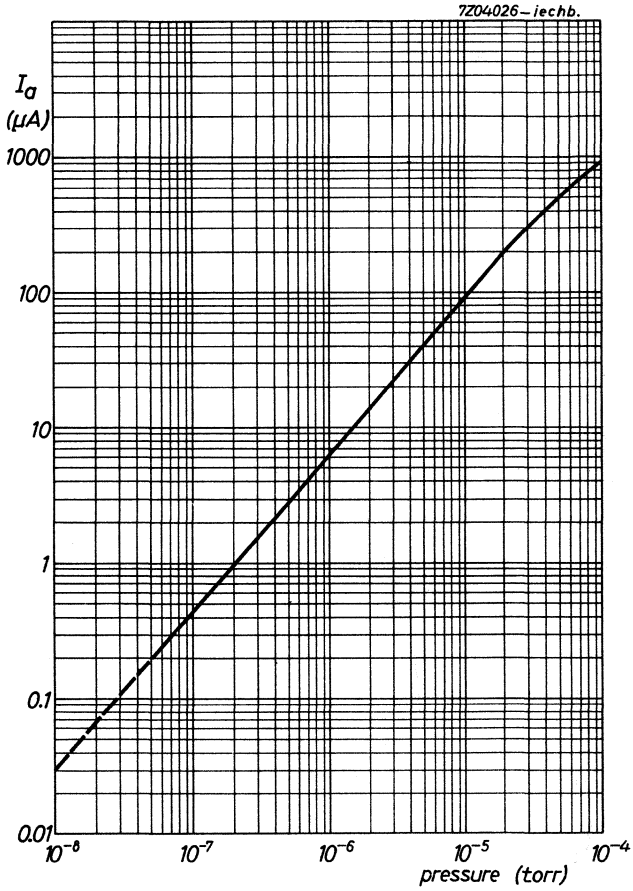






## LIMITING VALUES


Gauge filament voltage	max. 8 V
Gauge emission current	max. 75 mA
Getter filament current	max. 10 A
Grid wattage	max. 40 W
Bulb temperature during operation	max. 100 °C
Bake-out temperature	max. 450 °C

## MECHANICAL DATA

Dimensions in mm

Material W1 glass

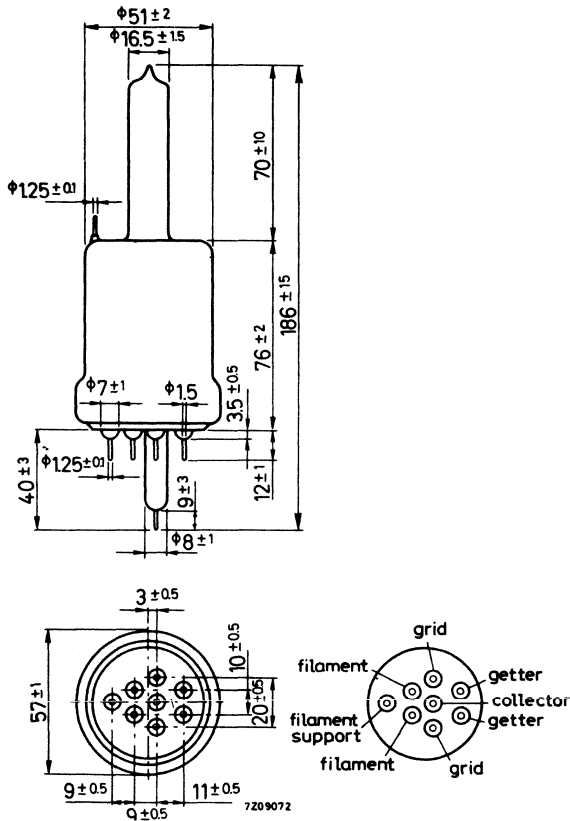

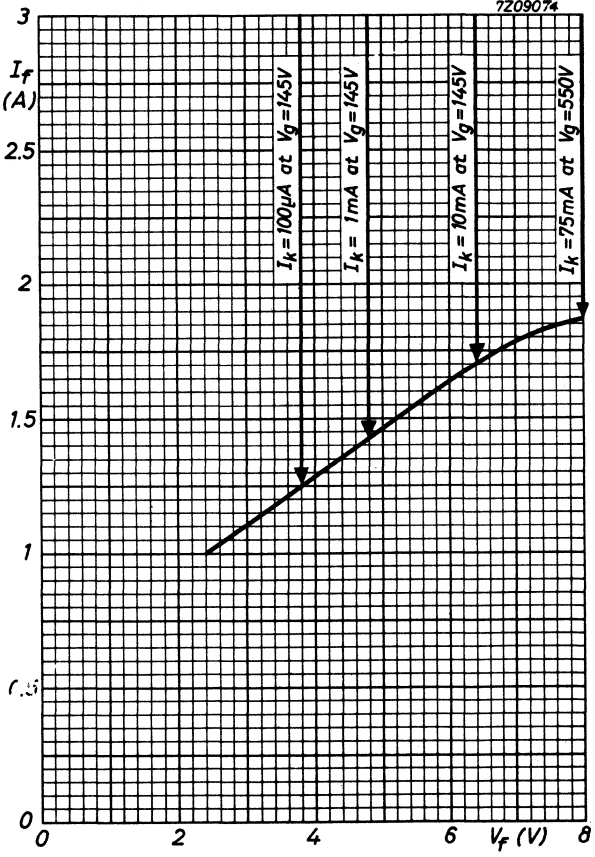



## VACUUM GAUGE HEAD , BAYARD-ALPERT TYPE



Glass envelope, ultra-high vacuum gauge head of the Bayard-Alpert type. Measuring range  $10^{-3}$  torr to  $10^{-10}$  torr; sensitivity approx. 12 per torr.

The gauge head is provided with an electrically conductive layer deposited on the inside of the glass envelope. By applying a fixed potential to the layer, excess primary electrons are attracted directly to the envelope rather than oscillating around the collector thereby leading to very stable measurements of low pressure. Moreover the gauge head features a low thermal inertia and a low filament power consumption.

### CHARACTERISTICS

Pressure range	10 <sup>-3</sup> to 10 <sup>-10</sup> torr
Sensitivity (for nitrogen)	approx. 12 per torr
Emission current range	1 $\mu$ A to 75 mA
Filament characteristics	see page 3
Insulation resistance	
Collector to other electrodes	min. 10 <sup>14</sup> $\Omega$
Grid to other electrodes	min. 10 <sup>12</sup> $\Omega$

### TYPICAL OPERATING CONDITIONS

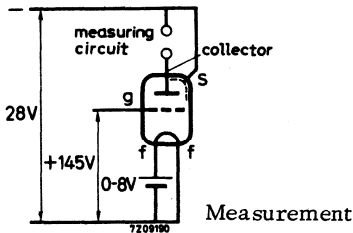

Emission current (see also page 3)

measurement	100 $\mu$ A, 1 mA or 10 mA
outgassing	75 mA



**LIMITING VALUES**

Pressure (filament litt)	max. $10^{-3}$ torr
Filament voltage	max. 8 V
Emission current	max. 75 mA
Grid input power	max. 40 W
Bulb temperature during operation	max. 100 °C
Bake-out temperature	max. 450 °C


**MECHANICAL DATA**

Material tubulation G28 glass  
 Filament Tungsten

Dimensions in mm

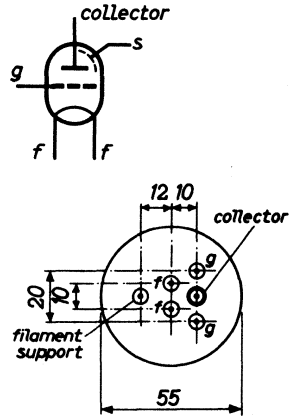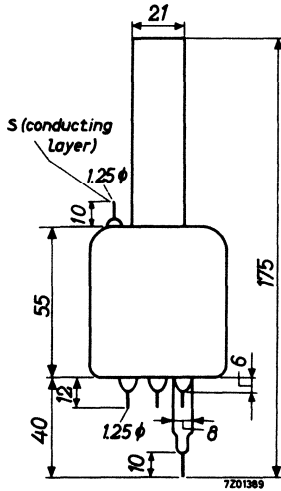



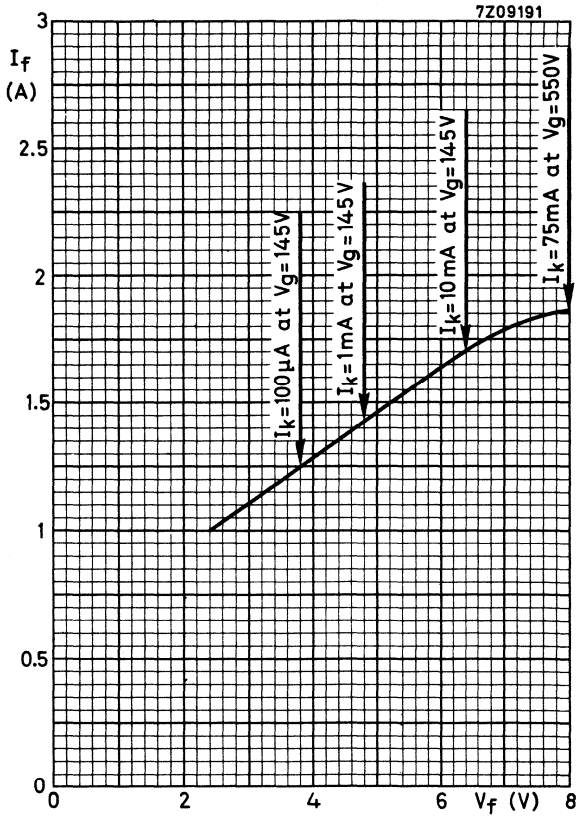



**VACUUM GAUGE HEAD, BAYARD-ALPERT TYPE**

Nude, ultra-high vacuum gauge head of the Bayard-Alpert type.  
 Measuring range  $10^{-3}$  torr to  $10^{-10}$  torr; sensitivity approx. 12 per torr.

Type IOG-13T has a fernico skirt, prepared for easy welding.

The gauge head features a low thermal inertia and a low filament power consumption.

FOR THE ELECTRICAL DATA SEE TYPE IOG-12

**MECHANICAL DATA**

Dimensions in mm



Material

Filament

Tungsten

Skirt

Fernico

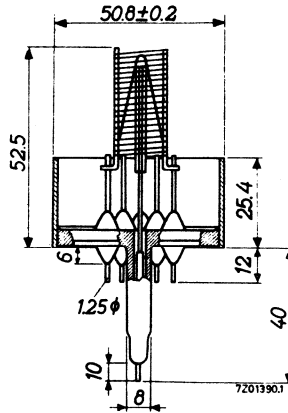

Mounting position: any



## VACUUM GAUGE HEAD , BAYARD-ALPERT TYPE


Glass envelope, ultra-high vacuum gauge head of the Bayard-Alpert type. Measuring range  $10^{-3}$  torr to  $10^{-10}$  torr; sensitivity approx. 12 per torr.

The gauge head is provided with two filaments, one of tungsten and one of lanthanum hexaboride.


### CHARACTERISTICS

Pressure range	$10^{-3}$ to $10^{-10}$ torr
Sensitivity (for nitrogen)	approx. 12 per torr
Emission current range	1 $\mu$ A to 75 mA
Filament characteristics	see page 3
Insulation resistance	
collector to other electrodes	min. $10^{14}$ $\Omega$
grid to other electrodes	min. $10^{12}$ $\Omega$

### TYPICAL OPERATING CONDITIONS




Measurement



Outgassing

Grid voltage, in combination with fil. 1	$V_g$ +145 V
in combination with fil. 2	+178 V
Emission current (see also page 3 )	
measurement	100 $\mu$ A, 1 mA or 10 mA
outgassing	75 mA



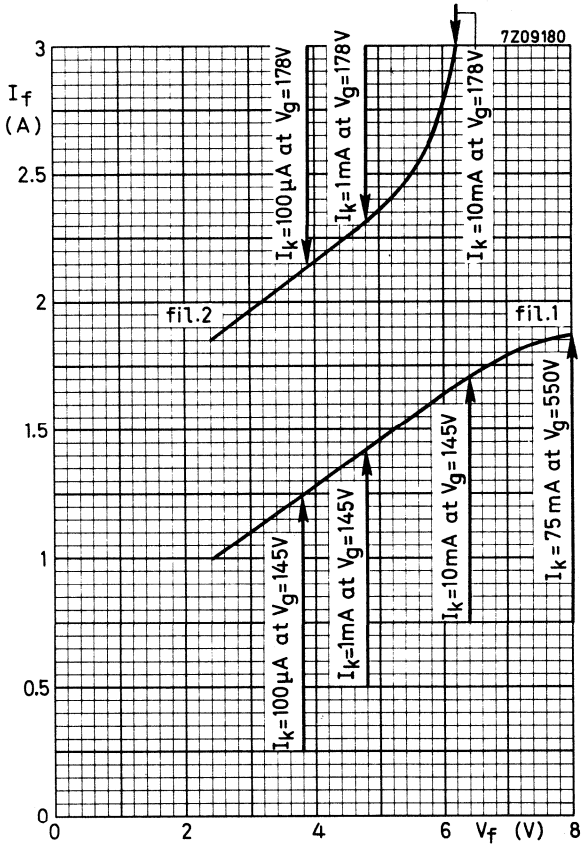





## VACUUM GAUGE HEAD, BAYARD-ALPERT TYPE

Ultra-high vacuum gauge head of the Bayard-Alpert type. Measuring range  $10^{-3}$  torr to  $4 \times 10^{-11}$  torr; sensitivity approx. 12 per torr.

Type IOG-18 has a glass envelope.

Type IOG-18N has a fernico skirt, prepared for easy welding.

The heads with a glass envelope are provided with an electrically conductive layer on the inside of the envelope. By applying a fixed potential to the layer, excess primary electrons are attracted directly to the envelope rather than oscillating around the collector thereby leading to very stable measurements of low pressure.



Moreover the gauge head features a low thermal inertia and a low filament power consumption.



### CHARACTERISTICS

Pressure range	$10^{-3}$ to $4 \times 10^{-11}$ torr
Sensitivity (for nitrogen)	approx. 12 per torr
Emission current range, type IOG-18	1 $\mu$ A to 50 mA
type IOG-18N	1 $\mu$ A to 30 mA
Filament characteristics	see page 4
Insulation resistance	
Collector to other electrodes	min. $10^{14}$ $\Omega$
Grid to other electrodes	min. $10^{12}$ $\Omega$

### TYPICAL OPERATING CONDITIONS




Emission current (see also page 4)  
measurement\*  
outgassing, type IOG-18  
type IOG-18N

100  $\mu$ A, 1 mA or 10 mA  
50 mA  
30 mA





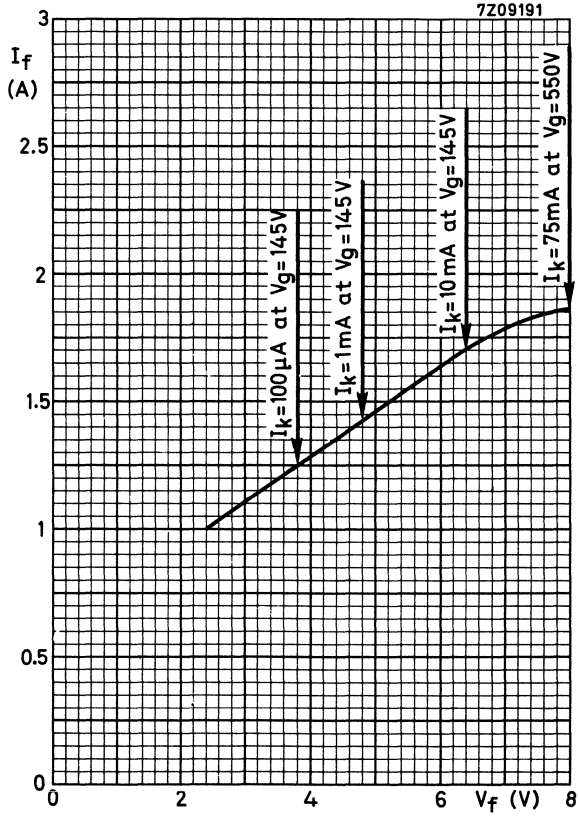

## VACUUM GAUGE HEAD, BAYARD-ALPERT TYPE

Ultra-high vacuum gauge head of the Bayard-Alpert type. Measuring range  $10^{-3}$  torr to  $4 \times 10^{-11}$  torr; sensitivity approx. 12 per torr.

Type IOG-19N has a fernico skirt, prepared for easy welding.

The gauge head features a low thermal inertia and a low filament power consumption.

FOR THE ELECTRICAL DATA SEE TYPE IOG-18

### MECHANICAL DATA

Material


Filament

Tungsten

Skirt

Fernico

Mounting position: any

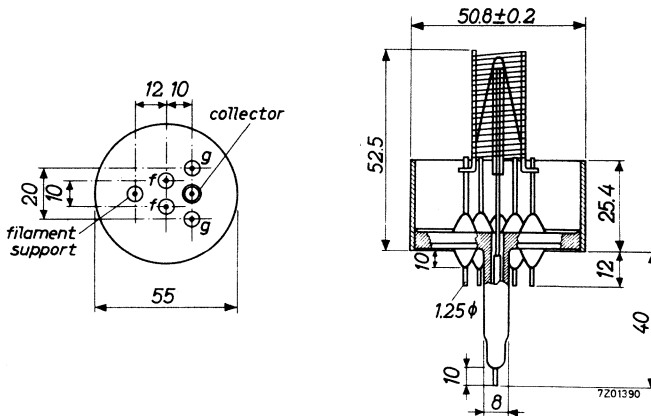




## VACUUM GAUGE HEAD, TRIODE TYPE

Glass envelope, high vacuum gauge head of the triode type (hot-cathode, ionization type). Measuring range  $10^{-3}$  to  $5 \times 10^{-8}$  torr, sensitivity 20 per torr.

### CHARACTERISTICS

Pressure range	$10^{-3}$ to $5 \times 10^{-8}$ torr
Sensitivity (for dry air)	20 per torr

### TYPICAL OPERATING CONDITIONS



### Grid current

above $10^{-4}$ torr	5 mA
below $10^{-4}$ torr	10 mA

### LIMITING VALUES



Pressure (filament litted)	max. $5 \times 10^{-3}$ torr
Filament voltage	max. 10 V
Bake-out temperature	max. 450 °C

MECHANICAL DATA


Dimensions in mm

Material: W1 glass

foot made to B7A spec.

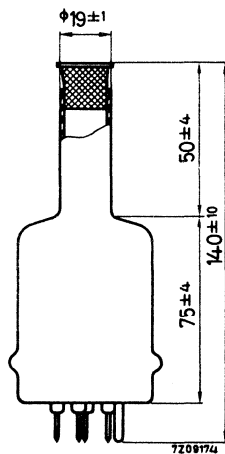



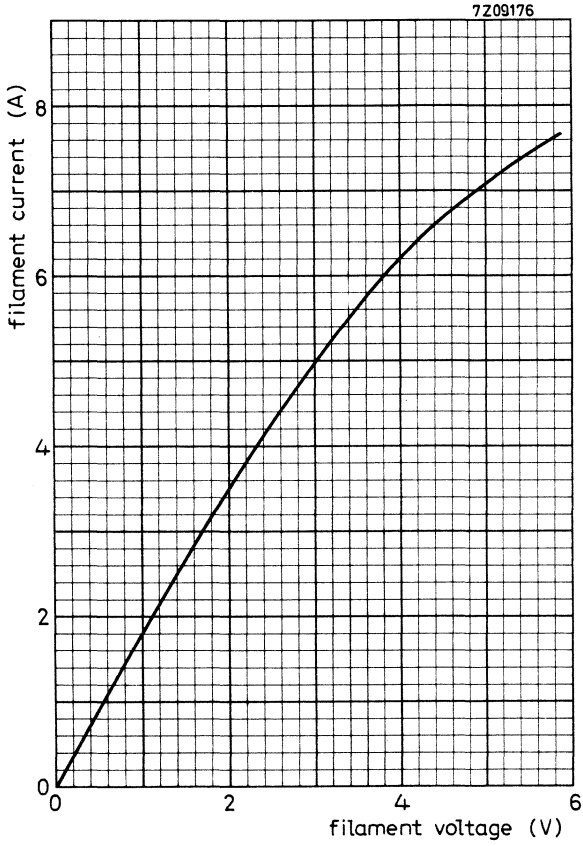



## DRY REED SWITCH

Miniature dry reed switch hermetically sealed in a gas-filled glass capsule. Single-pole, single-throw type, having normally open contacts, and containing two magnetically actuated reeds. The switch is of the double-ended type and may be actuated by means of either an electromagnet or a permanent magnet or combinations of both. The switch is intended for use in telephone equipment and other applications where exceptional reliability is required.


### QUICK REFERENCE DATA

Contact	S. P. S. T. normally open
Switched power	max. 5 W
Switched voltage	max. 65 V
Switched current	max. 100 mA
Failure rate	$< 5 \times 10^{-8}$

### MECHANICAL DATA

Contact material	gold
Contact arrangement	normally open
Terminal finish	tinned
Resonant frequency of single reed	approx. 1650 Hz
Net weight	approx. 0.6 g
Mounting position	any

Dimensions in mm

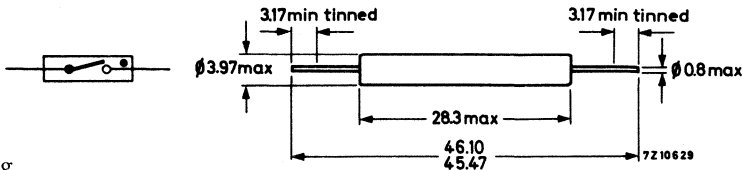

### Mounting

The leads should not be bent nearer than 2 mm to the glass-to-metal seals. Stress on the glass-to-metal seals should be avoided.

The robustness of terminations is tested according to IEC Publication 68-2-21. test U<sub>a</sub> (load 2.75 kg), U<sub>b</sub> (load 1 kg, 2 bends), and U<sub>c</sub>.

Care must be taken to prevent stray magnetic fields from influencing the operating and measuring conditions.

Soldering

The switch may be soldered direct into the circuit but heat conducted to the glass-to-metal seals should be kept to a minimum by the use of a thermal shunt.

Dip-soldering is permitted to a minimum of 4 mm from the seals at a solder temperature of 240 °C during maximum 10 s.

Solderability

Solderability is tested according to IEC Publication 68-2-20, test T, solder globule method.

**CHARACTERISTICS**

Non-operative

Breakdown voltage	min.	1000	V
Insulation resistance, initial (V = 100 V)	min.	10 <sup>5</sup>	MΩ
Capacitance without test coil		0.70	pF
Capacitance with earthed test coil		0.35	pF
Non-operative ampere turns	max.	30	A. T. <sup>1)</sup>

Operative

Operating ampere turns	max.	58	A. T. <sup>1)</sup>
Operating time, including bounce	av.	0.6	ms <sup>1)2)</sup>
	max.	1.0	ms <sup>1)2)</sup>
Switched current	max.	100	mA

Hold

Hold ampere turns	min.	27	A. T. <sup>1)</sup>
Current through closed contacts	max.	1	A
Contact resistance, initial	min.	60	mΩ <sup>1)3)</sup>
	max.	150	mΩ <sup>1)3)</sup>

Release

Release ampere turns	max.	15	A. T. <sup>1)</sup>
Release time	max.	50	μs <sup>1)2)</sup>
Switched current	max.	100	mA
Switched power	max.	5	W

1) Measured in a standard coil of 5000 turns of 42 SWG single enamelled copper wire on a coil former of 25.4 mm winding length and a core diameter of 8.75 mm.

2) Measured with 80 A. T.

3) Measured with 40 A. T.

**LIMITING VALUES** (Absolute max. rating system)

See also "Life expectancy and reliability"

Switched power	max.	5	W
Switched voltage	max.	65	V
Switched current	max.	100	mA
surge (T = max. 100 ns)	max.	1.5	A
Temperature, operating	min.	-55	°C
	max.	+80	°C

**LIFE EXPECTANCY AND RELIABILITY**

End of life is assumed to be reached when:

- a) the contact resistance exceeds 1 Ω for no load conditions or 2.5 Ω for loaded conditions
- b) the release time exceeds 2.5 ms (latching or contact sticking)

No load conditions

Life expectancy min.  $10^7$  operations with a failure rate of less than  $5.5 \times 10^{-9}$  with 90% confidence level.

Loaded conditions

Life expectancy min.  $5 \times 10^6$  operations with a failure rate of less than  $10^{-8}$  with 90% confidence level.

If inductive loads are to be interrupted, contact protection is recommended (diode or RC network).

Reliability - testing conditions

Capacitive loading resulting in a peak current of 0.8 A  $i_1/i_2 = 1.4$ .  $T = 80$  ns to 100 ns, see Fig. 1. Nominal switched voltage 50 V, nominal switched current 100 mA.

Under these conditions a life of more than  $5 \times 10^6$  operations can be reached with a failure rate of less than  $8.5 \times 10^{-9}$ .

Remark

Higher loads may be switched if a reduced life expectancy and reliability are acceptable. The manufacturer should be consulted before doing so.

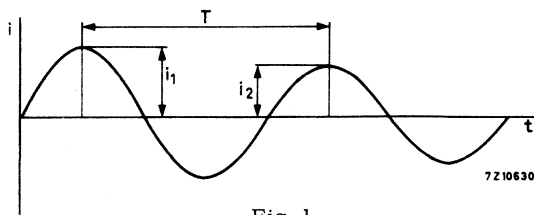


Fig. 1

**SHOCK AND VIBRATION**

Impact : Acceleration 50 g during 11 ms, due to a force perpendicular to the flat sides of the reeds.

Such an impact will not cause an open contact (no magnetic field present) to close, nor a contact kept closed by an 80 A.T. coil to open.

Vibration: Frequency range 50 Hz to 1500 Hz, acceleration 20 g due to a force perpendicular to the flat side of the reed.



Such a vibration will not cause an open contact (no magnetic field present) to close, nor a contact kept closed by an 80 A.T. coil to open.



## THERMOCOUPLES



Indirectly heated thermocouples in subminiature construction.

### DIMENSIONS AND CONNECTIONS

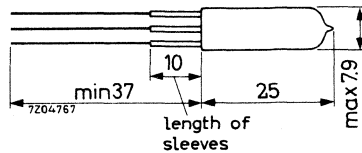

### CHARACTERISTICS AND LIMITING VALUES (Absolute max. rating system)

		TH71	TH73	TH75		
Heater current	$I_f$	0 to 15	0 to 75	0 to 300	mA	
Heater current <sup>1)</sup>	$I_f$	0 to 5	0 to 20	0 to 100	mA	
Heater current at $E = 12$ mV	$I_f$	10	40	200	mA	
Heater current ( $T = \text{max. } 1$ m)	$I_f$	max.	20	100	350	mA
Heater resistance	$R_f$	68	7.0	1.2	$\Omega$	
Resistance of thermocouple	$R_{TH}$	6.0	3.5	3.5	$\Omega$	
Response time <sup>2)</sup>	$T$	10	10	10	s	
at heater current $I_f =$		10	40	200	mA	
Heater to thermocouple voltage	$V_f/TH$	max.	100	100	V	



<sup>1)</sup> In approximately this range  $V_0$  is proportional to the square of  $I_f$

<sup>2)</sup> Time between the moment of switching on of  $I_f$  and the moment of reaching max. voltage (See page 4).

**REMARK**

The electrical characteristics of the types TH71, TH73 and TH75 are identical to those of the types TH1, TH3, TH5 and TH91, TH93 and TH95 respectively and therefore can be used as replacement for these types.

**GENERAL INFORMATION**


The "hot" weld of the thermocouple consists of an iron constantan junction.


The "cold" welds are iron to copper and constantan to copper junctions inside the vacuum envelope.

The tube has copper leads.

The measuring results are practically independent of the ambient temperature of the tube so that no corrections need to be made for the temperature of the "cold" weld.



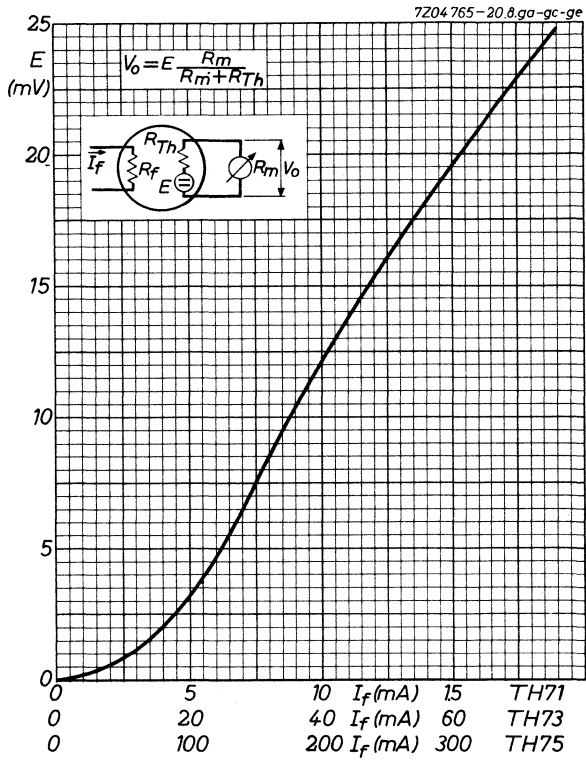

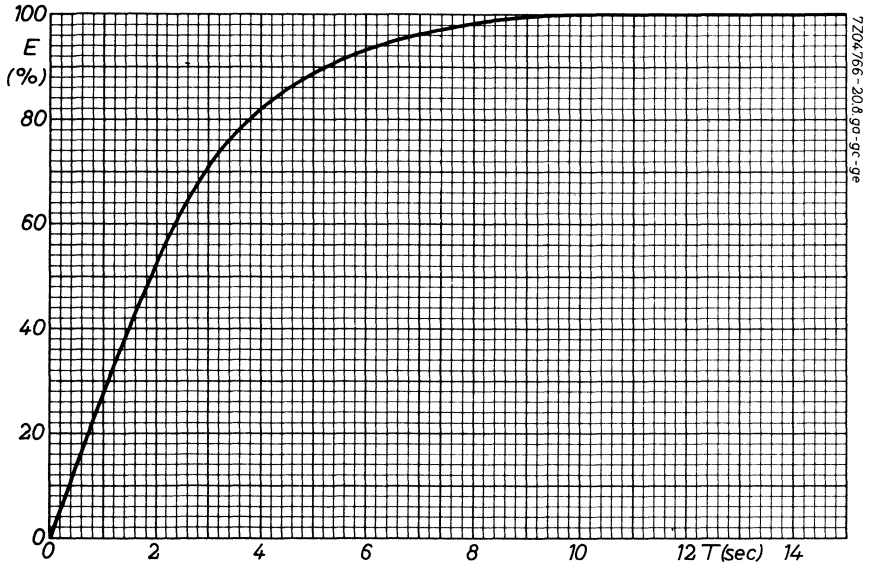

## VIBRATING CAPACITOR

Vibrating membrane capacitor in evacuated envelope to be driven by a high-frequency electric field.

Application: D.C. to A.C. converter, e.g. in dosimeters, pH meters and electrometer equipment, where a very high input resistance is of paramount importance.

Equipment measuring currents of 500 electrons per second have been realised.

### QUICK REFERENCE DATA

Contact potential	-50 to +50 mV
Short term drift of contact potential	< 100 $\mu$ V
Insulation	> 10 <sup>15</sup> $\Omega$
Outline dimensions:	
overall length	max. 64.7 mm
diameter	max. 30.2 mm

### MECHANICAL DATA



Base: Magnoval, gold plated pins

$C_m$  = measuring capacitor


$C_{dr}$  = driving capacitor

Operating position: any

Dimensions in mm



## PRINCIPLE OF OPERATION

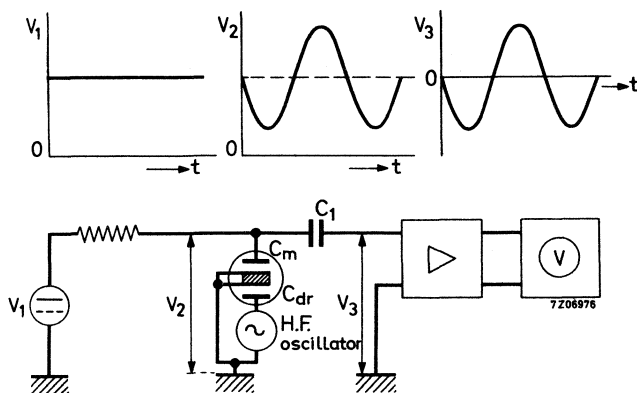

The D.C. voltage to be measured is connected to capacitor  $C_m$ . The earthed membrane vibrates in its own resonance frequency as a result of an H.F. electrical field between the electrodes of capacitor  $C_{dr}$ . So the D.C. voltage on capacitor  $C_m$  is modulated in the resonance frequency of the membrane. Capacitor  $C_1$  insulates the D.C. source from the A.C. amplifier.

### LIMITING VALUES (Absolute max. rating system)

D.C. voltage on  $C_m$  max. 25 V

Conversion efficiency

$$\frac{\text{R.M.S. output voltage}}{\text{D.C. input voltage}} \quad \text{max. } 40 \% \text{ } ^1)$$

### ELECTRICAL DATA

Contact potential over $C_m$	-50 to +50 mV
Short term drift (within 1 day)	0.1 mV
Long term drift (within 1 month)	1 mV
Temperature dependance	20 $\mu\text{V}/^\circ\text{C}$

Conversion efficiency:

At a certain driving voltage the conversion efficiency will show a max. spread of  $\pm 60\%$  (1:4)

<sup>1)</sup> Above 40 % it is possible that two capacitor plates will touch each other and will be damaged.

**ELECTRICAL DATA** (continued)

Driving voltage:

There can always be found a value of the H.F. driving voltage at which all capacitors have a conversion efficiency between 10% and 40%. <sup>1)</sup>

Insulation resistance between any two capacitor terminals	> 10 <sup>15</sup> Ω <sup>2)</sup>
Resonance frequency of the membrane	5.3 to 6.3 kHz
Drift	1.5 %
Temperature dependance	± 1 Hz/°C
Capacitances of C <sub>m</sub> and C <sub>dr</sub>	35 pF
Temperature dependance between -10 and +60 °C	ΔC 1 pF



**SHOCK AND VIBRATION RESISTANCE**

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected to a vibration of 15 to 1500 Hz with an acceleration of 2.5 g.

**APPLICATION NOTES**

The capacitive drive opens the possibility to use as driving signal for the membrane a high frequency signal amplitude-modulated with the resonance frequency of the vibrating membrane.

Since in that case there is a great difference between the frequency of the driving signal and the modulation frequency of the voltage to be measured, the stray influences of the driving signal can easily be kept away from the measuring amplifier. In addition, a high frequency drive simplifies design and execution of the driving oscillator.

1) For instance in an apparatus realised with the circuit shown in Fig.2, it turned out that all capacitors have a conversion efficiency between 10 and 40% at a voltage over L<sub>1</sub> of 1 V<sub>RMS</sub>.

2) Under standard atmospheric conditions as defined in I.E.C. publication 68-1, i.e. any combination of temperature, humidity and pressure within the following limits:

Temperature	+15 to +35 °C
Relative humidity	45 to 75 %
Air pressure	860 to 1060 mbar

**EXAMPLE OF A DRIVING OSCILLATOR**

Operating principle

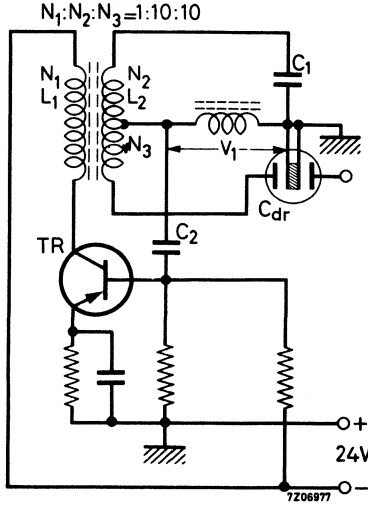


Fig.1

The driving capacitor ( $C_{dr}$ ) is incorporated in an impedance bridge that determines the feedback to the amplifier transistor. Capacitance  $C_1$  has been given a slightly larger value than that of capacitor  $C_{dr}$  in its quiescent state. Due to this the fed-back A.C. voltage  $V_1$  has the proper phase and amplitude to cause the circuit to oscillate in a frequency that is mainly determined by the circuit  $L_2 C_1 C_{dr}$ .

The electric attractive force between the capacitor plates of  $C_{dr}$  makes the membrane move towards the fixed plate of  $C_{dr}$  as a result of which its capacitance increases, the transistor receives less feedback and the oscillator voltage decreases.

The phases and amplitudes of the electrical and the mechanical forces on the membrane and of the feedback factor are such that the membrane begins to vibrate in its resonance frequency, while the H.F. voltage is modulated in amplitude with this frequency.

Since it is very difficult to realize this circuit in such a way that a stable operation is ensured, it is advisable to add some components for automatical adjustment of the capacitance  $C_1$ .

See the following circuit.

EXAMPLE OF A DRIVING OSCILLATOR (continued)

Practical circuit

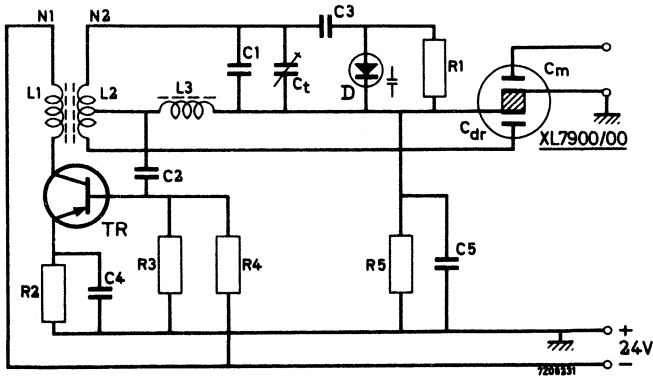


Fig.2

$C_1 = 12 \text{ pF mica}$

$C_2 = 1500 \text{ pF}$

$C_3 = 10 \text{ pF mica}$

$C_4 = 2200 \text{ pF}$

$C_5 = 0.1 \text{ } \mu\text{F}$

$C_t = 25 \text{ pF max.}$

$R_1 = 68 \text{ k}\Omega$

$R_2 = 3.3 \text{ k}\Omega$

$R_3 = 4.7 \text{ k}\Omega$

$R_4 = 1 \text{ k}\Omega$

$R_5 = 1 \text{ M}\Omega$

$L_2 = 1.3 \text{ mH}$

$L_3 = 1.3 \text{ mH R.F. choke}$

$N_2/N_1 = 20$

TR = BCY70

D = BA102





## ELECTROMETER TUBE


Subminiature electrometer triode

QUICK REFERENCE DATA		
Filament voltage	$V_f$	1.25 V
Anode voltage	$V_a$	9 V
Anode current	$I_a$	100 $\mu$ A
Grid current	$-I_g$	$< 12.5 \times 10^{-14}$ A

## DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Subminiature

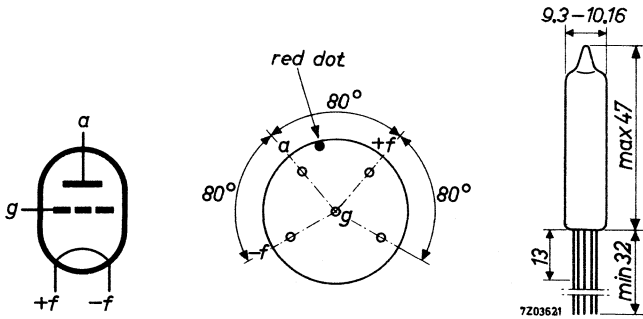

Directly soldered connections to the leads of this tube must be at least 13 mm from the seals and any bending of the leads must be at least 1.5 mm from the seals

**HEATING:** Direct by D.C.

Filament voltage	$V_f$	1.25 V
Filament current	$I_f$	13 mA

**CHARACTERISTICS AND RANGE VALUES**

Anode voltage	$V_a$	9	V
Grid voltage	$V_g$	-2.5	-2 to -3.75 V
Anode current	$I_a$	100	$\mu A$
Transconductance	S	80	70 to 90 $\mu A/V$
Amplification factor	$\mu$	2.0	1.7 to 2.7
Grid current	$-I_g$	$8.5 \times 10^{-14}$	$< 12.5 \times 10^{-14} A$ <sup>1)</sup>
Crossover point <sup>2)</sup>	$V_g$	-1.3	$< -1.6 V$
Anode current at crossover point	$I_a$	-	$> 160 \mu A$

**LIMITING VALUES** (Absolute max. rating system)

Anode voltage	$V_a$	max.	25 V
Anode current	$I_a$	max.	250 $\mu A$
Filament voltage	$V_f$	max.	1.5 V
		min.	1.1 V


**REMARKS**


1. In order to avoid excessive drift of the characteristics the filament voltage must be applied before the anode voltage.
2. To avoid contamination of the glass, the tube should not be removed from its protective envelope until it is mounted into the equipment.

<sup>1)</sup> Valid only in darkness

<sup>2)</sup> The "crossover point" is the point at which the direction of the grid current is reversed

7203619-djfe

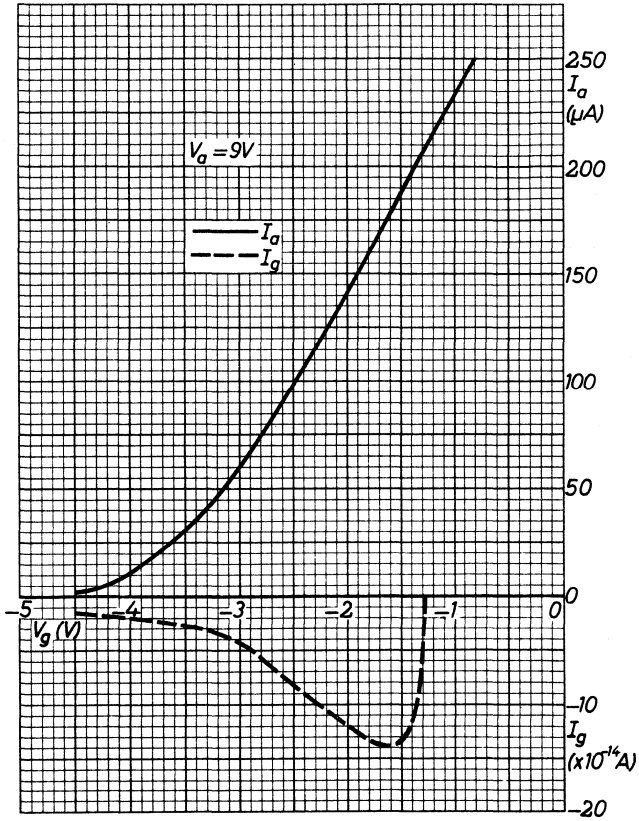

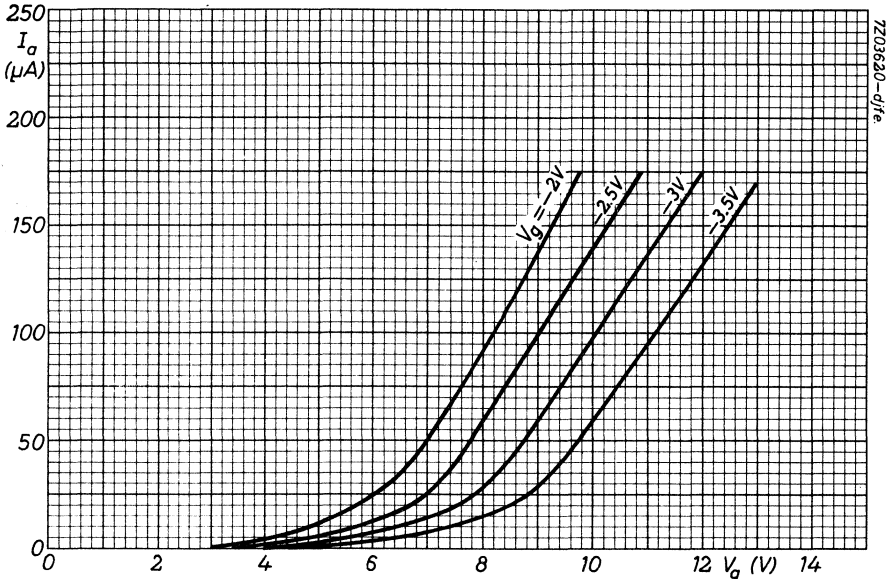

## ELECTROMETER TUBE

Subminiature electrometer tetrode


## QUICK REFERENCE DATA

Filament voltage	$V_f$	1.25 V
Anode voltage	$V_a$	4.5 V
Grid No. 2 voltage	$V_{g2}$	-3.2 V
Anode current	$I_a$	20 $\mu$ A
Grid No. 2 current	$I_{g2}$	$< 6 \times 10^{-15}$ A

## DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Subminiature

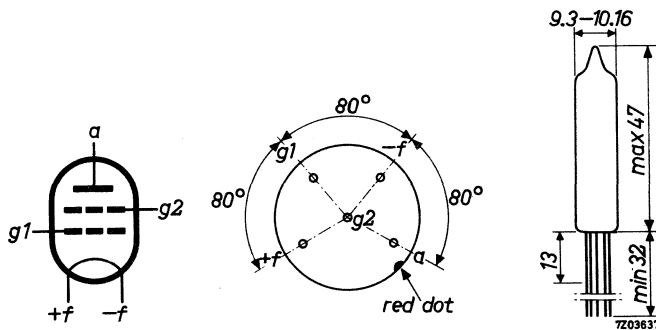

Directly soldered connections to the leads of this tube must be at least 13 mm from the seal and any bending of the leads must be at least 1.5 mm from the seal.

**HEATING:** Direct by D. C.

Filament voltage

 $V_f$  1.25 V

Filament current

 $I_f$  13 mA

## CHARACTERISTICS AND RANGE VALUES

Anode voltage	$V_a$	4.5		V
Grid No. 2 voltage	$V_{g_2}$	-3.2	-2 to -4.5	V
Grid No. 1 voltage	$V_{g_1}$	3.0	2 to 4	V
Anode current	$I_a$	20		$\mu A$
Grid No. 2 current	$-I_{g_2}$	$2.5 \times 10^{-15}$	$< 6 \times 10^{-15}$	A
Transconductance	$S_{ag_2}$	17	10 to 24	$\mu A/V$
Grid No. 1 current <sup>1)</sup>	$I_{g_1}$	250		$\mu A$
Grid No. 2 voltage at crossover point <sup>2)</sup>	$V_{g_2}$	-1.75		V

## LIMITING VALUES (Absolute max. rating system)


Anode voltage	$V_a$	max.	10	V
Cathode current	$I_k$	max.	300	$\mu A$
Filament voltage	$V_f$	max.	1.5	V
		min.	1.1	V



## REMARKS

1. In order to avoid excessive drift of the characteristics the filament voltage must be applied before the anode and grid No. 1 voltages.
2. To avoid contamination of the glass, the tube should not be removed from its protective envelope until it is mounted into the equipment.

<sup>1)</sup> Only valid in darkness

<sup>2)</sup> "Crossover point" is the point at which the direction of  $I_{g_2}$  is reversed  
At this point,  $V_{g_2}$  is at least 0.5 V less negative than its value at  $I_a = 20 \mu A$

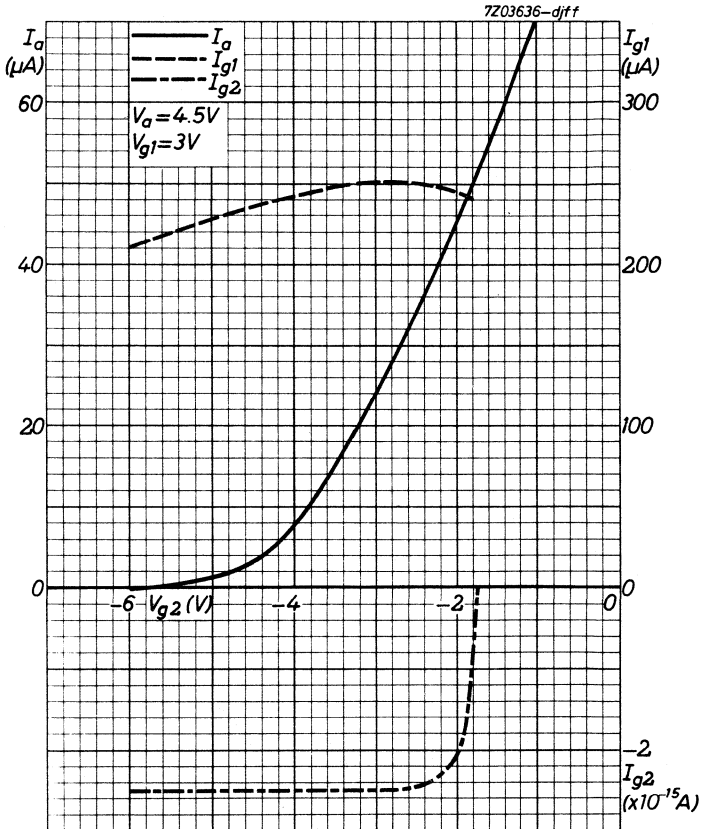

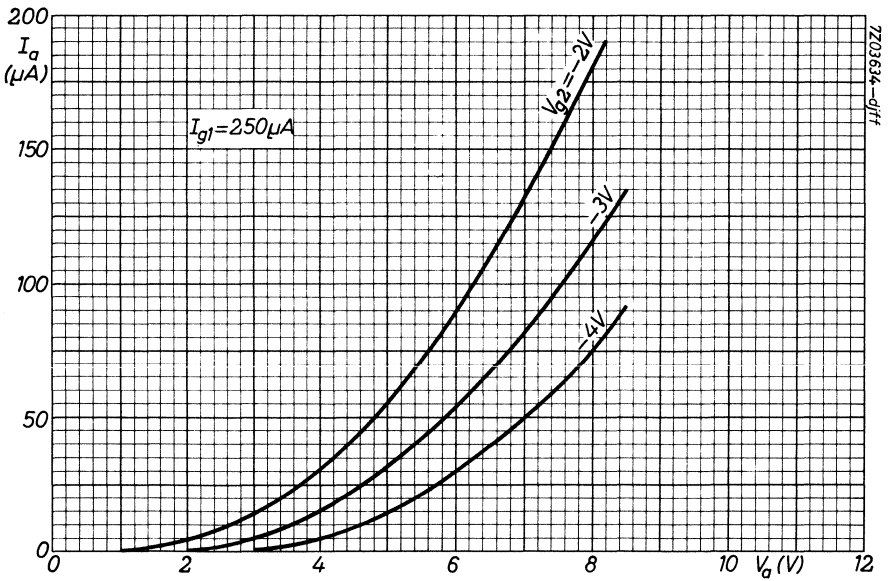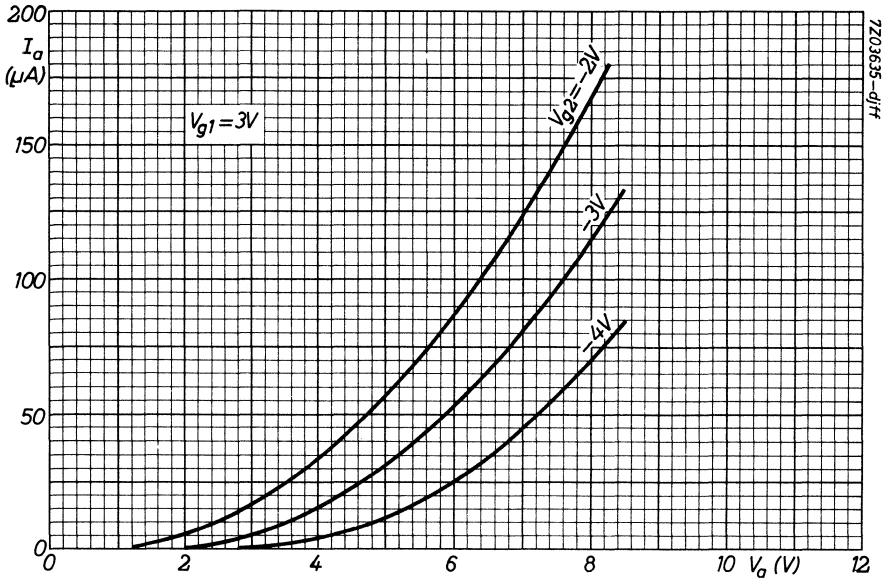



## ELECTROMETER TUBE


Subminiature electrometerpentode

QUICK REFERENCE DATA		
Filament voltage	$V_f$	1.25 V
Anode voltage	$V_a$	10 V
Anode current	$I_a$	5.0 $\mu$ A
Grid No.1 current	$-I_{g1}$	$< 8 \times 10^{-15}$ A

### DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Subminiature

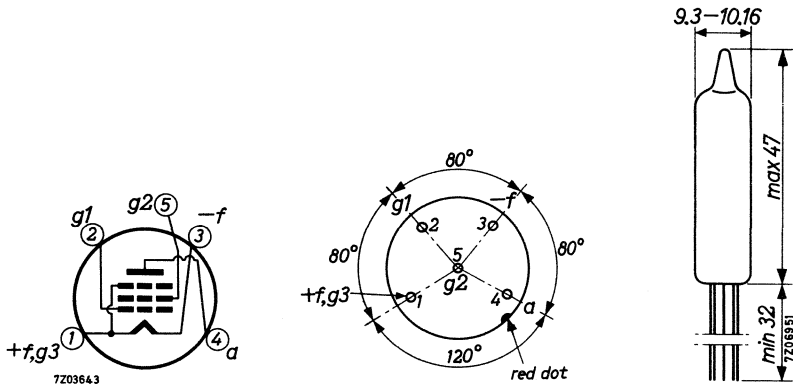

Directly soldered connections to the leads of this tube must be at least 13 mm from the seal and any bending of the leads must be at least 1.5 mm from the seal.

**HEATING:** Direct by D. C.

Filament voltage

$V_f$  1.25 V

Filament current

$I_f$  8.2 mA

## CAPACITANCES

Anode to all	$C_a$	4.0 pF
Grid No. 1 to all	$C_{g_1}$	3.0 pF
Anode to grid No. 1	$C_{ag_1}$	0.2 pF

## CHARACTERISTICS AND RANGE VALUES

Anode voltage	$V_a$	10	V
Grid No. 2 voltage	$V_{g_2}$	6.5	5.0 to 7.5 V
Grid No. 1 voltage	$V_{g_1}$	-2.5	V
Anode current	$I_a$	5.0	$\mu A$
Grid No. 2 current	$I_{g_2}$	2.2	1.5 to 3.0 $\mu A$
Grid No. 1 current <sup>1)</sup>	$-I_{g_1}$	$3 \times 10^{-15}$	$< 8 \times 10^{-15}$ A
Transconductance	S	10.5	8.0 to 15 $\mu A/V$
Internal resistance	$R_i$	10.5	$M\Omega$
Amplification factor	$\mu_{ag_1}$	110	$> 80$
Grid No. 1 voltage at crossover point <sup>2)</sup>	$V_{g_1}$	-1.15	V <sup>3)</sup>

## LIMITING VALUES (Absolute max. rating system)

Anode voltage	$V_a$	max.	45 V
Grid No. 2 voltage	$V_{g_2}$	max.	45 V
Cathode current	$I_k$	max.	180 $\mu A$
Filament voltage	$V_f$	max.	1.5 V
		min.	1.1 V



## REMARKS

- In order to avoid excessive drift of the characteristics the filament voltage must be applied before the anode and grid No. 2 voltages.
- To avoid contamination of the glass, the tube should not be removed from its protective envelope until it is mounted into the equipment.


<sup>1)</sup> Valid only in darkness.



<sup>2)</sup> The crossover point is the value of  $V_{g_1}$  at which the direction of  $I_{g_1}$  is reversed.

<sup>3)</sup> Measured at  $V_f = 1.25$  V,  $V_a = 10$  V,  $V_{g_2} =$  the value at which  $I_a = 5 \mu A$  when  $V_{g_1} = -2.5$  V.

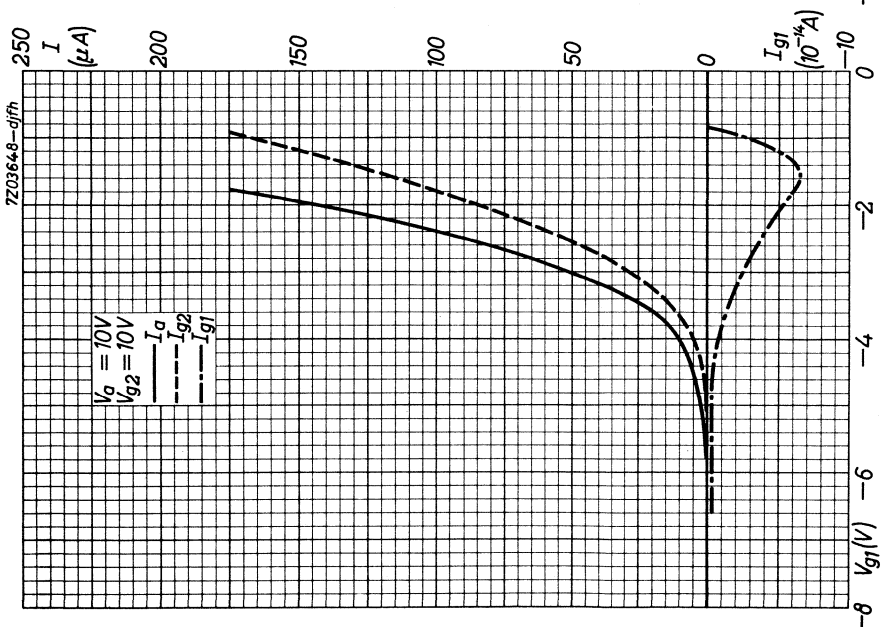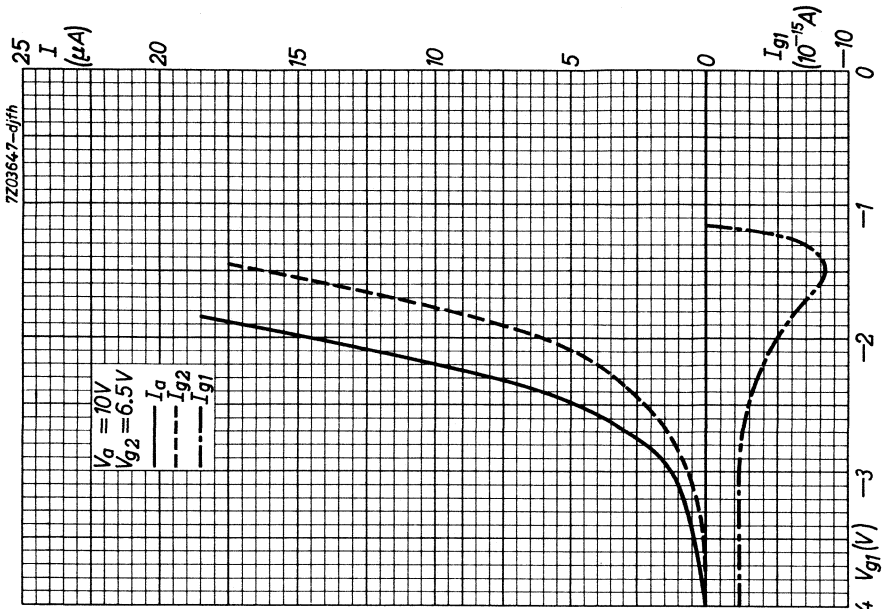


7Z03649-djfh

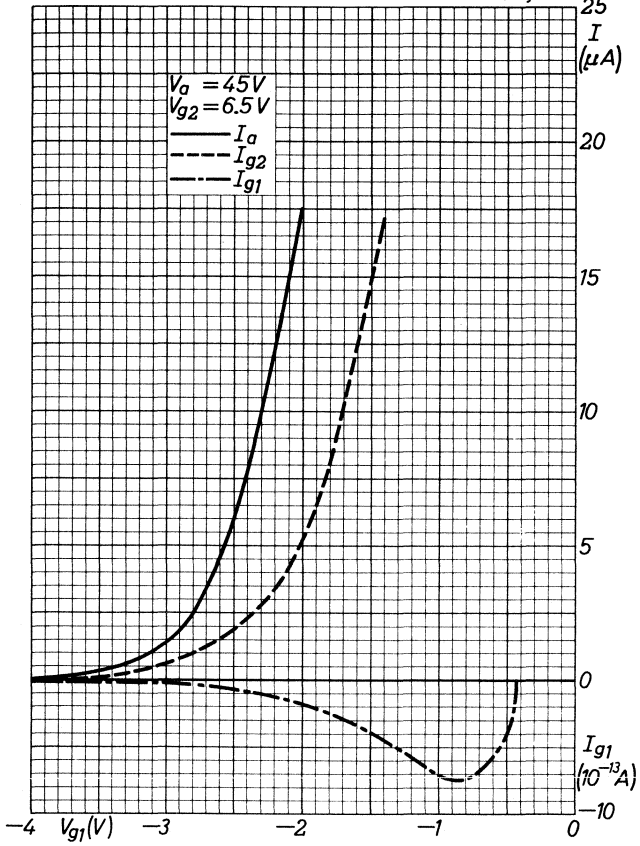

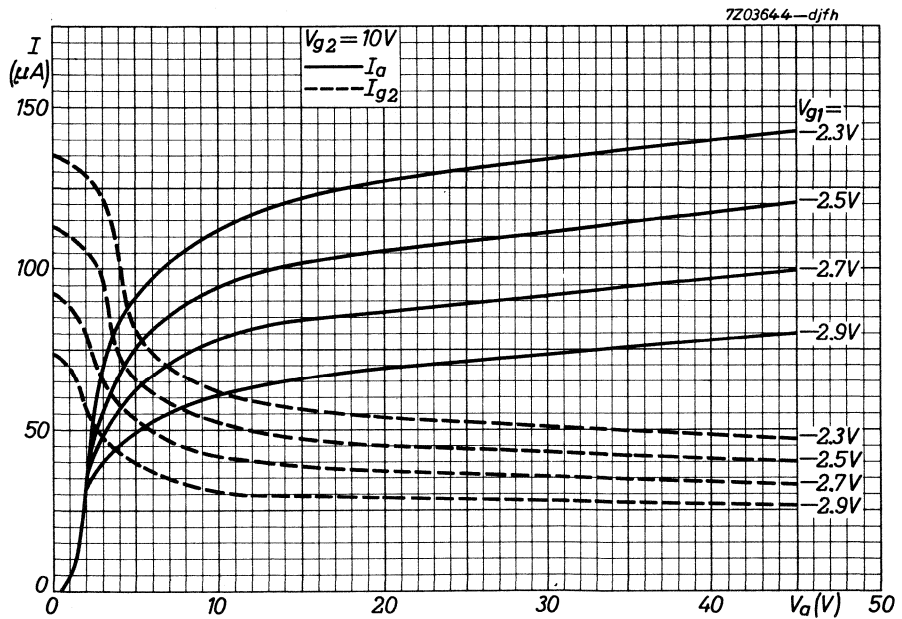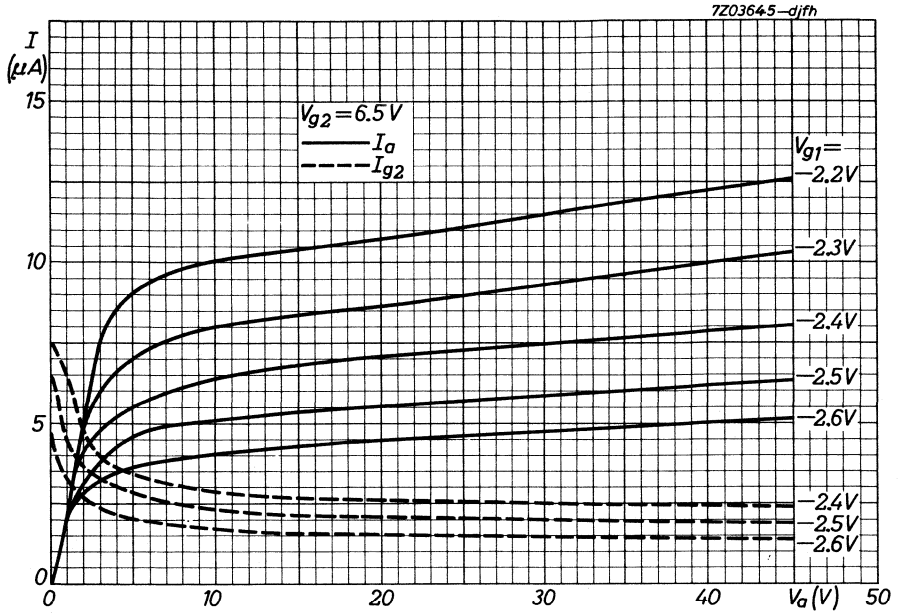

7203646-djh

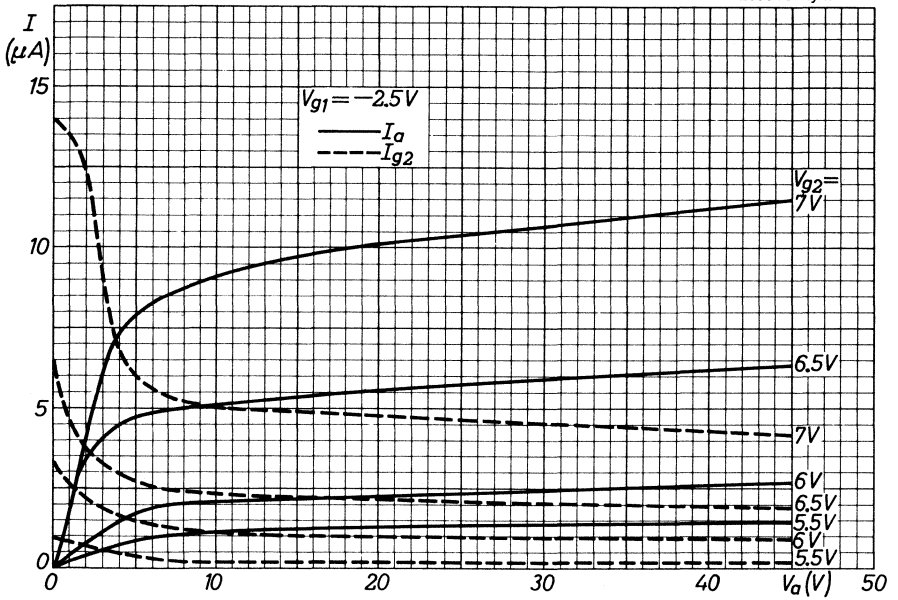

## ELECTROMETER TUBE




Subminiature electrometer triode for linear and logarithmic use with a controlled logarithmic relationship between positive grid current and anode current.

QUICK REFERENCE DATA			
Filament voltage	$V_f$	1.25	V
Anode voltage	$V_a$	9.0	V
Anode current	$I_a$	100	$\mu A$
Grid current	$-I_g$	< 10 <sup>-12</sup>	A

### DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Subminiature



Directly soldered connections to the leads of this tube must be at least 13 mm from the seal and any bending of the leads must be at least 1.5 mm from the seals.

**HEATING:** direct by D.C.

Filament voltage	$V_f$	1.25	V
Filament current	$I_f$	14	mA

### CAPACITANCES

Anode to all except grid	$C_{a(g)}$	0.8	pF
Grid to all except anode	$C_{g(a)}$	0.5	pF
Anode to grid	$C_{ag}$	2.0	pF

## CHARACTERISTICS AND RANGE VALUES

Anode voltage	$V_a$	9.0	V
Grid voltage	$V_g$	-2.7	-2.0 to 3.75 V
Anode current	$I_a$	100	$\mu A$
Grid current	$-I_g$	$1.6 \times 10^{-13}$	$< 10^{-12}$ A 1)
Transconductance	S	80	60 to 90 $\mu A/V$
Amplification factor	$\mu$	2.0	1.6 to 2.7
Grid voltage at crossover point 2) ( $I_a = 145 \mu A$ )	$V_g$	-1.4	$< 1.7$ V

## LIMITING VALUES (Absolute max. rating system)

Anode voltage	$V_a$	max.	25 V
Anode current	$I_a$	max.	250 $\mu A$
Filament voltage	$V_f$	max.	1.5 V
		min.	1.1 V


## REMARKS


- In order to avoid excessive drift of the characteristics the filament voltage must be applied before the anode voltage.
- To avoid contamination of the glass, the tube should not be removed from its protective envelope until it is mounted into the equipment. Great care should be taken not to handle the tube within 13 mm of the base.
- Operation with logarithmic characteristic.  
The tube has a controlled linear relationship between  $I_a$  and the logarithm of the positive  $I_g$ , which holds good over a range of  $I_g$  from  $3 \times 10^{-12}$  to  $3 \times 10^{-9}$  A. With  $+I_g = 3 \times 10^{-9}$  A,  $V_a$  can be set to some value within the range from 3 to 6 V (nominal 4.4 V) such that  $I_a$  falls by 50  $\mu A$  when  $+I_g$  is reduced to  $3 \times 10^{-12}$  A. The initial value of  $I_a$  will be found in the range from 65 to 100  $\mu A$ .

1) Only valid in darkness.

2) The crossover point is the point at which the direction of  $I_g$  is reversed.



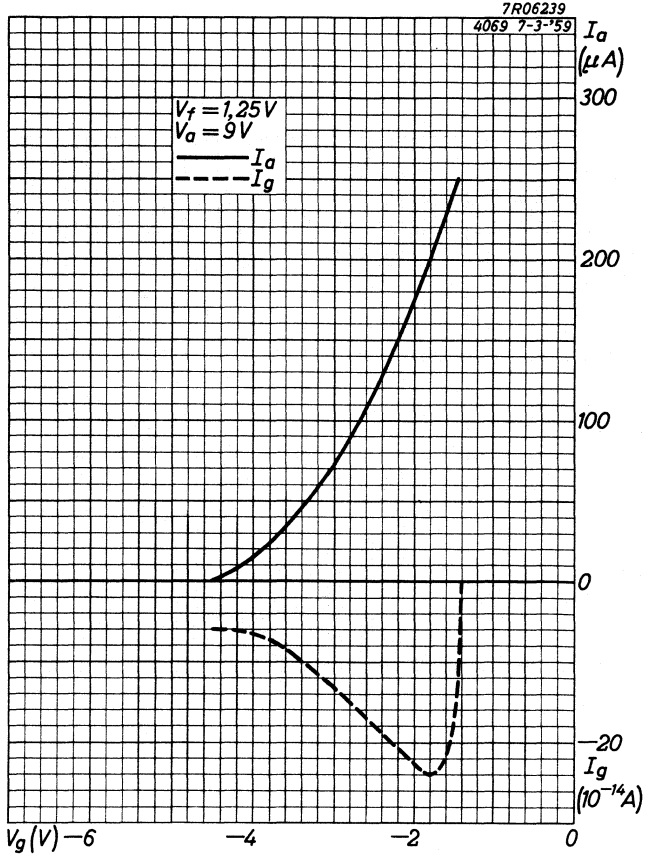

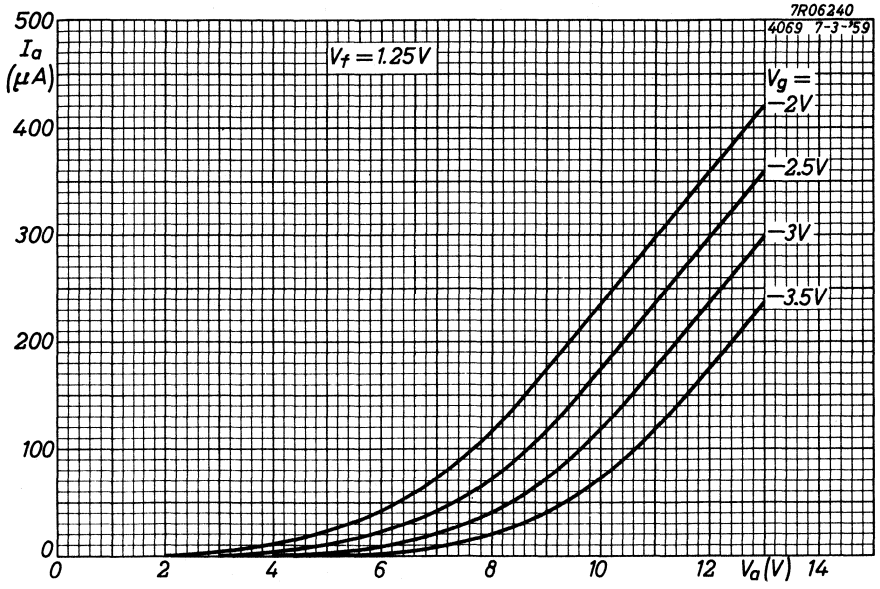

## OMEGATRON MASS-SPECTROMETER TUBE

Mass-spectrometer tube with platinum electrodes and tungsten cathode to be used for gasanalysis. Used with comparatively simple equipment, with this tube masses 32 and 33 can be completely separated.

Its sensitivity is large enough to make measurements possible at partial pressures of  $10^{-10}$  to  $10^{-11}$  torr.

By using platinum electrodes, the measuring qualities of this tube stay excellent also after repeated use. When cold, the tungsten cathode is insensitive to air of room temperature and atmospheric pressure.

The risk of damage during transport from factory to user is too large when the filament has been operated in the factory. For that reason the tube cannot be tested in operation before leaving the factory. The user, therefore, should test the tube immediately on receipt.

### OPERATING PRINCIPLE (see fig. 1)

Electrons emitted by the cathode are concentrated into a beam by a magnetic field and collimated by circular holes in the grids  $g_1$  and  $g_2$  and in the box D. The beam traverses box D, passes through a second hole in box D and is collected by the electron collector T.

While traversing box D, the electron beam ionises gas molecules. The magnetic field forces the ions thus formed into helical paths around the axis of the electron beam. Most of them will escape from the box along the electron beam or be neutralised on the wall of the box D.

There are, however, ions with a mass such that their angular velocity around the axis of the electron beam is in resonance with the frequency of the electric field which results from the radio frequency voltage between box D and electrode H. These ions will spiral out of the electron beam so far that they will strike and be neutralised by the ion collector P and cause a current from ion collector P to earth, which is amplified and measured.

Note: By choosing a suitable d.c. current meter it should be avoided that the voltage difference between ion collector P and electrode D is becoming too high. Values of 100 mV often have no appreciable influence on measuring results, but 10 mV is a safe voltage under any circumstances.

The relation connecting the frequency of the electric field between electrodes D and H, the mass of the ions that will strike collector P and the magnetic induction in the gap of the magnet is:

$$f_r = 15.33 \times 10^6 \times \frac{B}{M}$$

where:  $f_r$  is the resonance frequency in Hz  
 $B$  is the induction  $\text{Wb/m}^2$   
 $M$  is the ion mass in mass units.

Ions of different masses can be selected from the collision area by adjusting the frequency of the radio frequency voltage applied to electrode H; the resulting current is a measure of the rate of formation of ions having a particular mass. Thus by progressively varying the frequency, a mass spectrum can be recorded.

The resolution of the omegatron is given by:

$$\frac{M}{\Delta M} = 6450 \times \frac{B^2}{V_{HD}M}$$

where  $B$  = magnetic induction in  $\text{Wb/m}^2$   
 $V_{HD}$  = R.M.S. value of the radio-frequency voltage between electrodes H and D in volts  
 $M$  = ion mass in mass units

For  $B = 0.4 \text{ Wb/m}^2$ ,  $V_{HD} = 1 \text{ V}$  and  $M = 32$  the resolution  $\frac{M}{\Delta M} = 32$

Thus a system equipped with a  $0.4 \text{ Wb/m}^2$  magnet will allow complete separation over an interval of at least one mass unit of masses up to and including 33 mass units.

When no spurious effects are encountered, the curve which shows the values of current  $I_p$  plotted against the R.M.S. value of the R.F. frequency voltage  $V_{HD}$  (all other values constant) will be practically horizontal for values of  $V_{HD}$  between 1 V and  $2 V_{RMS}$ .

The value attained by current  $I_p$  in the horizontal part of the curve has the following relation to the gas pressure and the electron current  $I_T$ :

$$I_p = c.p.I_T$$

where  $p$  = partial pressure of the particular gas in torr.  
 $I_T$  = current to electron collector T in amperes.  
 $c$  = sensitivity constant depending on kind of gas and of mass number.


An indication of the absolute value of this constant for the mass number with the highest peak of each gas is displayed on page 6 for 12 common gases. The relative values with regard to the highest peak are given there for other mass numbers for each gas.

The validity of the above relation, and hence also the method of measurement, is limited to pressures below  $10^{-5}$  torr.

**DIMENSIONS AND CONNECTIONS**

Dimensions in mm


Base: Pin configuration according to IEC-67-I-6a (B9G)

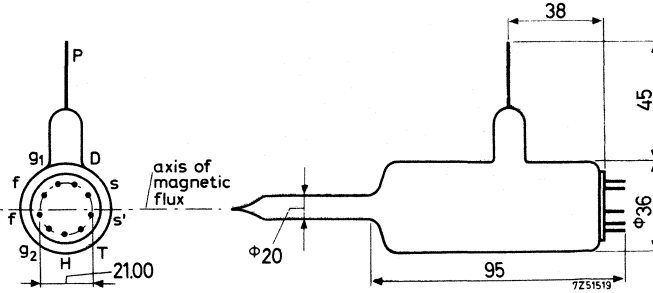

Envelope material: Fernico-sealing glass.

Note: When using a socket, all its magnetic parts should be removed.

**RECOMMENDED CIRCUIT**

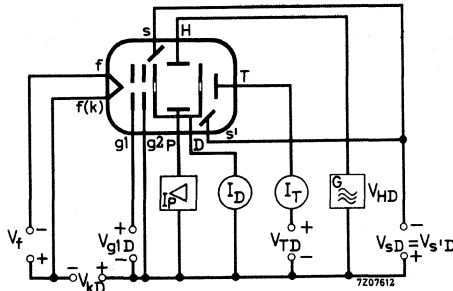

$V_f$  0 to 2 V  
 $V_{kD}$  - 90 V  
 $V_{g1D}$  - 80 V

$V_{g2D}$  0 V  
 $V_{TD}$  0 to 40 V

$V_{HD}$  1 to 5 V<sub>RMS</sub>  
 $V_{sD} = V_{s'D}$  0 to 60 V

Fig. 1

**ASSOCIATED EQUIPMENT**

To operate the omegatron four major items of equipment will be required.

For most purposes satisfactory results will be obtained with equipment meeting the following specifications:

1. Permanent magnet; Pole distance 40 mm. Pole diameter 90 mm.  
 Induction in the gap 0.45 Wb/m<sup>2</sup> (4500 gauss)

2. D.C. current meter, full scale deflection between  $2 \times 10^{-10}$  A and at least  $10^{-13}$  A, preferably  $2 \times 10^{-14}$  A.

This measuring equipment should be designed so that during measurement the voltage difference between electrodes P and D will not exceed 10 mV. The meter should preferably have a response time below 2 seconds.

3. Radio frequency signal-generator:

Output voltage 1 to 5 V<sub>RMS</sub>

Frequency range  $60 \times 10^3 \times B < f < 16000 \times 10^3 \times B$  Hz  
for the masses 1 to 250

B being the magnetic induction in Wb/m<sup>2</sup> in the gap of the magnet.

4. Power supply for the omegatron.

D.C. voltages required (fig. 1)

$$V_{kD} = -90 \text{ V}$$

$$V_{g1D} = -80 \text{ V}$$

$$V_f \quad \text{variable from 0 to + 2 V}$$

$$V_{sD} = V_{s'D} \quad \text{variable from 0 to -60 V}$$

$$V_{TD} \quad \text{variable from 0 to + 40 V}$$

Note: The operation of the equipment is much simplified and often measurements are more exact if the power supply is equipped with a possibility for automatic regulation of  $V_{g1D}$  or  $I_f$  to keep the current to electron collector T constant at a required value. ( $I_f$  should never be allowed to become larger than 3.5 A corresponding to a  $V_f$  of approx. 2 V).

## OPERATIONAL NOTES

- Affix filament leads to filament pins and place the omegatron between the magnet poles
- Bring the pressure down to below  $10^{-5}$  torr.
- Connect all electrodes except P to their supply voltages as shown in fig. 1, adjust  $V_{TD}$  to 10 V,  $V_{sD} = V_{s'D}$  to -10 V and adjust the filament current  $I_f$  so that a current  $I_D$  of 1  $\mu$ A flows to box D.
- Without changing the filament current  $I_f$ , the position of the omegatron in the magnetic field is so adjusted that current  $I_D$  attains a minimum value which should be below  $10^{-8}$  A. Current  $I_T$  should now be 1  $\mu$ A.
- Connect the amplifier to the ion collector P.
- Bring  $I_T$  on the value required by adjusting  $I_f$ . Usually, for measurements on gases with a partial pressure over  $10^{-9}$  torr, a value of 1  $\mu$ A will be chosen. For partial pressures below  $10^{-9}$  the values for  $I_T$  will be progressively larger. At  $10^{-11}$  torr a value of 30  $\mu$ A will often be most convenient.

7. Tune the generator to the resonant frequency of a heavy mass, e.g. 28 and make  $V_{HD} = 1.5 V_{RMS}$

By adjusting  $V_{sD} = V_{s'D}$  and  $V_{TD}$  the ion current  $I_P$  is maximalized,  $I_T$  being kept on the same value. b

8. The optimum adjustment thus obtained for heavy masses has to be checked now for light masses. This more critical adjustment is carried out by tuning the generator to the resonant frequency of a light mass, e.g. mass 2, and again maximalizing the ion current  $I_P$  by adjusting  $V_{sD} = V_{s'D}$  and  $V_{TD}$ . The deviation from the optimum ion current has to be made as small as possible for all masses (< 10%).

9. It is advisable not to exceed the following operating limits:

$$+5 < V_{TD} < +30 \text{ V}$$

$$0 < V_{sD} = V_{s'D} < -60 \text{ V}$$

$$I_f < 3.5 \text{ A}$$

### BAKING

To clean the glass, baking temperatures up to 450 °C are allowed.

The platinum electrodes are not ordinarily subject to contamination, but if necessary they can under a pressure below  $10^{-6}$  torr, be cleaned by heating up to 800 °C in a high frequency magnetic field.

### WARNINGS

1. Operation of the tube at pressures above  $10^{-2}$  torr will damage the filament.
2. Inhomogeneities in the radio frequency electric field between electrodes D and H may give rise to higher harmonics resulting in indications at mass numbers  $\frac{M}{2}$ ,  $\frac{M}{3}$ , etc. There will be individual, but also day to day difference in the occurrence of these harmonics.

The higher harmonics are liable to interfere with the accuracy of the measurements. However, the spurious effect can easily be recognized and it can be eliminated at the cost of some sensitivity. Peaks whose height alter considerably when the value of  $V_{HD}$  is changed contain a higher harmonic component, and this can be removed by lowering that voltage or the gas pressure, or both. A further method ... which is also likely to reduce the sensitivity of the measurement ... is to add a negative bias of a few tenths of a volt to the radio-frequency voltage on electrode H. Conversely, it should be noted that liability to higher-harmonic interference is increased by raising  $V_{HD}$  and the gas pressure in the tube.

SOME MASS SPECTRA MEASURED WITH OMEGATRON

	1	2	4	12	13	14	15	16	17	18	19	20	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	43	44	c	
H <sub>2</sub>	100																																	4.0
N <sub>2</sub>						7.40.03											100	0.75																11
CO				3.30.04	0.55		1.3										100	0.88	0.2		0.02													11.8
CO <sub>2</sub>				3.50.03	0.08		7.8										11.5	0.1			0.4												100	14
H <sub>2</sub> O	1						1.8	21	100	140.23											0.13													10.5
He		100																																1.8
A													14.2												0.38	0.06	100							13
CH <sub>4</sub>				1.8	5.7	12.5	81	100	2.7																									7.4
C <sub>2</sub> H <sub>2</sub>	3.5			1.4	4.0	0.3							5.1	19	100	3.2			3															15.5
C <sub>2</sub> H <sub>4</sub>				0.6	1.0	2.3	0.3	0.4					2.0	6.8	4751.5	100	3.3																	11.6
C <sub>2</sub> H <sub>6</sub>				0.20.55	2.0	3.10.15							0.5	2.7	18.127.6	100	20.525.90.54																	14
C <sub>3</sub> H <sub>8</sub>				0.180.36	1.13	3.80.12							0.13	0.64	8.239.160.3	100	2.1								0.64	4.1	5.820	1630.844.9					9	



INDEX OF TYPENUMBERS

Type No.	Section	Type No.	Section	Type No.	Section
C3m	SQ	EC81	SQ	5718	SQ
CIG-22	M	EC90	SQ	5719	SQ
CIG-82	M	EC91	SQ	5725	SQ
D3a	SQ	EC1000	SQ	5726	SQ
DL68	SQ	EC8010	SQ	5840	SQ
DM160	SQ	ECC2000	SQ	5842	SQ
E1T	SQ	EIP-12	M	5899	SQ
E55L	SQ	IOG-12	M	5902	SQ
E80CC	SQ	IOG-13T	M	5920	See E90CC
E80CF	SQ	IOG-17	M	6021	SQ
E80F	SQ	IOG-18	M	6080	SQ
E80L	SQ	IOG-18N	M	6084	See E80F
E81L	SQ	IOG-19N	M	6085	See E80CC
E82CC	SQ	IOG-71	M	6086	See 18042
E83CC	SQ			6111	SQ
E83F	SQ	RI-12	M	6112	SQ
E84L	SQ	TH71	M	6189	SQ
E86C	SQ	TH73	M	6201	SQ
E88C	SQ	TH75	M	6227	See E80L
E88CC	SQ			6370	See E1T
E90CC	SQ			6681	See E83CC
E130L	SQ	XL7900	M	6686	See E81L
E180CC	SQ	6AQ4	See EC91	6688	See E180F
E180F	SQ	6C4	See EC90	6689	See E83F
E182CC	SQ	6Q4	See EC80	6922	See E88CC
E186F	SQ	6R4	See EC81	6977	See DM160
E188CC	SQ	12AX7S	SQ	7062	See E180CC
E235L	SQ	4065	M	7119	See E182CC
E236L	SQ	4066	M	7308	See E188CC
E280F	SQ	4068	M	7320	See E84L
E282F	SQ	4069	M	7534	See E130L
E283CC	SQ	5636	SQ	7643	See E80CF
E288CC	SQ	5639	SQ	7721	See D3a
E810F	SQ	5642	SQ	7722	See E280F
EC80	SQ	5654	SQ	7737	See E186F

SQ = Special Quality Tubes

M = Miscellaneous

# INDEX

Type No.	Section
7788	See E810F
8223	See E288CC
8233	See E55L
8254	See EC1000
8255	See E88C
18042	SQ
18045	SQ
56006	M

SQ = Special Quality tubes  
M = Miscellaneous





---

Special Quality tubes

---

Miscellaneous devices

---



