


DATA SHEET

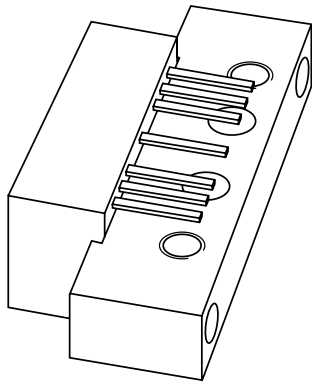

BGR269 200 MHz, 35 dB gain reverse amplifier

Product specification
Supersedes data of 2001 Oct 03

2002 Mar 05

200 MHz, 35 dB gain reverse amplifier

BGR269

FEATURES

- Excellent linearity
- Silicon nitride passivation
- Rugged construction
- Gold metallization ensures excellent reliability
- 35 dB amplification up to 200 MHz.

APPLICATIONS


- Reverse amplifier in two-way CATV systems operating in the 5 to 200 MHz frequency range.

DESCRIPTION

High performance amplifier in a SOT115J package, operating at a voltage supply of 24 V (DC).

PINNING - SOT115J

PIN	DESCRIPTION
1	input
2	common
3	common
5	+V _B
7	common
8	common
9	output

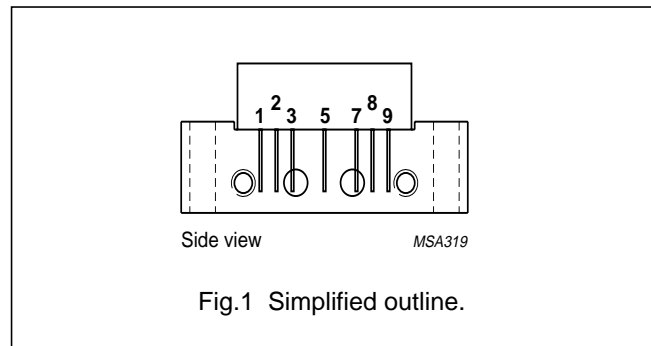

QUICK REFERENCE DATA

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
G _p	power gain	f = 5 MHz	34.5	35	35.5	dB
		f = 200 MHz	35	–	36	dB
I _{tot}	total current consumption (DC)	V _B = 24 V	145	160	175	mA

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 60134).

SYMBOL	PARAMETER	MIN.	MAX.	UNIT
V _i	RF input voltage	–	50	dBmV
T _{mb}	operating mounting base temperature	–20	+100	°C
T _{stg}	storage temperature range	–40	+100	°C

200 MHz, 35 dB gain reverse amplifier

BGR269

CHARACTERISTICSBandwidth 5 to 200 MHz; $V_B = 24\text{ V}$; $T_{mb} = 30\text{ °C}$; $Z_S = Z_L = 75\ \Omega$.

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
G _p	power gain	f = 5 MHz	34.5	35	35.5	dB
		f = 200 MHz	35	–	36	dB
SL	slope straight line	f = 5 to 200 MHz	0	–	0.6	dB
FL	flatness of frequency response	f = 5 to 10 MHz	–0.1	–	0.4	dB
		f = 10 to 190 MHz	–0.1	–	0.5	dB
		f = 190 to 200 MHz	–0.1	–	0.4	dB
S ₁₁	input return losses	f = 5 to 200 MHz	20	–	–	dB
S ₂₂	output return losses	f = 5 to 200 MHz	20	–	–	dB
S ₂₁	phase response	f = 5 MHz	–45	–	45	dB
S ₁₂	reverse isolation	f = 5 to 200 MHz	–	–	–42	dB
CTB	composite triple beat	6 chs flat; V _o = 50 dBmV; measured at 37 MHz; note 1	–	–	–74	dB
		10 chs flat; V _o = 50 dBmV; measured at 67.25 MHz; note 2	–	–	–68	dB
		28 chs flat; V _o = 50 dBmV; measured at 199.25 MHz; note 3	–	–	–57	dB
X _{mod}	cross modulation	6 chs flat; V _o = 50 dBmV; measured at 37 MHz; note 1	–	–	–66	dB
		10 chs flat; V _o = 50 dBmV; measured at 25 MHz; note 2	–	–	–57	dB
		28 chs flat; V _o = 50 dBmV; measured at 25 MHz; note 3	–	–	–50	dB
CSO	composite second order distortion	6 chs flat; V _o = 50 dBmV; measured at 38 MHz; note 1	–	–	–74	dB
		10 chs flat; V _o = 50 dBmV; measured at 68.5 MHz; note 2	–	–	–74	dB
		28 chs flat; V _o = 50 dBmV; measured at 200.5 MHz; note 3	–	–	–66	dB
V _o	output voltage	d _{im} = –60 dB; note 4	62	–	–	dBmV
d ₂	second order distortion	note 5	–	–	–70	dB
NF	noise figure	f = 70 MHz	–	–	5.3	dB
		f = 200 MHz	–	–	5.5	dB
I _{tot}	total current consumption	note 6	145	160	175	mA

200 MHz, 35 dB gain reverse amplifier**BGR269**

Notes

1. From the following frequencies: 7.00, 13.00, 19.00, 25.00, 31.00 and 37.00 MHz.
2. From the following frequencies: 7.00, 13.00, 19.00, 25.00, 31.00, 37.00, 43.00, 55.25, 61.25 and 67.25 MHz.
3. From the following frequencies: 7.00, 13.00, 19.00, 25.00, 31.00, 37.00, 43.00, 55.25, 61.25, 67.25, 77.25, 83.25, 109.25, 115.25, 121.25, 127.25, 133.25, 139.25, 145.25, 151.25, 157.25, 163.25, 169.25, 175.25, 181.25, 187.25, 193.25 and 199.25 MHz.
4. Measured according to DIN45004B:
 $f_p = 197.25$ MHz; $V_p = V_o$;
 $f_q = 204.25$ MHz; $V_q = V_o - 6$ dB;
 $f_r = 206.25$ MHz; $V_r = V_o - 6$ dB;
measured at $f_p + f_q - f_r = 195.25$ MHz.
5. $f_p = 83.25$ MHz; $V_p = 50$ dBmV;
 $f_q = 115.25$ MHz; $V_q = 50$ dBmV;
measured at $f_p + f_q = 198.5$ MHz.
6. The module normally operates at $V_B = 24$ V, but is able to withstand supply transients up to $V_B = 35$ V.


200 MHz, 35 dB gain reverse amplifier

BGR269

PACKAGE OUTLINE

Rectangular single-ended package; aluminium flange; 2 vertical mounting holes; 2 x 6-32 UNC and 2 extra horizontal mounting holes; 7 gold-plated in-line leads

SOT115J

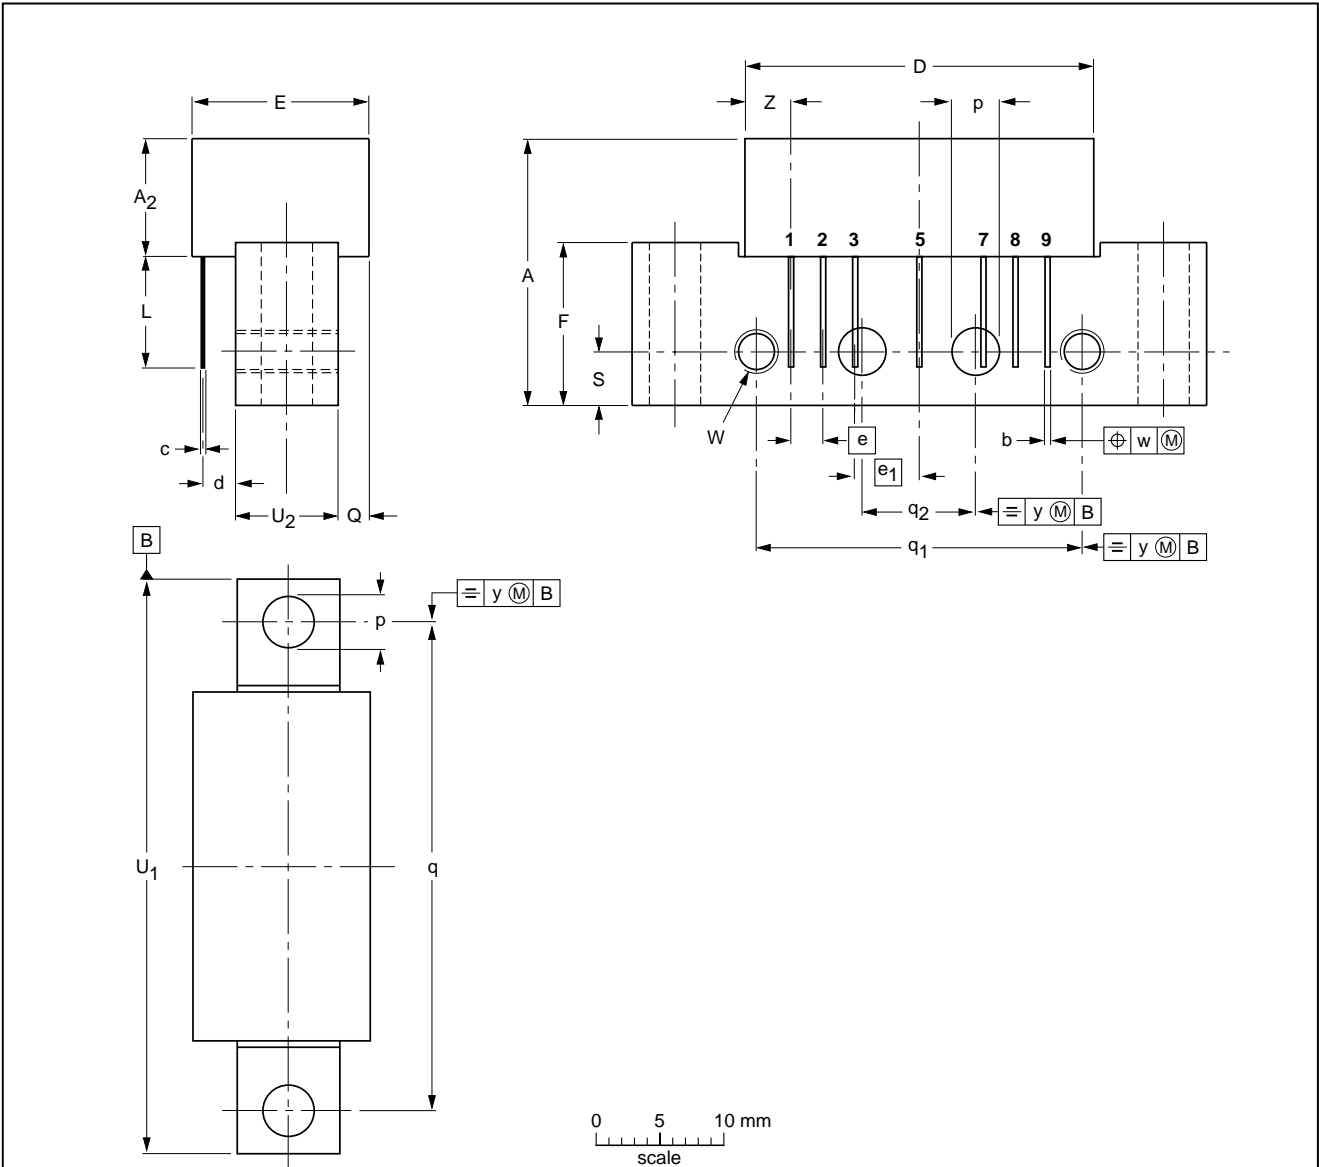

DIMENSIONS (mm are the original dimensions)

UNIT	A max.	A ₂ max.	b	c	D max.	d max.	E max.	e	e ₁	F	L min.	p	Q max.	q	q ₁	q ₂	S	U ₁ max.	U ₂	W	w	y	Z max.
mm	20.8	9.1	0.51 0.38	0.25	27.2	2.54	13.75	2.54	5.08	12.7	8.8	4.15 3.85	2.4	38.1	25.4	10.2	4.2	44.75	8	6-32 UNC	0.25	0.1	3.8

OUTLINE VERSION	REFERENCES				EUROPEAN PROJECTION	ISSUE DATE
	IEC	JEDEC	EIAJ			
SOT115J						99-02-06

200 MHz, 35 dB gain reverse amplifier

BGR269

DATA SHEET STATUS

DATA SHEET STATUS ⁽¹⁾	PRODUCT STATUS ⁽²⁾	DEFINITIONS
Objective data	Development	This data sheet contains data from the objective specification for product development. Philips Semiconductors reserves the right to change the specification in any manner without notice.
Preliminary data	Qualification	This data sheet contains data from the preliminary specification. Supplementary data will be published at a later date. Philips Semiconductors reserves the right to change the specification without notice, in order to improve the design and supply the best possible product.
Product data	Production	This data sheet contains data from the product specification. Philips Semiconductors reserves the right to make changes at any time in order to improve the design, manufacturing and supply. Changes will be communicated according to the Customer Product/Process Change Notification (CPCN) procedure SNW-SQ-650A.

Notes

1. Please consult the most recently issued data sheet before initiating or completing a design.
2. The product status of the device(s) described in this data sheet may have changed since this data sheet was published. The latest information is available on the Internet at URL <http://www.semiconductors.philips.com>.

DEFINITIONS

Short-form specification — The data in a short-form specification is extracted from a full data sheet with the same type number and title. For detailed information see the relevant data sheet or data handbook.

Limiting values definition — Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 60134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability.

Application information — Applications that are described herein for any of these products are for illustrative purposes only. Philips Semiconductors make no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

DISCLAIMERS

Life support applications — These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips Semiconductors customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips Semiconductors for any damages resulting from such application.

Right to make changes — Philips Semiconductors reserves the right to make changes, without notice, in the products, including circuits, standard cells, and/or software, described or contained herein in order to improve design and/or performance. Philips Semiconductors assumes no responsibility or liability for the use of any of these products, conveys no licence or title under any patent, copyright, or mask work right to these products, and makes no representations or warranties that these products are free from patent, copyright, or mask work right infringement, unless otherwise specified.

CAUTION

This product is supplied in anti-static packing to prevent damage caused by electrostatic discharge during transport and handling. For further information, refer to Philips specs.: SNW-EQ-608, SNW-FQ-302A and SNW-FQ-302B.

200 MHz, 35 dB gain reverse amplifier

BGR269

NOTES

Philips Semiconductors – a worldwide company

Contact information

For additional information please visit <http://www.semiconductors.philips.com>. Fax: +31 40 27 24825

For sales offices addresses send e-mail to: sales.addresses@www.semiconductors.philips.com.

© Koninklijke Philips Electronics N.V. 2002

SCA74

All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.

The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

Printed in The Netherlands

613518/04/pp8

Date of release: 2002 Mar 05

Document order number: 9397 750 09455

Let's make things better.

**Philips
Semiconductors**



PHILIPS