
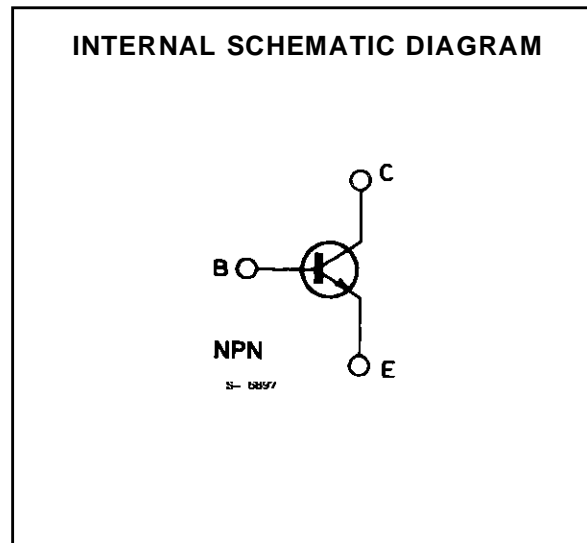


RF AMPLIFIER

DESCRIPTION

The 2N3137 is a silicon planar epitaxial NPN transistor in a TO-39 metal case. It is primarily designed for application as a Class-C, RF power amplifier. In addition to the large signal capabilities, the low noise and high transition frequency of the 2N3137 provide excellent performance in a variety of linear amplifier for telecommunication applications.

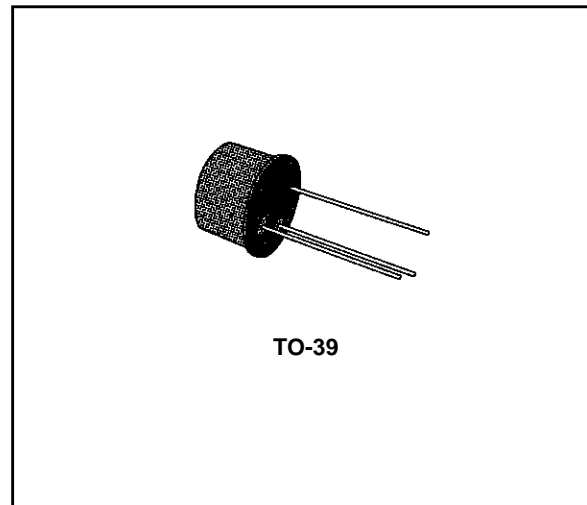

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V_{CBO}	Collector-base Voltage ($I_E = 0$)	40	V
V_{CEO}	Collector-emitter Voltage ($I_B = 0$)	20	V
V_{EBO}	Emitter-base Voltage ($I_C = 0$)	4	V
P_{tot}	Total Power Dissipation at $T_{amb} \leq 25\text{ }^\circ\text{C}$ at $T_{case} \leq 25\text{ }^\circ\text{C}$	0.6	W
		1	W
T_{stg}, T_j	Storage and Junction Temperature	- 65 to 200	$^\circ\text{C}$

THERMAL DATA


$R_{th\ j-case}$	Thermal Resistance Junction-case	Max	175	$^{\circ}C/W$
$R_{th\ j-amb}$	Thermal Resistance Junction-ambient	Max	292	$^{\circ}C/W$

ELECTRICAL CHARACTERISTICS ($T_{amb} = 25\ ^{\circ}C$ unless otherwise specified)


Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
I_{CBO}	Collector Cutoff Current ($I_E = 0$)	$V_{CB} = 20\ V$ $V_{CB} = 20\ V$ $T_{amb} = 150\ ^{\circ}C$		0.12 0.1	50 50	nA μA
$V_{(BR)CBO}$	Collector-base Breakdown Voltage ($I_E = 0$)	$I_C = 100\ \mu A$	40			V
$V_{CEO(sus)}^*$	Collector-emitter Sustaining Voltage ($I_B = 0$)	$I_C = 15\ mA$	20			V
$V_{(BR)EBO}$	Emitter-base Breakdown Voltage ($I_C = 0$)	$I_E = 100\ \mu A$	4			V
$V_{CE(sat)}$	Collector-emitter Saturation Voltage	$I_C = 50\ mA$ $I_B = 5\ mA$		0.12	0.3	V
h_{FE}^*	DC Current Gain	$I_C = 50\ mA$ $V_{CE} = 5\ V$	20	70	120	
G_{pe}	Power Gain (class-C)	$V_{CE} = 20\ V$ $f = 250\ MHz$ $P_i = 100\ mW$	6	7		dB
NF	Noise Figure	$V_{CE} = 10\ V$ $f = 200\ MHz$ $I_C = 30\ mA$ $R_g = 50\ \Omega$		4		dB
C_{CBO}	Collector-base Capacitance	$V_{CB} = 10\ V$ $f = 1\ MHz$		2.8	3.5	pF
f_T	Transition Frequency	$I_C = 50\ mA$ $V_{CE} = 10\ V$	500	750		MHz
η	Collector Efficiency	$V_{CE} = 20\ V$ $f = 250\ MHz$ $P_i = 100\ mW$	40	60		%

* Pulsed : pulse duration = 300 μs , duty cycle = 1 %.


DC Current Gain.

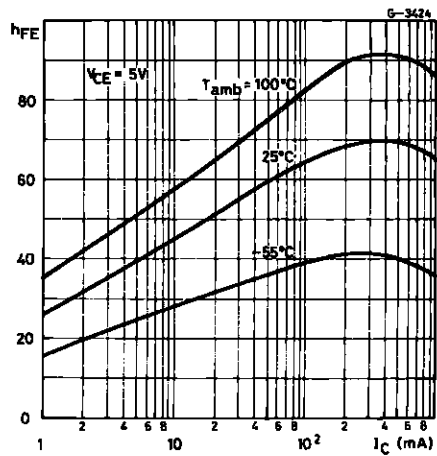


Collector-emitter Saturation Voltage.

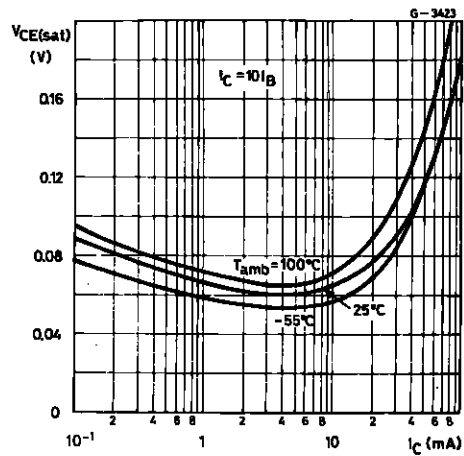


Base-emitter Saturation Voltage.

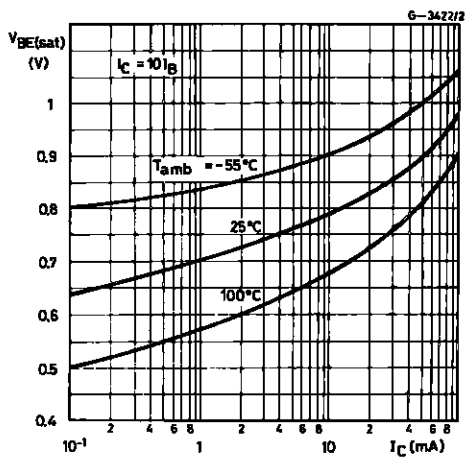


Contours of Constant Transition Frequency.

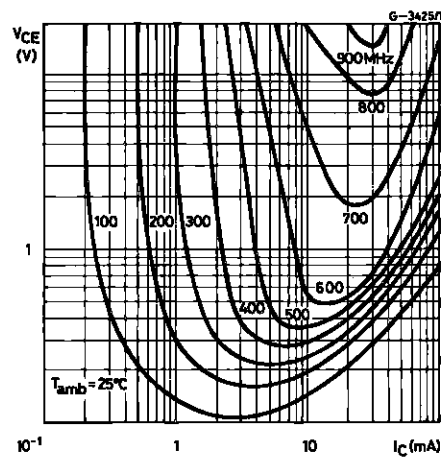

Collector-base capacitance.

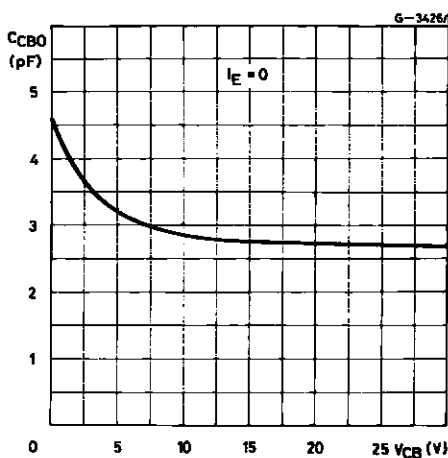


Emitter-base capacitance.

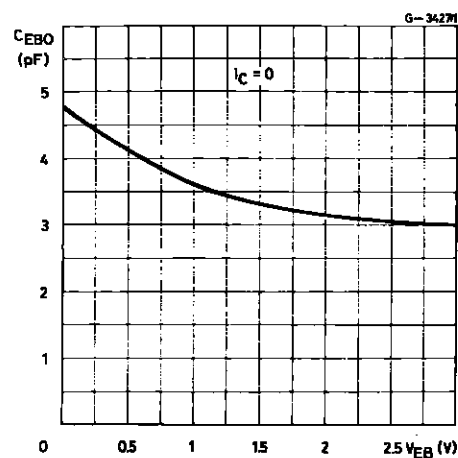

TO39 MECHANICAL DATA

DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A	12.7			0.500		
B			0.49			0.019
D			6.6			0.260
E			8.5			0.334
F			9.4			0.370
G	5.08			0.200		
H			1.2			0.047
I			0.9			0.035
L	45° (typ.)					

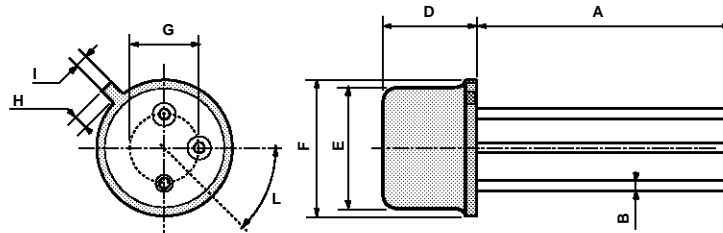

P008B

Information furnished is believed to be accurate and reliable. However, SGS-THOMSON Microelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of SGS-THOMSON Microelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. SGS-THOMSON Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of SGS-THOMSON Microelectronics.

© 1994 SGS-THOMSON Microelectronics - All Rights Reserved

SGS-THOMSON Microelectronics GROUP OF COMPANIES

Australia - Brazil - France - Germany - Hong Kong - Italy - Japan - Korea - Malaysia - Malta - Morocco - The Netherlands -
Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A