


# P-CHANNEL LATERAL POWER MOSFET FOR AUDIO

## ALF08P16V/ALF08P20V

- Designed specifically for linear audio amplifier applications
- High-speed for high bandwidth amplifiers
- High voltage rating – 160V & 200V
- TO-247 plastic package
- Enhanced oscillation suppression in multi-device applications
- Complimentary N-channel available – ALF08N16V/ALF08N20V

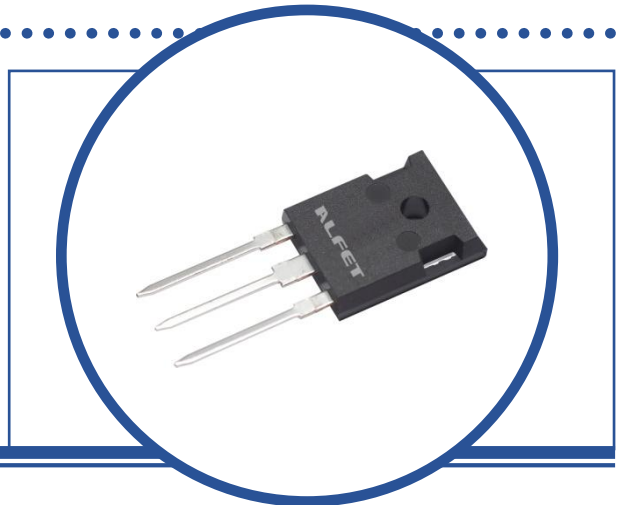


## ABSOLUTE MAXIMUM RATINGS

( $T_C = 25^\circ\text{C}$  unless otherwise stated)

		ALF08P16V	ALF08P20V
$V_{DSS}$	Drain – Source Voltage	-160V	-200V
$V_{GSS}$	Gate – Source Voltage	$\pm 20\text{V}$	
$I_D$	Continuous Drain Current	-8A	
$I_{DR}$	Body Drain Diode Current	-8A	
$P_D$	Allowable Power Dissipation $T_{\text{case}} = 25^\circ\text{C}$	125W	
$T_{\text{ch}}$	Channel Temperature	150°C	
$T_{\text{stg}}$	Storage Temperature Range	-55 to +150°C	

## THERMAL PROPERTIES

Symbols	Parameters	Min.	Typ.	Max.	Units
$R_{\theta JC}$	Thermal Resistance, Junction To Case			1	$^\circ\text{C/W}$

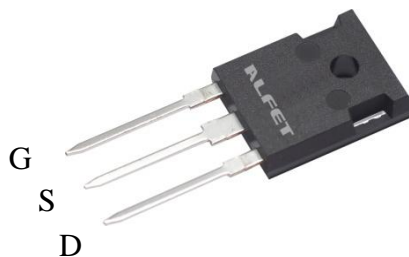

Magnatec reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by Magnatec is believed to be both accurate and reliable at the time of going to press. However Magnatec assumes no responsibility for any errors or omissions discovered in its use. Magnatec encourages customers to verify that datasheets are current before placing orders.

### Magnatec

Coventry Road, Lutterworth, Leicestershire, LE17 4JB  
 Telephone +44 (0) 1455 554711  
 Fax +44 (0) 1455 558843

Email: [sales@semelab-tt.com](mailto:sales@semelab-tt.com)

Website: <http://www.semelab-tt.com>



A subsidiary of  
TT electronics plc.

Document Number  
8411  
Issue 2  
Page 1 of 1

# ALF08P16V/ALF08P20V


## ELECTRICAL CHARACTERISTICS ( $T_C = 25^\circ\text{C}$ unless otherwise stated)

Symbols	Parameters	Test Conditions	Min.	Typ	Max.	Units	
$BV_{DSX}$	Drain-Source Breakdown Voltage	$V_{GS} = 10\text{V}$	ALF08P16V	-160		V	
		$I_D = -10\text{mA}$	ALF08P20V	-200			
$I_{GSS}$	Gate-Source Leakage Current	$V_{DS} = 0$ $V_{GS} = \pm 20\text{V}$			100	$\mu\text{A}$	
$V_{GS(\text{off})}$	Gate-Source Cut-off Voltage	$V_{DS} = -10\text{V}$ $I_D = -100\text{mA}$	-0.15		-1.5	V	
$V_{DS(\text{sat})}^*$	Drain-Source Saturation Voltage	$V_{GD} = 0$ $I_D = -8\text{A}$			-12	V	
$ y_{fs} ^*$	Forward Transfer Admittance	$V_{DS} = -10\text{V}$ $I_{DS} = -3\text{A}$	0.7		2	S( $\Omega$ )	
$I_{DSX}$	Drain-Source Cut-Off Current	$V_{GS} = -10\text{V}$	$V_{DS} = -160\text{V}$			-10	mA
			$V_{DS} = -200\text{V}$			-10	

\* Pulse Test: Pulse Width = 300 $\mu\text{s}$ , Duty Cycle  $\leq 2\%$







## DYNAMIC CHARACTERISTICS

$C_{iss}$	Input Capacitance	$V_{GS} = 0$		700		pF
$C_{oss}$	Output Capacitance	$V_{DS} = -10\text{V}$		300		
$C_{rss}$	Reverse Transfer Capacitance	$f = 1.0\text{MHz}$		25		
$t_{on}$	Turn-On Time	$V_{DS} = -20\text{V}$		120		ns
$t_{off}$	Turn-Off Time	$I_D = -5\text{A}$		60		

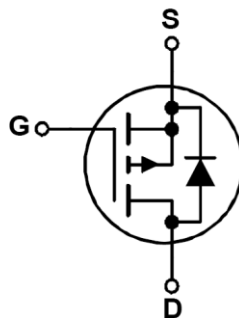



Please Note: These lateral mosfets do not include a G-S protection network and care must therefore be taken with static handling precautions and the appropriate protection in the amplifier circuit. Please refer to the application notes for more information.

## GENERAL CHARACTERISTICS ( $T_C = 25^\circ\text{C}$ unless otherwise stated)

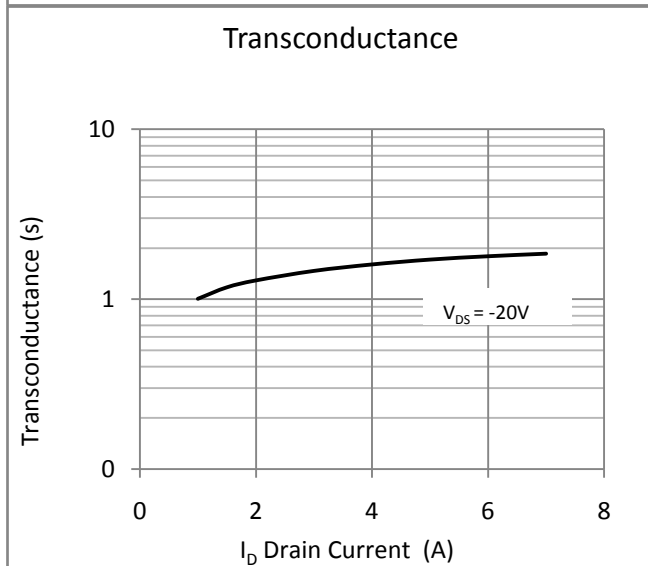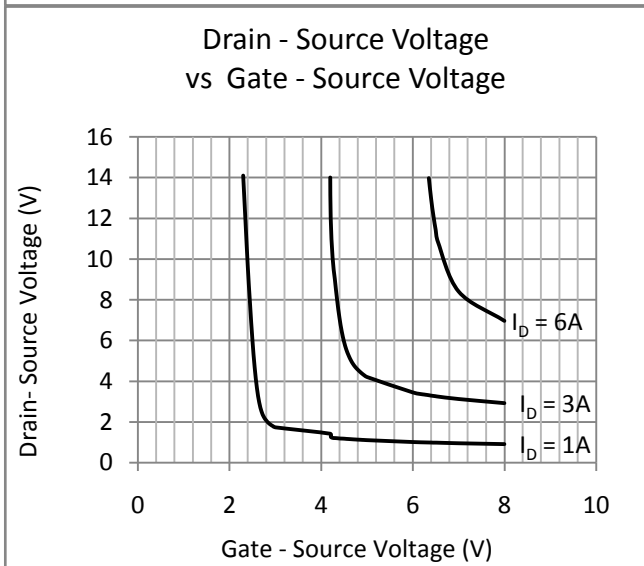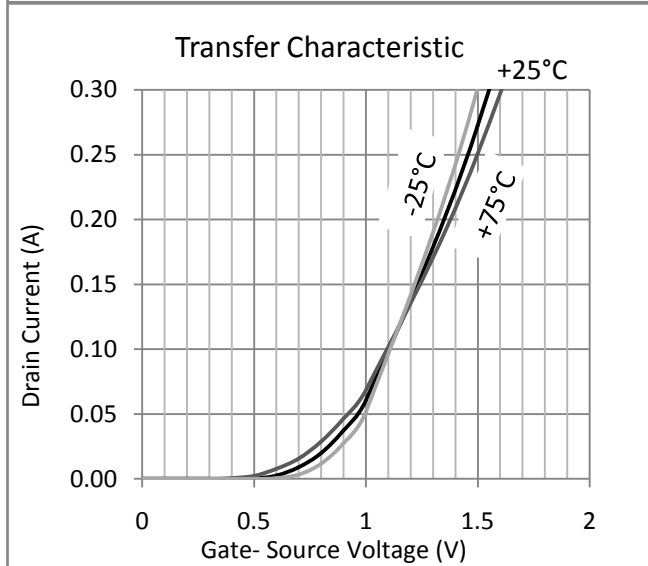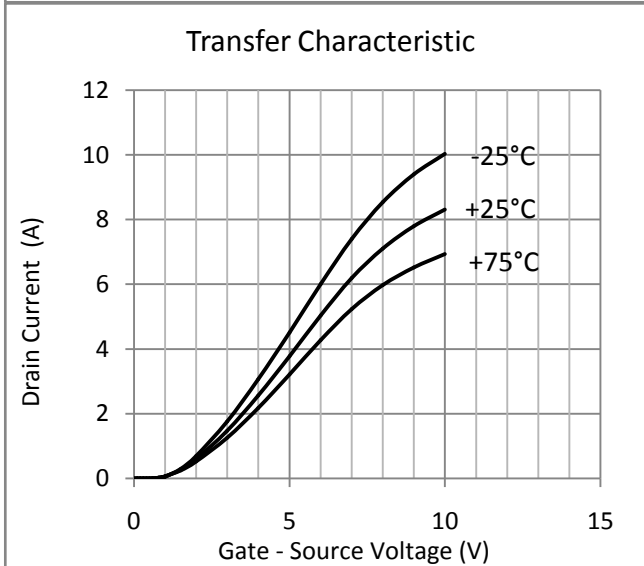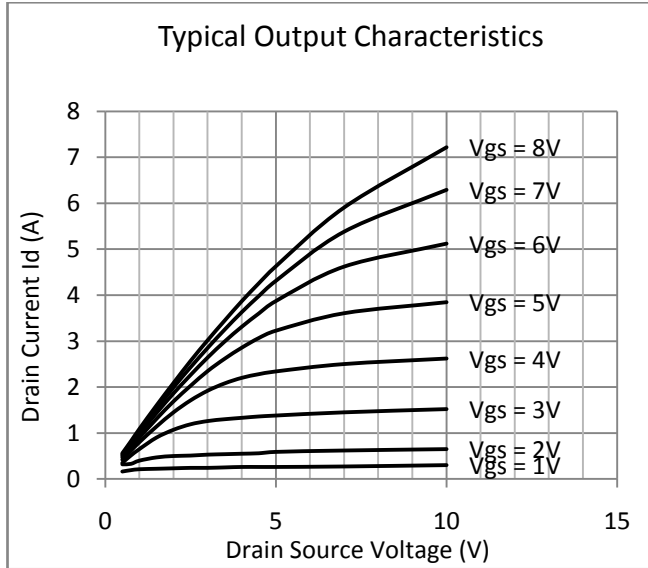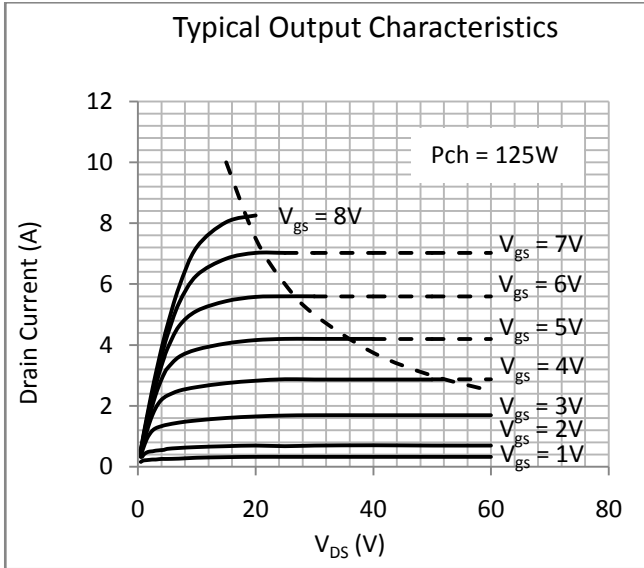


# ALF08P16V/ALF08P20V

## GENERAL CHARACTERISTICS CONTINUED ( $T_C = 25^\circ\text{C}$ unless otherwise stated)

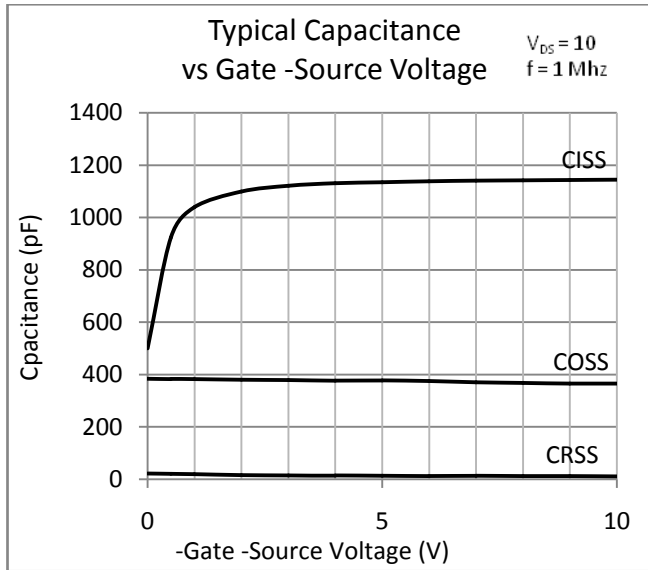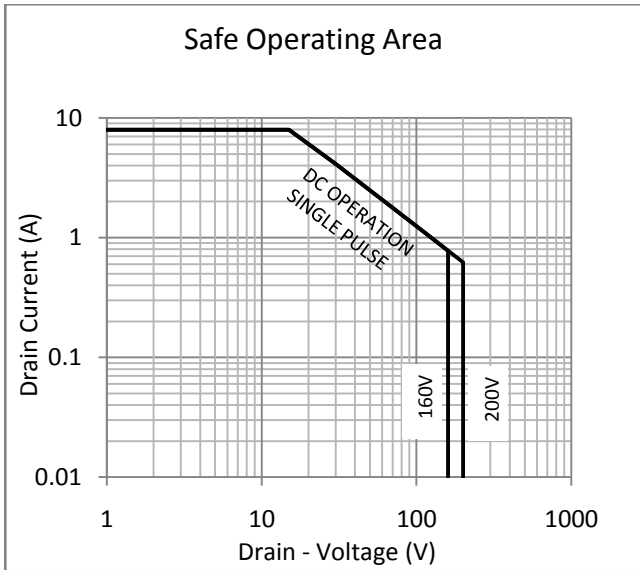

## MECHANICAL DATA

Dimensions in mm (Inches)

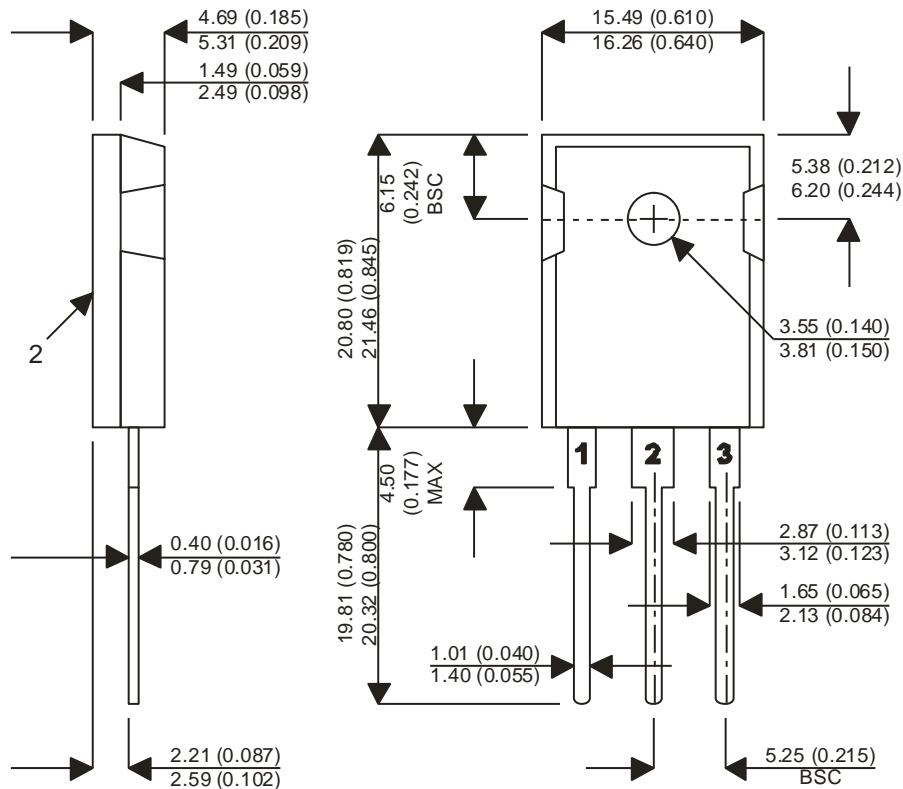

### TO-247

Pin 1 - Gate

Pin 2 - Source

Pin 3 - Drain