

LTI 35A

■ Features

- Small temperature coefficient of the Hall voltage
- Good linearity of the Hall voltage
- . Small imbalance voltage
- . Directly DC voltage applicable

■ Applications

- Brushless motors
VCR, CD, CD-ROM, FDD
- Measuring equipment
Gauss meters, magnetic substance detectors
- . Noncontact sensors
Microswitches, tape-end detection
- . Other magnetic detection

■ Absolute Maximum Ratings

(T_a=25°C)


| Parameter | Symbol | Rating | Unit |
|-------------------------------------|------------------|-------------|------|
| Control voltage | V _C | 12 | V |
| Control current | I _C | 15 | mA |
| Power dissipation | P _D | 150 | mW |
| Operating temperature | T _{opr} | -20 to +125 | °C |
| Storage temperature | T _{stg} | -55 to +150 | °C |
| Soldering temperature ^{※1} | T _{sol} | 260 | °C |

※1 Soldering time : 10 seconds

Hall Voltage 240mV GaAs Hall Device

■ Outline Dimensions

(Unit : mm)

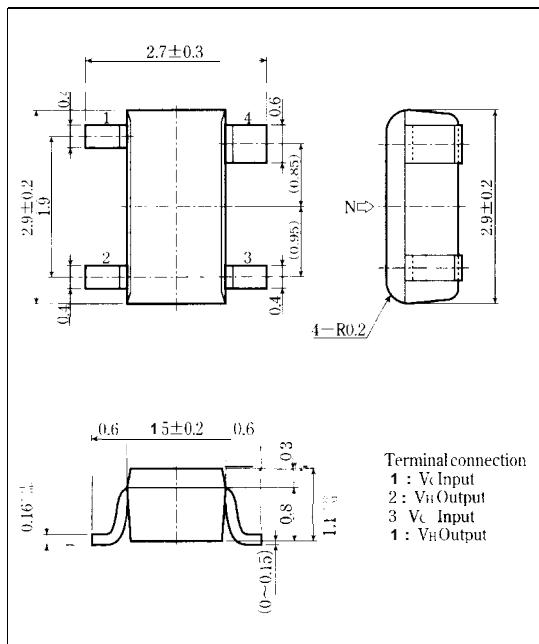

Terminal connection:
 1 : V_H Input
 2 : V_H Output
 3 : V_C Input
 4 : V_H Output

As for dimensions of tape-packaged products, refer to page 44

■ Electrical Characteristics

(T_a=25°C)

| Parameter | Symbol | Conditions | MIN | TYP. | MAX. | Unit |
|---|------------------|--|------|--------------|------|------|
| No-load Hall voltage ^{※1} | V _H | V _C =6V, B=100mT | 200 | 240 | 280 | mV |
| Imbalance voltage ^{※2} | V _{HO} | V _C =6V, B=0mT | -15 | - | 15 | mV |
| Input resistance | R _{IN} | I _M =1mA, B=0mT | 650 | 800 | 950 | Ω |
| Output resistance | R _{OUT} | I _M =1mA, B=0mT | 1300 | 1600 | 1900 | Ω |
| Drift of imbalanced voltage vs. temperature | △V _{HO} | V _C =6V, B=0mT, T _a =-20°C to 25°C V _C =6V, B=0mT, T _a =25°C to 125°C | - | 5 | - | mV |
| Temperature coefficient of Hall voltage | β | I _C =6mA, B=100mT, T ₁ =-20°C, T ₂ =125°C | - | -0.03 | - | %/°C |
| Temperature coefficient of input resistance | α | I _M =1mA, B=0mT, T ₁ =-20°C, T ₂ =125°C | - | 0.2 | - | %/°C |
| Linearity of Hall voltage | γ | I _C =6mA, B ₁ =50mT, B ₂ =100mT | - | 2 | - | % |

※1 No-load Hall voltage is nearly proportional to V_C (within the range of 1 to 6V) at temperatures of -20°C to +125°C

Keep the voltage within the allowable power dissipation range.

※2 Imbalanced ratio is in +/-12% within the range of V_C=1 to 6V.

$$V_{HI} = V_M - V_{HO}$$

$$\beta = \frac{1}{V_{HI}(T_1)} \times \frac{|V_H(T_2) - V_H(T_1)|}{(T_2 - T_1)} \times 100$$

V_M: observed Hall voltage

$$\alpha = \frac{1}{R_{IN}(T_1)} \times \frac{|R_{IN}(T_2) - R_{IN}(T_1)|}{(T_2 - T_1)} \times 100$$

V_{HO}: [rebalanced voltage]

$$\gamma = \frac{|K_H(B_2) - K_H(B_1)|}{|K_H(B_1) + K_H(B_2)|} \times 2 \times 100 \quad K_H = \frac{V_H}{(I_C \times B)}$$

K_H: Sensitivity**SHARP**

Fig. 1 Hall Voltage vs. Ambient Temperature

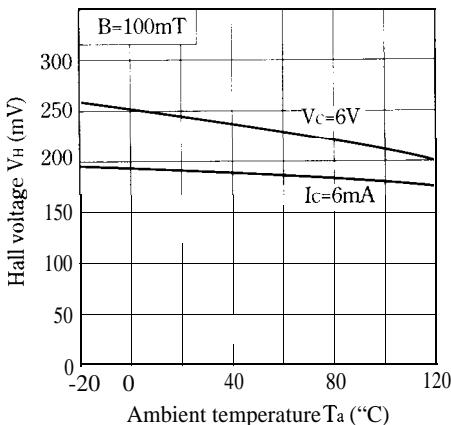


Fig. 3 Hall Voltage vs. Magnetic Flux Density

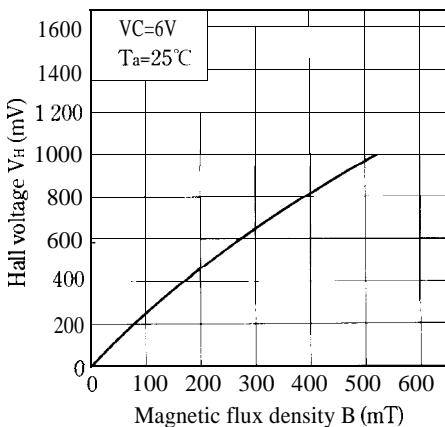


Fig. 5 Hall Voltage vs. Control Voltage

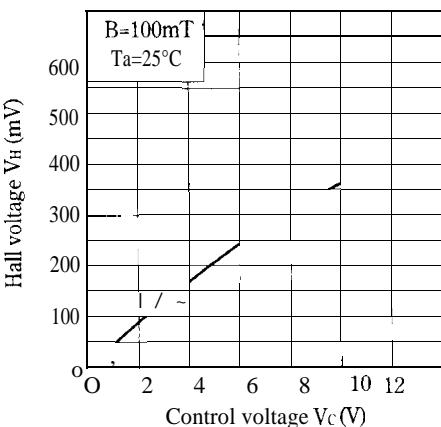


Fig. 2 Input Resistance vs. Ambient Temperature

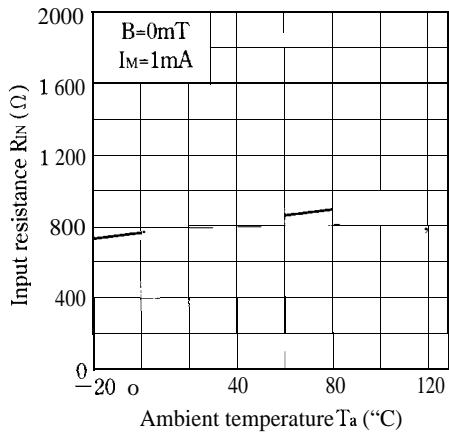


Fig. 4 Hall Voltage vs. Control Current

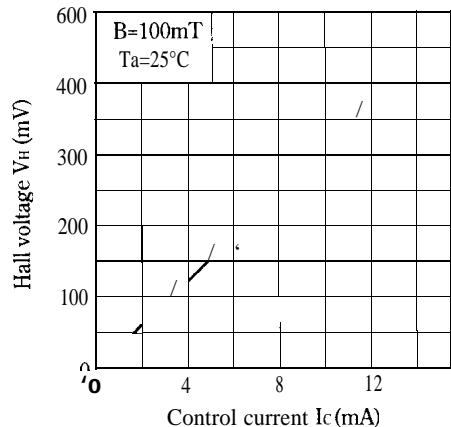


Fig. 6 Power Dissipation vs. Ambient Temperature

