

PQ05RBI 1 Series

Low Power-Loss Voltage Regulators (Built-in Overheat Shut-Down Function)

Features

- Compact resin full-mold package
- Low power-loss (Dropout voltage : MAX.0.5V)
- Overheat shut-down function (Keep shut-down output until power-on again)
- Overcurrent protection type
- Built-in ON/OFF* control function
- High-precision output type
(Output voltage precision : $\pm 2.5\%$,)

Applications


- Series power supply for TVs and VCRs
- Switching power supply

Model Line-ups

output	5V	9V	12V
Model No.	PQ05RB11	PQ09RBI 1	PQ12RB11

Outline Dimensions

(Unit : mm)

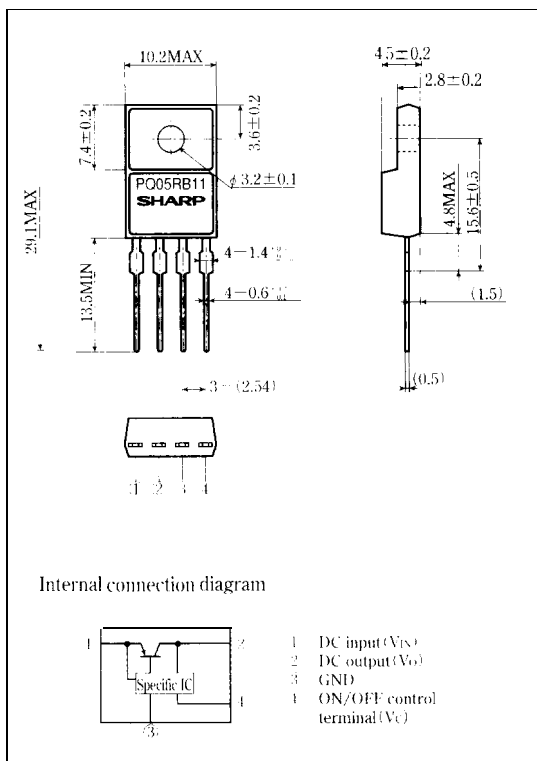

Absolute Maximum Ratings

(T_a=25°C)

Parameter	Symbol	Rating	Unit
*1 Input voltage	V _{IN}	35	v
1 ON/OFF control terminal voltage	V _C	35	v
Output current	I _O	1	A
Power dissipation (No heat sink)	P _{D1}	1.25	W
Power dissipation (With infinite heat sink)	P _{D2}	12.5	W
*2 Junction temperature	T _J	150	°C
operating temperature	T _{op}	-20 to +80	°C
Storage temperature	T _{str}	-40 to +150	°C
*3 Soldering temperature	T _{sol}	260	°C

*1 All are open except GND and applicable terminals.

*2 Overheat shut-down function operates at T_J ≥ 110°C

*3 For 10s

• Please refer to the chapter "Handling Precautions"

SHARP

Electrical Characteristics

(Unless otherwise specified, condition shall be $I_o=0.5A$, $V_{IN}=**4$, $T_a=25^{\circ}C$)

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
output Voltage	V_o		4.88	5.0	5.12	v
			8.78	9.0	9.22	
			11.7	12.0	12.3	
Load regulation	Reg_L	$I_o=5mA$ to 1A		0.1	2.0	%
Line regulation	Reg_I	*5		0.5	2.5	%
'temperature coefficient of output voltage	$T_C V_o$	$T_j=0$ to $125^{\circ}C$, $I_o=5mA$		± 0.02		%/ $^{\circ}C$
Ripple rejection	RR	Refer to Fig.2	45	55		dB
Dropout voltage	$V_{I(O)}$	*6, $I_o=0.5A$			0.5	v
ON-state voltage for control	$V_C(ON)$		2.0 *7	-		V
ON-state current for control	$I_C(ON)$	$V_C=2.7V$			20	μA
OFF-state voltage for control	$V_C(OFF)$				0.8	v
OFF-state current for control	$I_C(OFF)$	$V_C=0.4V$			-0.4	mA
Quiescent current	I_q	$I_o=0A$			10	mA
Overheat shut-down temperature	T_{SD}		110	130	150	$^{\circ}C$

*4 PQ05RB11 : $V_{IN}=7V$, PQ09RB11 : $V_{IN}=15V$, PQ12RB11 : $V_{IN}=18V$

*5 PQ05RB11 : $V_{IN}=6$ to $12V$, PQ09RB11 : $V_{IN}=10$ to $25V$, PQ12RB11 : $V_{IN}=13$ to $29V$

*6 Input voltage shall be the value when output voltage is 95% in comparison with the initial value

*7 In case of opening control terminal *4, output voltage turns on.

Fig. 1 Test Circuit



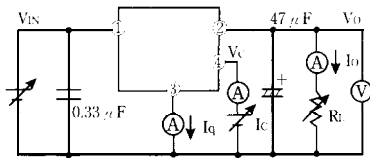


Fig. 2 Test Circuit of Ripple Rejection

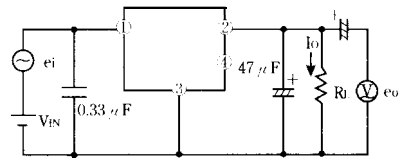

f=120Hz(sine wave)
 $e_i=0.5V_{rms}$
 $RR=2010R (e_i/e_o)$

Fig. 3 Power Dissipation vs. Ambient Temperature

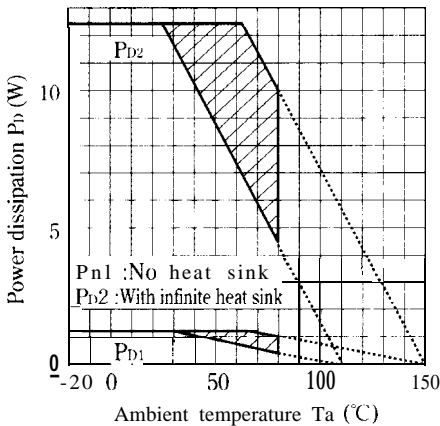

Note) Oblique line portion : Overheat protection operates in this area.

Fig. 4 Overcurrent Protection Characteristics (Typical Value)

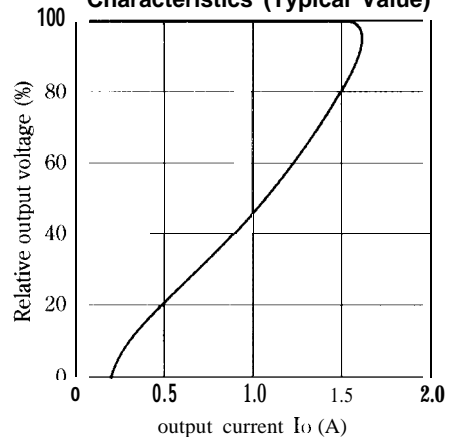


Fig. 5 Output Voltage vs. Input Voltage (PQ05RB11)

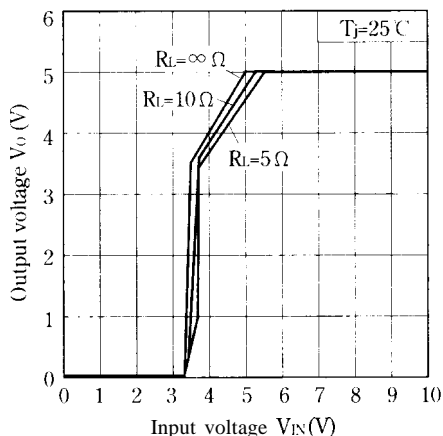


Fig. 6 Output Voltage vs. Input Voltage (PQ09RB11)

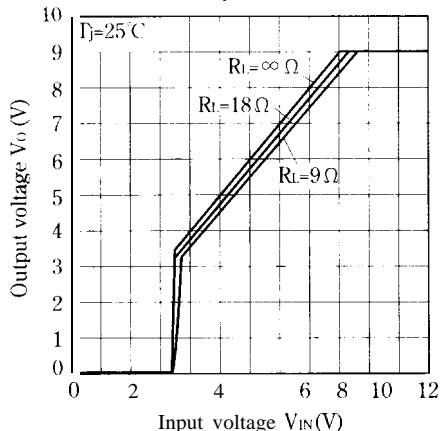


Fig. 7 Output Voltage vs. Input Voltage (PQ12RB11)

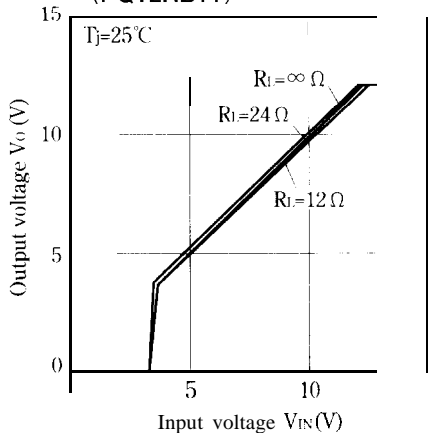


Fig. 8 Dropout Voltage vs. Junction Temperature

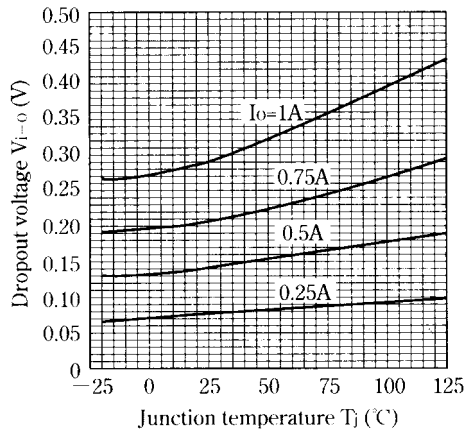


Fig. 9 Circuit Operating Current vs. Input Voltage (PQ05RB11)

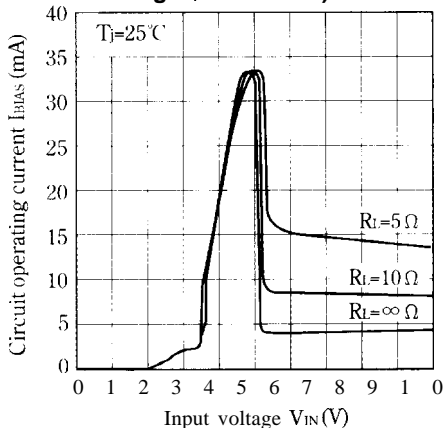


Fig.10 Circuit Operating Current vs. Input Voltage (PQ09RB11)

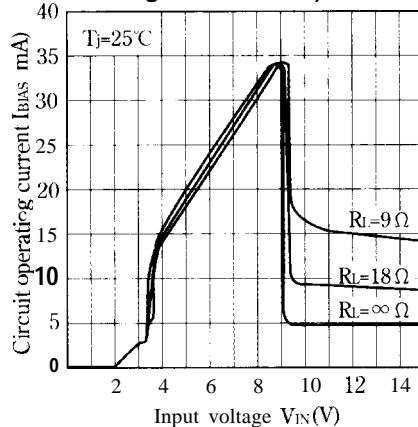


Fig.11 Circuit Operating Current vs. Input Voltage (PQ12RB1 1)



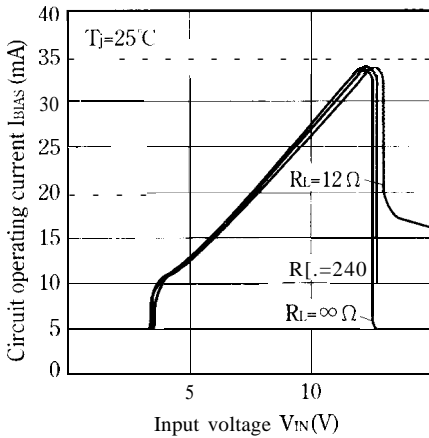


Fig.12 Output Peak Current vs. Junction Temperature

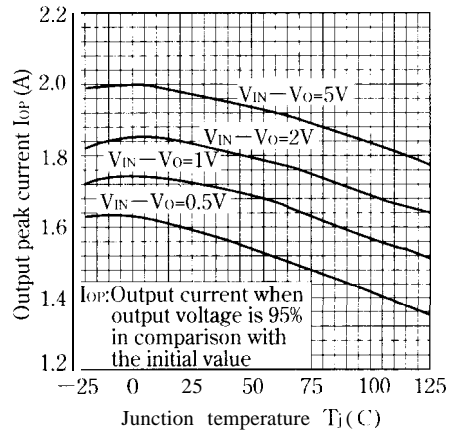

Overheat Shut-down Characteristics

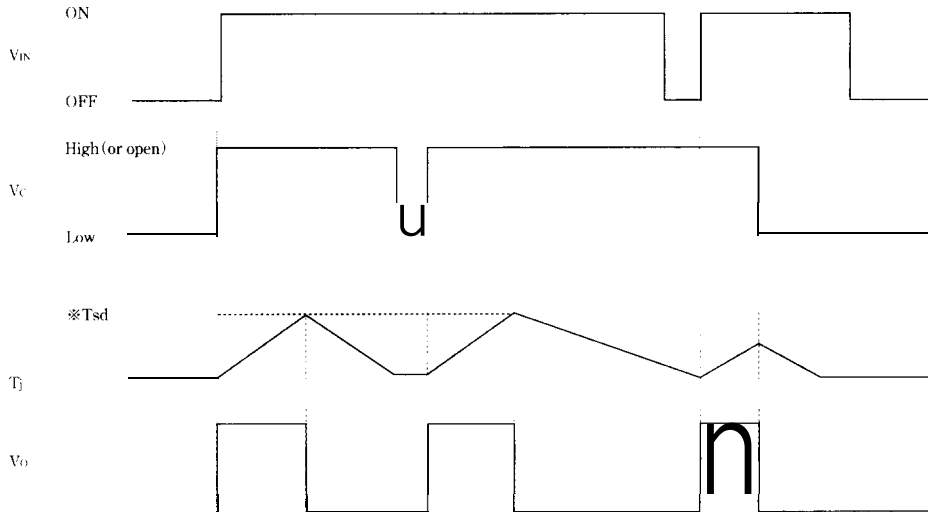

※ Tsd : overheat shut-down temperature ($T_j \geq 110^\circ\text{C}$)

- (1) Overheat shut-down operates at $T_j = Tsd$ and output OFF-state is maintained.
- (2) OFF-state is kept until V_{IN} is once turned off or V_C is turned down to the "L" level.

Typical Applications

