

GP1A52LR

OPIC Photointerrupter

■ Features


1. Output inverting type of **GPIA52HR**
2. High sensing accuracy (Slit width : 0.5mm)
3. TTL and CMOS compatible output
4. PWB mounting type

■ Applications

1. OA equipment, such as printers, floppy disk drives, etc.
2. VCRs

■ Outline Dimensions

(Unit : mm)

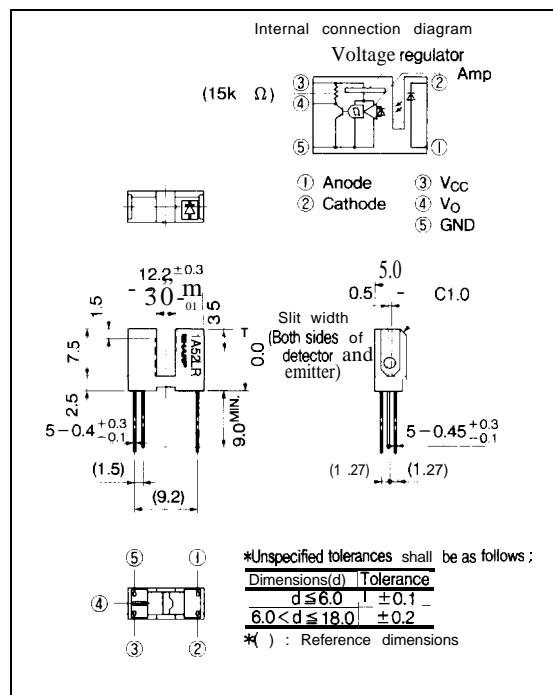

* "OPIC" (Optical IC) is a trademark of the SHARP Corporation.
An OPIC consists of a light-detecting element and signal processing circuit integrated onto a single chip.

■ Absolute Maximum Ratings

(Ta = 25°C)

	Parameter	Symbol	Rating	Unit
Input	Forward current	I _F	50	mA
	* ¹ Peak forward current	I _{FM}	1	A
	Reverse voltage	V _R	6	v
	Power dissipation	P	75	mW
Output	Supply voltage	V _{CC}	-0.5 to +17	v
	Low level output current	I _{OL}	50	mA
	Power dissipation	P _O	250	w
Operating temperature	T _{opr}		-25 to +85	°C
Storage temperature	T _{stg}		-40 to +100	°C
*Z Soldering temperature	T _{sot}		260	°C

*1 Pulse width ≤ 100 μs, Doty ratio = 0.01

*2 For 5 seconds

■ Electro-optical Characteristics

(Ta = 25°C)

		Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input	Forward voltage	V _F	I _F = 5mA	—	1.1	1.4	V
	Reverse current	I _R	V _R = 3V	—	—	10.0	μA
Output	Operating supply voltage	V _{CC}	I	4.5	—	17.0	V
	Low level output voltage	V _{OL}	V _{CC} = 5V, I _F = 5mA, I _{OL} = 16mA	—	0.15	0.4	V
	High level output voltage	V _{OH}	V _{CC} = 5V, I _F = 0mA	4.9	—	—	V
	Low level supply current	I _{CCL}	V _{CC} = 5V, I _F = 5mA	—	1.7	3.8	mA
	High level supply current	I _{CCR}	V _{CC} = 5V, I _F = 0mA	—	0.7	2.2	mA
Transfer characteristics	* ³ "High → Low" threshold input current	I _{FHL}	V _{CC} = 5V	—	1.0	5.0	mA
	* ⁴ Hysteresis	I _{FIH} /I _{FHL}	V _{CC} = 5V	0.55	0.75	0.95	—
	"High → Low" propagation delay time	t _{PHL}	V _{CC} = 5V, I _F = 5mA	—	3.0	9.0	μs
	"Low → High" propagation delay time	t _{PLH}		—	5.0	15.0	
	Rise time	t _r		—	0.1	0.5	
	Fall time	t _f	R _L = 280Ω	—	0.05	0.5	—

*³I_{FHL} represents forward current when output changes from high to low.*⁴I_{FIH} represents forward current when output changes from low to high. Hysteresis stands for I_{FIH}/I_{FHL}.

■ Recommended Operating Conditions

Parameter	Symbol	Operating temp.	MIN.	MAX.	Unit
Low level output current	I _{OL}	Ta = 0 to -70°C	—	16.0	mA
Forward current	I _F	—	10.0	20.0	mA

Fig. 1 Forward Current vs. Ambient Temperature

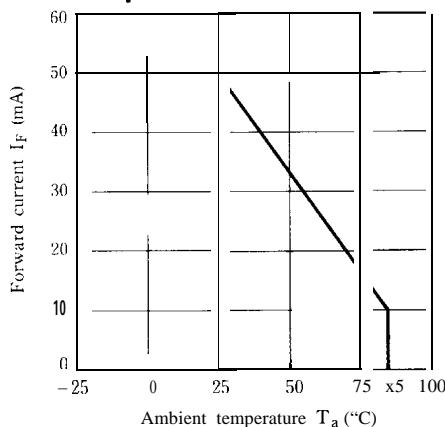


Fig. 2 Output Power Dissipation vs. Ambient Temperature

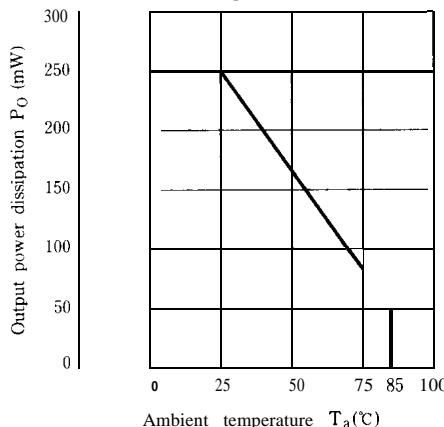


Fig. 3 Low Level output Current I_{OL} vs. Ambient Temperature

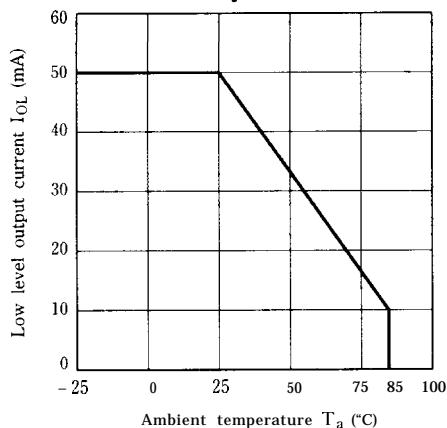


Fig. 4 Forward Current vs. Forward Voltage

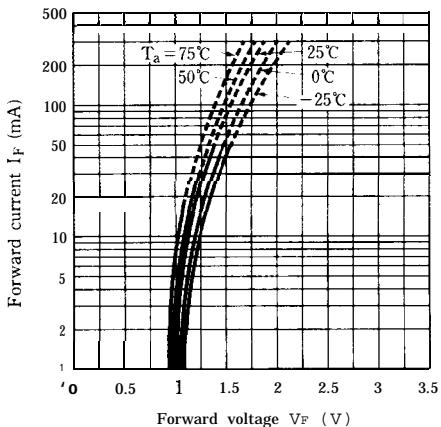


Fig. 5 Relative Threshold Input Current vs. Supply Voltage

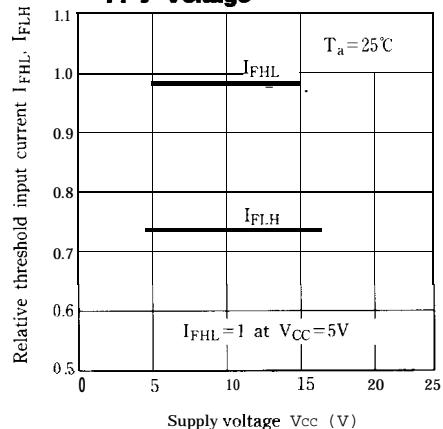


Fig. 6 Relative Threshold Input Current vs. Ambient Temperature

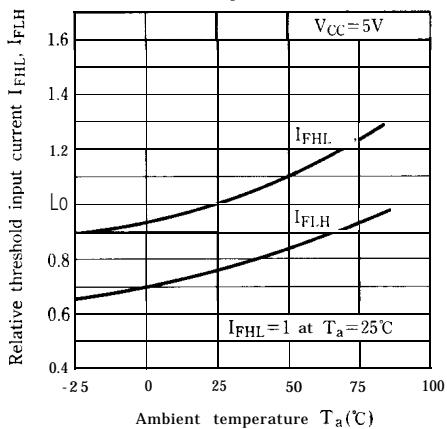


Fig. 7 Low Level Output Voltage vs. Low Level Output Current

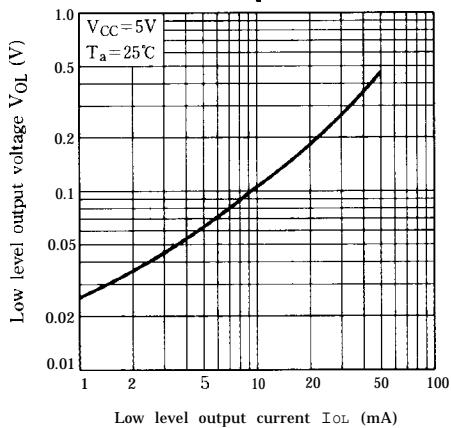


Fig. 8 Low Level Output Voltage vs. Ambient Temperature

