

**FEATURES**


- 12 dB Gain
- +8 V Nominal Supply Operation
- High Linearity
- Low Noise Figure: 2.7 dB (typ.)
- Characterized at +34 dBmV output power
- Wide Band Operation to Beyond 1.2 GHz
- -40 to +85°C
- RoHS-Compliant Package
- Heat Slug Package for enhanced Thermal Management

**APPLICATIONS**


- Driver Amplifier
- CATV - Distribution / Drop Amplifiers
- Set Top Boxes
- Home Gateway

**PRODUCT DESCRIPTION**

The ABA3101 is a monolithic IC intended for use in applications requiring high linearity, such as Cellular Telephone Base Station Driver Amplifiers, CATV Fiber Receiver and Distribution Amplifiers, CATV Drop Amplifiers, CATV Set Top Boxes, and Home Gateways. Offered in a modified 16 lead surface mount SOIC

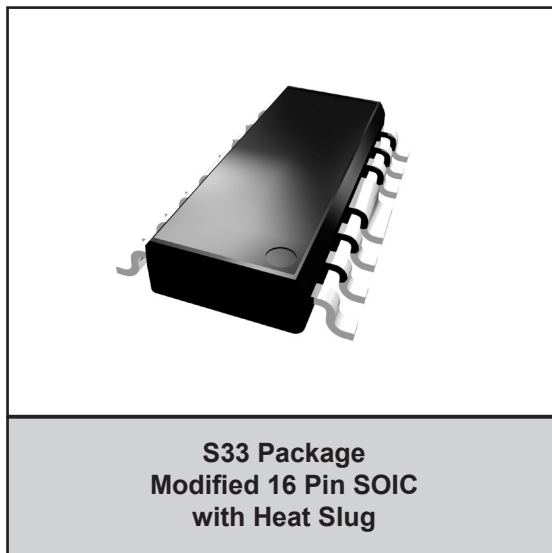

package with a heat slug, it is well suited for use in amplifiers where small size, reduced component count, and high reliability are important.

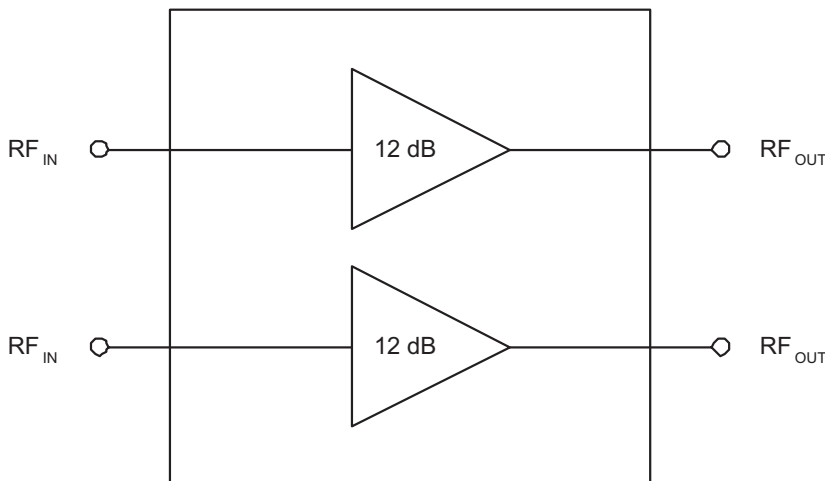

**Figure 1: Block Diagram**

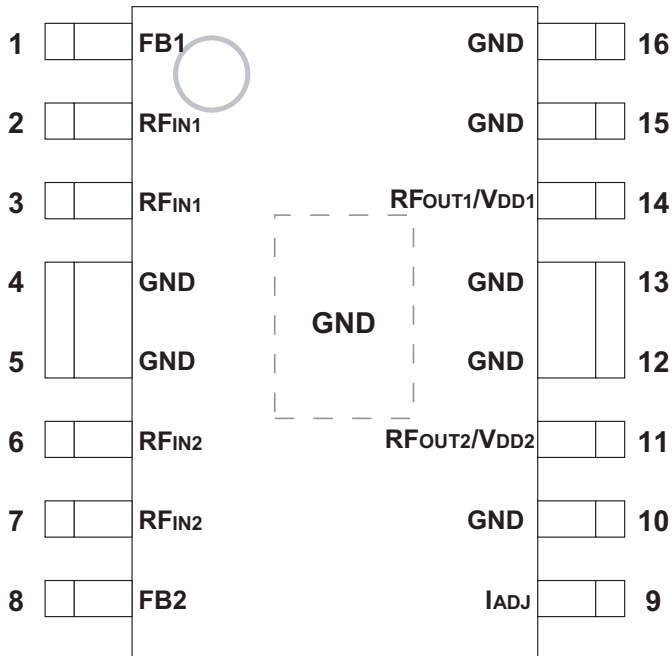


Figure 2: Pinout Diagram

Table 1: Pin Description

PIN	NAME	DESCRIPTION	PIN	NAME	DESCRIPTION
1	FB1	Feedback for Amplifier A1	9	I <sub>ADJ</sub>	Current Adjust
2	RF <sub>IN1</sub>	RF Input of Amplifier A1	10	GND	Ground
3	RF <sub>IN1</sub>	RF Input of Amplifier A1	11	RF <sub>OUT2</sub> /V <sub>DD2</sub>	RF Output and VDD of Amplifier A2
4	GND	Ground	12	GND	Ground
5	GND	Ground	13	GND	Ground
6	RF <sub>IN2</sub>	RF Input of Amplifier A2	14	RF <sub>OUT1</sub> /V <sub>DD1</sub>	RF Output and VDD of Amplifier A1
7	RF <sub>IN2</sub>	RF Input of Amplifier A2	15	GND	Ground
8	FB2	Feedback for Amplifier A2	16	GND	Ground

## ELECTRICAL CHARACTERISTICS

Table 2: Absolute Minimum and Maximum Ratings

PARAMETER	MIN	MAX	UNIT
Analog Supply (pins 11, 14)	0	+12	VDC
RF Power at Inputs (pins 2, 3, 6, 7)	-	+15	dBm
Storage Temperature	-65	+150	°C
Soldering Temperature	-	260	°C
Soldering Time	-	5	sec

Stresses in excess of the absolute ratings may cause permanent damage. Functional operation is not implied under these conditions. Exposure to absolute ratings for extended periods of time may adversely affect reliability.

Notes:

(1) Pins 1, 2, 3, 6, 7 and 8 should be AC-coupled. No external DC bias should be applied.

(2) Pin 9 should be AC-grounded. No external DC bias should be applied.

Table 3: Operating Ranges

PARAMETER	MIN	TYP	MAX	UNIT
RF Input / Output Frequency	50	-	1218	MHz
Analog Supply: $V_{DD}$ (pins 11, 14)	+4.5	+8	+9	VDC
Case Temperature: $T_C$	-40	-	+100	°C

The device may be operated safely over these conditions; however, parametric performance is guaranteed only over the conditions defined in the electrical specifications.

**Table 4: Electrical Specifications**  
 (T<sub>A</sub> = +25 °C, V<sub>DD</sub> = + 8 VDC, Test System = 75Ω)

PARAMETER	MIN	TYP	MAX	UNIT	COMMENTS
Gain at 1 GHz	12	12.5	13.2	dB	at 1 GHz
Noise Figure	-	2.5	3.5	dB	50 - 550 MHz
	-	2.7	3.5		550 - 800 MHz
	-	3.2	3.5		800 - 1002 MHz
Input / Output Return Loss	20	22	-	dB	
CSO <sup>(1)</sup>	-	-70	-69	dBc	
CTB <sup>(1)</sup>	-	-72	-70	dBc	
2nd Order Output Intercept Point (OIP2) <sup>(2)</sup>	-	+70	-	dBm	
3rd Order Output Intercept Point (OIP3) <sup>(2)</sup>	-	+40	-	dBm	
Thermal Resistance	-	-	10	°C/W	
Current Consumption <sup>(3)(4)</sup>	200	212	225	mA	

**Notes:**

(1) 112 channels, +34 dBmV per channel (measured at the output), 3 dB tilt, 6 MHz channel spacing.

(2) Two tones: 500 MHz and 501 MHz, +4 dBm per tone.

(3) Characterized with I<sub>ADJ</sub> pin floating.

(4) Adding a shunt resistor from the I<sub>ADJ</sub> pin to ground will lower current, but with some decrease in performance.

PERFORMANCE DATA

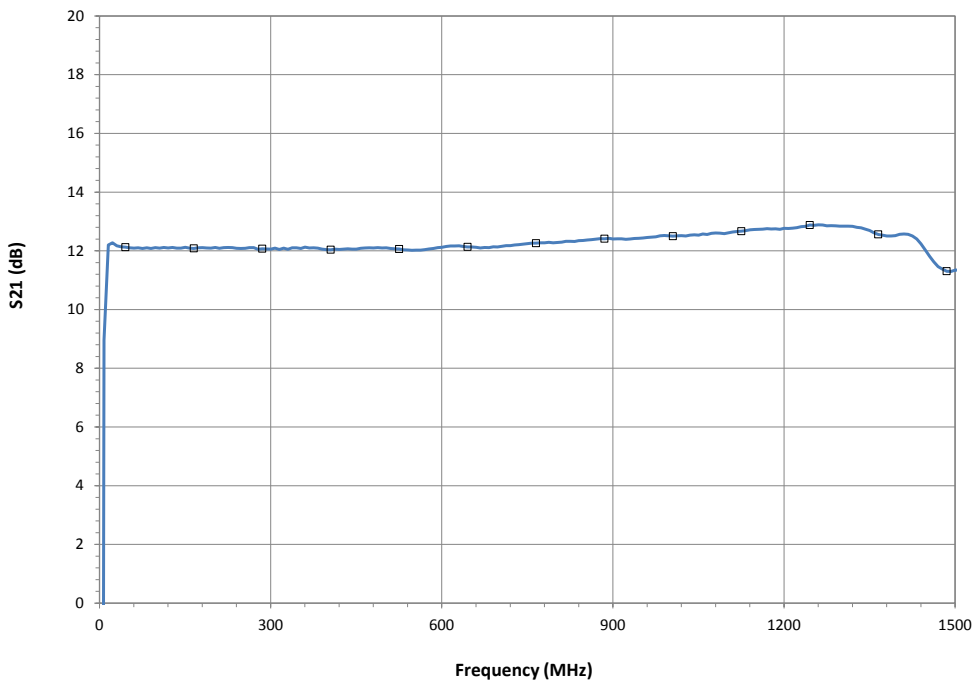


Figure 3: Typical Gain (S21) vs. Frequency

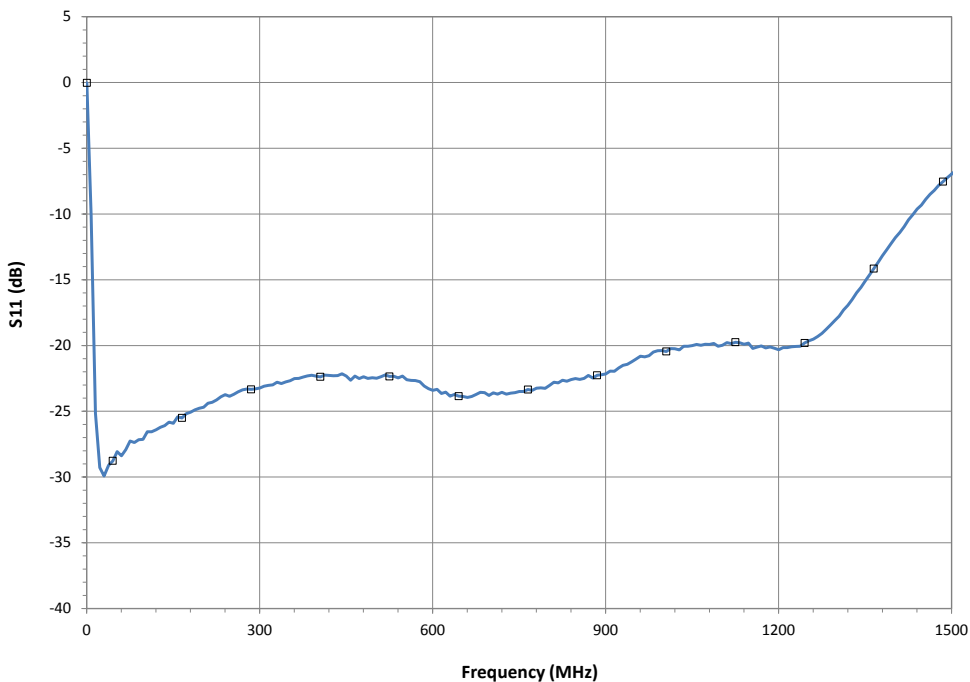


Figure 4: Typical Input Return Loss (S11) vs. Frequency

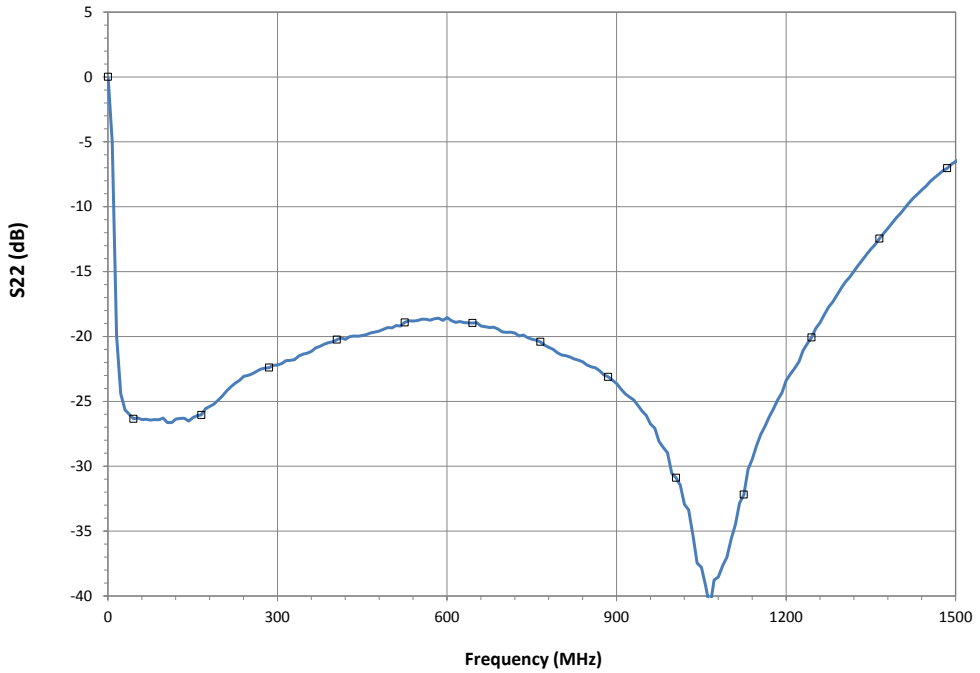


Figure 5: Typical Output Return Loss (S11) vs. Frequency



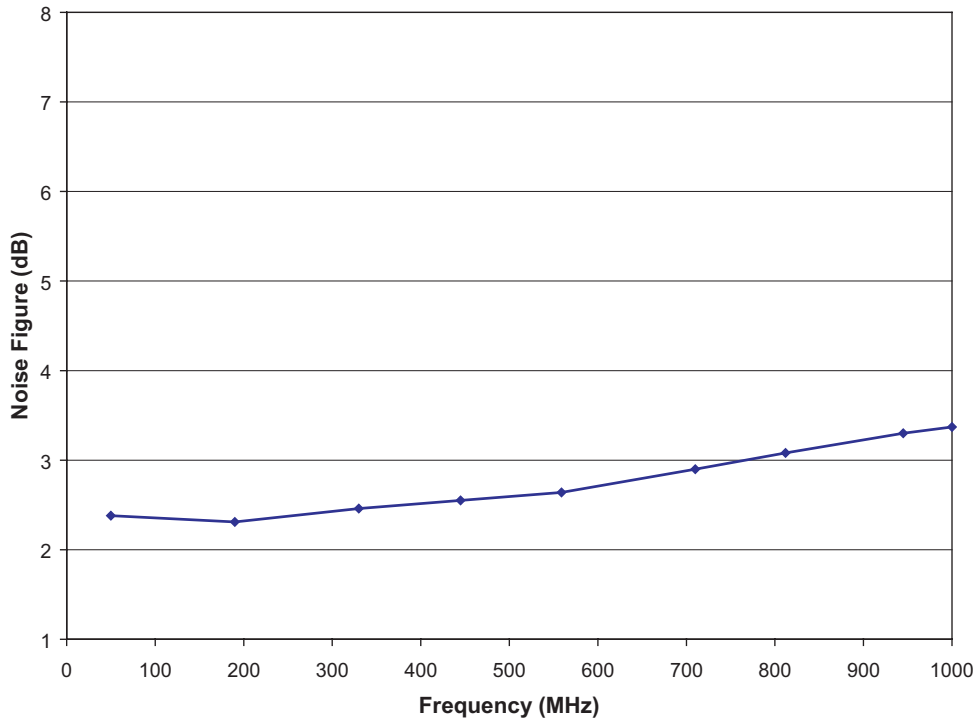



Figure 6: Typical Noise Figure vs. Frequency

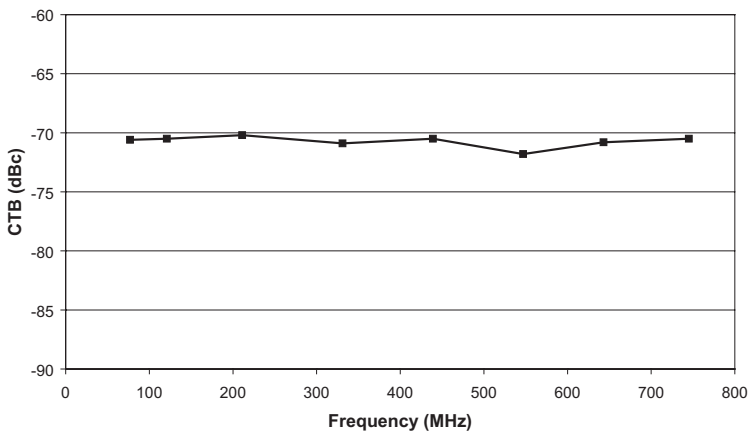

**Figure 7: CTB vs. Frequency**  
**112 Analog Channels, +34 dBmV Output Power, 3 dB Tilt @ 870 MHz, +8 V, 200 mA**

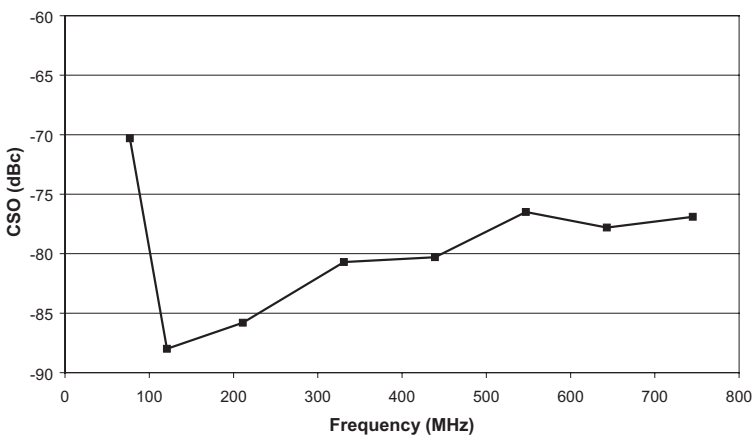

**Figure 8: CSO vs. Frequency**  
**112 Analog Channels, +34 dBmV Output Power, 3 dB Tilt @ 870 MHz, +8 V, 200 mA**

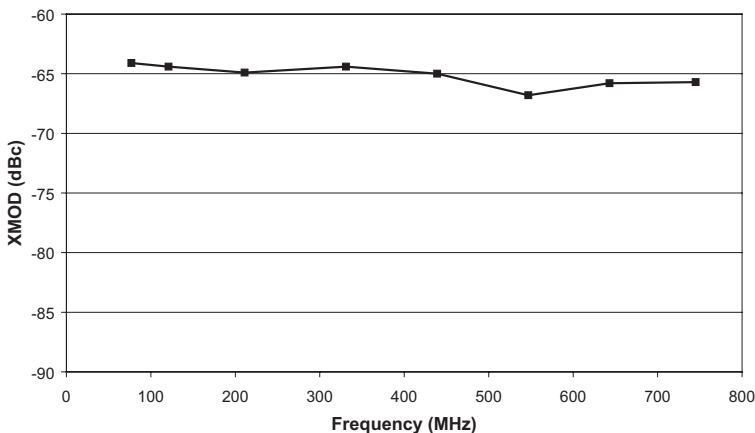

**Figure 9: XMOD vs. Frequency**  
**112 Analog Channels, +34 dBmV Output Power, 3 dB Tilt @ 870 MHz, +8 V, 200 mA**

APPLICATION INFORMATION

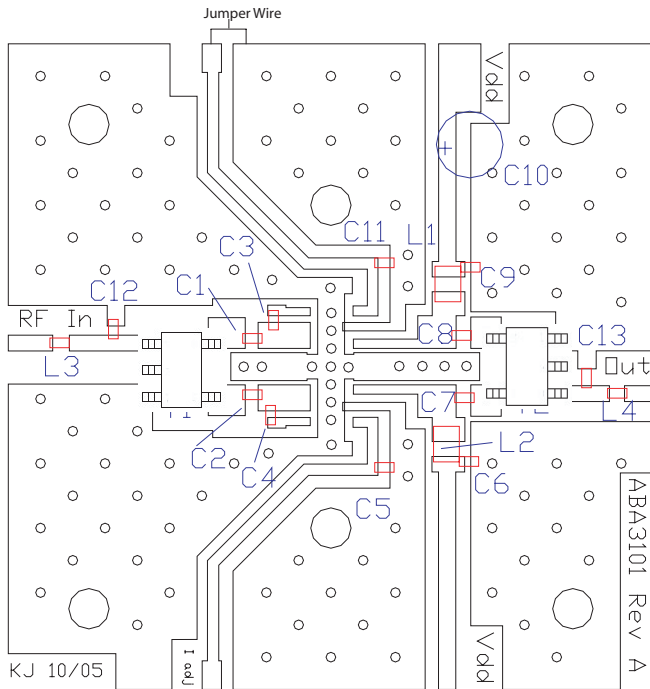


Figure 10: Evaluation Board Layout

Note: Pin 16 of the ABA3101 is connected to ground internally. Do not apply voltage to the  $V_{ADJ}$  input of the evaluation board.

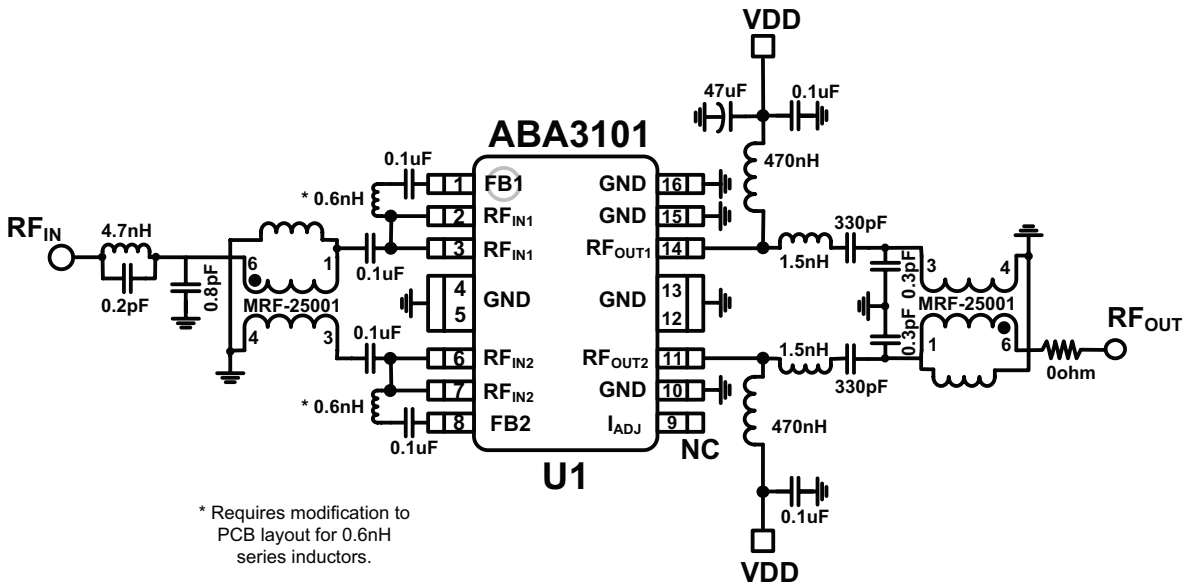


Figure 11: Evaluation Board Schematic

Note:

\* connecting a resistor from  $I_{ADJ}$  to ground lowers current; normal operation is with  $I_{ADJ}$  floating.



Table 5: Evaluation Board Parts List

ITEM	DESCRIPTION	QTY	VENDOR	VENDOR PART NUMBER
C1-C4, C6, C9	0.01uF CHIP CAP.	6	MURATA	GRM39X7R1103K25V
C7, C8	330 pF CHIP CAP.	2	MURATA	GRM39COG471J25V
C10	47 uF ELEC. CAP.	1	DIGI-KEY CORP	P5275-ND
C5, C11	(not installed)			
C12, C13	1.0 pF CHIP CAP.	2	MURATA	GRM1885C1H1ROCZ01B
L1, L2	470 nH CHIP INDUCTOR	2	MURATA	LQH1WA47KONOO03/4052
L3, L4	5.6 nH CHIP INDUCTOR	2	TOKO	PTL2012-F5N6C
CONNECTORS	75 □N MALE PANEL MOUNT	2	PASTERNAK ENTERPRISES	PE4504
T1, T2	BALUN	2	MACOM	MABAES0029 <sup>(4)</sup>
	PCB	1	STANDARD PRINTED CIRCUITS, INC.	

Notes:

(1) "N" Connector center pin should be approximately 80 mils in length.

(2) Connector tabs must be reduced by 150 mils.

(3) Device must be soldered on PC board.

(4) MABAES0029 is not RoHS compliant. For RoHS, the user should evaluate M/A-COM MABACT0069 balun or other similar replacement.


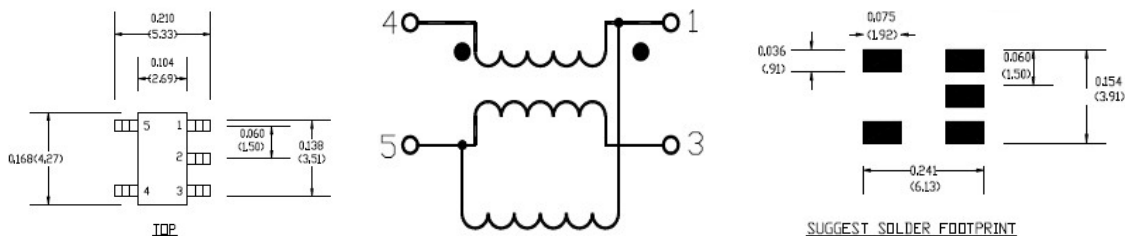


Figure 12: M/A-COM MABAES0029 Balun

Notes:

(1) Consult M/A-COM data sheet for more details.

PACKAGE OUTLINE

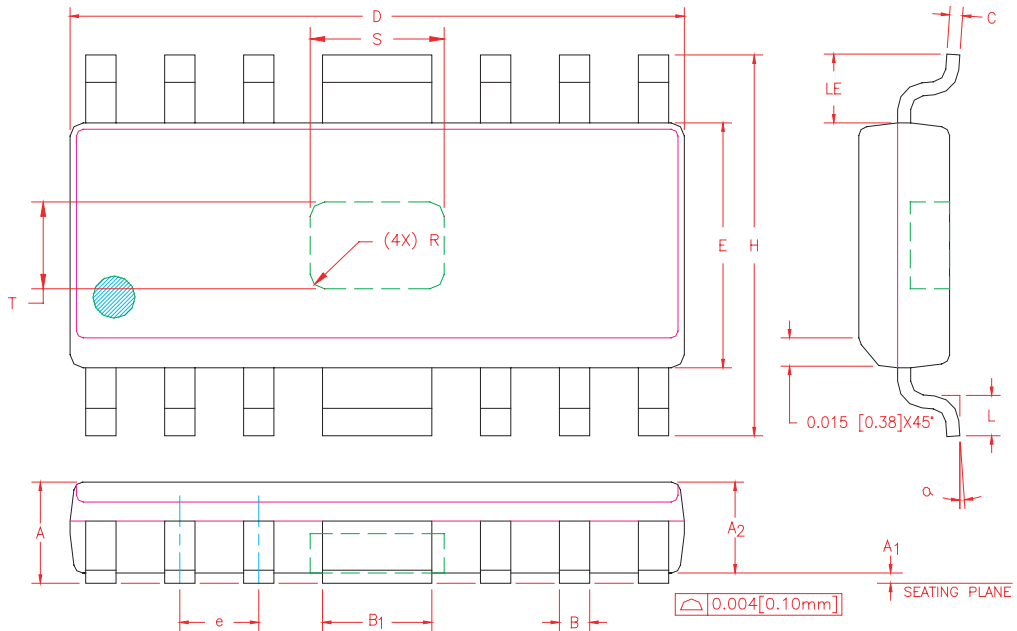

SYMBOL	INCHES		MILLIMETERS		NOTE
	MIN.	MAX.	MIN.	MAX.	
A	0.058	0.068	1.47	1.73	
A1	0.000	0.004	0.00	0.10	7
A2	0.054	0.065	1.37	1.65	
B	0.013	0.020	0.33	0.50	
B1	0.062	0.070	1.58	1.78	
C	0.008	0.010	0.20	0.25	4
D	0.380	0.400	9.66	10.16	2
E	0.150	0.160	3.81	4.06	3
e	0.050 BSC		1.27 BSC		
H	0.226	0.244	5.74	6.20	
L	0.016	0.040	0.41	1.02	
LE	0.030	—	0.76	—	
α	0°	8°	0°	8°	
S	0.070	0.100	1.78	2.54	6
T	0.040	0.070	1.02	1.78	6
R	0.015 REF.		0.38 REF.		6

NOTES:

1. CONTROLLING DIMENSION: INCHES
2. DIMENSION "D" DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH, PROTRUSIONS AND GATE BURRS SHALL NOT EXCEED 0.006 [0.15mm] PER SIDE.
3. DIMENSION "E" DOES NOT INCLUDE INTER-LEAD FLASH OR PROTRUSIONS. INTER-LEAD FLASH AND PROTRUSIONS SHALL NOT EXCEED 0.010 [0.25mm] PER SIDE.
4. MAXIMUM LEAD TWIST/SKEW TO BE ±0.005 [0.13mm].
5. LEAD THICKNESS AFTER PLATING TO BE 0.013 [0.33mm] MAXIMUM.
6. DIMENSIONS "S", "T" AND "R" INDICATE EXPOSED SLUG AREA.
7. A1 STAND OFF IS MEASURED FROM BOTTOM OF HEAT SLUG TO THE SEATING PLANE.

Figure 13: S33 Package Outline - Modified 16 Pin SOIC with Heat Slug

## ORDERING INFORMATION

ORDER NUMBER	TEMPERATURE RANGE	PACKAGE DESCRIPTION	COMPONENT PACKAGING
ABA3101RS33P1	-40 to +100 °C	RoHS Compliant Modified 16 Pin SOIC	3,500 piece Tape and Reel

---

Copyright © 2016 Skyworks Solutions, Inc. All Rights Reserved.

Information in this document is provided in connection with Skyworks Solutions, Inc. (“Skyworks”) products or services. These materials, including the information contained herein, are provided by Skyworks as a service to its customers and may be used for informational purposes only by the customer. Skyworks assumes no responsibility for errors or omissions in these materials or the information contained herein. Skyworks may change its documentation, products, services, specifications or product descriptions at any time, without notice. Skyworks makes no commitment to update the materials or information and shall have no responsibility whatsoever for conflicts, incompatibilities, or other difficulties arising from any future changes.

No license, whether express, implied, by estoppel or otherwise, is granted to any intellectual property rights by this document. Skyworks assumes no liability for any materials, products or information provided hereunder, including the sale, distribution, reproduction or use of Skyworks products, information or materials, except as may be provided in Skyworks Terms and Conditions of Sale.

THE MATERIALS, PRODUCTS AND INFORMATION ARE PROVIDED “AS IS” WITHOUT WARRANTY OF ANY KIND, WHETHER EXPRESS, IMPLIED, STATUTORY, OR OTHERWISE, INCLUDING FITNESS FOR A PARTICULAR PURPOSE OR USE, MERCHANTABILITY, PERFORMANCE, QUALITY OR NON-INFRINGEMENT OF ANY INTELLECTUAL PROPERTY RIGHT; ALL SUCH WARRANTIES ARE HEREBY EXPRESSLY DISCLAIMED. SKYWORKS DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. SKYWORKS SHALL NOT BE LIABLE FOR ANY DAMAGES, INCLUDING BUT NOT LIMITED TO ANY SPECIAL, INDIRECT, INCIDENTAL, STATUTORY, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS THAT MAY RESULT FROM THE USE OF THE MATERIALS OR INFORMATION, WHETHER OR NOT THE RECIPIENT OF MATERIALS HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Skyworks products are not intended for use in medical, lifesaving or life-sustaining applications, or other equipment in which the failure of the Skyworks products could lead to personal injury, death, physical or environmental damage. Skyworks customers using or selling Skyworks products for use in such applications do so at their own risk and agree to fully indemnify Skyworks for any damages resulting from such improper use or sale.

Customers are responsible for their products and applications using Skyworks products, which may deviate from published specifications as a result of design defects, errors, or operation of products outside of published parameters or design specifications.

Customers should include design and operating safeguards to minimize these and other risks. Skyworks assumes no liability for applications assistance, customer product design, or damage to any equipment resulting from the use of Skyworks products outside of stated published specifications or parameters.

Skyworks and the Skyworks symbol are trademarks or registered trademarks of Skyworks Solutions, Inc., in the United States and other countries. Third-party brands and names are for identification purposes only, and are the property of their respective owners. Additional information, including relevant terms and conditions, posted at [www.skyworksinc.com](http://www.skyworksinc.com), are incorporated by reference.

**Skyworks Solutions, Inc.**

Phone [781] 376-3000 • Fax [781] 376-3100 • [sales@skyworksinc.com](mailto:sales@skyworksinc.com) • [www.skyworksinc.com](http://www.skyworksinc.com)

Skyworks Proprietary and Confidential information • Products and Product Information are Subject to Change Without Notice