

## CMOS 8-bit Single Chip Microcomputer


### Description

The CXP845P60 is a CMOS 8-bit microcomputer integrating on a single chip an A/D converter, serial interface, timer/counter, time base timer, capture timer/counter, PWM output and the like besides the basic configurations of 8-bit CPU, PROM, RAM and I/O port.


The CXP845P60 also provides a sleep/stop functions that enable to execute the power-on reset function or lower the power consumption.

The CXP845P60 is the PROM-incorporated version of the CXP84548 with built-in mask ROM. This provides the additional feature of being able to write directly into the program. Thus, it is most suitable for evaluation use during system development and for small-quantity production.

80 pin QFP (Plastic)



80 pin LQFP (Plastic)



### Features


- A wide instruction set (213 instructions) which covers various types of data
  - 16-bit arithmetic/multiplication and division/Boolean bit operation instructions
- Minimum instruction cycle      143ns at 28MHz operation (4.5 to 5.5V)  
                                      200ns at 20kHz operation (3.0 to 5.5V)
- Incorporated PROM capacity    60K bytes
- Incorporated RAM capacity    1472 bytes
- Peripheral functions
  - A/D converter                8 bits, 8 channels, successive approximation method  
(Conversion time of 1.93µs at 28MHz, 2.7µs at 20MHz)
  - Serial interface             Incorporated 8-bit, 8-stage FIFO (Auto transfer for 1 to 8 bytes,  
latch output function, MSB/LSB first selectable), 1 channel  
8-bit clock sync type, 1 channel
  - Timer                        8-bit timer  
                                  8-bit timer/counter  
                                  19-bit time base timer  
                                  16-bit capture time/counter
  - PWM output                 8 bits, 2 channels
  - Interruption                14 factors, 14 vectors, multi-interruption possible
  - Standby mode              Sleep/stop
  - Package                    80-pin plastic QFP/LQFP

### Structure


Silicon gate CMOS IC

Sony reserves the right to change products and specifications without prior notice. This information does not convey any license by any implication or otherwise under any patents or other right. Application circuits shown, if any, are typical examples illustrating the operation of the devices. Sony cannot assume responsibility for any problems arising out of the use of these circuits.


## Block Diagram

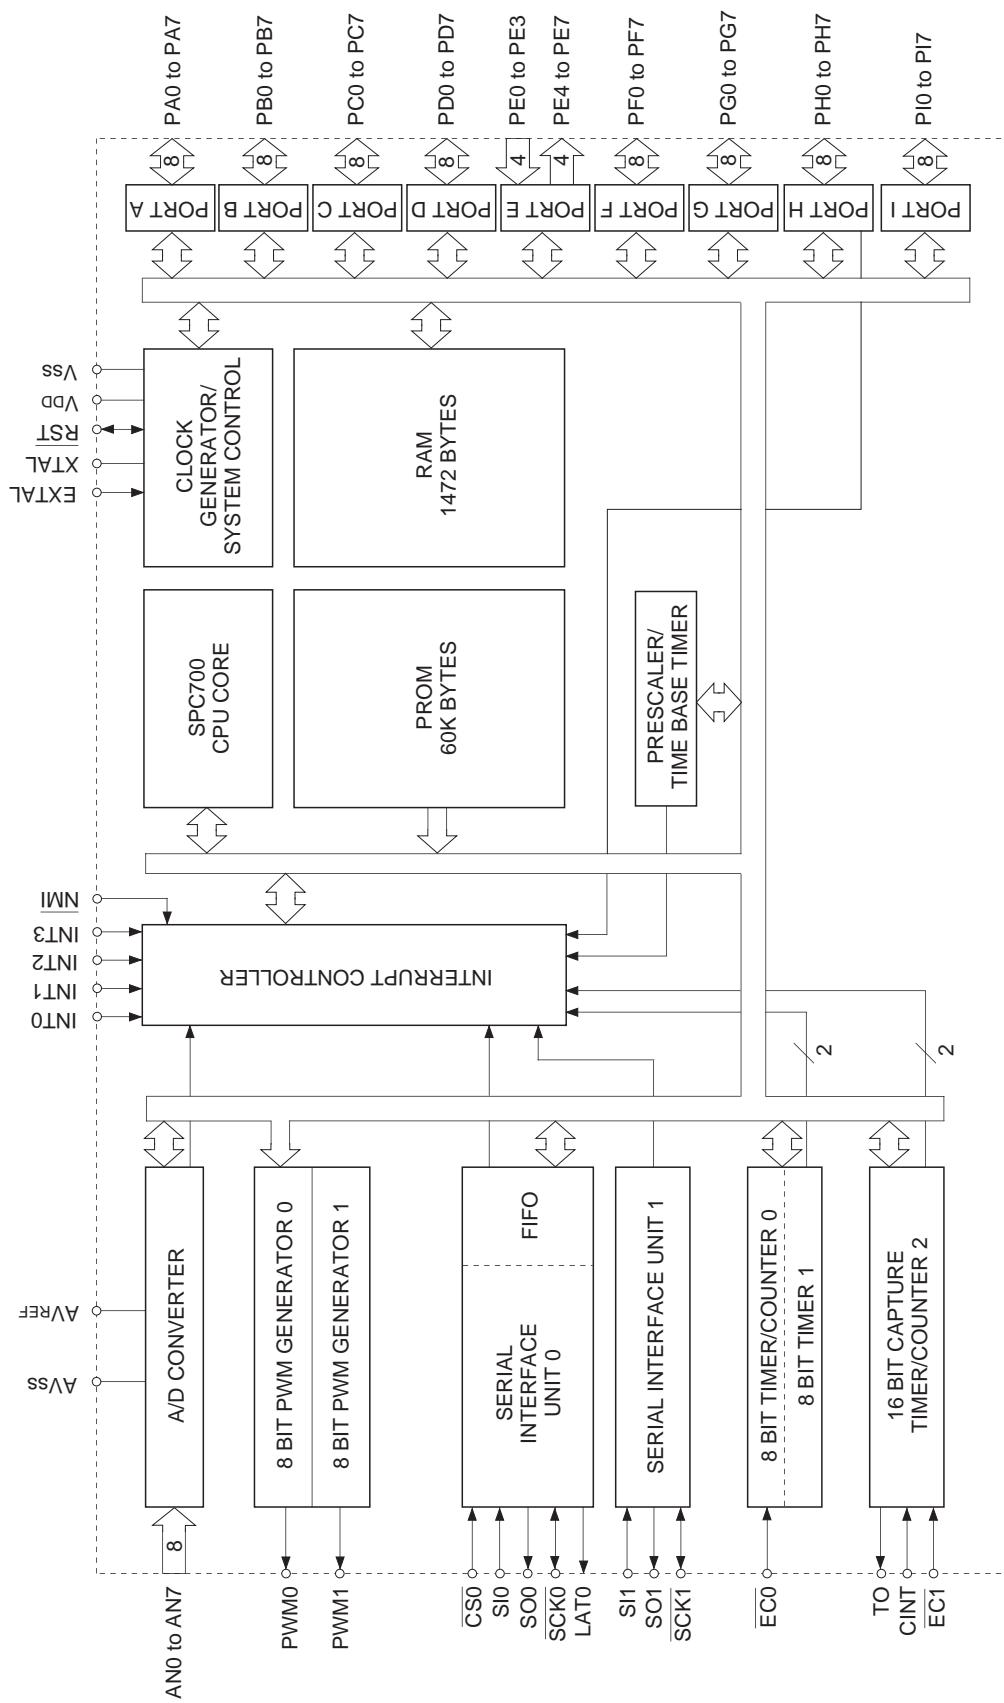

**Pin Assignment (Top View) 80-pin QFP package**

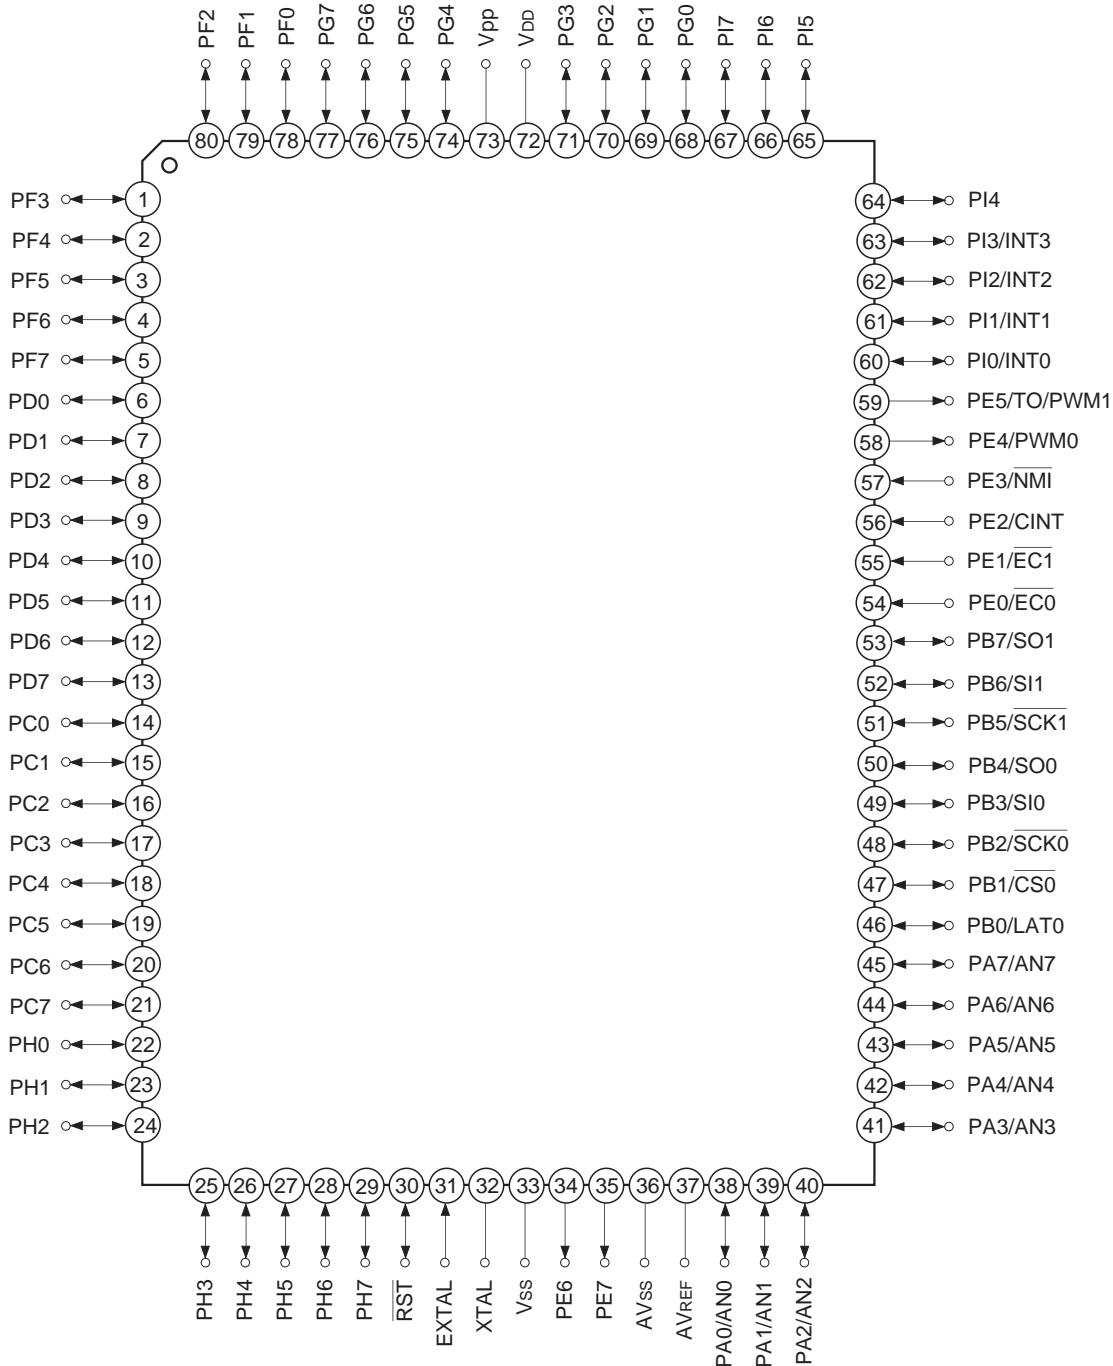

**Note)** Nothing is connected to Vpp (Pin 73). (Internally connected to VDD.) However, this pin is used for the Flash EEPROM-incorporated version (CXP845F60).

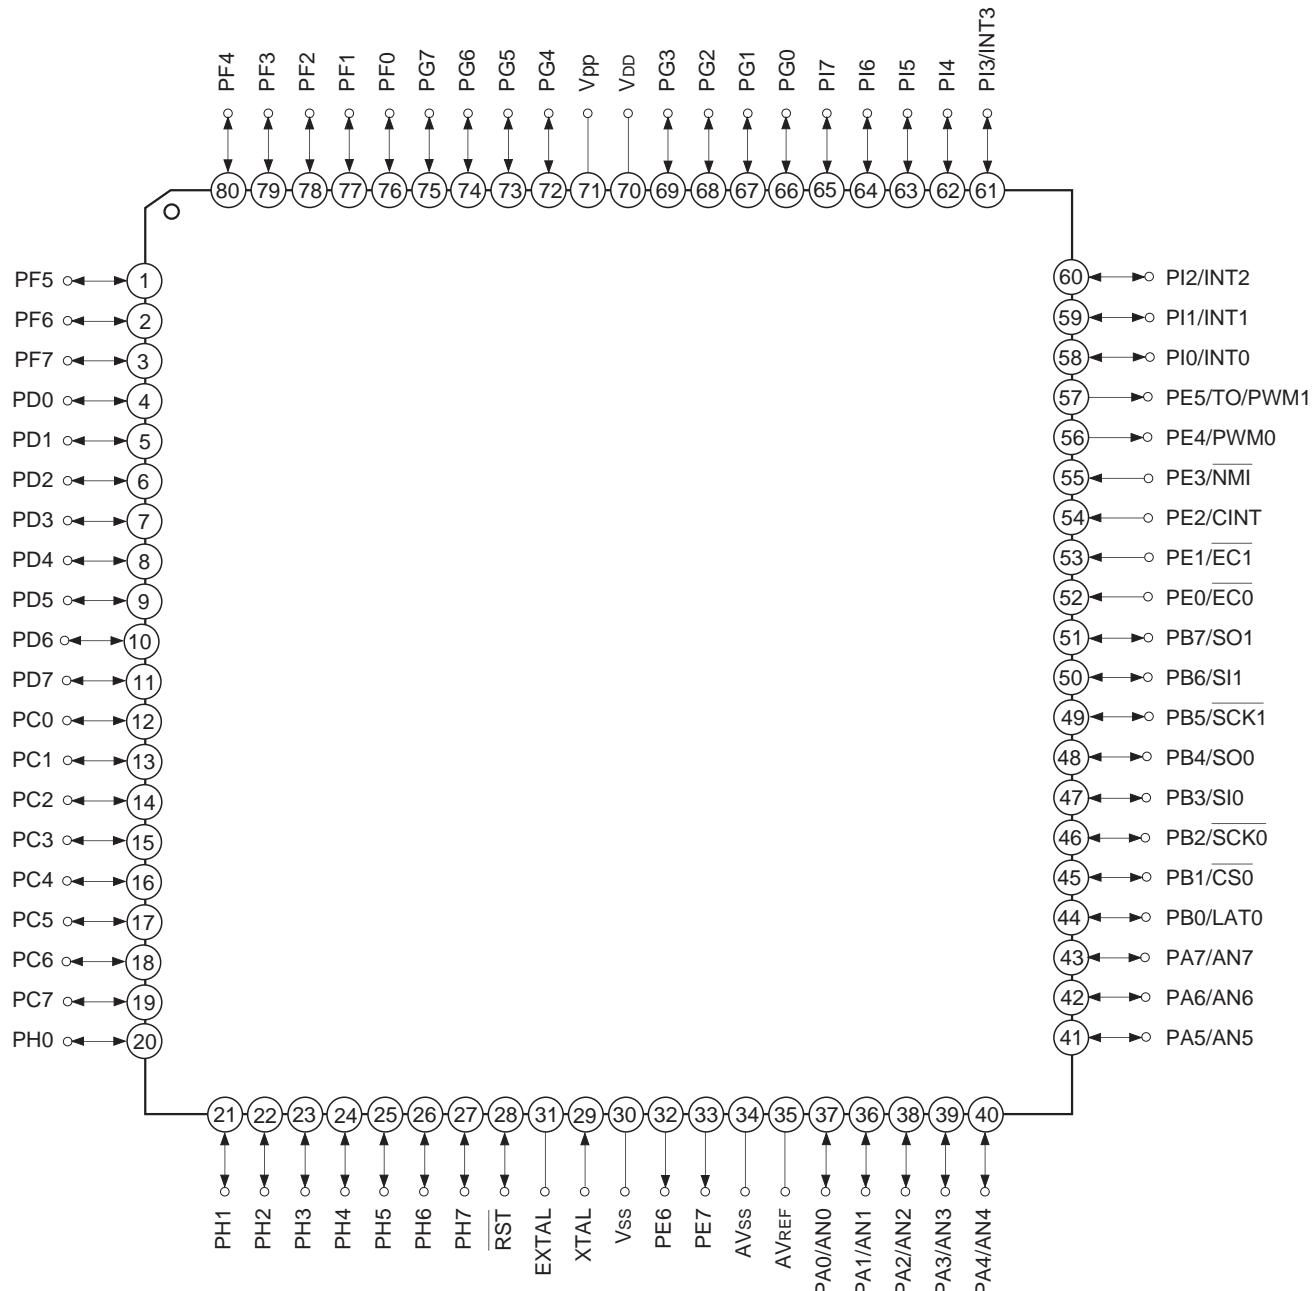**Pin Assignment (Top View) 80-pin LQFP package**


**Note)** Nothing is connected to Vpp (Pin 71). (Internally connected to VDD.) However, this pin is used for the Flash EEPROM-incorporated version (CXP845F60).




**Pin Description**

Symbol	I/O	Description	
PA0/AN0 to PA7/AN7	I/O/Analog input	(Port A) 8-bit I/O port. I/O can be set in a unit of single bits. Incorporation of the pull-up resistor can be set through the software in a unit of 4 bits. (8 pins)	Analog inputs to A/D converter. (8 pins)
PB0/LAT0	I/O/Output		Latch output for serial interface (CH0).
PB1/ <u>CS0</u>	I/O/Input		Chip select input for serial interface (CH0).
PB2/ <u>SCK0</u>	I/O/I/O		Serial clock I/O (CH0).
PB3/SI0	I/O/Input		Serial data input (CH0).
PB4/SO0	I/O/Output		Serial data output (CH0).
PB5/ <u>SCK1</u>	I/O/I/O		Serial clock I/O (CH1).
PB6/SI1	I/O/Input		Serial data input (CH1).
PB7/SO1	I/O/Output		Serial data output (CH1).
PC0 to PC7	I/O	(Port C) 8-bit I/O port. I/O can be set in a unit of single bits. Can drive 12mA sync current. Incorporation of pull-up resistor can be set through the software in a unit of 4 bits. (8 pins)	
PD0 to PD7	I/O	(Port D) 8-bit I/O port. I/O can be set in a unit of single bits. Incorporation of pull-up resistor can be set through the software in a unit of 4 bits. (8 pins)	
PE0/ <u>EC0</u>	Input/Input	(Port E) 8-bit port. Lower 4 bits are for inputs; upper 4 bits are for outputs. (8 pins)	External event inputs for timer/counter. (2 pins)
PE1/ <u>EC1</u>	Input/Input		Capture trigger input.
PE2/CINT	Input/Input		Non-maskable interruption request input.
PE3/NMI	Input/Input		8-bit PWM0 output.
PE4/PWM0	Output/Output		Rectangular wave output for 16-bit timer/counter and 8-bit PWM1 output.
PE5/TO/ PWM1	Output/Output/ Output		
PE6	Output		
PE7	Output		
PF0 to PF7	I/O	(Port F) 8-bit I/O port. I/O can be set in a unit of single bits. Incorporation of pull-up resistor can be set through the software in a unit of 4 bits. (8 pins)	

Symbol	I/O	Description	
PG0 to PG7	I/O	(Port G) 8-bit I/O port. I/O can be set in a unit of single bits. Incorporation of pull-up resistor can be set through the software in a unit of 4 bits. (8 pins)	
PH0 to PH7	I/O	(Port H) 8-bit I/O port. I/O and standby release input function can be set in a unit of single bits. Incorporation of pull-up resistor can be set through the software in a unit of 4 bits. (8 pins)	
PI0/INT0 to PI3/INT3	I/O/Input	(Port I) 8-bit I/O port. I/O can be set in a unit of single bits. Incorporation of pull-up resistor can be set through the software in a unit of 4 bits.	External interruption request inputs. (4 pins)
PI4 to PI7	I/O	(8 pins)	
EXTAL	Input	Connects a crystal for system clock oscillation. When the clock is supplied externally, input to EXTAL; opposite phase clock should be input to XTAL.	
XTAL	Output		
RST	I/O	System reset for active at Low level. This pin is I/O pin, and outputs Low level at the power on with the power-on reset function executed.	
Vpp		Positive power supply for incorporated PROM writing. Leave this pin open (internally connected to VDD). This is used for the Flash EEPROM-incorporated version (CXP845F60).	
AV <sub>REF</sub>	Input	Reference voltage input for A/D converter.	
AVss		A/D converter GND.	
V <sub>DD</sub>		Positive power supply.	
V <sub>ss</sub>		GND	



## Input/Output Circuit Formats for Pins

Pin	Circuit format	When reset
PA0/AN0 to PA7/AN7 8 pins	<p>Port A</p> <p>Pull-up resistor "0" when reset</p> <p>Port A data</p> <p>Port A direction "0" when direction</p> <p>Data bus RD (Port A)</p> <p>Port A function selection "0" when reset</p> <p>Input multiplexer</p> <p>A/D converter</p> <p>* Pull-up transistor Approx. 100kΩ (V<sub>DD</sub> = 4.5 to 5.5V) Approx. 300kΩ (V<sub>DD</sub> = 3.0 to 3.6V)</p> <p>IP Input protection circuit</p>	Hi-Z
PB0/LAT0 1 pin	<p>Port B</p> <p>Pull-up resistor "0" when reset</p> <p>LAT0 Latch output enable</p> <p>Port B data</p> <p>Port B direction "0" when reset</p> <p>Data bus RD (Port B)</p> <p>* Pull-up transistor Approx. 100kΩ (V<sub>DD</sub> = 4.5 to 5.5V) Approx. 300kΩ (V<sub>DD</sub> = 3.0 to 3.6V)</p> <p>IP Input protection circuit</p>	Hi-Z
PB1/CS0 PB3/SI0 PB6/SI1 3 pins	<p>Port B</p> <p>Pull-up resistor "0" when reset</p> <p>Port B data</p> <p>Port B direction "0" when reset</p> <p>Data bus RD (Port B)</p> <p>CS0 SI0 SI1</p> <p>Schmitt input</p> <p>* Pull-up transistor Approx. 100kΩ (V<sub>DD</sub> = 4.5 to 5.5V) Approx. 300kΩ (V<sub>DD</sub> = 3.0 to 3.6V)</p>	Hi-Z

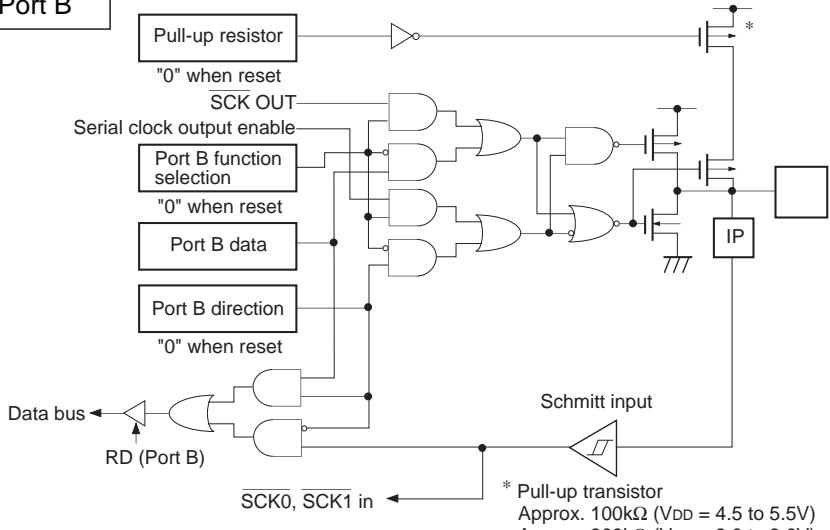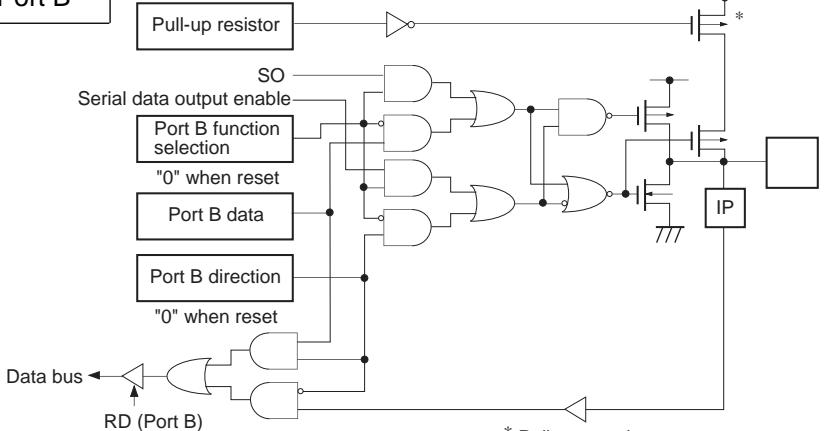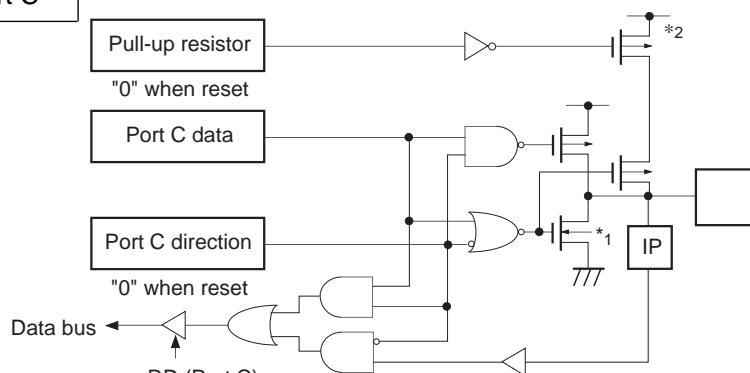Pin	Circuit format	When reset
PB2/SCK0 PB5/SCK1  2 pins	 <p>Port B</p> <p>Pull-up resistor "0" when reset</p> <p>SCK OUT Serial clock output enable</p> <p>Port B function selection "0" when reset</p> <p>Port B data</p> <p>Port B direction "0" when reset</p> <p>Data bus RD (Port B)</p> <p>SCK0, SCK1 in</p> <p>* Pull-up transistor Approx. 100kΩ (VDD = 4.5 to 5.5V) Approx. 300kΩ (VDD = 3.0 to 3.6V)</p>	Hi-Z
PB4/SO0 PB7/SO1  2 pins	 <p>Port B</p> <p>Pull-up resistor</p> <p>SO Serial data output enable</p> <p>Port B function selection "0" when reset</p> <p>Port B data</p> <p>Port B direction "0" when reset</p> <p>Data bus RD (Port B)</p> <p>* Pull-up transistor Approx. 100kΩ (VDD = 4.5 to 5.5V) Approx. 300kΩ (VDD = 3.0 to 3.6V)</p>	Hi-Z
PC0 to PC7  8 pins	 <p>Port C</p> <p>Pull-up resistor "0" when reset</p> <p>Port C data</p> <p>Port C direction "0" when reset</p> <p>Data bus RD (Port C)</p> <p>*1 Large current drive 12mA (VDD = 4.5 to 5.5V) 5mA (VDD = 3.0 to 3.6V)</p> <p>*2 Pull-up transistor Approx. 100kΩ (VDD = 4.5 to 5.5V) Approx. 300kΩ (VDD = 3.0 to 3.6V)</p>	Hi-Z

Pin	Circuit format	When reset
PE0/ <u>EC0</u> PE1/ <u>EC1</u> PE2/ <u>CINT</u> PE3/ <u>NMI</u>  4 pins	<p>Port E</p>	Hi-Z
PE4/ <u>PWM0</u>  1 pin	<p>Port E</p>	High level
PE5/ <u>TO</u> / <u>PWM1</u>  1 pin	<p>Port E</p> <p>* Pull-up transistor Approx. 150kΩ (VDD = 4.5 to 5.5V) Approx. 400kΩ (VDD = 3.0 to 3.6V)</p>	High level with resistor of pull-up transistor ON for reset
PE6, PE7  2 pins	<p>Port E</p>	Low level

Pin	Circuit format	When reset
PD0 to PD7 PF0 to PF7 PG0 to PG7 PI4 to PI7  28 pins	<p>* Pull-up transistor Approx. 100kΩ (V<sub>DD</sub> = 4.5 to 5.5V) Approx. 300kΩ (V<sub>DD</sub> = 3.0 to 3.6V)</p>	Hi-Z
PH0 to PH7  8 pins	<p>* Pull-up transistor Approx. 100kΩ (V<sub>DD</sub> = 4.5 to 5.5V) Approx. 300kΩ (V<sub>DD</sub> = 3.0 to 3.6V)</p>	Hi-Z
PI0/INT0 to PI3/INT3  4 pins	<p>* Pull-up transistor Approx. 100kΩ (V<sub>DD</sub> = 4.5 to 5.5V) Approx. 300kΩ (V<sub>DD</sub> = 3.0 to 3.6V)</p>	Hi-Z

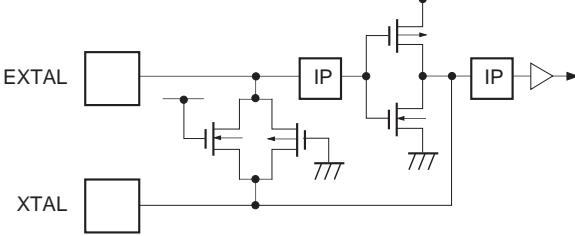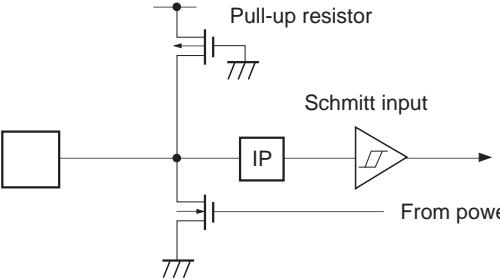Pin	Circuit format	When reset
EXTAL XTAL 2 pins	 <ul style="list-style-type: none"><li>Diagram shows the circuit composition during oscillation.</li><li>Feedback resistor is removed during stop mode and XTAL becomes High level.</li></ul>	Oscillation
RST 1 pin	 <p>Pull-up resistor</p> <p>Schmitt input</p> <p>From power-on reset circuit</p>	Low level

**Absolute Maximum Ratings**

(Vss = 0V reference)

Item	Symbol	Ratings	Unit	Remarks
Supply voltage	V <sub>DD</sub>	-0.3 to +7.0	V	
	A <sub>VSS</sub>	-0.3 to +0.3	V	
Input voltage	V <sub>IN</sub>	-0.3 to +7.0 <sup>*1</sup>	V	
Output voltage	V <sub>OUT</sub>	-0.3 to +7.0 <sup>*1</sup>	V	
High level output current	I <sub>OH</sub>	-5	mA	Output (value per pin)
High level total output current	$\Sigma I_{OH}$	-50	mA	Total for all output pins
Low level output current	I <sub>OL</sub>	15	mA	All pins excluding large current outputs (value per pin)
	I <sub>OLC</sub>	20	mA	Large current outputs (value per pin <sup>*2</sup> )
Low level total output current	$\Sigma I_{OL}$	100	mA	Total for all output pins
Operating temperature	T <sub>OPR</sub>	-20 to +75	°C	
Storage temperature	T <sub>STG</sub>	-55 to +150	°C	
Allowable power dissipation	P <sub>D</sub>	600	mW	

<sup>\*1</sup> V<sub>IN</sub> and V<sub>OUT</sub> must not exceed V<sub>DD</sub> + 0.3V.<sup>\*2</sup> The large current drive transistor is the N-ch transistor of Port C (PC).

**Note)** Usage exceeding absolute maximum ratings may permanently impair the LSI. Normal operation should be conducted under the recommended operating conditions. Exceeding these conditions may adversely affect the reliability of the LSI.

**Recommended Operating Conditions**

(Vss = 0V reference)

Item	Symbol	Min.	Max.	Unit	Remarks
Supply voltage <sup>*1</sup>	V <sub>DD</sub>	4.5 (3.0)	5.5	V	Guaranteed operation range for 1/2 and 1/4 frequency dividing modes
		3.5 (2.7)	5.5		Guaranteed operation range for 1/16 frequency dividing and sleep modes
		2.0	5.5		Guaranteed data hold range during stop mode
High level input voltage	V <sub>IH</sub>	0.7V <sub>DD</sub>	V <sub>DD</sub>	V	<sup>*2</sup>
	V <sub>IHS</sub>	0.8V <sub>DD</sub>	V <sub>DD</sub>	V	Hysteresis input <sup>*3</sup>
	V <sub>IHEX</sub>	0.9V <sub>DD</sub>	V <sub>DD</sub> + 0.3	V	EXTAL <sup>*4</sup>
Low level input voltage	V <sub>IL</sub>	0	0.3V <sub>DD</sub>	V	<sup>*2</sup>
	V <sub>ILS</sub>	0	0.2V <sub>DD</sub>	V	Hysteresis input <sup>*3</sup>
	V <sub>ILEX</sub>	-0.3	0.1V <sub>DD</sub>	V	EXTAL <sup>*4</sup>
Operating temperature	T <sub>OPR</sub>	-20	+75	°C	

<sup>\*1</sup> Specifies values in parenthesis for 1 to 20MHz system clock operation.<sup>\*2</sup> Normal input ports (PA, PB0, PB4, PB7, PC, PE0 to PE3, PD, PF to PH, PI4 to PI7)<sup>\*3</sup> RST, CINT, CS0, SCK0, SCK1, EC0, EC1, SI0, SI1, NMI, INT0, INT1, INT2, INT3<sup>\*4</sup> Specifies only during external clock input.

**Electrical Characteristics****DC Characteristics (V<sub>DD</sub> 4.5 to 5.5V)**(Ta = -20 to +75°C, V<sub>SS</sub> = 0V reference)

Item	Symbol	Pins	Conditions	Min.	Typ.	Max.	Unit
High level output voltage	V <sub>OH</sub>	PA to PD, PE4 to PE7, PF to PI, RST (only V <sub>OL</sub> )	V <sub>DD</sub> = 4.5V, I <sub>OH</sub> = -0.5mA	4.0			V
			V <sub>DD</sub> = 4.5V, I <sub>OH</sub> = -1.2mA	3.5			V
Low level output voltage	V <sub>OL</sub>	PC	V <sub>DD</sub> = 4.5V, I <sub>OL</sub> = 1.8mA			0.4	V
			V <sub>DD</sub> = 4.5V, I <sub>OL</sub> = 3.6mA			0.6	V
Input current	I <sub>IHE</sub>	EXTAL	V <sub>DD</sub> = 5.5V, V <sub>IH</sub> = 5.5V	0.1		25	µA
	I <sub>IIE</sub>		V <sub>DD</sub> = 5.5V, V <sub>IL</sub> = 0.4V	-0.1		-25	µA
	I <sub>IIR</sub>	RST	V <sub>DD</sub> = 5.5V, V <sub>IL</sub> = 4.0V	-1.5		-400	µA
	I <sub>IIL</sub>					-50	µA
		PA to PD* <sup>1</sup> PF to PI* <sup>1</sup>	V <sub>DD</sub> = 4.5V, V <sub>IL</sub> = 4.0V	-2.78			µA
I/O leakage current	I <sub>Iz</sub>	PA to PD* <sup>1</sup> PF to PI* <sup>1</sup> PE0 to PE3	V <sub>DD</sub> = 5.5V, V <sub>I</sub> = 0, 5.5V			±10	µA
Supply current * <sup>2</sup>	I <sub>DD1</sub>	V <sub>DD</sub>	For 1/2 frequency dividing mode V <sub>DD</sub> = 5.5V, 28MHz crystal oscillation (C <sub>1</sub> = C <sub>2</sub> = 1pF)		35	64	mA
	I <sub>DD2</sub>		Sleep mode V <sub>DD</sub> = 5.5V, 28MHz crystal oscillation (C <sub>1</sub> = C <sub>2</sub> = 1pF)				
	I <sub>DDS1</sub>		Stop mode V <sub>DD</sub> = 5.5V, termination of 28MHz crystal oscillation		2.5	10	mA
	I <sub>DDS2</sub>						
	I <sub>DDS3</sub>						
Input capacity	C <sub>IN</sub>	PA to PD, PE0 to PE3, PF to PI, EXTAL, RST	Clock 1MHz 0V for all pins excluding measured pins		10	20	pF

\*<sup>1</sup> For PA to PD and PF to PI pins, specifies the input current when pull-up resistance is selected; leakage current when no resistance is selected.

\*<sup>2</sup> When all pins are open.

DC Characteristics ( $V_{DD} = 3.0$  to  $3.6V$ )

(Ta = -20 to +75°C, Vss = 0V reference)

Item	Symbol	Pins	Conditions	Min.	Typ.	Max.	Unit
High level output voltage	$V_{OH}$	PA to PD, PE4 to PE7, PF to PI, $\overline{RST}$ (only $V_{OL}$ )	$V_{DD} = 3.0V, I_{OH} = -0.15mA$	2.7			V
			$V_{DD} = 3.0V, I_{OH} = -0.5mA$	2.3			V
Low level output voltage	$V_{OL}$	PC	$V_{DD} = 3.0V, I_{OL} = 1.2mA$			0.3	V
			$V_{DD} = 3.0V, I_{OL} = 1.6mA$			0.5	V
Input current	$I_{IHE}$	EXTAL	$V_{DD} = 3.6V, V_{IH} = 3.6V$	0.05		15	$\mu A$
	$I_{ILE}$		$V_{DD} = 3.6V, V_{IL} = 0.3V$	-0.05		-15	$\mu A$
	$I_{ILR}$	$\overline{RST}$	$V_{DD} = 3.6V, V_{IL} = 0.3V$	-0.7		-200	$\mu A$
	$I_{IL}$					-30	$\mu A$
		PA to PD* <sup>1</sup> PF to PI* <sup>1</sup>	$V_{DD} = 3.0V, V_{IL} = 2.7V$	-1.0			$\mu A$
I/O leakage current	$I_{IZ}$	PA to PD* <sup>1</sup> PF to PI* <sup>1</sup> PE0 to PE3	$V_{DD} = 3.6V,$ $V_I = 0, 3.6V$			$\pm 5$	$\mu A$
Supply current* <sup>2</sup>	$I_{DD1}$	V <sub>DD</sub>	For 1/2 frequency dividing mode		14.5	30	mA
	$I_{DD2}$		$V_{DD} = 3.6V, 20MHz$ crystal oscillation (C <sub>1</sub> = C <sub>2</sub> = 10pF)				
	$I_{DDS1}$		Sleep mode		0.85	4.0	mA
	$I_{DDS2}$		$V_{DD} = 3.6V, 20MHz$ crystal oscillation (C <sub>1</sub> = C <sub>2</sub> = 10pF)				
	$I_{DDS3}$		Stop mode		5	$\mu A$	$\mu A$
			$V_{DD} = 3.6V$ , termination of 20MHz crystal oscillation				

\*<sup>1</sup> For PA to PD and PF to PI pins, specifies the input current when pull-up resistance is selected; leakage current when no resistance is selected.

\*<sup>2</sup> When all pins are open.

## AC Characteristics

## (1) Clock timing

(Ta = -20 to +75°C, VDD = 3.0 to 5.5V, Vss = 0V reference)

Item	Symbol	Pin	Conditions	Min.	Typ.	Max.	Unit
System clock frequency	fc	XTAL EXTAL	Fig. 1, Fig. 2 VDD = 4.5 to 5.5V	1		28	MHz
				1		20	
System clock input pulse width	txL, txH	EXTAL	Fig. 1, Fig. 2 VDD = 4.5 to 5.5V External clock drive	15.6			ns
				23			
System clock input rise time, fall time	tCR, tCF	EXTAL	Fig. 1, Fig. 2 External clock drive			100	ns
Event count input clock pulse width	tEH, tEL	$\overline{\text{EC0}}$ $\overline{\text{EC1}}$	Fig. 3				ns
Event count input clock rise time, fall time	tER, tEF	$\overline{\text{EC0}}$ $\overline{\text{EC1}}$	Fig. 3			20	ns

\*1 tsys indicates the three values according to the contents of the clock control register (CLC: 00FEH) upper 2 bits (CPU clock selection).

tsys [ns] = 2000/fc (Upper 2 bits = "00"), 4000/fc (Upper 2 bits = "01"), 16000/fc (Upper 2 bits = "11")

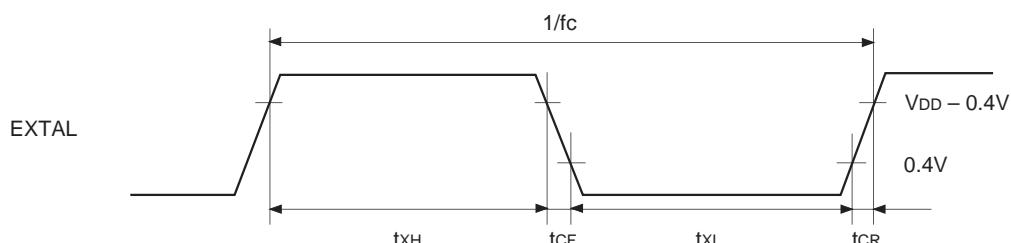


Fig. 1. Clock timing

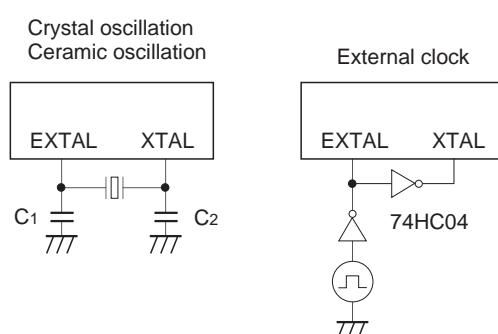


Fig. 2. Clock applied conditions

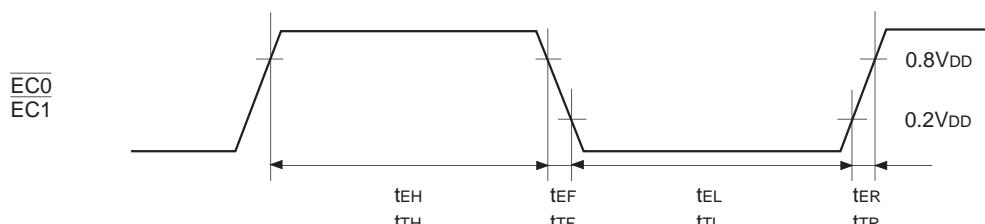


Fig. 3. Event count clock timing

## (2) Serial transfer (CH0)

(Ta = -20 to +75°C, V<sub>DD</sub> = 4.5 to 5.5V, V<sub>ss</sub> = 0V reference)

Item	Symbol	Pin	Condition	Min.	Max.	Unit
CS0 ↓ → SCK0 delay time	t <sub>DCSK</sub>	SCK0	Chip select transfer mode (SCK0 = output mode)		1.5t <sub>sys</sub> + 100	ns
CS0 ↑ → SCK0 float delay time	t <sub>DCSKF</sub>	SCK0	Chip select transfer mode (SCK0 = output mode)		1.5t <sub>sys</sub> + 100	ns
CS0 ↓ → SO0 delay time	t <sub>DCSO</sub>	SO0	Chip select transfer mode		1.5t <sub>sys</sub> + 100	ns
CS0 ↑ → SO0 float delay time	t <sub>DCSOF</sub>	SO0	Chip select transfer mode		1.5t <sub>sys</sub> + 100	ns
CS0 High level width	t <sub>WHCS</sub>	CS0	Chip select transfer mode	t <sub>sys</sub> + 150		ns
SCK0 cycle time	t <sub>KCY</sub>	SCK0	Input mode	2t <sub>sys</sub> + 200		ns
			Output mode	8000/fc		ns
SCK0 High, Low level width	t <sub>KH</sub> t <sub>KL</sub>	SCK0	Input mode	t <sub>sys</sub> + 90		ns
			Output mode	4000/fc - 25		ns
SI0 input setup time (for SCK0 ↑)	t <sub>SIK</sub>	SI0	SCK0 input mode	50		ns
			SCK0 output mode	100		ns
SI0 input hold time (for SCK0 ↑)	t <sub>ksi</sub>	SI0	SCK0 input mode	t <sub>sys</sub> + 100		ns
			SCK0 output mode	50		ns
SCK0 ↓ → SO0 delay time	t <sub>KSO</sub>	SO0	SCK0 input mode		t <sub>sys</sub> + 100	ns
			SCK0 output mode		50	ns
SCK0 ↓ → LAT0 output delay time	t <sub>LADLY</sub>	LAT0	Latch output mode (SCK0 = output mode)	t <sub>KCY</sub>	t <sub>KCY</sub> + 50	ns
LAT0 data pulse width	t <sub>LAPLS</sub>	LAT0	Latch output mode (SCK0 = output mode)	t <sub>KCY</sub> - 10	t <sub>KCY</sub> + 50	ns

**Note 1)** t<sub>sys</sub> indicates the three values according to the contents of the clock control register (CLC: 00FEH)  
upper 2 bits (CPU clock selection).

t<sub>sys</sub> [ns] = 2000/fc (Upper 2 bits = "00"), 4000/fc (Upper 2 bits = "01"), 16000/fc (Upper 2 bits = "11")

**Note 2)** The load condition for the SCK0 output mode, SO0 output delay time is 50pF + 1TTL.

**Serial transfer (CH0)**

(Ta = -20 to +75°C, VDD = 3.0 to 3.6V, Vss = 0V reference)

Item	Symbol	Pin	Condition	Min.	Max.	Unit
CS0 ↓ → SCK0 delay time	t <sub>DCSK</sub>	SCK0	Chip select transfer mode (SCK0 = output mode)		1.5t <sub>sys</sub> + 200	ns
CS0 ↑ → SCK0 float delay time	t <sub>DCKSF</sub>	SCK0	Chip select transfer mode (SCK0 = output mode)		1.5t <sub>sys</sub> + 200	ns
CS0 ↓ → SO0 delay time	t <sub>DCSO</sub>	SO0	Chip select transfer mode		1.5t <sub>sys</sub> + 200	ns
CS0 ↑ → SO0 float delay time	t <sub>DCSOF</sub>	SO0	Chip select transfer mode		1.5t <sub>sys</sub> + 200	ns
CS0 High level width	t <sub>WHCS</sub>	CS0	Chip select transfer mode	t <sub>sys</sub> + 200		ns
SCK0 cycle time	t <sub>KCY</sub>	SCK0	Input mode	2t <sub>sys</sub> + 200		ns
			Output mode	8000/fc		ns
SCK0 High, Low level width	t <sub>KH</sub> t <sub>KL</sub>	SCK0	Input mode	t <sub>sys</sub> + 80		ns
			Output mode	4000/fc - 50		ns
SI0 input setup time (for SCK0 ↑)	t <sub>SIK</sub>	SI0	SCK0 input mode	80		ns
			SCK0 output mode	150		ns
SI0 input hold time (for SCK0 ↑)	t <sub>KSI</sub>	SI0	SCK0 input mode	t <sub>sys</sub> + 120		ns
			SCK0 output mode	70		ns
SCK0 ↓ → SO0 delay time	t <sub>KSO</sub>	SO0	SCK0 input mode		t <sub>sys</sub> + 200	ns
			SCK0 output mode		80	ns
SCK0 ↓ → LAT0 output delay time	t <sub>LADLY</sub>	LAT0	Latch output mode (SCK0 = output mode)	t <sub>KCY</sub>	t <sub>KCY</sub> + 100	ns
LAT0 data pulse width	t <sub>LAPLS</sub>	LAT0	Latch output mode (SCK0 = output mode)	t <sub>KCY</sub> - 10	t <sub>KCY</sub> + 100	ns

**Note 1)** t<sub>sys</sub> indicates the three values according to the contents of the clock control register (CLC: 00FEH)  
upper 2 bits (CPU clock selection).

t<sub>sys</sub> [ns] = 2000/fc (Upper 2 bits = "00"), 4000/fc (Upper 2 bits = "01"), 16000/fc (Upper 2 bits = "11")

**Note 2)** The load condition for the SCK0 output mode, SO0 output delay time is 50pF.

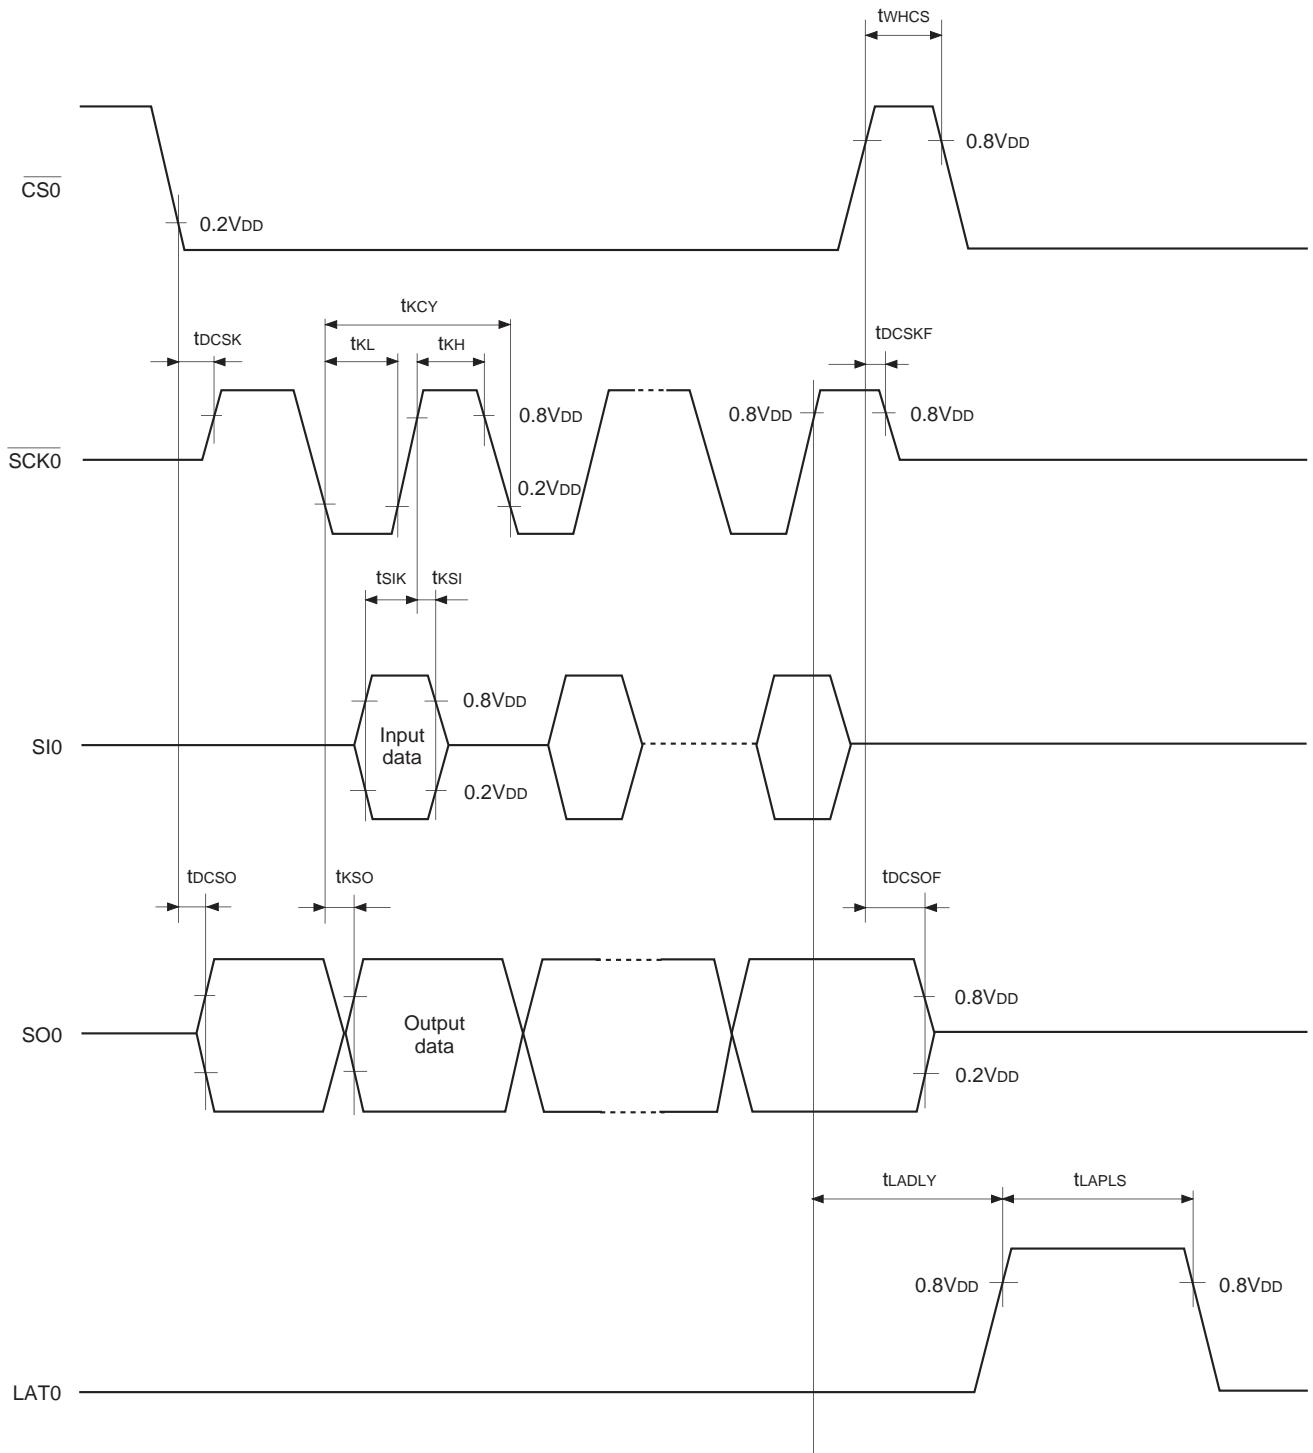


Fig. 4. Serial transfer CH0 timing

## (3) Serial transfer (CH1)

(Ta = -20 to +75°C, V<sub>DD</sub> = 4.5 to 5.5V, V<sub>ss</sub> = 0V reference)


Item	Symbol	Pin	Condition	Min.	Max.	Unit
<u>SCK1</u> cycle time	t <sub>KCY</sub>	<u>SCK1</u>	Input mode	500		ns
			Output mode	8000/fc		ns
<u>SCK1</u> High, Low level width	t <sub>KH</sub> t <sub>KL</sub>	<u>SCK1</u>	Input mode	200		ns
			Output mode	4000/fc – 25		ns
SI1 input setup time (for <u>SCK1</u> ↑)	t <sub>SIK</sub>	SI1	<u>SCK1</u> input mode	50		ns
			<u>SCK1</u> output mode	100		ns
SI1 input hold time (for <u>SCK1</u> ↑)	t <sub>KSI</sub>	SI1	<u>SCK1</u> input mode	100		ns
			<u>SCK1</u> output mode	50		ns
<u>SCK1</u> ↓ → SO1 delay time	t <sub>KSO</sub>	SO1	<u>SCK1</u> input mode		100	ns
			<u>SCK1</u> output mode		50	ns

**Note)** The load condition for the SCK1 output mode, SO1 output delay time is 50pF + 1TTL.

(Ta = -20 to +75°C, V<sub>DD</sub> = 3.0 to 3.6V, V<sub>ss</sub> = 0V reference)

Item	Symbol	Pin	Condition	Min.	Max.	Unit
<u>SCK1</u> cycle time	t <sub>KCY</sub>	<u>SCK1</u>	Input mode	700		ns
			Output mode	8000/fc		ns
<u>SCK1</u> High, Low level width	t <sub>KH</sub> t <sub>KL</sub>	<u>SCK1</u>	Input mode	300		ns
			Output mode	4000/fc – 50		ns
SI1 input setup time (for <u>SCK1</u> ↑)	t <sub>SIK</sub>	SI1	<u>SCK1</u> input mode	70		ns
			<u>SCK1</u> output mode	150		ns
SI1 input hold time (for <u>SCK1</u> ↑)	t <sub>KSI</sub>	SI1	<u>SCK1</u> input mode	150		ns
			<u>SCK1</u> output mode	70		ns
<u>SCK1</u> ↓ → SO1 delay time	t <sub>KSO</sub>	SO1	<u>SCK1</u> input mode		150	ns
			<u>SCK1</u> output mode		80	ns

**Note)** The load condition for the SCK1 output mode, SO1 output delay time is 50pF.

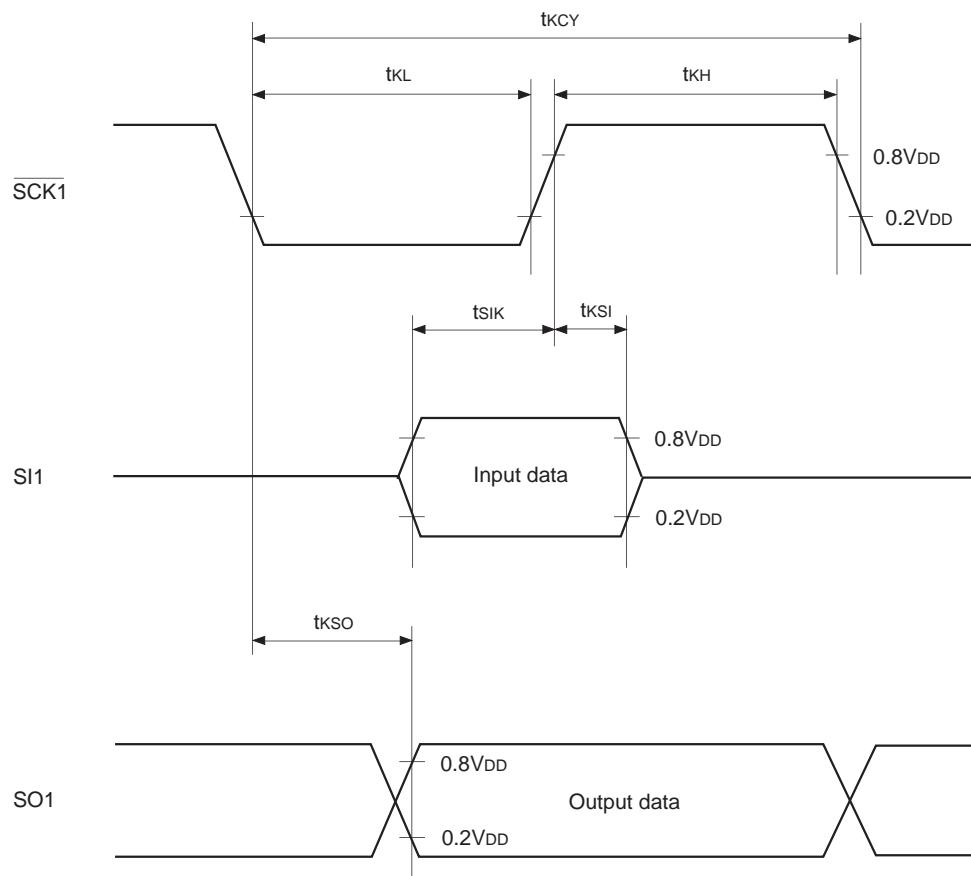


**Fig. 5. Serial transfer CH1 timing**

## (4) A/D converter characteristics (Ta = -20 to +75°C, VDD = 4.5 to 5.5V, AVREF = 4.0 to VDD, Vss = AVss = 0V reference)

Item	Symbol	Pin	Condition	Min.	Typ.	Max.	Unit
Resolution						8	Bits
Linearity error						$\pm 4$	LSB
Zero transition voltage	VZT <sup>*1</sup>		Ta = 25°C VDD = AVREF = 5.0V Vss = AVss = 0V	-10	10	70	mV
Full-scale transition voltage	VFT <sup>*2</sup>			4910	4970	5030	mV
Conversion time	tCONV			27/fADC <sup>*3</sup>			μs
Sampling time	tSAMP			6/fADC <sup>*3</sup>			μs
Reference input voltage	VREF	AVREF		VDD - 0.5		VDD	V
Analog input voltage	VIAN	AN0 to AN7		0		AVREF	V
AVREF current	IREF	AVREF	Operation mode		0.6	1.0	mA
	IREFS		Sleep mode Stop mode			10	μA

(Ta = -20 to +75°C, VDD = 3.0 to 3.6V, AVREF = 2.7 to VDD, Vss = AVss = 0V reference)

Item	Symbol	Pin	Condition	Min.	Typ.	Max.	Unit
Resolution						8	Bits
Linearity error						$\pm 5$	LSB
Zero transition voltage	VZT <sup>*1</sup>		Ta = 25°C VDD = AVREF = 3.3V Vss = AVss = 0V	-10	6.5	70	mV
Full-scale transition voltage	VFT <sup>*2</sup>			3216	3280.5	3345	mV
Conversion time	tCONV			27/fADC <sup>*3</sup>			μs
Sampling time	tSAMP			6/fADC <sup>*3</sup>			μs
Reference input voltage	VREF	AVREF		VDD - 0.3		VDD	V
Analog input voltage	VIAN	AN0 to AN7		0		AVREF	V
AVREF current	IREF	AVREF	Operation mode		0.4	0.7	mA
	IREFS		Sleep mode Stop mode			5	μA

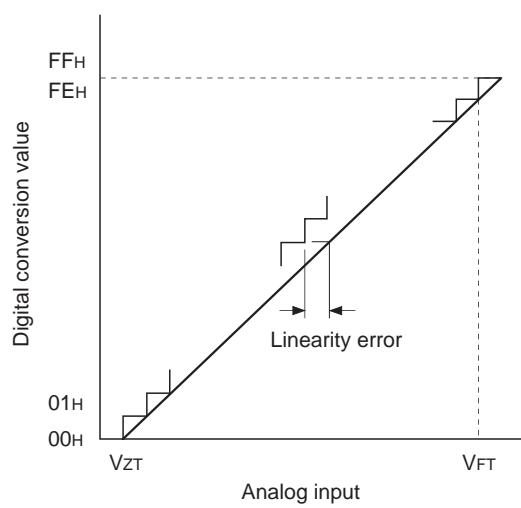

\*1 VZT: Value at which the digital conversion value changes from 00H to 01H and vice versa.

\*2 VFT: Value at which the digital conversion value changes from FEH to FFH and vice versa.

\*3 fADC indicates the values below due to the contents of bit 6 (CKS) of the A/D control register (ADC: 00F9H).

fADC = fc (CKS = "0"), fc/2 (CKS = "1")

However, the selection for fADC = fc (CKS = "0") is limited in the clock range of fc = 1 to 14MHz (VDD 4.5 to 5.5V) and fc = 1 to 10MHz (VDD = 3.0 to 4.5V).

Fig. 6. Definition of A/D converter terms

(4) Interruption, reset input (Ta = -20 to +75°C, V<sub>DD</sub> = 3.0 to 5.5V, V<sub>SS</sub> = 0V reference)

Item	Symbol	Pin	Condition	Min.	Max.	Unit
External interruption High, Low level width	t <sub>IH</sub> t <sub>IL</sub>	INT0 INT1 INT2 INT3 NMI		1		μs
Reset input Low level width	t <sub>RSL</sub>	$\overline{RST}$		32/fc		μs

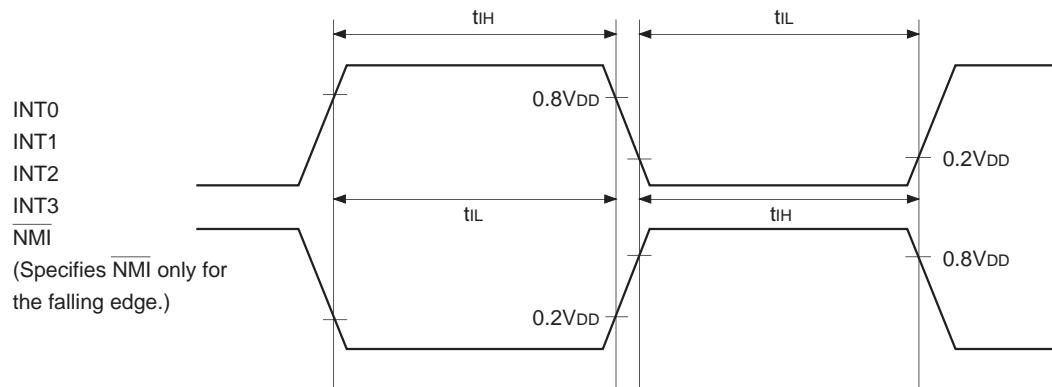
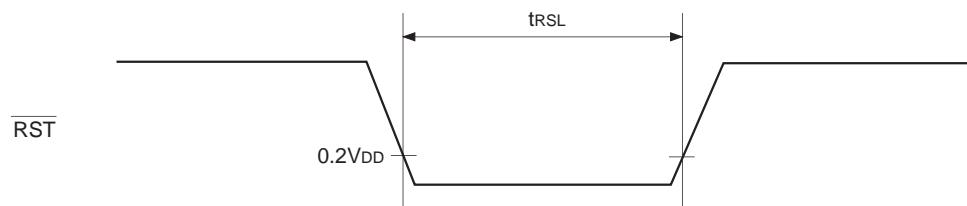



Fig 7. Interruption input timing

Fig. 8.  $\overline{RST}$  input timing

## (5) Power-on reset

(Ta = -20 to +75°C, V<sub>DD</sub> = 4.5 to 5.5V, V<sub>SS</sub> = 0V reference)

Item	Symbol	Pin	Condition	Min.	Max.	Unit
Power supply rise time	t <sub>R</sub>	V <sub>DD</sub>	Power-on reset	0.05	50	ms
Power supply cut-off time	t <sub>OFF</sub>		Repetitive power-on reset	1		ms

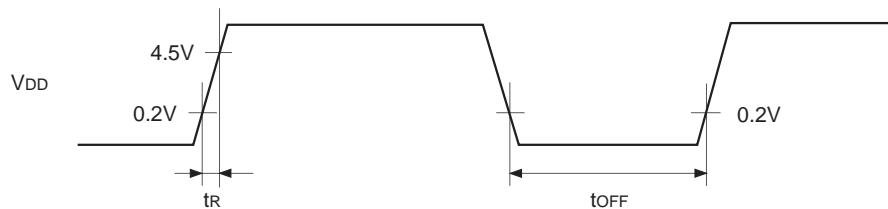

Turn the power on smoothly.

Fig. 9. Power-on reset

## Appendix

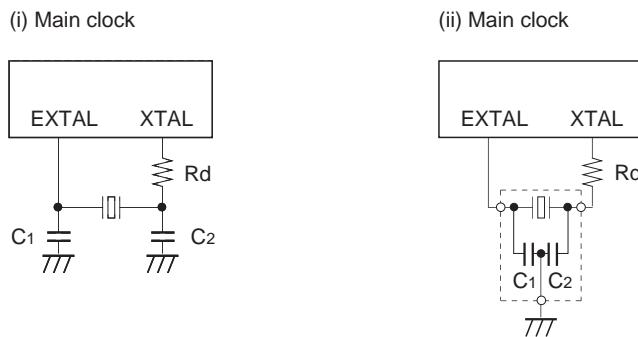


Fig. 10. SPC700 Series recommended oscillation circuit

Manufacturer	Model	fc (MHz)	C1 (pF)	C2 (pF)	Rd ( $\Omega$ )	Circuit example
MURATA MFG CO., LTD.	CSA8.00MTZ	8.00	30	30	0	(i)
	CSA10.0MTZ	10.00				
	CSA12.00MTZ	12.00				
	CST8.00MTW*	8.00				(ii)
	CST10.0MT*	10.00				
	CST12.0MTW*	12.00				
	CSA16.00MXZ040	16.00	5	5	0	(i)
	CST16.00MXZ0C1*	16.00	5	5	0	(ii)
	CSA20.00MXZ040	20.00	OPEN	OPEN	0	(i)
	CSA24.00MXZ040	24.00	3	3	0	
	CSA28.00MXZ040	28.00	3	3	0	
TDK CORPORATION.	CCR20.0MC6*	20.00	16	16	0	(ii)
	CCR24.0MC6*	24.00	16	16	0	
KINSEKI LTD.	HC49/U-S	28.00	1	1	220	(i)
	CX-11F	28.00	1	1	220	





Models with an asterisk (\*) have the built-in ground capacitance (C<sub>1</sub>, C<sub>2</sub>).

## Selection Guide

Option item	Mask		OTP	
Product name	CXP84540	CXP84548	CXP845P60Q-1-□□□	CXP845P60R-1-□□□
Package	80-pin plastic QFP/LQFP		80-pin plastic QFP	
ROM capacitance	40K bytes		PROM 60K bytes	
Reset pin pull-up resistor	Existential/Non-existent		Existential	
Power-on reset function*1	Existential/Non-existent		Existential	

\*1 When the OTP product with the power-on reset function is used outside the range of V<sub>DD</sub> = 4.5 to 5.5V, be sure to keep the external reset (setting the RST pin to Low) for the oscillation stable time or more.


## Characteristics Curves

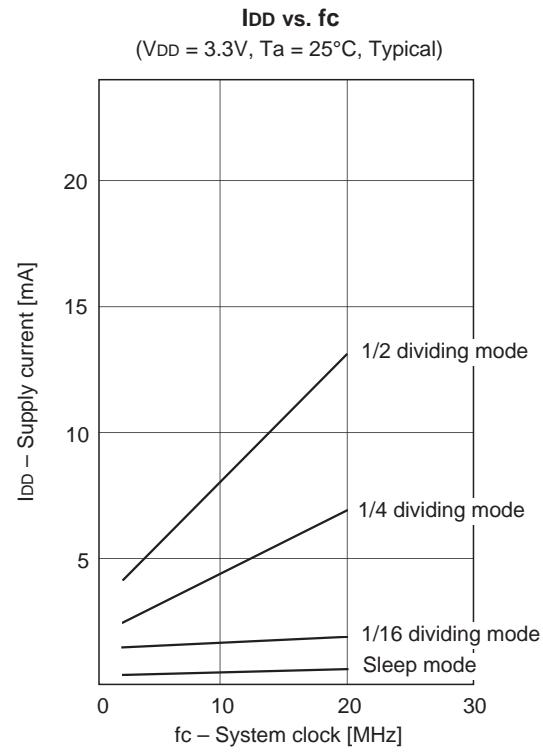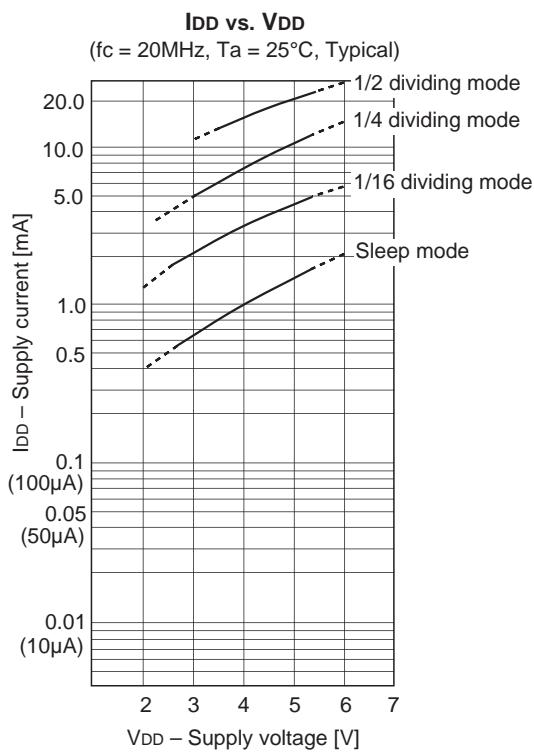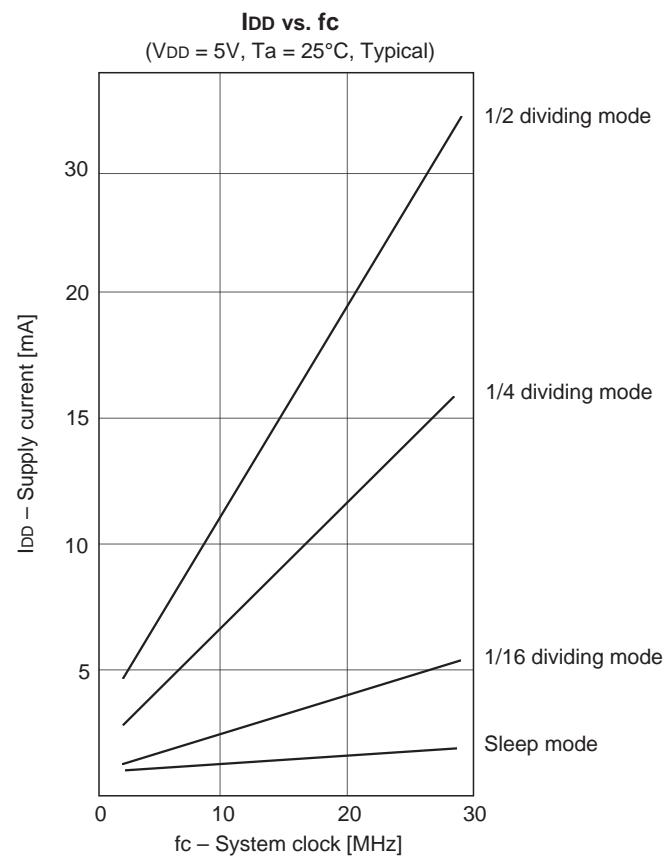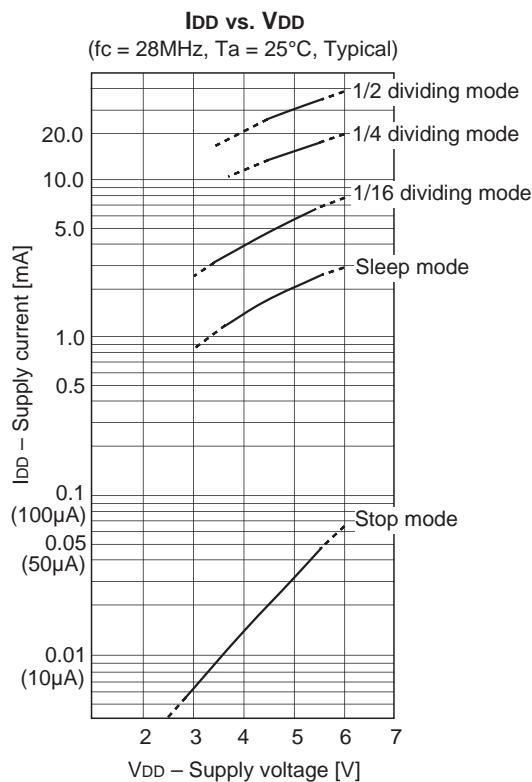

## Package Outline

Unit: mm

80PIN QFP (PLASTIC)

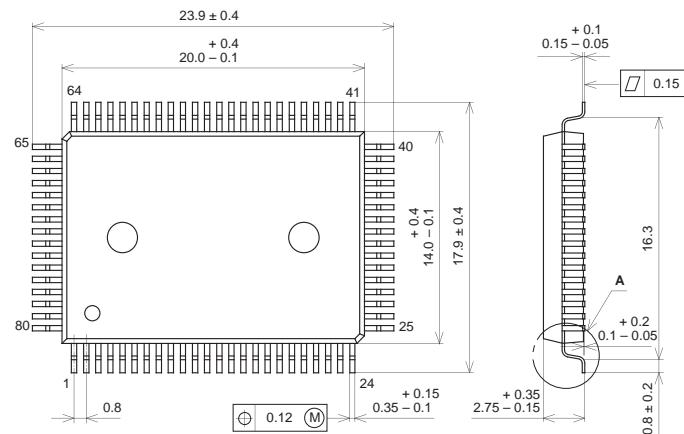


DETAIL A

SONY CODE	QFP-80P-L01
EIAJ CODE	*QFP080-P-1420-A
JEDEC CODE	-----

PACKAGE STRUCTURE

PACKAGE MATERIAL	EPOXY RESIN
LEAD TREATMENT	SOLDER PLATING
LEAD MATERIAL	COPPER / 42 ALLOY
PACKAGE WEIGHT	1.6g

80PIN LQFP (PLASTIC)

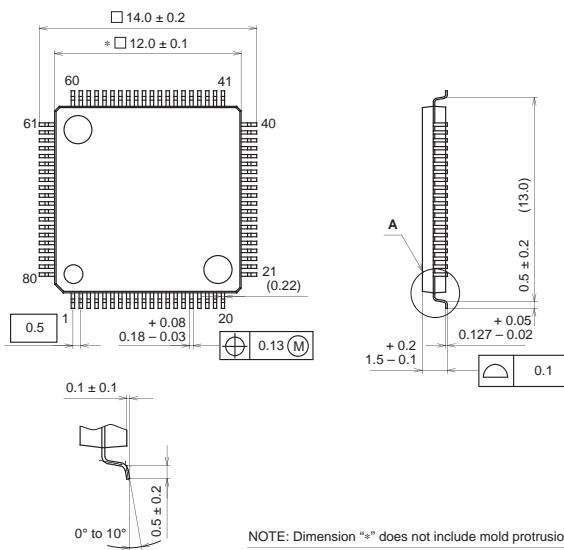

NOTE: Dimension '\*' does not include mold protrusion.

DETAIL A

SONY CODE	LQFP-80P-L01
EIAJ CODE	LQFP080-P-1212
JEDEC CODE	-----

PACKAGE STRUCTURE

PACKAGE MATERIAL	EPOXY RESIN
LEAD TREATMENT	SOLDER PLATING
LEAD MATERIAL	42 ALLOY
PACKAGE MASS	0.5g