

# Sylvania

## Radio Tube Characteristics Chart



### Notice

This chart has been completely revised and many new and old types have been added to make it of more use to servicemen.

Please note that the inclusion of many of these old types does not mean that they are available from Sylvania. They are included for your reference in finding substitutes, etc. Consult our price list for types currently available.

The data published here have been compiled from various sources and while believed to be accurate, no responsibility can be assumed in case of error.

### How To Use This Chart

The types are listed in numerical and alphabetical order because there are now so many types it is difficult to remember even the style of construction or whether it has a filament or cathode as emitter. The second column now lists the style of construction. Lock-In, Miniature and GT are, of course, well known, but the letters "T" and "ST" may need explaining. "T" means tubular bulb and "ST" is the dome topped bulb as now used in Type 6D6, 24, etc. The following number gives the nominal maximum diameter in eighths of inches.

New columns have been added to show the type of emitter, (cathode or filament), and for interelectrode capacitances on those types having capacitance ratings. On converters the capacitances shown are respectively, Signal Grid to Plate; R-F Input; and Mixer Output. The capacitance values shown are for a shielded tube when the data are available, since this is the latest standard method. Except in the case of obsolete (or newly announced) types, more complete technical data may be found in the Manual.

•

### License Notice

Mention or reference to patented circuits does not constitute permission for their use. The license agreement under which Sylvania tubes are sold is enclosed in the tube carton.

**SYLVANIA  
ELECTRIC**

**EMPORIUM, PENNA.**

COMPILED BY  
COMMERCIAL ENGINEERING DEPARTMENT  
**SYLVANIA ELECTRIC PRODUCTS, INC.**

COPYRIGHT 1945

# SYLVANIA TUBES — AVERAGE CHARACTERISTICS

Type	Construction		Emitter		Note Capacitors in $\mu$ fd.			Use	Plate Volts	Negative Grid Volts	Screen Volts	Plate Current Ma.	Screen Current Ma.	Plate Resistance Ohms	Micromhos Mutual Conductance	Amplification Factor	Ohms Load for Stated Power Output	Undistorted Power Output Milli-watts	Type
	Style	Class	Rating Diag.	Type	Volts	Amps	Cap.												
OAA4	ST-12	Gas Triode	4-W	Cold K	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	OAA4
OB3/VR90-30	ST-12	Diode	4-W	Cold K	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	OB3/VR90-30
OC3/VR105-30	ST-12	Diode	4-W	Cold K	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	OC3/VR105-30
OD3/VR150-30	ST-12	Diode	4-W	Cold K	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	OD3/VR150-30
OZ4	Metal	Gas Duodi.	4-R	Cold K	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	OZ4
OZ4G	1-7	Gas Duodi.	4-R	Cold K	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	OZ4G
O1A	ST-14	Triode	4-D	Filament	5.0	0.25	8.1	3.1	2.2	.....	.....	.....	.....	.....	.....	.....	.....	.....	O1A
1A3	Miniature	Diode	5-AP	Cathode	1.4	0.15	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	1A3
1A4P	ST-12	Pentode	4-M	Filament	2.0	0.06	.007m	5.0	11.0	.....	.....	.....	.....	.....	.....	.....	.....	.....	1A4P
1A4T	ST-12	Tetrode	4-K	Filament	2.0	0.06	.010m	5.0	11.0	.....	.....	.....	.....	.....	.....	.....	.....	.....	1A4T
1A5GT	GT	Pentode	6-X	Filament	1.4	0.05	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	1A5GT
1A6	ST-12	Heptode	6-L	Filament	2.0	0.06	0.25	10.5	9.0	.....	.....	.....	.....	.....	.....	.....	.....	.....	1A6
1A7GT	GT	Heptode	7-Z	Filament	1.4	0.05	0.5m	7.0	10.0	.....	.....	.....	.....	.....	.....	.....	.....	.....	1A7GT
1A85	Lock-in	Pentode	5-8F	Filament	1.2	0.13	0.25m	2.80	4.2	.....	.....	.....	.....	.....	.....	.....	.....	.....	1A85
1B4P	ST-12	Pentode	4-M	Filament	2.0	0.06	.007m	5.0*	11.0*	.....	.....	.....	.....	.....	.....	.....	.....	.....	1B4P
1B5/85S	ST-12	Diode-Tri.	6-M	Filament	2.0	0.06	3.6	1.6	1.9	.....	.....	.....	.....	.....	.....	.....	.....	.....	1B5/85S
1B7GT	GT	Heptode	7-Z	Filament	1.4	0.10	0.34	7.0	7.5	.....	.....	.....	.....	.....	.....	.....	.....	.....	1B7GT
1C5GT	GT	Pentode	6-X	Filament	1.4	0.10	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	1C5GT
1C6	ST-12	Heptode	6-L	Filament	2.0	0.12	0.3	10.0	10.0	.....	.....	.....	.....	.....	.....	.....	.....	.....	1C6
1C7G	ST-12	Heptode	7-Z	Filament	2.0	0.12	0.26	10.0	14.0	.....	.....	.....	.....	.....	.....	.....	.....	.....	1C7G
1D5GP	ST-12	Pentode	5-Y	Filament	2.0	0.06	.007m	5.0*	12.0*	.....	.....	.....	.....	.....	.....	.....	.....	.....	1D5GP
1D5GT	ST-12	Tetrode	5-R	Filament	2.0	0.06	.010m	4.4	10.8	.....	.....	.....	.....	.....	.....	.....	.....	.....	1D5GT
1D7G	ST-12	Heptode	7-Z	Filament	2.0	0.06	0.25	10.5	9.0	.....	.....	.....	.....	.....	.....	.....	.....	.....	1D7G
1D8GT	GT	Diode Triode Pentode	8-AJ	Filament	1.4	0.100	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	1D8GT
1E4G	GT	Triode	5-S	Filament	1.4	0.05	2.4	2.4	6.0	.....	.....	.....	.....	.....	.....	.....	.....	.....	1E4G
1E5GP	ST-12	Pentode	5-Y	Filament	2.0	0.06	.007m	5.5	12.0	.....	.....	.....	.....	.....	.....	.....	.....	.....	1E5GP
1E7G	ST-12	Duo. Pentode	8-C	Filament	2.0	0.24	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	1E7G
1F4	ST-12	Pentode	5-K	Filament	2.0	0.12	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	1F4
1F5G	ST-12	Pentode	6-X	Filament	2.0	0.12	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	1F5G
1F6	ST-12	Diode. Pent.	6-W	Filament	2.0	0.06	.007m	4.0	9.0	.....	.....	.....	.....	.....	.....	.....	.....	.....	1F6
1F7G	ST-12	Duodi. Pent.	7-AD	Filament	2.0	0.06	.01m	3.8*	9.5*	.....	.....	.....	.....	.....	.....	.....	.....	.....	1F7G
1F7GV	ST-12	Duodi. Pent.	7-AD	Filament	2.0	0.60	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	1F7GV
1G4GT	GT	Triode	5-S	Filament	1.4	0.05	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	1G4GT
1G5G	ST-14	Pentode	6-X	Filament	2.0	0.12	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	1G5G
1G6GT	GT	Duodiode	7-AB	Filament	1.4	0.10	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	1G6GT
1H4G	ST-12	Triode	5-S	Filament	2.0	0.06	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	1H4G
1H5GT	GT	Diode Triode	5-Z	Filament	1.4	0.05	1.1	0.35	4.0	.....	.....	.....	.....	.....	.....	.....	.....	.....	1H5GT
1H6G	ST-12	Duodiode-Tri.	7-AA	Filament	2.0	0.06	3.6	1.6	1.9	.....	.....	.....	.....	.....	.....	.....	.....	.....	1H6G
1J5G	ST-14	Pentode	6-X	Filament	2.0	0.12	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	1J5G
1J6G	ST-12	Duodiode	7-AB	Filament	2.0	0.24	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	1J6G
1L4	Miniature	Pentode	6-AR	Filament	1.4	0.05	.008m	3.8	7.5	.....	.....	.....	.....	.....	.....	.....	.....	.....	1L4
1LA4	Lock-in	Pentode	5-AD	Filament	1.4	0.05	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	1LA4

# PENNSYLVANIA TUBES — AVERAGE CHARACTERISTICS

Type	Construction		Emitter			Note (1) Capacitances in $\mu\mu\text{f}$ .		Use	Plate Volts	Negative Grid Volts	Screen Volts	Plate Current Ma.	Screen Current Ma.	Plate Resistance Ohms	Micromhos Mutual Conductance	Amplification Factor	Ohms Load for Staked Power Output	Undisorted Power Output Milli-watts	Type
	Style	Class	Basing Diag.	Type	Volts	Amps	Cgp.												
1LA6	Lock-in	Heptode	7-AK	Filament	1.4	0.05	0.4	7.5	8.0	0.0	45	0.55	0.6	750,000	950A	(G2 - 90 V)	Max., 1.9 Ma.	1LA6	
1LB4	Lock-in	Pentode	5-AD	Filament	1.4	0.05				4.5	1.6	0.3	0.3	300,000	650		20,000	35	
1LC5	Lock-in	Pentode	7-AO	Filament	1.4	0.05	.007m	3.2	7.0	0.0	45	1.1	1.0	200,000	875		12,000	100	
1LC6	Lock-in	Heptode	7-AK	Filament	1.4	0.05	.007m	9.0	5.5	0.0	45	1.1	0.20	700,000	750		1,500	300	
1LD5	Lock-in	Diode Pent.	6-AX	Filament	1.4	0.05	0.18	3.2	6.0	0.0	35	0.75	0.7	300,000	950A	(G2 - 45 V)	Max., 1.4 Ma.		
1LE3	Lock-in	Triode	4-AA	Filament	1.4	0.05	1.7	11.7	3.0	0.0	45	0.6	0.1	750,000	350		8,000	270	
1LH4	Lock-in	Diode-Triode	5-AG	Filament	1.4	0.05				0.0	90	0.15		240,000	275				
1LN5	Lock-in	Pentode	7-AO	Filament	1.4	0.05	.007m	3.4	8.0	0.0	90	1.6	0.35	1.1 Meg.	800				
1N5GT	GT	Pentode	5-Y	Filament	1.4	0.05	.007m	3.4	10.0	0.0	90	1.2	0.3	1.5 Meg.	750				
1N6G	GT	Diode Pent.	7-AM	Filament	1.4	0.05				4.5	3.4	0.7	0.7	300,000	800		25,000	100	
1P5GT	GT	Pentode	5-Y	Filament	1.4	0.05	.007m	3.0	10.0	0.0	90	2.3	0.7	800,000	750				
1Q5GT	GT	Beam Amp.	6-AF	Filament	1.4	0.10				9.0	4.5	1.3		2,900					
1R4-1994	Lock-in	H. F. Diode	4-AH	Cathode	1.4	.150				Half-Wave Cathode Type Rectifier for High Frequency Use.									1R4-1994
1R5	Miniature	Heptode	7-AT	Filament	1.4	0.05	0.4m	7.0	12.0	0.0	45	0.7	1.9	600,000	335A			1R5	
1S4	Miniature	Pentode	7-AV	Filament	1.4	0.1				4.5	0.0	0.0	0.0	100,000	300A			1S4	
1S5	Miniature	Diode Pent.	6-AU	Filament	1.4	0.05	0.2	2.0	4.0	4.5	45	3.8	0.8	100,000	1,250		8,000	65	
1SA6GT	GT	Pentode	6-BD	Filament	1.4	0.05	.01m	5.2	8.6	0.0	7.0	67.5	1.4	100,000	1,575		8,000	270	
1SB6GT	GT	Diode Pent.	6-BE	Filament	1.4	0.05	0.25	3.2	3.0	0.0	67.5	1.6	0.4	600,000	625			1S5	
1T4	Miniature	Pentode	6-AR	Filament	1.4	0.05	.008m	3.8	7.5	0.0	45	1.1	0.3	700,000	750			1SA6GT	
1T5GT	GT	Beam Amp.	6-AF	Filament	1.4	0.05	0.5	4.8	8.0	0.0	45	1.1	0.3	700,000	750			1T4	
1V	ST-12	Diode	4-G	Cathode	6.3	0.30				0.0	0.0	0.0	0.0	350,000	700			1V	
2A3	ST-16	Triode	4-D	Filament	2.5	2.50	16.0	7.0	5.0	395 A. C. Volts Per Plate, RMS, 45 Ma. Output Current.	60.0	6.5	1.4	1,150			14,000	170	
2A4G	ST-12	Gas Triode	5-S	Filament	2.5	2.50				350 A. C. Volts Per Plate, RMS, 45 Ma. Output Current.	40.0	3.7	1.25	500,000	900			2A3	
2A5	ST-14	Pentode	6-B	Cathode	2.5	1.75				300	45.0	60.0	800	800	5,250		2,500	3,500	
2A6	ST-12	Duodiode Tri.	6-C	Cathode	2.5	0.80	1.7	1.7	3.8	350	62.0	40.0	Per Tube, Push Pull, Fixed Bias	3,000			15,000	2A4G	
2A7, 2A7S	ST-12	Heptode	7-G	Cathode	2.5	0.80	0.3m	8.5	9.0	300	25.0	30.0	Push-Pull Class C F. Amplifier	1,800	15			2A5	
2B7, 2B7S	ST-12	Duodi. Pent.	7-D	Cathode	2.5	0.80		See Type 6B7		350	25.0	30.0	Push-Pull Class C F. Amplifier	1,800	15			2A6	
2E5	T-9	Electron Ray	6-R	Cathode	2.5	0.80				Characteristics Same as Type 6E5.									2A7, 2A7S
2S45	ST-12	Duodiode	5-D	Cathode	2.5	1.35				Characteristics Same as Type 6E5.									2E5
2V3G	ST-12	Diode	4-Y	Filament	2.5	5.0				The Two Diode Plates each Draw Approximately 40.0 Ma. with 50 Volts D.C. on the Plates.									2V3G
2W3GT	GT	Diode	4-X	Filament	2.5	1.50				6000 A. C. Volts Per Plate, RMS, 2 Ma. Output Current. Condenser input to Filter.									2W3GT
2X2, 2X9	ST-12	Diode	4-AB	Cathode	2.5	1.75				350 A. C. Volts Per Plate, RMS, 35 Ma. Output Current. Condenser input to Filter.									2X2, 2X9
2Z2, 2Z9	ST-12	Diode	4-B	Filament	2.5	1.50				4,500 A. C. Volts Per Plate, RMS, 7.5 Ma. Output Current. Condenser Input to Filter.									2Z2, 2Z9
3A4	Miniature	Pentode	7-BB	Filament	2.5	1.50				350 A. C. Volts Per Plate, RMS, 50 Ma. Output Current.									3A4
3A5	Miniature	Duotriode	7-BC	Filament	1.4	0.20	0.35m	4.8	7.0	7.5	90	14.8	2.6	90,000	1,900		8,000	600	
3A8GT	GT	Diode Tri.-Pent.	8-AS	Filament	1.4	0.05	.012m	3.0	10.0	150	8.4	13.3	2.2	100,000	1,900		8,000	700	
3B5GT	GT	Beam Amp.	7-AP	Filament	1.4	0.10				135	2.5	3.7	0.3	940,000	375			3A5	
3B7-1291	Lock-in	Duotriode	7-BE	Filament	2.8	0.05				135	20.0	30.0	0.5	600,000	750			3A8GT	
3D6-1999	Lock-in	Beam Amp.	6-BB	Filament	1.4	.120	.30	7.5	6.5	0.0	90	1.20	0.3	300,000	975			3B5GT	
3LF4	Lock-in	Beam Amp.	6-BB	Filament	1.4	0.10				45	4.5	4.4	0.3	100,000	1,400		8,000	70	
3Q4	Miniature	Pentode	7-BA	Filament	1.4	0.10				67.5	7.0	6.7	0.5	100,000	1,500		5,000	180	

(1) Values are given shielded unless marked with (\*).  
 (2) Converter tube capacitances given are signal grid to plate;  
 RF Input; Mixer Output.  
 m. maximum.  
 \*Applied through 250,000 ohms.  
 †Per tube or Section—No Signal.  
 ‡Plate and Target Supply Voltage.  
 §With Average Power input of 320 Mw. Grid to Grid.  
 ¶Pentode Operation.  
 ††Applied through 200,000 ohms.  
 ‡‡For two tubes with 40 volts RMS applied to each grid.  
 †††Plate to Plate.  
 ††††Applied through 20,000 ohms.  
 †††††Approximate.  
 ††††††Conversion Conductance.  
 †††††††150 Volts RMS applied to two grids.

# SYLVANIA TUBES — AVERAGE CHARACTERISTICS

Type	Construction		Emitter			Note (1) Capacitances in $\mu\mu\text{f}$ .			Use	Plate Volts	Negative Grid Volts	Screen Volts	Plate Current Mb.	Screen Current Ma.	Plate Resistance Ohms	Microphos Mutual Conductance	Amplification Factor	Unfiltered Power Output Milli-watts	
	Style	Class	Basing Diag.	Type	Volts	Amps	Ceo.	Cin.											Cout.
3Q5GT	GT	Beam Amp.	7-AP	Filament	1.4	0.10				90	4.5	90	9.5	1.3	75,000	2,200	1.3	8,000	
					2.8	0.05				90	4.5	90	8.0	1.0	80,000	2,000	1.0	8,000	
354	Miniature	Pentode	7-BA	Filament	1.4	0.10	30	5.0	7.0	90	7.0	67.5	7.4	1.4	100,000	1,575	1.4	8,000	
					2.8	0.05				90	7.0	67.5	6.1	1.1	100,000	1,425	1.1	8,000	
4A6G	ST-12	Duodiode	8-L	Filament	2.0	0.12				90	1.5		1.1		26,500	750	90	8,000	
					4.0	0.06				90	1.5		10.8		Signal.			1,000	
5T4	Metal	Duodiode	5-T	Filament	5.0	5.0				450 A. C. Volts Per Plate, RMS, 225 Ma. Output Current. Condenser Input to Filter.					Condenser Input to Filter.				
					5.0	5.0				550 A. C. Volts Per Plate, RMS, 225 Ma. Output Current. Choke Input to Filter.					Condenser Input to Filter.				
5U4G	ST-16	Duodiode	5-T	Filament	5.0	3.00				375 A. C. Volts Per Plate, RMS, 175 Ma. Output Current. Condenser Input to Filter.					Condenser Input to Filter.				
5V4G	ST-14	Duodiode	5-L	Cathode	5.0	2.00				350 A. C. Volts Per Plate, RMS, 175 Ma. Output Current. Condenser Input to Filter.					Condenser Input to Filter.				
5W4GT	GT	Duodiode	5-T	Filament	5.0	1.50				400 A. C. Volts Per Plate, RMS, 110 Ma. Output Current. Choke or Condenser Input to Filter.					Choke or Condenser Input to Filter.				
5X3	ST-14	Duodiode	4-C	Filament	5.0	2.0				1275 A. C. Volts Per Plate, RMS, 30 Ma. Output Current. Choke or Condenser Input to Filter.					Choke or Condenser Input to Filter.				
5X4G	ST-16	Duodiode	5-Q	Filament	5.0	2.00				450 A. C. Volts Per Plate, RMS, 225 Ma. Output Current. Condenser Input to Filter.					Condenser Input to Filter.				
					5.0	2.00				500 A. C. Volts Per Plate, RMS, 195 Ma. Output Current. Choke Input to Filter.					Condenser Input to Filter.				
5Y3GT	GT	Duodiode	5-T	Filament	5.0	2.00				Characteristics Same as Type 5Y3GT					Condenser Input to Filter.				
					5.0	2.00				450 A. C. Volts Per Plate, RMS, 225 Ma. Output Current. Condenser Input to Filter.					Condenser Input to Filter.				
5Y4G	ST-14	Duodiode	5-Q	Filament	5.0	2.00				Characteristics Same as Type 5Y4GT, Except Capacitances.					Condenser Input to Filter.				
5Z3	ST-16	Duodiode	4-C	Filament	5.0	3.00				350 A. C. Volts Per Plate, RMS, 195 Ma. Output Current. Condenser Input to Filter.					Condenser Input to Filter.				
5Z4	Metal	Duodiode	5-L	Cathode	5.0	2.00				250 45.0 60.0 80.0 100.0 120.0 150.0 200.0 250.0 300.0 325 350					800 5,250 4.2				
5Z4GT	GT	Duodiode	5-L	Cathode	5.0	2.00				250 45.0 60.0 80.0 100.0 120.0 150.0 200.0 250.0 300.0 325 350					800 5,250 4.2				
6A3	ST-16	Triode	4-D	Filament	6.3	1.00	16.0	7.0	5.0	250 325 350	45.0 68.0	60.0 40.0 40.0	60.0 40.0 40.0	60.0 40.0 40.0	800 5,250 4.2			2,500 3,000* 15,000 5,000* 10,000	
6A4/LA	ST-14	Pentode	5-B	Filament	6.3	0.30				135 180 250	9.0 12.0 18.0	13.0 9.0 9.0	13.0 9.0 9.0	2.8 3.9	52,600 60,000 2,500			9,500 8,000 1,500	
6A5G	ST-16	Triode	6-T	Cathode	6.3	1.25				250 325 350	45.0 60.0 80.0	60.0 40.0 40.0	60.0 40.0 40.0	2.8 3.9	52,600 60,000 2,500			9,500 8,000 1,500	
6A6	ST-14	Duodiode	7-B	Cathode	6.3	0.80				300 250 294	0.0 5.0 6.0	17.5 Per Tube, Class B Operation, Zero Signal	17.5 Per Tube, Class B Operation, Zero Signal	40.0 Per Tube, Push Pull, Fixed Bias	800 3,000* 10,000			3,500 3,000* 15,000	
6A7, 6A7S	ST-12	Heptode	7-C	Cathode	6.3	0.30	0.3	8.5	9.0	Characteristics Same as Type 6A8G, Except Capacitances.					800 3,000* 10,000			3,500 3,000* 15,000	
6A8	Metal	Heptode	8-A	Cathode	6.3	0.30	0.6	12.0	12.0	100 150 250	1.5 3.0 3.0	1.1 1.3 2.7	1.1 1.3 2.7	1.3 2.7	600,000 360* 550*			( $G_2 = 100 \text{ V}$ , 2.0 Ma.) ( $G_2 = 250 \text{ V}$ , Max., 4.0 Ma.)	
6A8G	GT	Heptode	8-A	Cathode	6.3	0.30	0.6	9.5	12.0	Characteristics Same as Type 6A8G, Except Capacitances.					600,000 360* 550*			( $G_2 = 100 \text{ V}$ , 2.0 Ma.) ( $G_2 = 250 \text{ V}$ , Max., 4.0 Ma.)	
6AB5/6N5	T-9	Electron Ray	6-R	Cathode	6.3	0.15				135* (Series Plate Resistor 0.25 Meg., Target Current 9.0 Ma., Grid Bias = 10 for 0° Shadow.)					600,000 360* 550*			( $G_2 = 100 \text{ V}$ , 2.0 Ma.) ( $G_2 = 250 \text{ V}$ , Max., 4.0 Ma.)	
6AB7	Metal	Pentode	8-N	Cathode	6.3	0.45	0.15m	8.0	5.0	300 250 294	0.0 5.0 6.0	17.5 Per Tube, Class B Operation, Zero Signal	17.5 Per Tube, Class B Operation, Zero Signal	40.0 Per Tube, Push Pull, Fixed Bias	800 3,000* 10,000			3,500 3,000* 15,000	
6AC3GT	T-9	Triode	6-Q	Cathode	6.3	0.40				300 250 294	0.0 5.0 6.0	17.5 Per Tube, Class B Operation, Zero Signal	17.5 Per Tube, Class B Operation, Zero Signal	40.0 Per Tube, Push Pull, Fixed Bias	800 3,000* 10,000			3,500 3,000* 15,000	
6AC7	Metal	Pentode	8-N	Cathode	6.3	0.45	0.15m	11.0	5.0	Characteristics Same as Type 6A8G, Except Capacitances.					800 3,000* 10,000			3,500 3,000* 15,000	
6AD5G, GT	ST-12, GT	Triode	6-O	Cathode	6.3	0.3	3.3*	4.1*	3.9*	100* (Ray Control Volts = 45 Approx. For 0° Shadow, Approx. = 23 Volts for 135° Shadow.)					66,000 1,500 100			7,000 10,000*	
6AD6G	T-9	Electron Ray	7-AG	Cathode	6.3	0.15				150* (Ray Control Volts = 75 Approx. For 0° Shadow, Approx. = 50 Volts for 135° Shadow.)					66,000 1,500 100			7,000 10,000*	
6AD7G	ST-14	Tri. Pentode	8-AY	Cathode	6.3	0.85				300 250 294	0.0 5.0 6.0	17.5 Per Tube, Class B Operation, Zero Signal	17.5 Per Tube, Class B Operation, Zero Signal	40.0 Per Tube, Push Pull, Fixed Bias	800 3,000* 10,000			3,500 3,000* 15,000	
6AE5GT	GT	Triode	6-O	Cathode	6.3	0.30				250 250 294	0.0 5.0 6.0	17.5 Per Tube, Class B Operation, Zero Signal	17.5 Per Tube, Class B Operation, Zero Signal	40.0 Per Tube, Push Pull, Fixed Bias	800 3,000* 10,000			3,500 3,000* 15,000	
6AE6G	ST-12	Duo Plate Triode	7-AH	Cathode	6.3	0.15				250 250 294	0.0 5.0 6.0	17.5 Per Tube, Class B Operation, Zero Signal	17.5 Per Tube, Class B Operation, Zero Signal	40.0 Per Tube, Push Pull, Fixed Bias	800 3,000* 10,000			3,500 3,000* 15,000	
6AE7GT	GT	Duodiode	7-AX	Cathode	6.3	0.50	2.5	3.0	1.8	250 250 294	0.0 5.0 6.0	17.5 Per Tube, Class B Operation, Zero Signal	17.5 Per Tube, Class B Operation, Zero Signal	40.0 Per Tube, Push Pull, Fixed Bias	800 3,000* 10,000			3,500 3,000* 15,000	
					6.3	0.50	2.5	3.0	1.8	(Driver for P.P. 6AC5GT - 950 V, 10 Ma., 6AC5GT Plate Ma. - 64. Output 9.5 Watts with 10,000 Ohms Load, Bias Developed in Circuit.)					66,000 1,500 100			7,000 10,000*	
6AF5G	ST-12	Triode	6-O	Cathode	6.3	0.30				180 180	18.0	7.0	7.0	7.0	4,200 1,500 7.4			4,500 10,800	
6AF6G	T-9	Twin Elec. Ray	7-AG	Cathode	6.3	0.15				100* (Ray Control Volts = Approx. 60 for 0° Shadow, Approx. Zero Volts for 100° Shadow.)					4,200 1,500 7.4			4,500 10,800	
6AG5	Miniature	Pentode	7-BD	Cathode	6.3	0.30	0.25m	6.1	2.3	135* (Ray Control Volts = Approx. 81 for 0° Shadow, Approx. Zero Volts for 100° Shadow.)					4,200 1,500 7.4			4,500 10,800	
6AG7	Metal	Pentode	8-Y	Cathode	6.3	0.95				100 125 250	10.0 12.5 15.0	3.5 2.2 2.0	3.5 2.2 2.0	1.6 2.1 2.0	300,000* 4,750 5,000			4,500 10,800	
6AH7GT	GT	Duodiode	8-BE	Cathode	6.3	0.30				300 300	10.5 300	2.0 2.0	2.0 2.0	6.5 6.5	100,000 7,700			4,500 10,800	
6AH5G	ST-16	Beam Amp.	6-AP	Cathode	6.3	0.9				Characteristics Same as Type 12AH7GT					100,000 7,700			4,500 10,800	
6AK5	Miniature	Pentode	7-BD	Cathode	6.3	0.175	0.1	3.9	2.85	120 150 180	12.0 14.0 19.0	7.5 7.0 7.7	7.5 7.0 7.7	2.5 2.2 2.4	340,000 4,300 5,100			4,500 10,800	
6AL5	Miniature	Duodiode	6-BT	Cathode	6.3	0.30				150 150	15.0 15.0	9.0	9.0	9.0	High Perveance Rectifier for High Frequency Use.			4,500 10,800	
6AL6G	ST-16	Beam Amp.	6-AM	Cathode	6.3	0.9				Characteristics Same as Type 6L6G					340,000 4,300 5,100			4,500 10,800	
6AO6	Miniature	Duodiode-Tri.	7-BT	Cathode	6.3	0.15	1.8	1.7	1.5	100 250	1.0 3.0	0.8 1.0	0.8 1.0	0.8 1.0	61,000 1,200 70			61,000 1,200 70	
6B4G	ST-16	Triode	5-S	Filament	6.3	1.00	16.0	7.0	5.0	Characteristics Same as Type 6A3.					61,000 1,200 70			61,000 1,200 70	

# PENNSYLVANIA TUBES — AVERAGE CHARACTERISTICS

Type	Construction		Emitter		Capacitances in p.f.			Use	Plate Volts	Screen Volts	Plate Current Ma.	Screen Current Ma.	Plate Resistance Ohms	Micromhos Mutual Conductance	Amplification Factor	Ohms Load for Stated Power Output	Undistorted Power Output Milli-watts	Type
	Style	Class	Basing Diag.	Type	Volts	Amps	Csp.											
6B5	ST-14	Duotriode	6-AS	Cathode	6.3	0.80	1.7	1.7	3.8	0.9	0.9	91,000	1,100	100		685		
6B6G	ST-12	Duodiode-Tri.	7-V	Cathode	6.3	0.30	0.07	3.5*	9.5*	5.8	1.7	300,000	950	100		686G		
6B7	ST-12	Duodi. Pent.	7-D	Cathode	6.3	0.30				3.0	0.9	140,000	840			687		
6B7S										3.0	0.9	140,000	840			687S		
6B8	Metal	Duodi. Pent.	8-E	Cathode	6.3	0.30	.005m	6.0	9.0	0.5	0.5	7,790	9,900	17	5,500	688		
6B8GT	GT	Duodi. Pent.	8-E	Cathode	6.3	0.30	.01m	3.6	9.5	0.5	0.5	7,790	9,900	17	5,500	688GT		
6C4	Miniature	Triode	6-BG	Cathode	6.3	0.15	1.4	1.8	2.5	11.8	11.8	6,250	3,100	19.5		6C4		
6C5	Metal	Triode	6-Q	Cathode	6.3	0.30	2.0	3.0	11.0	8.0	8.0	10,000	9,000	20		6C5		
6C5GT	GT	Triode	6-Q	Cathode	6.3	0.30	2.2	4.8	12.0	0.5	0.5	1 Meg.	1,185	20		6C5GT		
6C6	ST-12	Pentode	6-F	Cathode	6.3	0.30	.007m	5.0*	6.5*	2.0	0.5	1 Meg.	1,225			6C6		
6C7	ST-12	Duodiode-Tri.	7-G	Cathode	6.3	0.30	2.6	2.6	2.2	3.2	4.5	16,000	1,250	20		6C7		
6C8G	ST-12	Duotriode	8-G	Cathode	6.3	0.30	1.8	1.3	2.2	3.0	3.0	29,500	1,600	36		6C8G		
6D4	Miniature	Gas Triode	5-A1	Cathode	6.3	0.25				50	2.0	350,000	1,500			6D4		
6D6	ST-12	Pentode	6-F	Cathode	6.3	0.30	.007m	4.7*	6.5*	8.0	2.2	250,000	1,500			6D6		
6D7	ST-12	Pentode	7-H	Cathode	6.3	0.30	0.2	8.0	11.0	1.5	1.7	600,000	325A			6D7		
6D8G	ST-12	Heptode	8-A	Cathode	6.3	0.15	0.2	8.0	11.0	3.5	2.6	400,000	550A			6D8G		
6E5	T-9	Electron Ray	6-R	Cathode	6.3	0.30				100	2.0	350,000	1,500			6E5		
6E6	ST-14	Duotriode	7-B	Cathode	6.3	0.60				180	11.5	4,300	1,700	6.0	15,000*	750	6E6	
6E7	ST-12	Pentode	7-H	Cathode	6.3	0.30				90	18.0	3,500	1,700	6.0	14,000*	1,600	6E7	
6F5GT	Metal	Triode	5-M	Cathode	6.3	0.30	2.3	5.5	4.0	0.9	0.9	66,000	1,500	100		6F5GT		
6F5GT	GT	Triode	5-M	Cathode	6.3	0.30	2.8*	2.9*	3.2*	34.0	38.0	80,000	2,500			6F5GT		
6F6, 6F6G, 6F6GT	Metal	Pentode	7-S	Cathode	6.3	0.70				20.0	28.5	78,000	2,500			6F6, 6F6G		
6F7, 6F7S	ST-12	Pent.-Triode	7-E	Cathode	6.3	0.30	.008m	3.2	12.5	6.5	7.0	10,000*	10,000*			6F7, 6F7S		
6F8G	ST-12	Duotriode	8-G	Cathode	6.3	0.60	3.2*	1.9*	1.9*	34.0	37.5	290,000	1,050			6F8G		
6G6G	ST-12	Pentode	7-S	Cathode	6.3	0.15				100	6.5	850,000	1,100			6G6G		
6H4GT	GT	Diode	5-A1	Cathode	6.3	0.15				135	11.5	170,000	2,100			6H4GT		
6H6GT	Metal	Duodiode	7-Q	Cathode	6.3	0.30				180	15.0	175,000	2,300			6H6GT		
6J5GT	GT	Duodiode	7-Q	Cathode	6.3	0.30				100	8.5	7,100	5,300			6J5GT		
6J5GT	GT	Triode	6-Q	Cathode	6.3	0.30	3.4	3.6	3.6	9.0	2.0	7,700	2,600	20		6J5GT		
6J6	Miniature	Triode	6-Q	Cathode	6.3	0.30	3.8	4.2	5.0	30	30	7,700	2,600	38		6J6		
6J7	Miniature	Duotriode	7-BF	Cathode	6.3	0.45	1.4	2.3	1.6	8.5	30	7,700	2,600	20		6J7		
6J8G	ST-12, GT	Pentode	7-R	Cathode	6.3	0.30	.005m	7.0	12.0	2.0	0.5	1.0 Meg.	1,225			6J8G		
6K5G	ST-12, GT	Pentode	7-R	Cathode	6.3	0.30	.007m	5.4	12.0	1.3	2.9	4.0 Meg.	290A			6K5G		
6K5GT	GT	Tri.-Heptode	8-H	Cathode	6.3	0.30	.02m	4.0	10.0	3.0	1.0	78,000	900	70		6K5GT		
6K6GT	GT	Triode	5-U	Cathode	6.3	0.30	2.0	2.9	5.75	1.0	1.0	104,000	1,500	70		6K6GT		
6K7	Metal	Pentode	7-R	Cathode	6.3	0.30	0.05m	7.0	12.0	5.4	1.3	300,000	1,275			6K7		
6K7G	ST-12	Pentode	7-R	Cathode	6.3	0.30	.007m	5.0	12.0	4.0	1.0	1 Meg.	1,100			6K7G		
6K7GT	GT	Pentode	7-R	Cathode	6.3	0.30	.005m	4.6	12.0	7.0	1.7	800,000	1,450			6K7GT		
6K8	Metal	Tri.-Hexode	8-K	Cathode	6.3	0.30	.03m	6.6	3.5	3.0	3.0	300,000	1,275			6K8		

(1) Values are given shielded unless marked with (\*).  
 (2) Converter tube capacitances given are signal grid to plate;  
 RF Input, Mixer Output.  
 m maximum.  
 \*Applied through 250,000 ohms.  
 †Per Tube or Section—No Signal.  
 ‡Applied through 200,000 ohms.  
 §Plate and Target Supply Voltage.  
 ¶With Average Power input of 320 Mw. Grid to Grid.  
 ††Triode Operation.  
 ‡‡Applied through 20,000 ohms.  
 †††For two tubes with 40 volts RMS applied to each grid.  
 ††††Applied through 20,000 ohms.  
 †††††Plate to Plate.  
 ††††††Conversion Conductance.  
 †††††††50 Volts RMS applied to two grids.

# SYLVANIA TUBES — AVERAGE CHARACTERISTICS

Type	Construction		Emitter		Note (1) (2) Capacitances in $\mu\text{f}$ .			Use	Plate Volts	Negative Grid Volts	Screen Volts	Plate Current Ma.	Screen Current Ma.	Plate Resistance Ohms	Micromhos Mutual Conductance	Amplification Factor	Ohms Load Stated Power Output	Undis- torted Power Output Milli- watts
	Style	Class	Basing Diag.	Type	Volts	Amps	Cgp.											
6K8G	ST-12 GT	Tri.-Hexode	8-K	Cathode	6.3	0.30	.08m	4.6	4.8	3.0	100	2.5	6.0	600,000	350A	3,000	3,000	6K8GT
6L5G	ST-12	Triode	6-Q	Cathode	6.3	0.15	2.8	5.0	4.3	3.0	50,000	3.8	6.0	10,000	1,900	15	2,500	6L5G
6L6	Metal ST-16 ST-14	Beam Amp.	7-AC	Cathode	6.3	0.90	.....	.....	.....	14.0	950	72.0	5.0	92,500	5,000	.....	6,500	6L6G
6L6GA										18.0	350	34.0	2.5	33,500	5,000	.....	17,500	6L6GA
										17.5	350	14.0	1.0	23,500	5,000	.....	17,500	
										22.5	370	88.0	5.0	Current & Output for Two Tubes	9,600*	.....	20,000	
										23.0	270	88.0	5.0	Current & Output for Two Tubes	3,800*	.....	47,000	
6L7	Metal	Heptode	7-T	Cathode	6.3	0.30	.001m	7.5	11.0	.....	.....	.....	.....	.....	.....	.....	.....	6L7
6L7G	ST-12	Heptode	7-T	Cathode	6.3	0.30	.005m	6.0	10.0	6.0	150	3.3	9.9	1 Meg. +	350A	(G3 = Neg. 15 Volts)	.....	6L7G
6N6G	ST-14	Duotriode	7-AU	Cathode	6.3	0.80	.....	.....	.....	0.0	(Input Section)	5.3	6.5	600,000	1,100	(G3 = Neg. 3.0 Volts)	.....	6N6G
6N7	Metal	Duotriode	8-B	Cathode	6.3	0.80	.....	.....	.....	0.0	(Output Section)	45.0	8.0	24,000*	2,400	58	7,000	6N7
6N7GT	GT	Duotriode	8-B	Cathode	6.3	0.80	.....	.....	.....	0.0	(Output Section)	45.0	8.0	24,000*	2,400	58	7,000	6N7GT
6P5GT	GT	Triode	6-Q	Cathode	6.3	0.30	0.26	3.4	5.5	0.0	17.5 Per Plate, Class B Operation, Zero Signal	7.0	3.5	11,300	3,100	35	8,000*	6P5GT
6P7G	ST-12	Pent.-Triode	7-U	Cathode	6.3	0.30	.007m	2.8	2.8	0.0	.....	3.7	0.9	11,000	3,900	35	(Class A Driver)	6P7G
6Q7	Metal	Duotriode-Tri.	7-V	Cathode	6.3	0.30	1.4	5.0	3.8	0.0	.....	7.0	2.0	88,000	800	70	607	
6Q7G	ST-12	Duotriode-Tri.	7-V	Cathode	6.3	0.30	1.5	3.2	5.0	0.0	.....	0.35	8.5	58,000	1,200	70	6Q7G	
6Q7GT	GT	Duotriode-Tri.	7-V	Cathode	6.3	0.30	1.6	2.2	5.0	0.0	.....	1.1	8.5	800,000	1,450	1,160	6Q7GT	
6R6G	ST-12	Pentode	6-W	Cathode	6.3	0.3	.007m	4.5*	11.0*	0.0	.....	1.7	1.7	800,000	1,450	1,160	6R6G	
6R7	Metal	Duotriode-Tri.	7-V	Cathode	6.3	0.30	0.23	4.8	3.8	0.0	.....	5.0	13.8	9,500	1,450	13.8	6R7	
6R7GT	GT	Duotriode-Tri.	7-V	Cathode	6.3	0.30	0.21	2.6	5.2	0.0	.....	5.0	13.8	9,500	1,450	13.8	6R7GT	
6S7	Metal	Pentode	7-R	Cathode	6.3	0.15	.005m	6.5	10.5	0.0	.....	9.5	2.0	8,500	1,900	16	6S7	
6S7G	ST-12	Pentode	7-R	Cathode	6.3	0.15	.008m	4.4	8.0	0.0	.....	9.5	2.0	8,500	1,900	16	6S7G	
6SA7	Metal	Heptode	8-R	Cathode	6.3	0.30	.13m	9.5	12.0	0.0	.....	3.7	0.9	1 Meg.	1,950	375	6SA7	
6SA7GT	GT	Heptode	8-AD	Cathode	6.3	0.30	.5m	11.0	11.0	0.0	.....	8.5	2.0	1 Meg.	1,750	1,100	6SA7GT	
6SC7	Metal	Duotriode	8-S	Cathode	6.3	0.30	0.2	9.2	3.0	0.0	.....	2.0	8.5	500,000*	425A	.....	6SC7	
6SC7G	GT	Duotriode	8-S	Cathode	6.3	0.30	0.2	9.2	3.0	0.0	.....	2.0	8.5	500,000*	425A	.....	6SC7G	
6SD7GT	GT	Pentode	8-N	Cathode	6.3	0.30	.0035	9.0	7.5	0.0	.....	5.7	2.0	250,000*	3,350	70	6SD7GT	
6SE7GT	GT	Pentode	8-N	Cathode	6.3	0.3	.0035m	6.0	7.5	0.0	.....	6.0	1.9	1.0 Meg. +	3,100	.....	6SE7GT	
6SF5	Metal	Triode	6-AB	Cathode	6.3	0.30	0.4	4.0	3.6	0.0	.....	3.4	3.4	66,000	1,500	100	6SF5	
6SF5GT	GT	Triode	6-AB	Cathode	6.3	0.30	0.6	4.0	3.8	0.0	.....	19	3.4	800,000*	1,975	.....	6SF5GT	
6SF7	Metal	Diode Pent.	7-AZ	Cathode	6.3	0.30	.004m	5.5	6.0	0.0	.....	12.4	3.3	700,000*	2,050	.....	6SF7	
6SG7	Metal	Pentode	8-BK	Cathode	6.3	0.30	.003m	8.5	7.0	0.0	.....	8.2	3.2	250,000*	4,100	.....	6SG7	
6SG7GT	GT	Pentode	8-BK	Cathode	6.3	0.30	.004m	8.5	7.0	0.0	.....	11.8	4.4	900,000*	4,700	.....	6SG7GT	
6SH7	Metal	Pentode	8-BK	Cathode	6.3	0.30	.003m	8.5	7.0	0.0	.....	9.2	3.4	1 Meg. +	4,000	.....	6SH7	
6SH7GT	GT	Pentode	8-BK	Cathode	6.3	0.30	.004m	8.5	7.0	0.0	.....	5.3	2.1	350,000*	4,000	.....	6SH7GT	
6SJ7	Metal	Pentode	8-N	Cathode	6.3	0.30	.005m	6.0	7.0	0.0	.....	10.8	4.1	900,000*	4,900	.....	6SJ7	
6SJ7GT	GT	Pentode	8-N	Cathode	6.3	0.30	.005m	6.3	7.5	0.0	.....	2.9	0.9	700,000*	1,575	.....	6SJ7GT	
6SK7	Metal	Pentode	8-N	Cathode	6.3	0.30	.003m	6.0	7.0	0.0	.....	3.0	0.8	1.5 Meg. +	1,650	.....	6SK7	
6SK7G1	GT	Pentode	8-N	Cathode	6.3	0.30	.005m	6.5	7.5	0.0	.....	3.0	0.8	1.5 Meg. +	1,650	.....	6SK7G1	
6SL7GT	GT	Duotriode	8-BD	Cathode	6.3	3.00	.....	.....	.....	0.0	.....	9.2	2.6	190,000*	2,350	.....	6SL7GT	
6SN7GT	GT	Duotriode	8-BD	Cathode	6.3	600 3.8*	.....	.....	.....	0.0	.....	9.2	2.6	800,000*	2,000	.....	6SN7GT	
6SQ7	Metal	Duotriode-Tri.	8-O	Cathode	6.3	0.30	1.6	3.2	3.0	0.0	.....	2.3	2.6	44,000	1,600	70	6SQ7	
6SR7	Metal	Duotriode-Tri.	8-Q	Cathode	6.3	0.30	1.8	4.2	3.4	0.0	.....	9.5	2.6	190,000*	1,950	16	6SR7	
6SR7GT	GT	Duotriode-Tri.	8-Q	Cathode	6.3	0.30	2.3	3.0	3.0	0.0	.....	9.2	2.6	1,000,000*	1,850	.....	6SR7GT	
6SS7	Metal	Duotriode-Tri.	8-Q	Cathode	6.3	0.30	2.3	3.5	3.8	0.0	.....	9.2	2.0	1,000,000*	1,850	.....	6SS7	
6S7	Metal	Pentode	8-N	Cathode	6.3	0.15	.004m	5.5	7.0	0.0	.....	9.5	2.0	8,500	1,900	16.0	6S7	
6T5	Metal	Duotriode-Tri.	8-Q	Cathode	6.3	0.15	1.5	2.8	3.0	0.0	.....	9.5	2.0	8,500	1,900	16.0	6T5	
6T7G	ST-12	Electron Ray	6-R	Cathode	6.3	0.3	.....	.....	.....	0.0	.....	0.2	.....	95,000	680	65	6T7G	
	ST-12	Duotriode-Tri.	7-V	Cathode	6.3	0.15	1.7	1.8	3.1	0.0	.....	1.2	.....	62,000	1,050	65	6T7G	

# SYLVANIA TUBES — AVERAGE CHARACTERISTICS

Type	Construction		Emitter		Note (1) (2) Capacitances in $\mu\mu\text{f}$ .			Use	Plate Volts	Negative Grid Volts	Screen Volts	Plate Current Ma.	Screen Current Ma.	Plate Resistance Ohms	Micromhos Mutual Conductance	Amplification Factor	Ohms Load for Stated Power Output	Undistorted Power Output Milli-watts	Type
	Style	Class	Rating Diags.	Type	Volts	Amps	Cou.												
6U5/6G5	T-9	Electron Ray	6-R	Cathode	6.3	0.30	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	6U5/6G5	
6U6GT	GT	Beam Amp.	7-AC	Cathode	6.3	0.75	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	6U6GT	
6U7G	ST-12	Pentode	7-R	Cathode	6.3	0.30	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	6U7G	
6V6	Metal	Beam Amp.	7-AC	Cathode	6.3	0.45	0.3	10.0	11.0	.....	.....	.....	.....	.....	.....	.....	.....	6V6	
6V6GT	GT	Beam Amp.	7-AC	Cathode	6.3	0.45	0.7*	9.5*	.....	.....	.....	.....	.....	.....	.....	.....	.....	6V6GT	
6V7G	ST-12	Duodiode-Tri.	7-V	Cathode	6.3	0.30	1.3	1.5	6.0	.....	.....	.....	.....	.....	.....	.....	.....	6V7G	
6W5G	ST-12	Duodiode	6-S	Cathode	6.3	0.9	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	6W5G	
6W6GT	GT	Beam Amp.	7-AC	Cathode	6.3	1.25	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	6W6GT	
6W7G	ST-12	Pentode	7-R	Cathode	6.3	0.15	0.07m	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	6W7G	
6X5	Metal	Duodiode	6-S	Cathode	6.3	0.60	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	6X5	
6X5GT	GT	Duodiode	6-S	Cathode	6.3	0.60	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	6X5GT	
6Y3G	ST-12	Diode	4-AC	Cathode	6.3	0.7	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	6Y3G	
6Y5	ST-12	Duodiode	6-J	Cathode	6.3	0.80	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	6Y5	
6Y6G	ST-14	Beam Amp.	7-AC	Cathode	6.3	1.25	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	6Y6G	
6Y7G	ST-12	Duodiode	8-B	Cathode	6.3	0.60	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	6Y7G	
6Z5	ST-12	Duodiode	6-K	Cathode	6.3	0.80	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	6Z5	
6ZY5G	ST-12	Duodiode	6-S	Cathode	6.3	0.30	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	6ZY5G	
6Z7G	ST-12	Duodiode	8-B	Cathode	6.3	0.30	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	6Z7G	
7A4	Lock-in	Triode	5-AC	Cathode	6.3	0.30	4.0	3.4	3.0	.....	.....	.....	.....	.....	.....	.....	.....	7A4	
7A5	Lock-in	Beam Amp.	6-AA	Cathode	6.3	0.75	0.44	13.0	7.2	.....	.....	.....	.....	.....	.....	.....	.....	7A5	
7A6	Lock-in	Duodiode	7-AJ	Cathode	6.3	0.15	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	7A6	
7A7	Lock-in	Pentode	8-V	Cathode	6.3	0.30	0.035m	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	7A7	
7AF7	Lock-in	Duodiode	8-AC	Cathode	6.3	0.30	2.3	2.2	1.6	.....	.....	.....	.....	.....	.....	.....	.....	7AF7	
7A8	Lock-in	Octode	8-U	Cathode	6.3	0.15	0.15m	7.5	9.0	.....	.....	.....	.....	.....	.....	.....	.....	7A8	
7B4	Lock-in	Triode	5-AC	Cathode	6.3	0.30	1.6	3.2	3.2	.....	.....	.....	.....	.....	.....	.....	.....	7B4	
7B5	Lock-in	Pentode	6-AE	Cathode	6.3	0.40	0.8	7.4	8.0	.....	.....	.....	.....	.....	.....	.....	.....	7B5	
7B6	Lock-in	Duodiode-Tri.	8-W	Cathode	6.3	0.30	1.6	3.0	2.4	.....	.....	.....	.....	.....	.....	.....	.....	7B6	
7B7	Lock-in	Pentode	8-V	Cathode	6.3	0.15	0.07m	5.0	6.0	.....	.....	.....	.....	.....	.....	.....	.....	7B7	
7B8	Lock-in	Heptode	8-X	Cathode	6.3	0.30	0.2m	10.0	9.0	.....	.....	.....	.....	.....	.....	.....	.....	7B8	
7C4-1203A	Lock-in	H. F. Diode	4-AH	Cathode	6.3	0.15	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	7C4-1203A	
7C5	Lock-in	Beam Amp.	6-AA	Cathode	6.3	0.45	0.40	9.5	9.0	.....	.....	.....	.....	.....	.....	.....	.....	7C5	
7C6	Lock-in	Duodiode-Tri.	8-W	Cathode	6.3	0.15	1.6	2.4	2.4	.....	.....	.....	.....	.....	.....	.....	.....	7C6	
7C7	Lock-in	Pentode	8-V	Cathode	6.3	0.15	0.07m	5.5	6.5	.....	.....	.....	.....	.....	.....	.....	.....	7C7	
7E5-1201	Lock-in	Triode	8-BN	Cathode	6.3	0.15	1.5	3.6	2.8	.....	.....	.....	.....	.....	.....	.....	.....	7E5-1201	
7E6	Lock-in	Duodiode-Tri.	8-W	Cathode	6.3	0.30	1.5	3.0	2.4	.....	.....	.....	.....	.....	.....	.....	.....	7E6	
7E7	Lock-in	Duodi. Pent.	8-AE	Cathode	6.3	0.30	0.035m	4.6	5.5	.....	.....	.....	.....	.....	.....	.....	.....	7E7	

(1) Values are given shielded unless marked with (\*).  
 (2) Converter tube capacitances given are signal grid to plate, RF input, Mixer Output.  
 m maximum.  
 \*Applied through 250,000 ohms.  
 †Per tube or Section—No Signal.  
 ‡With Average Power input of 350 Mw. Grid to Grid.  
 §Plate to Plate.  
 ¶Triode Operation.  
 ††Applied through 200,000 ohms.  
 ‡‡For two tubes with 40 volts RMS applied to each grid.  
 §§Plate to Plate.  
 ¶¶Applied through 20,000 ohms.  
 †††Approximate.  
 ‡‡‡Conversion Conductance.  
 §§§150 Volts RMS applied to two grids.



# SYLVANIA TUBES — AVERAGE CHARACTERISTICS

Type	Construction		Emitter		Note (1) (2) Capacitances in $\mu\mu\text{f}$ .			Use	Plate Volts	Negative Grid Volts	Screen Volts	Plate Current Ma.	Screen Current Ma.	Plate Resistance Ohms	Micromhos Mutual Conductance	Amplification Factor	Ohms Load for Stated Power Output	Undisorted Power Output Milli-watts	Type
	Style	Class	Basing Dia.	Type	Volts	Amps	Cap.												
7F7	Lock-in	Duotriode	8-AC	Cathode	6.3	0.30	1.6	2.4	2.0	100	0.65	2.3	62,000 $\Delta$	1,135	70	.....	7F7		
7F8	Lock-in	Duotriode	8-BW	Cathode	6.3	0.30	1.2	2.8	1.4	250	10.5	.....	44,000 $\Delta$	1,600	70	.....	7F8		
7G7/1232	Lock-in	Pentode	8-V	Cathode	6.3	0.45	.007m	9.0	7.0	250	6.0	2.0	800,000 $\Delta$	5,300	50	(Cathode Bias Resistor = 200 Ohms)	7G7/1232		
7G8/1206	Lock-in	Duotriode	8-BV	Cathode	6.3	0.30	0.15m	3.4	2.6	250	4.5	0.8	225,000 $\Delta$	4,500	.....	.....	7G8/1206		
7H7	Lock-in	Pentode	8-V	Cathode	6.3	0.30	.007m	8.0	7.0	100	8.2	3.3	950,000 $\Delta$	4,800	(Cath. Bias Resistor = 180 Ohm)	.....	7H7		
7J7	Lock-in	Tri-Heptode	8-BL	Cathode	6.3	0.30	.03m	4.6	7.5	100	1.5	2.6	500,000 $\Delta$	3,800	.....	.....	7J7		
7K7	Lock-in	Duodiode-Tri.	8-BF	Cathode	6.3	0.30	1.8	2.6	3.0	250	1.4	2.8	1.5 Meg. (Triode Grid Current 0.3 Ma.)	3,900 $\Delta$	.....	.....	7K7		
7L7	Lock-in	Pentode	8-V	Cathode	6.3	0.30	.010m	8.0	6.5	100	5.5	9.4	100,000 $\Delta$	3,000	70	.....	7L7		
7N7	Lock-in	Duotriode	8-AC	Cathode	6.3	0.60	3.0	3.4	9.0	90	10.0	10.0	1.0 Meg.	3,100	20	.....	7N7		
7Q7	Lock-in	Heptode	8-AL	Cathode	6.3	0.30	0.20m	9.0	9.0	100	3.3	8.5	500,000 $\Delta$	5,550 $\Delta$	Osc. Grid Resistor 20,000	.....	7Q7		
7R7	Lock-in	Duodi. Pent.	8-AE	Cathode	6.3	0.30	.004m	5.6	5.3	100	3.4	9.0	500,000 $\Delta$	9,100	Osc. Grid Current 0.5 Ma.	.....	7R7		
7S7	Lock-in	Tri-Heptode	8-BL	Cathode	6.3	0.30	.03m	5.0	8.0	100	1.9	3.0	500,000 $\Delta$	5,000 $\Delta$	.....	.....	7S7		
7T7	Lock-in	Pentode	8-V	Cathode	6.3	0.3	.005m	8.0	7.0	100	1.8	1.8	1.25 Meg. $\Delta$	5,250 $\Delta$	.....	.....	7T7		
7V7	Lock-in	Pentode	8-V	Cathode	6.3	0.45	.004m	9.5	6.5	950	10.8	4.1	900,000 $\Delta$	4,900	.....	.....	7V7		
7W7	Lock-in	Pentode	8-BJ	Cathode	6.3	0.45	.0055m	9.5	7.0	100	5.3	2.1	350,000 $\Delta$	4,000	(Cath. Bias Resistor = 160 Ohms)	.....	7W7		
7X7/XXFM	Lock-in	Duodiode-Tri.	8-BZ	Cathode	6.3	0.30	.....	.....	.....	300	10.0	3.9	300,000 $\Delta$	5,800	.....	.....	7X7/XXFM		
7Y4	Lock-in	Duodiode	5-AB	Cathode	6.3	0.50	.....	.....	.....	100	1.2	1.9	85,000 $\Delta$	1,000	85	.....	7Y4		
7Z4	Lock-in	Duodiode	5-AB	Cathode	6.3	0.90	.....	.....	.....	325	10.8	4.1	900,000 $\Delta$	4,900	100	.....	7Z4		
10	ST-16	Triode	4-D	Filament	7.5	1.25	7.0*	4.0*	3.0*	250	100	.....	6,000	1,330	8.0	13,000	400		
12A	ST-14	Triode	4-D	Filament	5.0	0.25	8.5*	4.0*	2.0*	350	160	.....	5,150	1,550	8.0	11,000	900		
12A5	ST-12	Pentode	7-F	Cathode	12.6	0.30	0.3	9.0	9.0	425	18.0	.....	5,000	1,600	8.0	10,200	1,600		
12A6	Metal	Beam Amp.	7-AC	Cathode	12.6	0.60	.....	.....	.....	90	5.0	.....	5,400	1,575	8.5	5,000	35		
12A7	ST-12	Diode-Pent.	7-K	Cathode	12.6	0.30	.....	.....	.....	135	6.2	.....	5,100	1,650	8.5	9,000	130		
12A8GT	GT	Heptode	8-A	Cathode	12.6	0.15	.26	9.5	12.0	180	17.0	.....	4,700	1,800	8.5	10,650	285		
12A8GT	GT	Diode-Triode	8-BE	Cathode	12.6	0.15	3.0	2.8	2.6	100	45.0	.....	50,000 $\Delta$	1,700	.....	4,500	800		
12A8GT	GT	Pentode Tri.	8-T	Cathode	12.6	0.15	.015*	5.2*	9.6*	180	45.0	.....	35,000 $\Delta$	2,400	.....	3,300	3,400		
12A8GT	Metal	Duodiode Pentode	8-E	Cathode	12.6	0.15	.005m	6.0	9.0	100	3.0	3.5	70,000 $\Delta$	3,000	.....	7,500	3,400		
12A8GT	GT	Triode	5-M	Cathode	12.6	0.15	2.8*	2.2*	3.2*	125	30.0 Max.	.....	105,000 $\Delta$	975	100	13,500	550		
12A8GT	Metal	Duodiode	7-Q	Cathode	12.6	0.15	.....	.....	.....	100	3.7	.....	10,300	1,550	16	.....	12A8GT		
12J5GT	GT	Triode	6-Q	Cathode	12.6	0.15	3.8	4.2	5.0	180	6.5	7.6	8,400	1,900	16	.....	12A8GT		
12J7GT	GT	Pentode	7-R	Cathode	12.6	0.15	.007m	5.4	12.0	100	8.0	.....	170,000 $\Delta$	2,100	360	Pentode Section	12A8GT		
12K7GT	GT	Pentode	7-R	Cathode	12.6	0.15	.007m	5.4	12.0	100	8.0	.....	73,000 $\Delta$	2,100	110	Triode Section	12A8GT		
12K8	Metal	Tri-Hexode	8-K	Cathode	12.6	0.15	0.3m	6.6	3.5	100	0.6	.....	.....	.....	.....	.....	12A8GT		
12K8GT	GT	Tri-Hexode	8-K	Cathode	12.6	0.15	.008m	5.0	4.3	100	1.0	.....	.....	.....	.....	.....	12A8GT		
12L8GT	GT	Duo. Pentode	8-BU	Cathode	12.6	0.15	0.7*	5.0*	6.0*	110	6.1	1.3	280,000 $\Delta$	1,680 $\Delta$	.....	14,000	300		
12Q7GT	GT	Duodiode-Tri.	7-V	Cathode	12.6	0.15	1.6	2.2	5.0	180	13.0	2.8	160,000 $\Delta$	2,150 $\Delta$	.....	10,000	1,000		
12S7	Metal	Heptode	8-R	Cathode	12.6	0.15	.13m	9.5	12.0	Characteristics Same as Type 6Q7GT.	.....	.....	.....	.....	.....	.....	.....	12Q7GT	
12SA7GT	GT	Heptode	8-AD	Cathode	12.6	0.15	2.0	11.0	11.0	Characteristics Same as Type 6SA7.	.....	.....	.....	.....	.....	.....	.....	12S7	
12SC7	Metal	Duotriode	8-S	Cathode	12.6	0.15	5.0	2.2	3.0	Characteristics Same as Type 6SA7GT.	.....	.....	.....	.....	.....	.....	.....	12SA7GT	
12SF5	Metal	Triode	6-AB	Cathode	12.6	0.15	2.4	4.0	3.6	Characteristics Same as Type 6SC7.	.....	.....	.....	.....	.....	.....	.....	12SC7	
12SF5GT	GT	Triode	6-AB	Cathode	12.6	0.15	2.6	4.2	3.8	Characteristics Same as Type 6SF5.	.....	.....	.....	.....	.....	.....	.....	12SF5	
12SF5GT	GT	Triode	6-AB	Cathode	12.6	0.15	2.6	4.2	3.8	Characteristics Same as Type 6SF5GT.	.....	.....	.....	.....	.....	.....	.....	12SF5GT	

# PENNSYLVANIA TUBES — AVERAGE CHARACTERISTICS

Type	Construction		Emitter		Note Capacitances in $\mu\mu\text{f}$ .			Use	Plate Volts	Negative Grid Volts	Screen Volts	Plate Current Ma.	Screen Current Ma.	Plate Resistance Ohms	Microhms Mutual Conductance	Amplification Factor	Ohms Load for Stated Power Output	Undersorted Power Output Milli-watts	Type
	Style	Class	Basing	Type	Volts	Amps	Cgp.												
12SF7	Metal	Diode Pent.	7-AZ	Cathode	12.6	0.15	.004m	5.5	6.0	Characteristics Same as Type 6SF7.								12SF7	
12SG7	Metal	Pentode	8-BK	Cathode	12.6	0.15	.003m	8.5	7.0	Characteristics Same as Type 6SG7.								12SG7	
12SH7	Metal	Pentode	8-BK	Cathode	12.6	0.15	.003m	8.5	7.0	Characteristics Same as Type 6SH7.								12SH7	
12SH7GT	GT	Pentode	8-BK	Cathode	12.6	0.15	.004m	8.5	7.0	Characteristics Same as Type 6SH7GT.								12SH7GT	
12SJ7	Metal	Pentode	8-N	Cathode	12.6	0.15	.003m	6.0	7.0	Characteristics Same as Type 6SJ7.								12SJ7	
12SJ7GT	GT	Pentode	8-N	Cathode	12.6	0.15	.005m	6.3	7.5	Characteristics Same as Type 6SJ7, Except Capacitances								12SJ7GT	
12SK7	Metal	Pentode	8-N	Cathode	12.6	0.15	.003m	6.0	7.0	Characteristics Same as Type 6SK7.								12SK7	
12SK7GT	GT	Pentode	8-N	Cathode	12.6	0.15	.003m	6.0	7.5	Characteristics Same as Type 6SK7GT.								12SK7GT	
12SL7GT	GT	Duotriode	8-BD	Cathode	12.6	0.15	.003m	6.0	7.5	Characteristics Same as Type 6SL7GT.								12SL7GT	
12SN7GT	GT	Duotriode	8-BD	Cathode	12.6	0.15	.003m	6.0	7.5	Characteristics Same as Type 6SN7GT.								12SN7GT	
12SQ7	Metal	Duodiode-Tri.	8-Q	Cathode	12.6	0.30	.....	3.2	3.0	Characteristics Same as Type 6SQ7.								12SQ7	
12SQ7GT	GT	Duodiode-Tri.	8-Q	Cathode	12.6	0.15	1.8	4.2	3.4	Characteristics Same as Type 6SQ7GT.								12SQ7GT	
12SR7	Metal	Duodiode-Tri.	8-Q	Cathode	12.6	0.15	2.3	3.0	3.0	Characteristics Same as Type 6SR7.								12SR7	
12Z3	ST-12	Diode	4-U	Cathode	12.6	0.30	.....	.....	.....	235 A-C Volts Per Plate, RMS, 55 Ma. Output Current. Condenser Input to Filter.								12Z3	
14A4	Lock-in	Triode	5-AC	Cathode	12.6	0.15	4.0	3.4	3.0	Characteristics Same as Type 7A4.								14A4	
14A5	Lock-in	Beam Amp.	6-AA	Cathode	12.6	0.15	0.4	6.8	7.0	Characteristics Same as Type 7A4.								14A5	
14A7/12B7	Lock-in	Pentode	8-V	Cathode	12.6	0.15	.005m	6.0	7.0	Characteristics Same as Type 7A7.								14A7/12B7	
14AF7/XXD	Lock-in	Duotriode	8-AC	Cathode	12.6	0.15	2.3	2.2	1.6	Characteristics Same as Type 7AF7.								14AF7/XXD	
14B6	Lock-in	Duodiode-Tri.	8-W	Cathode	12.6	0.15	1.5	3.0	2.4	Characteristics Same as Type 7B6.								14B6	
14B8	Lock-in	Heptode	8-X	Cathode	12.6	0.15	0.2m	10.0	9.0	Characteristics Same as Type 7B8.								14B8	
14C5	Lock-in	Beam Amp.	6-AA	Cathode	12.6	0.225	0.4	9.5	9.0	Characteristics Same as Type 7C5.								14C5	
14C7	Lock-in	Pentode	8-V	Cathode	12.6	0.15	.007m	6.0	6.5	Characteristics Same as Type 7C5.								14C7	
14E6	Lock-in	Duodiode-Tri.	8-W	Cathode	12.6	0.15	1.5	3.0	2.4	Characteristics Same as Type 7E6.								14E6	
14E7	Lock-in	Duodiode-Tri.	8-AE	Cathode	12.6	0.15	.005m	4.6	5.5	Characteristics Same as Type 7E7.								14E7	
14F7	Lock-in	Duotriode	8-AC	Cathode	12.6	0.15	1.6	2.4	2.0	Characteristics Same as Type 7F7.								14F7	
14H7	Lock-in	Pentode	8-V	Cathode	12.6	0.15	.007m	8.0	7.0	Characteristics Same as Type 7H7.								14H7	
14J7	Lock-in	Tri.-Heptode	8-BL	Cathode	12.6	0.15	0.03m	4.6	7.5	Characteristics Same as Type 7J7.								14J7	
14N7	Lock-in	Duotriode	8-AC	Cathode	12.6	0.30	.....	See 7N7	.....	Characteristics Same as Type 7N7.								14N7	
14Q7	Lock-in	Heptode	8-AL	Cathode	12.6	0.15	0.2m	9.0	9.0	Characteristics Same as Type 7Q7.								14Q7	
14R7	Lock-in	Duodi. Pent.	8-AE	Cathode	12.6	0.15	.004m	5.6	5.3	Characteristics Same as Type 7R7.								14R7	
14S7	Lock-in	Tri. Heptode	8-BL	Cathode	12.6	0.15	.03m	5.0	8.0	Characteristics Same as Type 7S7.								14S7	
14W7	Lock-in	Pentode	8-BJ	Cathode	12.6	0.225	.0025m	9.5	7.0	Characteristics Same as Type 7W7, Except Capacitances.								14W7	
14Y4	Lock-in	Duodiode	5-AB	Cathode	12.6	0.30	.....	.....	.....	Characteristics Same as Type 7Y4.								14Y4	
15	ST-12	Pentode	5-F	Cathode	2.0	0.22	.01m	2.4*	8.0*	67.5 1.5 67.5 1.85 0.3 830,000 710 450 135 1.5 67.5 1.85 0.3 800,000 750 600								15	
18	ST-14	Pentode	6-B	Cathode	14.0	0.30	.....	.....	.....	Characteristics Same as Type 6F6G.								18	
19	ST-12	Duotriode	6-C	Filament	2.0	0.26	.....	.....	.....	Characteristics Same as Type 6F6G.								19	
20	T-8	Triode	4-D	Filament	3.3	0.132	.....	.....	.....	Characteristics Same as Type 6F6G.								20	
22	ST-14	Tetrode	4-K	Filament	3.3	0.135	.02m	4.0*	10.0*	Characteristics Same as Type 6F6G.								22	
24A, 24S	ST-14	Tetrode	5-E	Cathode	2.5	1.75	.007m	5.3	10.5	Characteristics Same as Type 6F6G.								24A, 24S	
25A6	Metal	Pentode	7-S	Cathode	25.0	0.30	.....	.....	.....	Characteristics Same as Type 25A6GT.								25A6	
25A6GT	GT	Pentode	7-S	Cathode	25.0	0.30	.....	.....	.....	Characteristics Same as Type 25A6GT.								25A6GT	
25A7GT	GT	Diode Pent.	8-F	Cathode	25.0	0.30	.....	.....	.....	Characteristics Same as Type 25A6GT.								25A7GT	
25AC5GT	GT	Triode	6-Q	Cathode	25.0	0.30	.....	.....	.....	Characteristics Same as Type 25A6GT.								25AC5GT	
25B5	ST-12	Duotriode	6-D	Cathode	25.0	0.30	.....	.....	.....	Characteristics Same as Type 25N6G.								25B5	
25B6G	ST-14	Pentode	7-S	Cathode	25.0	0.30	.....	.....	.....	Characteristics Same as Type 25N6G.								25B6G	
25B8GT	GT	Pent.-Triode	8-T	Cathode	25.0	0.15	.02	5.5	10.0	Characteristics Same as Type 676G.								25B8GT	
25C6G	ST-14	Beam Amp.	7-AC	Cathode	25.0	0.30	.....	.....	.....	Characteristics Same as Type 676G.								25C6G	
25L6	Metal	Beam Amp.	7-AC	Cathode	25.0	0.30	0.3	16.0	13.5	Characteristics Same as Type 25L6GT.								25L6	
25L6GT	GT	Beam Amp.	7-AC	Cathode	25.0	0.30	0.8*	15.0*	10.0*	Characteristics Same as Type 25L6GT.								25L6GT	

(1) Values are given shielded unless marked with (\*).  
 (2) Converter tube capacitances given are signal grid to plate.  
 (3) RF Input; Mixer Output.  
 m maximum.  
 \*Applied through 250,000 ohms.  
 †Per Tube or Section—No Signal.  
 ‡Plate and Target Supply Voltage.  
 §With Average Power Input of 320 Mw. Grid to Grid.  
 ¶Pentode Operation.  
 ††Applied through 200,000 ohms.  
 ‡‡Applied through 20,000 ohms.  
 §§Plate to Plate.  
 ¶¶Applied through 20,000 ohms.  
 †††Applied through 200,000 ohms.  
 ‡‡‡Approximate.  
 ††††Conversion Conductance.  
 †††††50 Volts RMS applied to two grids.

# PENNSYLVANIA TUBES — AVERAGE CHARACTERISTICS

Type	Construction		Emitter		Note (1) Capacitances in $\mu\mu\text{f}$ .			Use	Plates Volts	Negative Grid Volts	Screen Volts	Plate Current Ma.	Screen Current Ma.	Plate Resistance Ohms	Micromhos Mutual Conductance	Amplification Factor	Ohms Load for Stated Power Output	Undistorted Power Output Milliwatts	Type
	Style	Class	Basing Diag.	Type	Volts	Amps	Csp.												
95N6G	ST-12	Duodiode	7-W	Cathode	25.0	0.30					110	0	110	45	7.0	Direct	9,200	2,000	95N6G
95Y5	ST-12	Duodiode	6-E	Cathode	25.0	0.30					180	0	100	46	5.8	Coupled	9,300	3,800	95Y5
95Z5	ST-12	Duodiode	6-E	Cathode	25.0	0.30					235	0	100	46	5.8	Coupled	9,300	3,800	95Z5
95Z6	GT	Metal	7-Q	Cathode	25.0	0.30					235	0	100	46	5.8	Coupled	9,300	3,800	95Z6
95Z6GT	GT	Duodiode	7-Q	Cathode	25.0	0.30					235	0	100	46	5.8	Coupled	9,300	3,800	95Z6GT
26	ST-14	Triode	4-D	Filament	1.5	1.05	8.1*	2.8*	2.5*		90	7.0	2.9	2.0			8,900	935	26
26A7GT	GT	Duo. Beam Amplifier	8-BU	Cathode	26.5	0.6	1.2*	16.0*	13.0*		135	10.0	5.5	30.0			7,600	1,100	26A7GT
27, 27S	ST-12	Triode	5-A	Cathode	2.5	1.75	3.3*	3.9*	2.3*		90	6.0	3.0	20.0			10,000	900	27, 27S
28D7	Lock-In	Duo. Beam Amplifier	8-B	Cathode	28.0	0.40					135	3.5	4.7	5.0			9,000	1,000	28D7
28Z5	Lock-In	Double Diode	6-BJ	Cathode	28.0	0.24					180	3.5	5.2	5.2			9,000	1,000	28Z5
30	ST-12	Triode	4-D	Filament	2.0	0.06	6.0*	3.0*	2.1*		90	4.5	2.5	60			11,000	850	30
31	ST-12	Triode	4-D	Filament	2.0	0.13					135	3.5	3.1	40			10,300	900	31
32	ST-14	Tetrode	4-K	Filament	2.0	0.06	.015m	5.3*	10.5*		135	22.5	8.0	12.3			4,100	925	32
32L7GT	GT	Diode-Beam Amplifier	8-Z	Cathode	32.5	0.30					180	3.0	67.5	9.7			400,000	560	32L7GT
33	ST-14	Pentode	5-K	Filament	2.0	0.26	1.0*	8.0*	12.0*		180	18.0	18.0	22.0			55,000	1,450	33
34	ST-14	Pentode	4-M	Filament	2.0	0.06	.015m	6.0*	11.0*		135	3.0	67.5	9.7			400,000	560	34
35, 51, 35S, 51S	ST-14	Tetrode	5-E	Cathode	2.5	1.75	.007m	5.3*	10.5*		180	3.0	90.0	6.3			300,000	1,020	35, 51, 35S, 51S
35A5	Lock-In	Beam Amp.	6-AA	Cathode	35.0	0.15					250	3.0	90.0	6.5			400,000	5,900	35A5
35L6GT	GT	Beam Amp.	7-AC	Cathode	35.0	0.15	0.8*	13.0*	9.5*		250	1.0	45 to 67.5	0.5			400,000	1,050	35L6GT
35Y4	Lock-In	Diode	5-AL	Cathode	35.0	0.15					90	8.0	110	41.0			15,000	6,000	35Y4
35Z3	Lock-In	Diode	4-Z	Cathode	35.0	0.15					110	7.5	110	40.0			15,000	6,000	35Z3
35Z4GT	GT	Diode	5-AA	Cathode	35.0	0.15					135	13.5	135	14.5			50,000	1,450	35Z4GT
35Z5GT	GT	Diode	6-AD	Cathode	35.0	0.15					180	3.0	67.5	9.7			400,000	560	35Z5GT
35Z6G	ST-14	Duodiode	7-Q	Cathode	35.0	0.30					180	3.0	67.5	9.8			400,000	600	35Z6G
36	ST-12	Tetrode	5-E	Cathode	6.3	0.30	.007m	3.7*	9.2*		110	7.5	110	40.0			14,000	5,800	36
37	ST-12	Triode	5-A	Cathode	6.3	0.30	2.0*	3.5*	2.9*		135	1.5	67.5	2.8			8,400	1,100	37
38	ST-12	Pentode	5-F	Cathode	6.3	0.30	0.3*	3.5*	7.5*		180	3.0	90.0	3.1			30,000	1,050	38
39/44	ST-12	Pentode	5-F	Cathode	6.3	0.30	.007m	3.5*	10.0*		250	6.0	20 to 25	3.2			110,000	1,080	39/44
40	ST-14	Triode	4-D	Filament	5.0	0.25	8.0	2.8	2.2		90	3.0	90.0	5.6			375,000	960	40
40Z5/45Z5GT	GT	Diode	6-AD	Cathode	45.0	0.15					135	1.5	67.5	0.2			150,000	900	40Z5/45Z5GT
41	ST-12	Pentode	6-B	Cathode	6.3	0.40					180	18.0	14.0	1.2			100,000	1,200	41
42	ST-14	Pentode	6-B	Cathode	6.3	0.65					250	3.0	90.0	3.8			100,000	1,200	42
43	ST-14	Pentode	6-B	Cathode	25.0	0.30					250	1.0	67.5	1.4			1 Meg.	1,050	43

# PENNSYLVANIA TUBES — AVERAGE CHARACTERISTICS

Type	Construction		Emitter			Note (1) (2) Capacitances in $\mu\mu\text{f}$ .			Use	Plate Volts	Screen Volts	Plate Current Ma.	Screen Current Ma.	Plate Resistance Ohms	Microhms Mutual Conductance	Amplification Factor	Ohms Load for Stated Power Output	Undis- orted Power Output Milli- watts	Type									
	Style	Class	Beating Diag.	Type	Volts	Amps	Cgp.	Cin.												Cout.								
45	ST-14	Triode	4-D	Filament	2.5	1.50	7.0*	4.0*	3.0*	180 250 275	31.0 50.0 56.0	31.0 34.0 36.0	1,650 1,910 1,700	9,125 9,175 2,050	3.5 3.5 3.5	9,700 3,900 4,600	830 1,600 2,000	45										
45Z3	Miniature	Diode	5-AM	Cathode	45.0	0.075												46										
46	ST-16	Dual Grid Triode	5-C	Filament	2.5	1.75				117 A-C Volts Per Plate, RMS, 65 Ma. Output Current.	33.0 30.0 0.0	33.0 30.0 0.0	2,380 (Class B Operation) (Class B Operation)	2,350 (Class B Operation) (Class B Operation)	5.6	6,400 5,200* 5,800*	1,250 16,000 20,000	46										
47	ST-16	Pentode	5-B	Filament	2.5	1.75	1.2*	8.6*	1.3*		16.5	25.0	60,000	2,500	150	7,000	2,700	47										
48	ST-16	Tetrode	6-A	Cathode	30.0	0.40					95.0 92.5	12.0 12.0	4,000 11,000	3,900 3,900	15.6 43	1,500 1,500	2,000 3,000	48										
49	ST-14	Dual Grid Triode	5-C	Filament	2.0	0.12					31.0 29.0	6.0	4,750 (Two Tubes Class B Operation)	2,000 1,900	4.7	11,000 12,000*	170 3,500	49										
50	ST-16	Triode	4-D	Filament	7.5	1.95	7.1*	4.9*	3.4*		54.0 35.0 45.0 55.0 84.0	35.0 45.0 55.0	2,000 1,900 1,800 1,800	1,900 2,000 2,100	3.8 3.8 3.8	4,600 4,700 3,400 4,350	1,600 2,400 4,600	50										
50A5	Lock-in	Beam Amp.	6-AA	Cathode	50.0	0.15					110 200	49.0 1.5	10,000* 35,000*	8,200 8,250		2,000* 3,000	2,100 4,300	50A5										
50C6G	ST-14	Beam Amp.	7-AC	Cathode	50.0	0.15				Characteristics Same as Type 6Y6G.																		
50L6GT	GT	Beam Amp.	7-AC	Cathode	50.0	0.15				Characteristics Same as Type 25L6GT.																		
50Y6GT	GT	Duodiode	7-Q	Cathode	50.0	0.15				Characteristics Same as Type 25Y6GT.																		
50Z7G	ST-12	Duodiode	8-AN	Cathode	50.0	0.15				117 A-C Volts Per Plate, RMS, 65 Ma. Output Current Per Plate. With Current passing thru Panel Lamp Section.																		
52	ST-14	Dual Grid Triode	5-C	Filament	6.3	0.30					0	43	G. to P	1,750	3,000	5.2	2,000*	1,500	52									
53	ST-14	Duotriode	7-B	Cathode	2.5	2.0				Characteristics Same as Type 6A6.																		
55, 55S	ST-12	Duodiode-Tri.	6-G	Cathode	2.5	1.0	1.5*	1.5*	4.3*	Characteristics Same as Type 6V7G.																		
56, 56S	ST-12	Triode	5-A	Cathode	2.5	1.0	2.8*	3.5*	2.5*	250	13.5	5.0	9,500	1,450	13.8				53									
56AS	ST-12	Triode	5-A	Cathode	6.3	0.40				Characteristics Same as Type 56.																		
57, 57S	ST-12	Pentode	6-F	Cathode	2.5	1.00	.007m	5.0*	6.5*	100	3.0	2.0	1 Meg.	1,185					56AS									
57AS	ST-12	Pentode	6-F	Cathode	6.3	0.40				250	3.0	2.0	1 Meg.	1,225					57, 57S									
58, 58S	ST-12	Pentode	6-F	Cathode	2.5	1.00	.007m	4.7*	6.0*	100	3.0	2.0	1 Meg.	1,225					57AS									
58AS	ST-12	Pentode	6-F	Cathode	6.3	0.40				Characteristics Same as Type 57.																		
59	ST-16	Pentode	7-A	Cathode	2.5	2.0				Characteristics Same as Type 58.																		
70A7GT	GT	Diode-Beam Amplifier	8-AB	Cathode	70.0	0.15				125 A-C Volts Per Plate, RMS, 60 Ma. Output Current.	110	7.5	110	3	5,800	2,500	1,500	70A7GT										
70L7GT	GT	Diode-Beam Amplifier	8-AA	Cathode	70.0	0.15				117 A-C Volts, RMS, 70 Ma. Output Current.	110	7.5	110	3.0	7,500	2,000	1,800	70L7GT										
71A	ST-14	Triode	4-D	Filament	5.0	0.25	7.5*	3.2*	2.9*	90	16.5	10.0	2,170	1,400	3.0	3,000	1,25	71A										
75, 75S	ST-12	Duodiode-Tri.	6-G	Cathode	6.3	0.30	1.7*	1.7*	3.8*	135	27.0	17.3	1,820	1,450	3.0	3,000	400	75, 75S										
76	ST-12	Triode	5-A	Cathode	6.3	0.30	2.8*	3.5*	2.5*	180	40.5	20.0	1,750	1,700	3.0	4,800	790	76										
77	ST-12	Pentode	6-F	Cathode	6.3	0.30	.007m	4.7*	11.0*	250	2.0	0.9	91,000	1,100	100			77										
78	ST-12	Pentode	6-F	Cathode	6.3	0.30	.007m	4.5*	11.0*	250	3.0	1.3	300,000*	1,975				78										
79	ST-12	Duotriode	6-H	Cathode	6.3	0.60				180	3.0	7.5	800,000*	1,450				79										
80	ST-14	Duodiode	4-C	Filament	5.0	2.00				350 A-C Volts Per Plate, RMS, 125 Ma. Output Current.	110	10.5	15,000	7,500				80										
81	ST-16	Diode	4-B	Filament	7.5	1.25				500 A-C Volts Per Plate, RMS, 125 Ma. Output Current.	110	10.5	15,000	7,500				81										
82	ST-14	Duodiode	4-C	Filament	2.5	3.0				700 A-C Volts Per Plate, RMS, 85 Ma. Output Current.	110	10.5	15,000	7,500				82										
83	ST-16	Duodiode	4-C	Filament	5.0	3.00				450 A-C Volts Per Plate, RMS, 115 Ma. Output Current.	110	10.5	15,000	7,500				83										
83V	ST-14	Duodiode	4-AD	Cathode	5.0	2.00				450 A-C Volts Per Plate, RMS, 115 Ma. Output Current.	110	10.5	15,000	7,500				83V										
84, 6Z4	ST-12	Duodiode	5-D	Cathode	6.3	0.50				375 A-C Volts Per Plate, RMS, 175 Ma. Output Current.	110	10.5	15,000	7,500				84, 6Z4										
85	ST-12	Duodiode-Tri.	6-G	Cathode	6.3	0.30	1.5*	1.5*	4.3*	325 A-C Volts Per Plate, RMS, 175 Ma. Output Current.	110	10.5	15,000	7,500				85										
85AS	ST-12	Duodiode-Tri.	6-G	Cathode	6.3	0.30				Characteristics Same as Type 6V7G.																		

(1) Values are given shielded unless marked with (\*).  
 (2) Converter tube capacitances given are signal grid to plate/  
 RF Input; Mixer Output.  
 m maximum.  
 \*Applied through 250,000 ohms.  
 †Per Tube or Section—No Signal.  
 ‡With Average Power Input of 320 Mw. Grid to Grid.  
 §Plate to Plate.  
 ¶Triode Operation.  
 ††Applied through 200,000 ohms.  
 †††For two tubes with 40 volts RMS applied to each grid.  
 ††††Approximate.  
 †††††Conversion Conductance.  
 †††††150 Volts RMS applied to two grids.












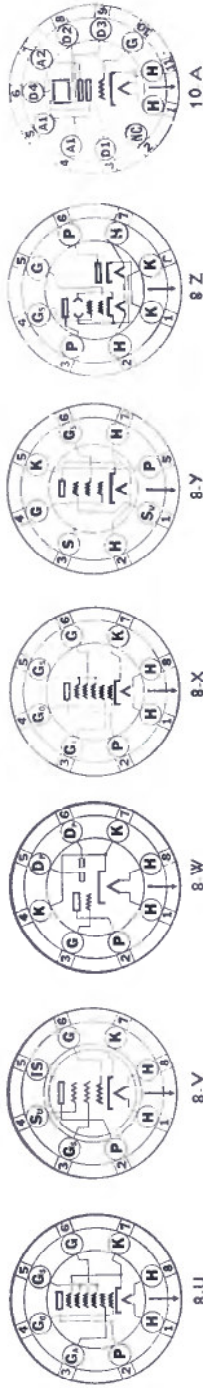

## SYLVANIA PANEL LAMP CHARACTERISTICS

Type No.	Circuit Volts	Design		Bead Color	Bulb Style	Miniature Base	Usual Service	Type No.	Circuit Volts	Design		Bead Color	Bulb Style	Miniature Base	Usual Service	Type No.
		Volts	Amp.							Volts	Amp.					
S40	6-8	6.3	0.15	Brown	T-3 $\frac{1}{4}$	Screw	Radio Dials	S40	2.0	2.0	0.06	Pink	T-3 $\frac{1}{4}$	Bayonet	Battery Set Dials	*S49
S41	2.5	2.5	0.50	White	T-3 $\frac{1}{4}$	Screw	Radio Dials	S41	6-8	7.5	0.20	White	G-3 $\frac{1}{2}$	Screw	Auto Sets, Flash Lights	S50
S42	3.2	3.2	0.35	Green	T-3 $\frac{1}{4}$	Screw	Radio Dials	S42	6-8	7.5	0.20	White	G-3 $\frac{1}{2}$	Bayonet	Auto Sets, Auto Panels	S51
S43	2.5	2.5	0.50	White	T-3 $\frac{1}{4}$	Bayonet	Radio Dials and Tuning Meters	S43	6-8	6.5	0.40	White	G-4 $\frac{1}{2}$	Bayonet	Auto Sets, Parking Lights	S55
S44	6-8	6.3	0.25	Blue	T-3 $\frac{1}{4}$	Bayonet	Radio Dials and Tuning Meters	S44	2.9	2.9	0.17	White	T-3 $\frac{1}{4}$	Screw	Radio Dials	S999
S45	3.2	3.2	0.35	White	T-3 $\frac{1}{4}$	Bayonet	Radio Dials	S45	2.9	2.9	0.17	White	T-3 $\frac{1}{4}$	Bayonet	Radio Dials, Coin Machines	S999A
S46	6-8	6.3	0.25	Blue	T-3 $\frac{1}{4}$	Screw	Radio Dials and Tuning Meters	S46	18.0	18.0	0.25	Brown	G-5	Screw	Coin Machines	S1455
*S47	6-9	6.3	0.15	Brown	T-3 $\frac{1}{4}$	Bayonet	Radio Dials	*S47	18.0	18.0	0.25	Brown	G-5	Bayonet	Coin Machines	S1455A
S48	2.0	2.0	0.06	Pink	T-3 $\frac{1}{4}$	Screw	Battery Set Dials	S48								

\*Sylvania Types S47 and S49 are interchangeable with Types 40A and 49A, respectively, in other brands.