

Universal Serial Bus Power Controller

FEATURES

- Fully USB Compliant
- Support Four 5V Peripherals and One USB 3.3V Controller
- Separate Power Enables
- 500mA Current Limiting per Channel
- Separate Open Drain Fault Indicator for Each Channel
- 3.3V Output for USB Controller
- Available in 20 Pin DIP


DESCRIPTION

The UCC38531 Power Controller is designed to provide a self powered USB hub with a local 3.3V regulated voltage and four 5V regulated voltages for USB ports. Each of the 5V output ports is individually enabled for optimal port control. Each port also provides an overcurrent fault signal indicating that the port has exceeded a 500mA current limit. The 3.3V linear regulator is used to power the local USB microcontroller. This regulator is protected with a 100mA current limit.

The UCC38531 is configured by connecting the VREG to a regulated 5.5V 2A source.

The 20-pin DIP package is protected by internal over-temperature shutdown mechanism, which disables the outputs should the internal junction temperature exceed 150°C.


APPLICATION AND BLOCK DIAGRAM

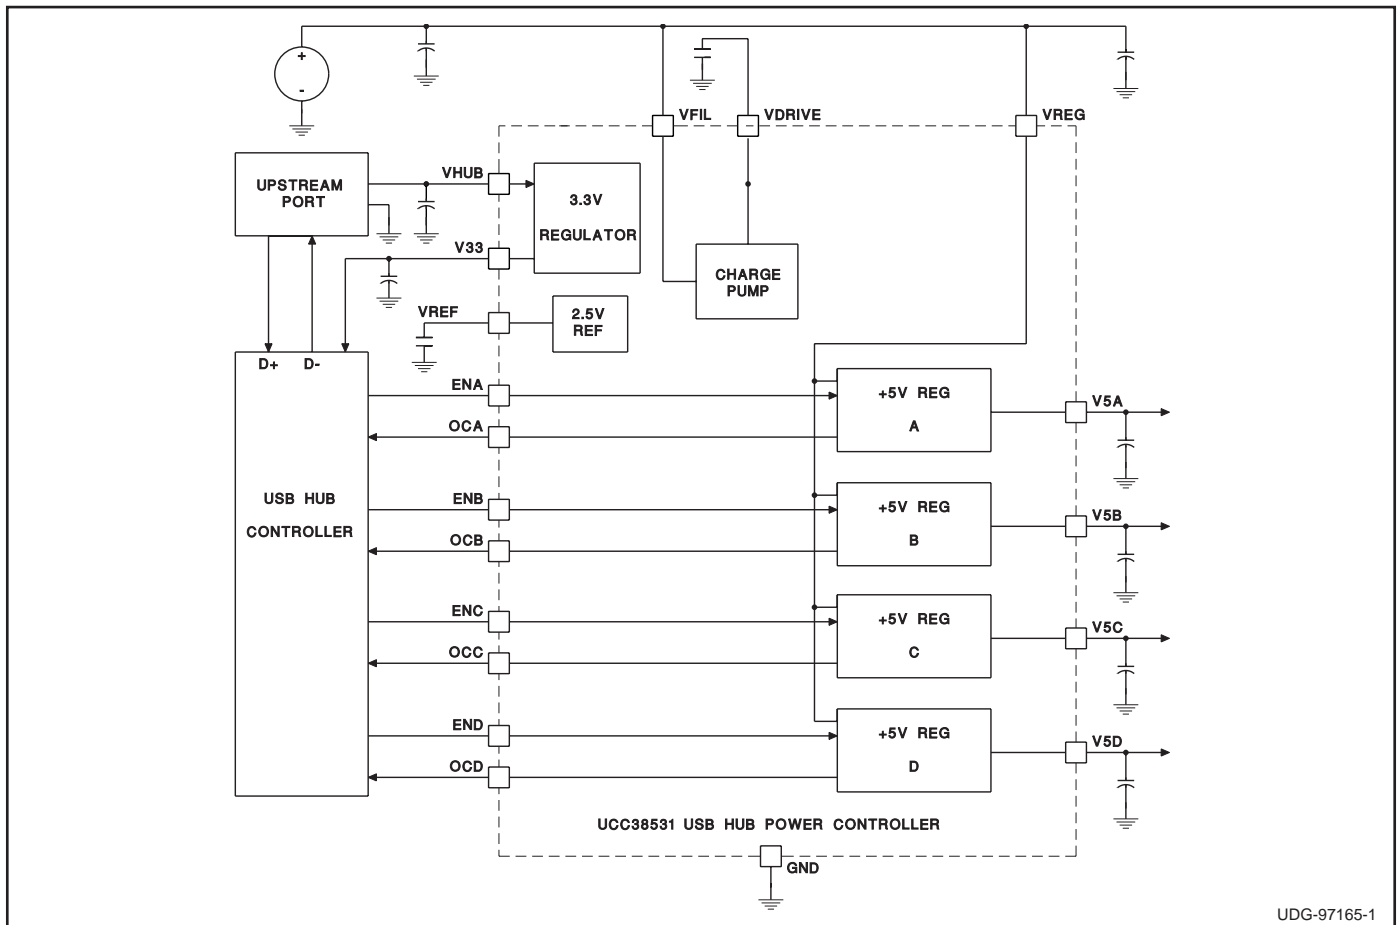

ABSOLUTE MAXIMUM RATINGS

VFIL 9V
VCON Supply Voltage 9V
Logic Inputs (ENA-D)
 Maximum Forced Voltage -0.3V to 7V
 Maximum Forced Current ±1mA
V33
 Maximum Forced Voltage 5V
 Maximum Current 200mA
V5A-D
 Maximum Voltage 9V
 Maximum Current 750mA
Storage Temperature -65°C to +150°C
Junction Temperature -55°C to +150°C
Lead Temperature (Soldering, 10 sec.) +300°C
*Unless otherwise indicated, voltages are reference to ground.
Pulsed is defined as a less than 10% duty cycle with a maximum
duration of 500µS. Currents are positive into, negative out of the
specified terminal. All voltages are with respect to ground. Con-
sult Packaging Section of Databook for thermal limitations and
considerations of packages.*

CONNECTION DIAGRAM

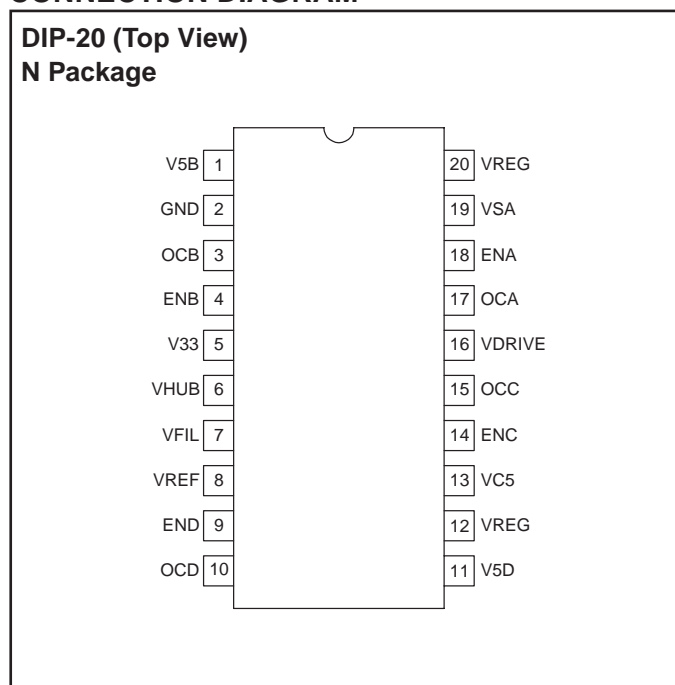

ELECTRICAL CHARACTERISTICS Unless otherwise specified, T_J = 0°C to 125°C for the UCC38531. VFIL = 6.5V, VHUB = 5V. T_A = T_J.

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNITS
Input Supply Currents					
VHUB Supply Current	No External Load on V33		1	3	mA
VFIL Supply Current			1	3	mA
Reference					
VREF Voltage	Over Temperature	2.35	2.5	2.65	V
Line Regulation	VHUB = 4.5V to 9V		3	10	mV
3.3V Regulator					
V33 Voltage	T _J = 25°C, I _{LOAD} = 10mA	3.2	3.3	3.4	V
	0mA to 100mA, 0°C to 125°C, VHUB = 4.5V to 9V	3.165	3.3	3.435	V
Short Circuit Current Limit	VHUB = 6V, Output shorted to Ground	100	120	150	mA
5V Regulator					
V5A-D Voltage	T _J = 25°C, I _{LOAD} = 250mA, VREG = 5.5V	4.85	5	5.15	V
	0mA to 500mA, 0°C to 125°C	4.8	5	5.2	V
Short Circuit Current Limit	VREG = 5.5V, Output Shorted to Ground	500	600	750	mA
Charge Pump					
Quiescent Output Voltage	T _J = 25°C, VFIL = 6V, ENA-D = 5V, ENHUB = 5V	11	11.45	12	V
	0°C to 125°C, VFIL = 6V	10.5	11.45	12	V
Output Impedance			9	15	kΩ
Enable Inputs					
ENA-D Inputs - Guaranteed Low				0.7	V
ENA-D Inputs - Guaranteed High		3			V
Overcurrent Signals					
Active Sink Current	I _{OCX} = 100µA		140	500	mV

PIN DESCRIPTIONS

ENA-D: Separate enables pins for each of the four 5V supplies.

GND: All voltages are measured with respect to this pin. Bypass capacitors should be connected to GND as close to this pin as possible.

OCA-D: Open drain overcurrent indicator. OCA-D can be wire OR'ed by the user to create a single overcurrent indicator.

V5A-D: 5V regulated output with enable, 500mA (minimum) current limit, and overcurrent indicator.

V33: 3.3V regulator output. Current limit is 100mA minimum.

VDRIVE: Internal charge pump voltage is brought out

for external decoupling. Nominal voltage is between 11V and 13V. No external loading permitting. Decouple with at least 0.001 μ F capacitor.

VFIL: Bias supply for all four of the 5V regulators. VFIL voltage must be between 6V and 9V.

VHUB: Supply for the 3.3V USB controller power supply and bandgap reference.

VREF: Internal 2.5V reference is brought out for external decoupling only. Decouple with 0.01 μ F capacitor.

VREG: Input supply for all four 5V regulators. 2 pins supply up to a total of 2.5A to the four 5V bus voltages (V5A, V5B, V5C, V5D). Can be tied directly to VFIL.