


## Specifications and Selection Charts

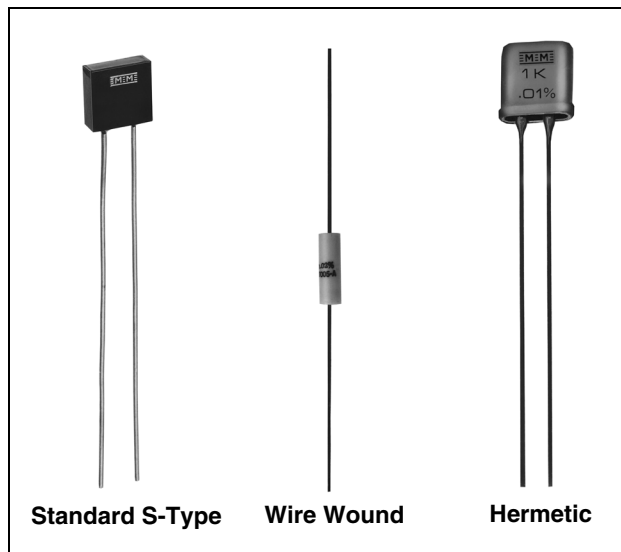

Fixed resistors have two primary uses in strain gage circuits: shunt calibration of strain-measuring instrumentation, and bridge completion. For shunt calibration, a fixed resistor is temporarily shunted across a bridge arm to produce a known resistance change in the bridge circuit. The resulting instrument indication is then compared to the calculated strain corresponding to the resistance change. For bridge-completion applications, a fixed resistor may be used in the adjacent arm of the bridge to complete the external half-bridge circuit when a single strain gage is connected in a quarter-bridge arrangement.

In each of these applications, the accuracy of the strain measurement is affected, directly or indirectly, by the accuracy and stability of the fixed resistor(s) used in the circuit. It is important, therefore, that only precision, high-stability resistors be selected for these purposes.

PRECISION RESISTOR SPECIFICATIONS		
Standard S-Type (Prefix "S")	Wire-Wound (Prefix "W")	Hermetic (Prefix "H")
<p>Noted for long-term stability and low temperature-coefficient-of-resistance. Used for shunt calibration (below 100,000Ω) and bridge completion.</p> <p><b>Size:</b> 0.295 x 0.320 x 0.10in [7.5 x 8.1 x 2.5mm].</p> <p><b>Temperature Coefficient:</b> ±0.6 ppm/°F; +32° to +140°F [±1 ppm/°C; 0° to +60°C].</p> <p><b>Stability:</b> 25 ppm/year max. drift.</p> <p><b>Wattage:</b> 0.3 at +75°F [+24°C].</p> <p><b>Leadwires:</b> 22 AWG tinned copper.</p> <p><b>Construction:</b> Encapsulated in epoxy case for use in normal laboratory environment.</p>	<p>For high-value shunt resistance requirements (above 100,000Ω).</p> <p><b>Size:</b> 0.25 in dia. x 0.75in long [6.4 x 19.1mm].</p> <p><b>Temperature Coefficient:</b> ±12 ppm/°F; +32° to +140°F [±20 ppm/°C; 0° to +60°C].</p> <p><b>Stability:</b> 30 ppm/year max. drift.</p> <p><b>Wattage:</b> 0.3 at +75°F [+24°C].</p> <p><b>Leadwires:</b> 20 AWG tinned copper.</p> <p><b>Construction:</b> Noninductive windings. Encapsulated for use in normal laboratory environment.</p>	<p>Best long-term stability under adverse environmental conditions. Premium resistors used for bridge completion where highest accuracy and stability are required.</p> <p><b>Size:</b> 0.4 in square x 0.15in thick [10 x 4mm].</p> <p><b>Temperature Coefficient:</b> ±0.6 ppm/°F; +32° to +140°F [±1 ppm/°C; 0° to +60°C].</p> <p><b>Stability:</b> 5 ppm/year max. drift.</p> <p><b>Wattage:</b> 0.25 at +75°F [+24°C].</p> <p><b>Leadwires:</b> 22 AWG tinned copper.</p> <p><b>Construction:</b> Hermetically sealed in metal case. Excellent long-term stability.</p>

## Specifications and Selection Charts

<b>SHUNT-CALIBRATION RESISTORS</b>				
	Order No.	Resistance in Ohms	Tolerance in %	Equivalent Microstrain
<b>For 120Ω Gage Circuit</b>	W-599880-02	599 880	±0.02	100
	W-119880-02	119 880	±0.02	500
	S-59880-01	59 880	±0.01	1000
	S-29880-01	29 880	±0.01	2000
	S-19880-01	19 880	±0.01	3000
	S-14880-01	14 880	±0.01	4000
	S-11880-01	11 880	±0.01	5000
	S-5880-01	5 880	±0.01	10,000
<b>For 350Ω Gage Circuit</b>	W-349650-02	349 650	±0.02	500
	W-174650-02	174 650	±0.02	1000
	S-87150-01	87 150	±0.01	2000
	S-57983-01	57 983	±0.01	3000
	S-43400-01	43 400	±0.01	4000
	S-34650-01	34 650	±0.01	5000
	S-17150-01	17 150	±0.01	10,000
<b>For 1000Ω Gage Circuit</b>	W-999000-02	999 000	±0.02	500
	W-499000-02	499 000	±0.02	1000
	W-249000-02	249 000	±0.02	2000
	W-165666-02	165 666	±0.02	3000
	W-124000-02	124 000	±0.02	4000
	S-99000-01	99 000	±0.01	5000
	S-49000-01	49 000	±0.01	10,000

The "Equivalent Microstrain" column shows the true compression strain simulated by shunting each calibration resistor across an active strain gage arm of the exact indicated resistance, based on a circuit gage factor setting of 2.000.

<b>BRIDGE COMPLETION RESISTORS</b>	
Circuit and Bridge Completion Tolerance ±0.01%	
Order No.	Resistance in Ohms
S-50-01	50
S-60-01	60
S-100-01	100
S-120-01	120
S-175-01	175
S-240-01	240
S-350-01	350
S-500-01	500
S-1000-01	1000
S-2000-01	2000
S-5000-01	5000
H-100-01	100
H-120-01	120
H-350-01	350
H-1000-01	1000

**Note:** Shunt-calibration resistors are chosen to accurately simulate resistance change in a strain gage subjected to specified levels of compressive strain. Strain indicators generally produce a linear output with a fully active half-bridge or full-bridge input circuit, and will be slightly in error when a single active arm is used. The same nonlinearity occurs whether the gage is actually strained in compression or simulated by shunting the gage with the corresponding calibration resistor. See Tech Note TN-514, "Shunt Calibration of Strain Gage Instrumentation."

## Disclaimer

All product specifications and data are subject to change without notice.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay Precision Group"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay Precision Group disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay Precision Group's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay Precision Group.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay Precision Group products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay Precision Group for any damages arising or resulting from such use or sale. Please contact authorized Vishay Precision Group personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.