



AMBIENT LIGHT SENSORS

OPTOELECTRONICS

PRODUCT OVERVIEW





AMBIENT LIGHT SENSORS

Ambient light sensors are used to detect light or brightness in a manner similar to the human eye. They are most commonly found in industrial lighting, consumer electronics, and automotive systems, where they allow settings to be adjusted automatically in response to changing ambient light conditions. By turning on, turning off, or adjusting features, ambient light sensors can conserve battery power or provide extra safety while eliminating the need for manual adjustments.

Illuminance



Light Source	Illuminance (Lux)
Street Light	20
Dusk	1 to 100
Living Room	50 to 200
Office	200 to 600
Operating Room	5 k to 10 k
Cloudy	2 k to 10 k
Hazy	25 k to 50 k
Bright Sun	50 k to 100 k

Illuminance is the measure of the intensity of light incident on a surface and can be correlated to the brightness perceived by the human eye. In the visible range, it is measured in units called "lux." Light sources with the same lux measurement appear to be equally bright.

In the diagram below, the incandescent light and sunlight have been scaled to have the same lux measurement. In the infrared region, the intensity of the incandescent light is significantly higher. A standard silicon photodetector is much more sensitive to infrared light than visible light. Using it to measure ambient light will result in serious deviations between the lux measurements of different light sources and human-eye perception. Using Vishay's ambient light sensors will solve this problem because they are most sensitive to the visible part of the spectrum.

Spectral Sensitivity

The human eye can see light with wavelengths from 380 nm to 780 nm. Vishay's ambient light sensors closely match this range of sensitivity.

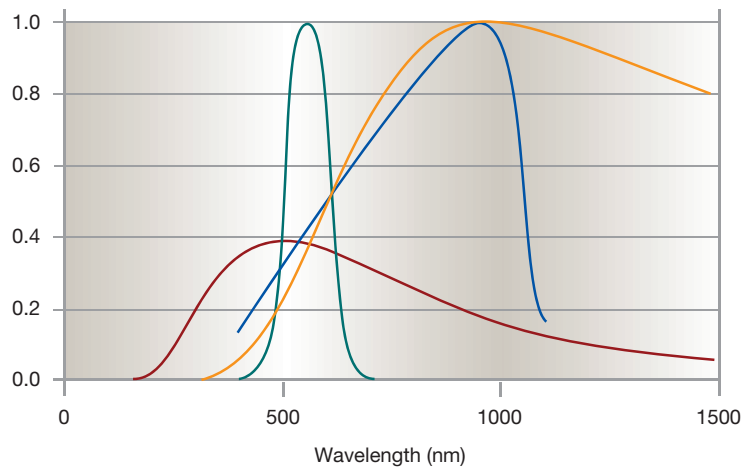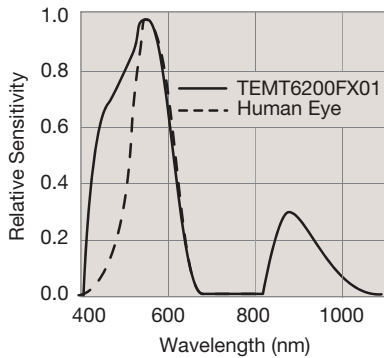


Linearity

The response of an ambient light sensor should be linear. Vishay's ambient light sensors are linear from 10 lux to 100 klx. Photodiode output typically requires amplification while phototransistor output may not.

Output Variability

Vishay offers phototransistor- and photodiode-based ambient light sensors. For a given irradiance, phototransistors may show lot-to-lot variability of the output current caused by variability of the photosensitivity and gain. In most applications, this is not a problem. The lot-to-lot variability of photodiodes is significantly lower because it is caused only by the variability of the photosensitivity.

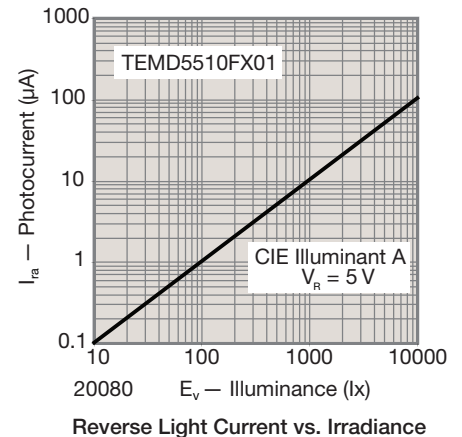


Part Number	Mounting	Size (mm)	Peak Wavelength (nm)	Bandwidth (nm)	Angle of Half Sensitivity (±*)	Light Current ¹ Standard A (µA)	Light Current ² Fluorescent (µA)
Photodiode Output							
TEMD6010FX01	SMD	2.0 x 4.0 x 1.0	540	430 - 610	60	0.04	0.03
TEMD5510FX01	SMD	4.2 x 5.0 x 1.1	540	430 - 610	65	1.00	0.70
TEMD6200FX01	SMD	1.2 x 2.0 x 0.85	540	430 - 610	60	0.04	0.03
BPW21R	Leaded	TO5 - 8 mm	565	420 - 675	50	0.9	0.75
Phototransistor Output							
TEMT6200FX01	SMD	1.2 x 2.0 x 0.85	550	450 - 610	60	12	7
TEMT6000X01	SMD	2.0 x 4.0 x 1.0	570	430 - 800	60	50	21
TEPT5700	Leaded	5 mm, flat top	570	430 - 800	50	75	31
TEPT5600	Leaded	5 mm	570	430 - 800	20	350	145
TEPT4400	Leaded	3 mm	570	430 - 800	30	200	83

¹ E_v = 100 lux, V_{CE} = 5 V, CIE Illuminant A, typical

² E_v = 100 lux, V_{CE} = 5 V, e.g., Sylvania color abbrev. D830, typical

F	Part numbers with an F contain an infrared filtering epoxy to further improve the ambient light sensing performance	X01	Part numbers with an X01 are qualified to the AEC Q101 standard and support operating temperatures from - 40 °C to + 100 °C
---	---	-----	---

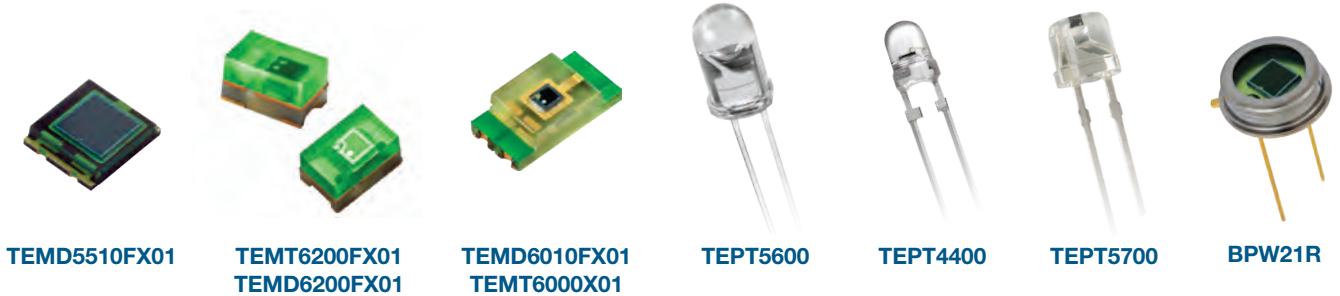

Development Kit

Vishay's ambient light sensor evaluation kits allow developers to quickly and easily evaluate the ambient light sensor. The kit includes:

- Sensor board with selected sensor, ADC and I²C interface
- Adapter board converts the I²C to RS-232
- Microsoft® Windows®-based software
- Programmable sampling rate and gain
- Displays measured illuminance in Lux, µA, voltage, decimal, and hexadecimal



Development Kit Part Numbers
TEMT6000DevKit
TEMT6200FDevKit
TEPT4400DevKit
TEPT5700DevKit
TEPT5600DevKit

DISCLAIMER All product specifications and data are subject to change without notice. Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product. Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications. Product names and markings noted herein may be trademarks of their respective owners.

SEMICONDUCTORS:

Rectifiers • High-Power Diodes and Thyristors • Small-Signal Diodes • Zener and Suppressor Diodes
• FETs • Optoelectronics • ICs • Modules

PASSIVE COMPONENTS:

Resistive Products • Magnetics • Capacitors



One of the World's Largest Manufacturers of
Discrete Semiconductors and Passive Components

WORLDWIDE SALES CONTACTS

THE AMERICAS

UNITED STATES

VISHAY AMERICAS
ONE GREENWICH PLACE
SHELTON, CT 06484
UNITED STATES
PH: +1-402-563-6866
FAX: +1-402-563-6296

ASIA

SINGAPORE

VISHAY INTERTECHNOLOGY ASIA PTE LTD.
37A TAMPINES STREET 92 #07-00
SINGAPORE 528886
PH: +65-6788-6668
FAX: +65-6788-0988

P.R. CHINA

VISHAY CHINA CO., LTD.
15D, SUN TONG INFOPORT PLAZA
55 HUAI HAI WEST ROAD
SHANGHAI 200030
P.R. CHINA
PH: +86-21-5258 5000
FAX: +86-21-5258 7979

JAPAN

VISHAY JAPAN CO., LTD.
MG IKENOHATA BLDG. 4F
1-2-18, IKENOHATA
TAITO-KU
TOKYO 110-0008
JAPAN
PH: +81-3-5832-6210
FAX: +81-3-5832-6260

EUROPE

GERMANY

VISHAY ELECTRONIC GMBH
GEHEIMRAT-ROSENTHAL-STR. 100
95100 SELB
GERMANY
PH: +49-9287-71-0
FAX: +49-9287-70435

FRANCE

VISHAY S.A.
199, BLVD DE LA MADELEINE
06003 NICE, CEDEX 1
FRANCE
PH: +33-4-9337-2727
FAX: +33-4-9337-2726

UNITED KINGDOM

VISHAY LTD.
SUITE 6C, TOWER HOUSE
ST. CATHERINE'S COURT
SUNDERLAND ENTERPRISE PARK
SUNDERLAND SR5 3XJ
UNITED KINGDOM
PH: +44-191-516-8584
FAX: +44-191-549-9556

Build **Vishay**
into your **Design**

VMN-PL0366-1005

www.vishay.com