



SFP4-A

5FP4-A

VIEW-FINDER KINESCOPE

MAGNETIC FOCUS

MAGNETIC DEFLECTION

DATA

General:

Heater, for Unipotential Cathode:

Voltage	6.3	ac or dc volts
Current	0.6	amp

Direct Interelectrode Capacitances:

Grid No.1 to All Other Electrodes	8	μuf
Cathode to All Other Electrodes	5	μuf

Phosphor (For Curves, see front of this Section). P4—Sulfide Type

Fluorescence and Phosphorescence	White
--------------------------------------------	-------

Persistence of Phosphorescence	Short
------------------------------------------	-------

Focusing Method. Magnetic

Deflection Method. Magnetic

Deflection Angle (Approx.) 53° Overall Length $11\frac{1}{8}'' \pm 3/8''$ Greatest Diameter of Bulb. $4\frac{15}{16}'' \pm 3/32''$ Min. Useful Screen Diameter. $4\frac{1}{4}''$

Mounting Position. Any

Cap. Recessed Small Ball (JETEC No.J1-22)

Base Long Medium-Shell Octal 8-Pin

BOTTOM VIEW

Pin 1-No
Connection
Pin 2-Heater
Pin 3-Grid No.2
Pin 4-No
Connection



Pin 5-Grid No.1
Pin 6-No
Connection
Pin 7-Cathode
Pin 8-Heater
Cap-Anode

Maximum Ratings, Design-Center Values:

ANODE VOLTAGE* 8000 max. volts

GRID-No.2 VOLTAGE. 410 max. volts

GRID-No.1 VOLTAGE:

Negative bias value.	125 max.	volts
------------------------------	----------	-------

Positive bias value.	0 max.	volts
------------------------------	--------	-------

Positive peak value.	2 max.	volts
------------------------------	--------	-------

PEAK HEATER-CATHODE VOLTAGE:

Heater negative with respect to cathode.	150 max.	volts
--------------------------------------------------	----------	-------

Heater positive with respect to cathode.	150 max.	volts
--------------------------------------------------	----------	-------

Typical Operation:

Anode Voltage**. 6000 volts

Grid-No.2 Voltage. 250 volts

Grid-No.1 Voltage for Visual Extinction
of Undeflected Focused Spot -25 to -70 volts

* The product of anode voltage and average anode current should be limited to 6 watts.

** Brilliance and definition decrease with decreasing anode voltage. In general, the anode voltage should not be less than 4000 volts.

← Indicates a change.



5FP4-A

VIEW-FINDER KINESCOPE

→ Focusing-Coil Current (DC, approx.) 120 ± 15% ma

Maximum Circuit Values:

Grid-No.1-Circuit Resistance. 1.5 max. megohms

- For specimen focusing coil similar to JETEC Focusing Coil No. 106 positioned with air gap toward kinescope screen, and center line of air gap 3-1/4" from Reference Line (see Outline Drawing). The indicated current is for condition with combined grid-No.1 bias voltage and video-signal voltage adjusted to produce a highlight brightness of 10 foot-lamberts on a 3-7/8" x 2-7/8" picture area sharply focused at center of screen.

→ indicates a change.

AUG. 1, 1951

TUBE DEPARTMENT


RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

DATA



5FP4-A

VIEW-FINDER KINESCOPE

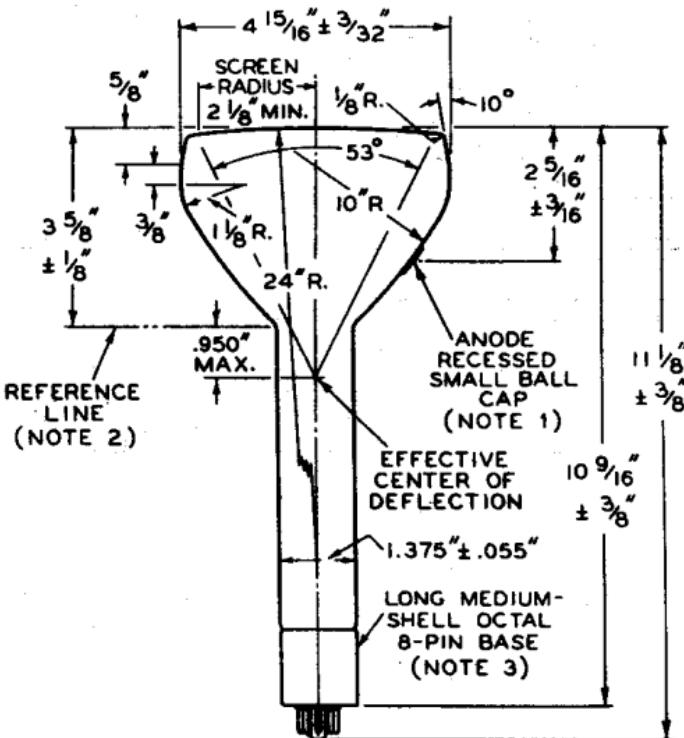

NOTE 1: THE PLANE THROUGH THE TUBE AXIS AND PIN No.5 MAY VARY FROM THE PLANE THROUGH THE TUBE AXIS AND ANODE TERMINAL BY AN ANGULAR TOLERANCE (MEASURED ABOUT THE TUBE AXIS) OF $\pm 10^\circ$. ANODE TERMINAL IS ON SAME SIDE OF TUBE AS PIN No.5.

NOTE 2: REFERENCE LINE IS DETERMINED BY POSITION WHERE GAUGE 1.430" + .003" - .000" I.D. AND 2" LONG WILL REST ON BULB CONE.

NOTE 3: 1/2 OF BULB WILL NOT DEVIATE MORE THAN 2° IN ANY DIRECTION FROM THE PERPENDICULAR ERECTED AT THE CENTER OF THE BOTTOM OF THE BASE.


92CM-6362R4



5FP4-A

AVERAGE GRID-DRIVE CHARACTERISTICS

$E_f = 6.3$ VOLTS
ANODE VOLTS = 6000
GRID-N^o2 VOLTS = 250
GRID-N^o1 BIASED TO CUTOFF OF
UNDEFLECTED FOCUSED SPOT
RASTER SIZE = $3\frac{7}{8}'' \times 2\frac{7}{8}''$ (FOCUSED
FOR AVERAGE BRIGHTNESS)

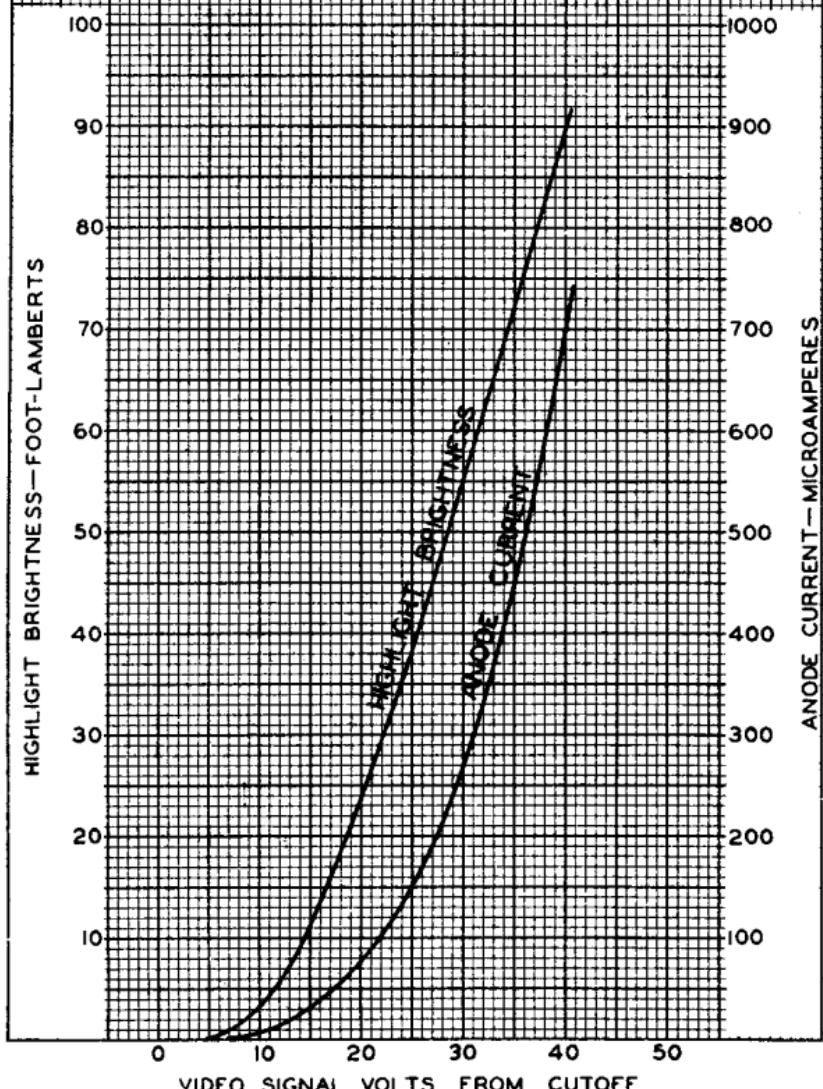

View-Finder Kinescope

MAGNETIC FOCUS

MAGNETIC DEFLECTION

GENERAL DATA

Electrical:

Direct Interelectrode Capacitances:

Cathode to all other electrodes.	8	pf
Grid No.1 to all other electrodes.	5	pf
Heater Current at 6.3 volts.	600	ma

Optical:

Phosphor (For Curves, see front of this section)	P4—Sulfide Type
Fluorescence	White
Phosphorescence.	White
Persistence.	Short
Focusing Method.	Magnetic
Deflection Method.	Magnetic
Deflection Angle (Approx.)	53°

Mechanical:

Overall Length	11-1/8" \pm 3/8"
Greatest Diameter.	4-15/16" \pm 3/32"
Minimum Useful Screen Diameter	4-1/4"
Cap.	Recessed Small Ball (JEDEC No.J1-22)


Bases (Alternates):

Long Medium-Shell Octal:

- 8-Pin (JEDEC Group 1, No.B8-65)
- 5-Pin (JEDEC Group 1, No.B5-80)

Medium-Shell Octal 8-Pin:

- 8-Pin (JEDEC Group 1, No.B8-11)

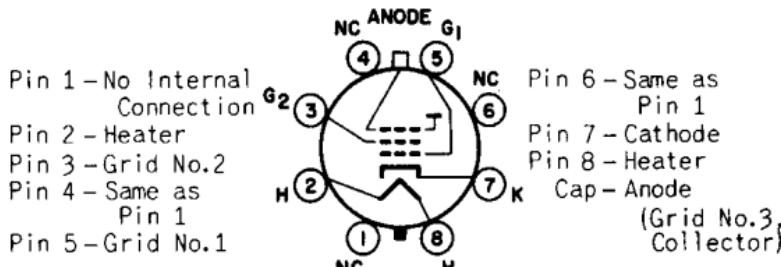**Maximum Ratings, Design-Center Values:**

ANODE VOLTAGE ^a	8000 max.	volts
GRID-No.2 VOLTAGE	410 max.	volts
GRID-No.1 VOLTAGE:		
Negative bias value	125 max.	volts
Positive bias value	0 max.	volts
Positive peak value	2 max.	volts
PEAK HEATER-CATHODE VOLTAGE:		
Heater negative with respect to cathode	150 max.	volts
Heater positive with respect to cathode	150 max.	volts



5FP4A

Typical Operation:

Anode Voltage^b 6000 volts
Grid-No.2 Voltage 250 volts
Grid-No.1 Voltage for Visual Extinction
 of Undeflected Focused Spot -25 to -70 volts
Focused-Coil Current (DC, approx.)^c 120 ± 15% ma

Maximum Circuit Values:


Grid-No.1-Circuit Resistance. 1.5 max. megohms

^a The product of anode voltage and average anode current should be limited to 6 watts.

^b Brilliance and definition decrease with decreasing anode voltage. In general, the anode voltage should not be less than 4000 volts.

^c For specimen focusing coil similar to JEDEC Focusing Coil No.106 positioned with air gap toward kinescope screen, and center line of air gap 3-1/4" from Reference Line (see Outline Drawing). The indicated current is for condition with combined grid-No.1 bias voltage and video-signal voltage adjusted to produce a highlight brightness of 10 foot-lamberts on a 3-7/8" x 2-7/8" picture area sharply focused at center of screen.



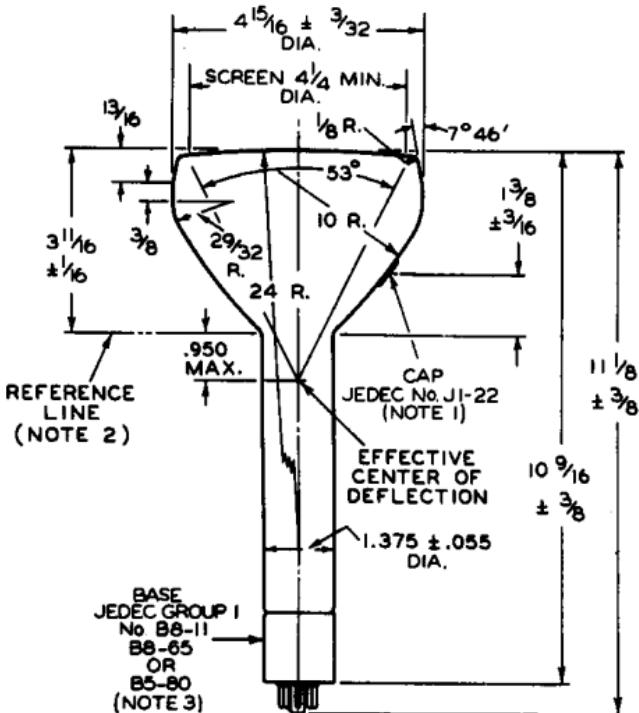

92CM-6362R5

DIMENSIONS IN INCHES

NOTE 1: THE PLANE THROUGH THE TUBE AXIS AND PIN 5 MAY VARY FROM THE PLANE THROUGH THE TUBE AXIS AND ANODE TERMINAL BY AN ANGULAR TOLERANCE (MEASURED ABOUT THE TUBE AXIS) OF 10°. ANODE TERMINAL IS ON SAME SIDE OF TUBE AS PIN 5.


NOTE 2: REFERENCE LINE IS DETERMINED BY POSITION WHERE GAUGE 1.430" +.003" -.000" INSIDE DIAMETER AND 2" LONG WILL REST ON BULB CONE.

NOTE 3: CENTER LINE OF BULB WILL NOT DEVIATE MORE THAN 2° IN ANY DIRECTION FROM THE PERPENDICULAR ERECTED AT THE CENTER OF THE BOTTOM OF THE BASE.



AVERAGE GRID-DRIVE CHARACTERISTICS

$E_f = 6.3$ VOLTS
ANODE VOLTS = 6000
GRID-N₂ VOLTS = 250
GRID-N₁ BIASED TO CUTOFF OF
UNDEFLECTED FOCUSED SPOT
RASTER SIZE = $3\frac{7}{8}'' \times 2\frac{7}{8}''$ (FOCUSED
FOR AVERAGE BRIGHTNESS)

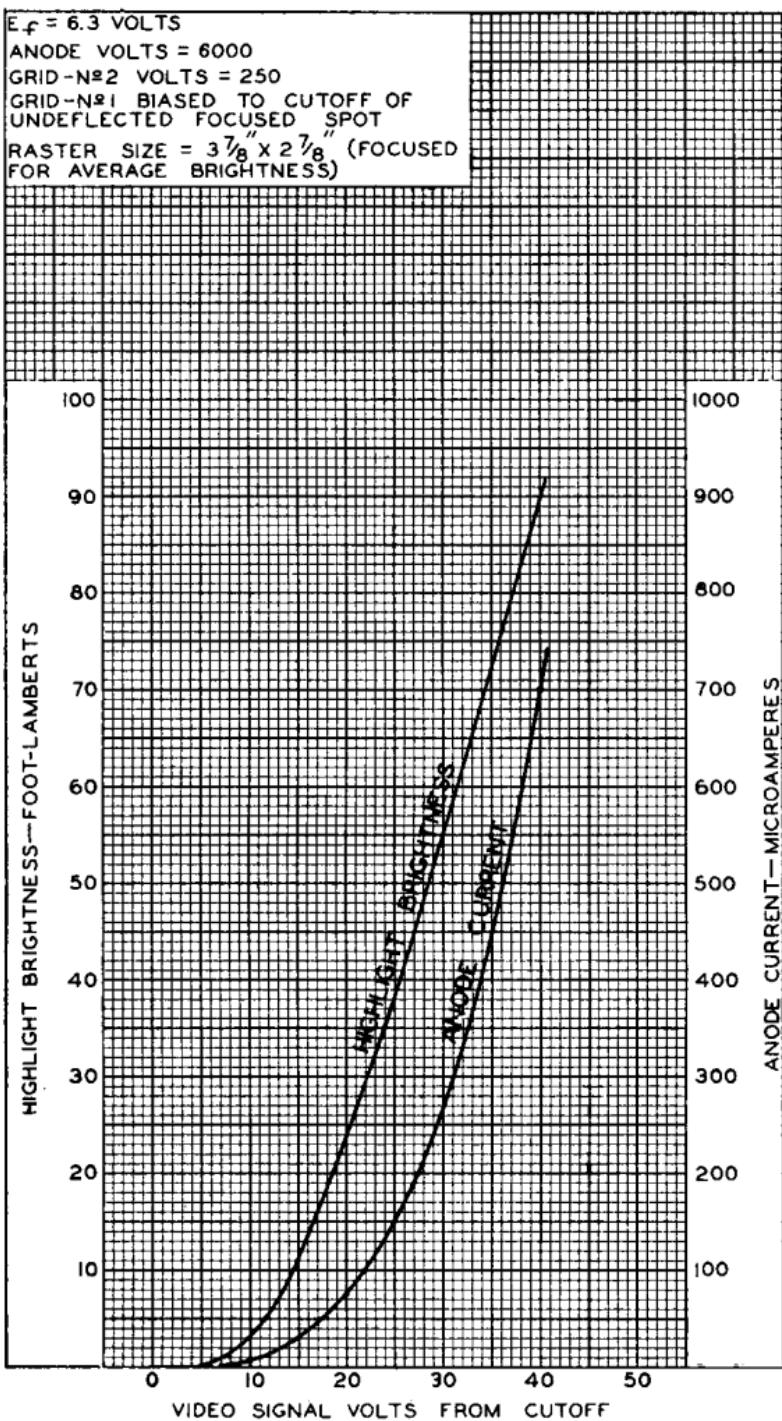

92CM - 6683RI

