

## R.F. POWER TRIODE

R.F. zero bias power triode intended for use as linear S.S.B. amplifier and A.F. class B amplifier

QUICK REFERENCE DATA				
Class B SSB			B mod. Two tubes	
Frequency (MHz)	$V_a$ (V)	$W_{load}$ (PEP) (W)	$V_a$ (V)	$W_o$ (W)
30	2500	580	3000	1310

**HEATING:** direct by A.C. or D.C.; filament thoriated tungsten

Filament voltage  $V_f = 5.0$  V

Filament current  $I_f = 14.1$  A

### CAPACITANCES

Anode to filament  $C_{af} = 0.033$  pF

Grid to filament  $C_{gf} = 8.0$  pF

Anode to grid  $C_{ag} = 5.0$  pF

### TYPICAL CHARACTERISTICS

Anode voltage  $V_a = 5$  kV

Anode current  $I_a = 80$  mA

Mutual conductance  $S = 11$  mA/V

Amplification factor  $\mu = 350$

### TEMPERATURE LIMITS (Absolute limits)

Anode seal temperature  $t = \text{max. } 220$  °C

Pin seal temperature  $t = \text{max. } 180$  °C

Bulb temperature  $t = \text{max. } 350$  °C



### COOLING

Radiation and low velocity air flow

**MECHANICAL DATA**

Net weight: 210 g

Base : Giant 5p.

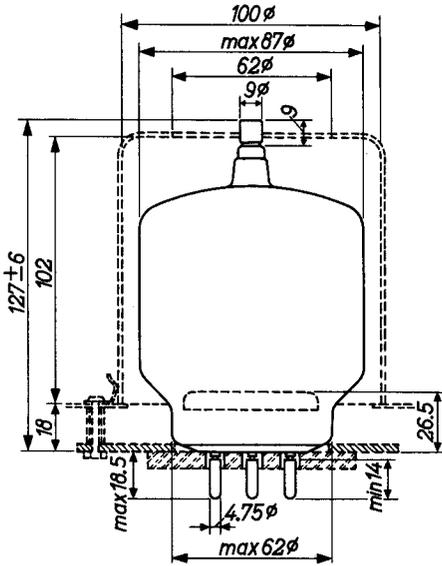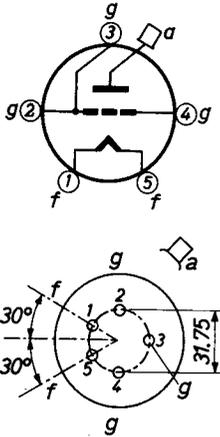

Mounting suggestion of tube with chimney

Dimensions in mm

Mounting position: vertical with base up or down

In order to prevent overheating of the grid pins by high-frequency current it is recommended to include the three grid socket connections in the circuit.

**ACCESSORIES**

Anode connector	40624
Socket	2422 512 01001
Chimney	40666

**R. F. CLASS B LINEAR POWER AMPLIFIER SINGLE SIDE BAND**  
 suppressed carrier, zero bias, grounded grid

**LIMITING VALUES** (Absolute limits)

Frequency	f	up to	110	MHz
Anode voltage	$V_a$	=	max. 3000	V
Anode input power	$W_{i_a}$	=	max. 1200	W
Anode dissipation	$W_a$	=	max. 400	W
Anode current	$I_a$	=	max. 400	mA
Grid dissipation	$W_g$	=	max. 20	W

**OPERATING CHARACTERISTICS**

Frequency	f	=	30	MHz		
Anode voltage	$V_a$	=	2500	V		
Grid voltage	$V_g$	=	0	V		
			zero signal	single tone signal	double tone signal	
Peak cathode driving voltage	$V_{k_p}$	=	0	91	91	V
Anode current	$I_a$	=	72	400	270	mA
Grid current	$I_g$	=	-	140	80	mA
Driver output power	$W_{dr}$	=	-	35	35 (PEP)	W
Anode input power	$W_{i_a}$	=	180	1000	675	W
Anode dissipation	$W_a$	=	180	385	368	W
Output power	$W_o$	=	0	640 <sup>1)</sup>	640 (PEP) <sup>2)</sup>	W
Output power in load	$W_{load}$	=	0	580	580 (PEP)	W <sup>3)</sup>
Overall efficiency	$\eta$	=	-	58	43	%
Intermodulation distortion						
of the 3rd order	$d_3$	=	-	-	-29	dB <sup>4)</sup>
of the 5th order	$d_5$	=	-	-	-34	dB <sup>4)</sup>

1) Inclusive 25 W feedthrough power

2) Inclusive 25 W peak envelope feedthrough power

3) Measured in a circuit having an efficiency of 91 %

4) Maximum distortion level encountered at any driving level up to full drive, referred to the amplitude of either of the two tones in a double tone test signal at full drive.

**A.F. CLASS B AMPLIFIER AND MODULATOR**

**LIMITING VALUES (Absolute limits)**

Anode voltage	$V_a$	=	max. 3000	V
Anode input power	$W_{i_a}$	=	max. 1200	W
Anode dissipation	$W_a$	=	max. 400	W
Anode current	$I_a$	=	max. 400	mA
Grid dissipation	$W_g$	=	max. 20	W

**OPERATING CONDITIONS Class B, two tubes in push-pull**

Anode voltage	$V_a$	=	3000	V
Load resistance	$R_{aa\sim}$	=	9500	$\Omega$
Peak grid driving voltage	$V_{ggp}$	=	0	176 V
Anode current	$I_a$	=	2x90	2x333 mA
Grid current	$I_g$	=	0	2x120 mA
Driving power	$W_{dr}$	=	0	26 W
Anode input power	$W_{i_a}$	=	2x270	2x1000 W
Anode dissipation	$W_a$	=	2x270	2x345 W
Output power	$W_o$	=	0	1310 W
Efficiency	$\eta$	=	-	65 %

7206416-25.4.aacj.

