
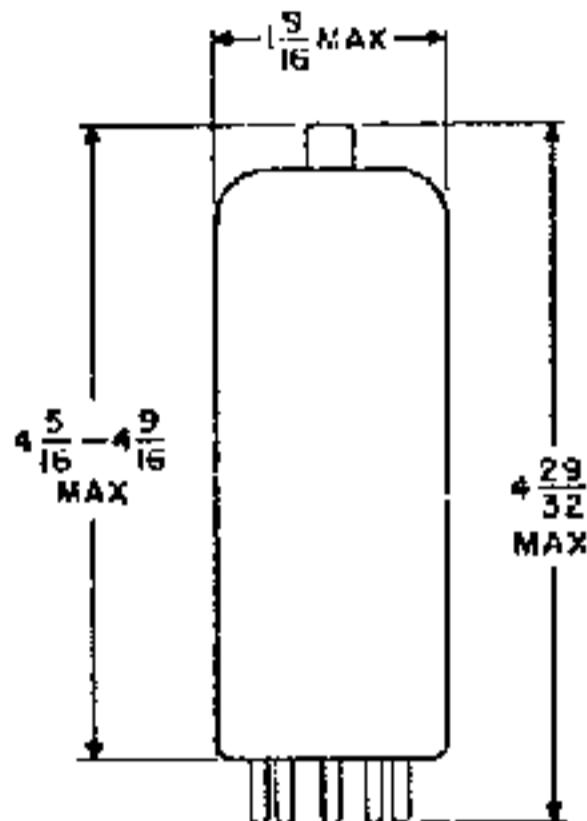


Amperex Tube Type 6KG6/EL509

Except for filament voltage and current,
equivalent to type 40KG6/PL519.

The 6KG6A is an output pentode designed for use in horizontal deflection
circuits of color television receivers.

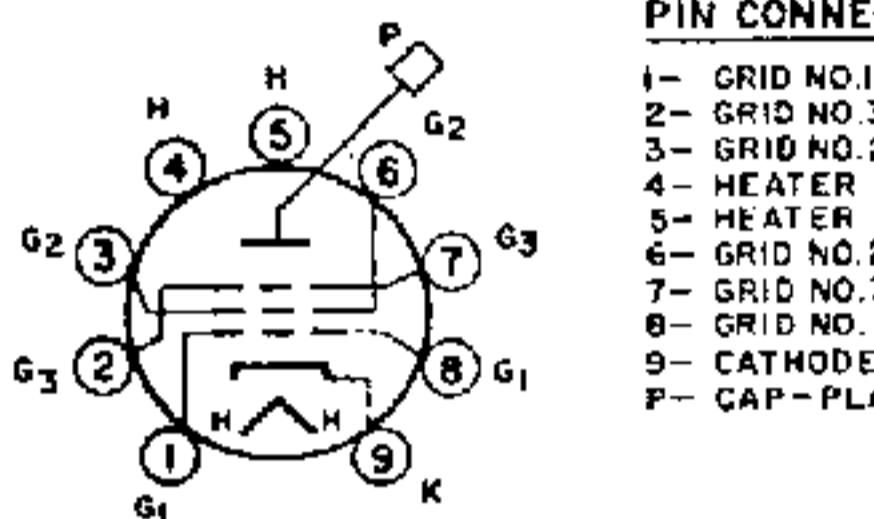

GENERAL CHARACTERISTICS

MECHANICAL ¹⁾

Base Dimensions magnoval
Dimensions see outline drawing

ELECTRICAL

Heating AC or DC, parallel supply
Heater Voltage 6.3 volts
Heater Current 2 amps

Interelectrode Capacitances

Plate to Grid No. 1	2.5 pf	3.0 pf (max.)
Input	37 pf	
Output	18.5 pf	

TYPICAL CHARACTERISTICS (measured under pulse conditions)

	Min.	Max.	During flyback	
Plate Voltage	50	160	7000	volts
Beam Plate Voltage	0	0	0	volts
Grid No. 2 Voltage	175	160	175	volts
Grid No. 1 Voltage	-10	0	-185	volts
Plate Current	800	1400	<0.05	mA
Grid No. 2 Current	70	45	-	mA

1) This tube must be supported at top.

6KG6A

LIMITING VALUES

	<u>Design Center</u>	<u>Design Max.</u>	
Plate Voltage at Zero Current	max. 700	max. 990	Volts
Peak Positive Plate Voltage	max. 7000	max. 8000	volts 1)
Plate Dissipation	max. 30	max. 40	Watts
Beam Plate Voltage	max. 50	max. 50	Volts
Grid No. 2 Voltage at Zero Current	max. 700	max. 770	Volts
Grid No. 2 Voltage	max. 250	max. 275	Volts
Grid No. 2 Dissipation	max. 7	max. 9	Watts 2)
Cathode to Heater Voltage	max. 250	max. 275	Volts
Beam Plates Circuit Resistor	max. 10000	max. 10000	Ohms 3)
Peak Negative Grid No. 1 Voltage	-	max. 550	volts 4)
Bulb Temperatures	-	max. 300°C	
Grid No. 1 Circuit Resistance	-	-	Ohms 5)

Remarks:

- 1) Max. pulse duration is 22% of a cycle, max. 18 micro seconds.
- 2) To prevent an excessive value of Pg2 the minimum Rc2 values are given in Fig. 1
- 3) With Rc3 10.000 ohms, capacitive decoupling of grid No. 3 is not required.
- 4) Abs. max. value
- 5) Circuit design has to be such that negative control grid currents up to 5 micro-amperes do not have any detrimental effect upon tube adjustment or circuit performance.
Care should be taken, that with 5 micro-amperes grid current the limiting values for Ik, Pp and Pg2 are not exceeded.

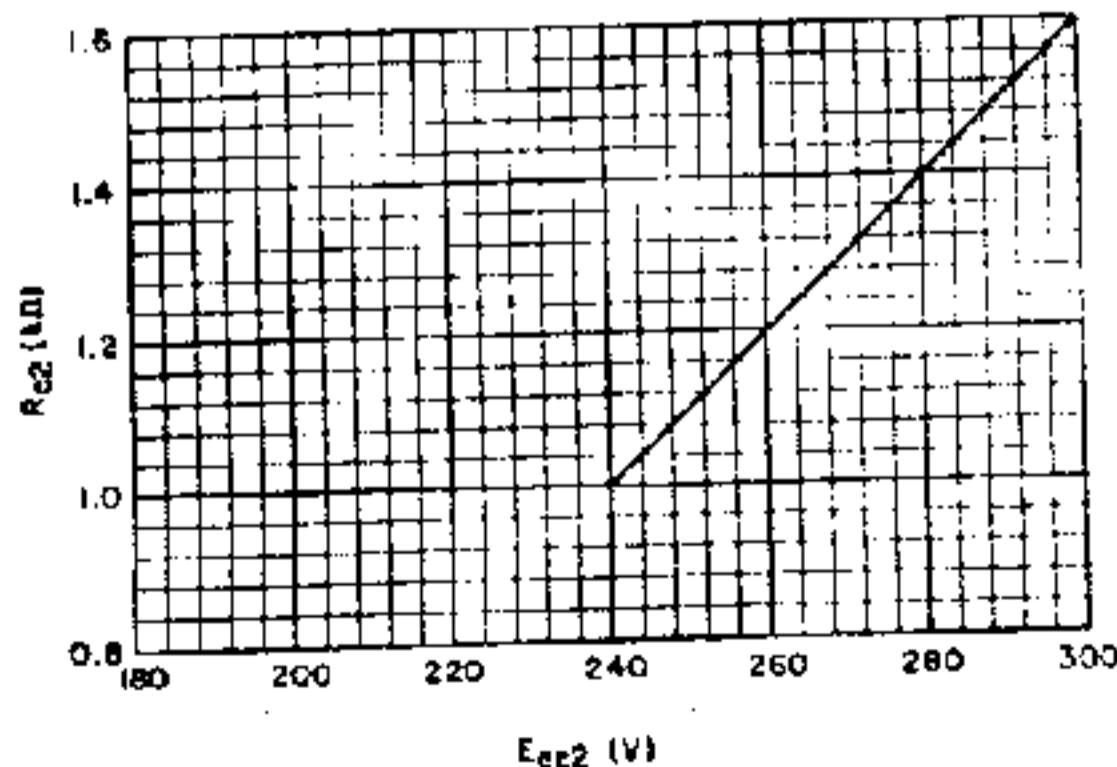



Figure 1

6KG6A

OPERATING CHARACTERISTICS

Stabilized circuits (D.C. Feedback)

Supply voltage: Refer to Figure 2, minimum plate voltage and maximum screen grid series resistance, when the tube is used in a line output stage. The curves refer to nominal line voltage, provided specified values of E_b are increased by 10% of the plate supply voltage. The specified values of I_b will be available throughout the life of the tube at supply voltages 10% below nominal. Barkenhausen interference and loss of stability can be prevented by ensuring the plate voltage is above the specified minimum E_b , during the scanning period. When optimum suppression of Barkenhausen oscillations and/or snivets is required, Grid No. 3 may be connected to a positive voltage of approximate 20 volts.

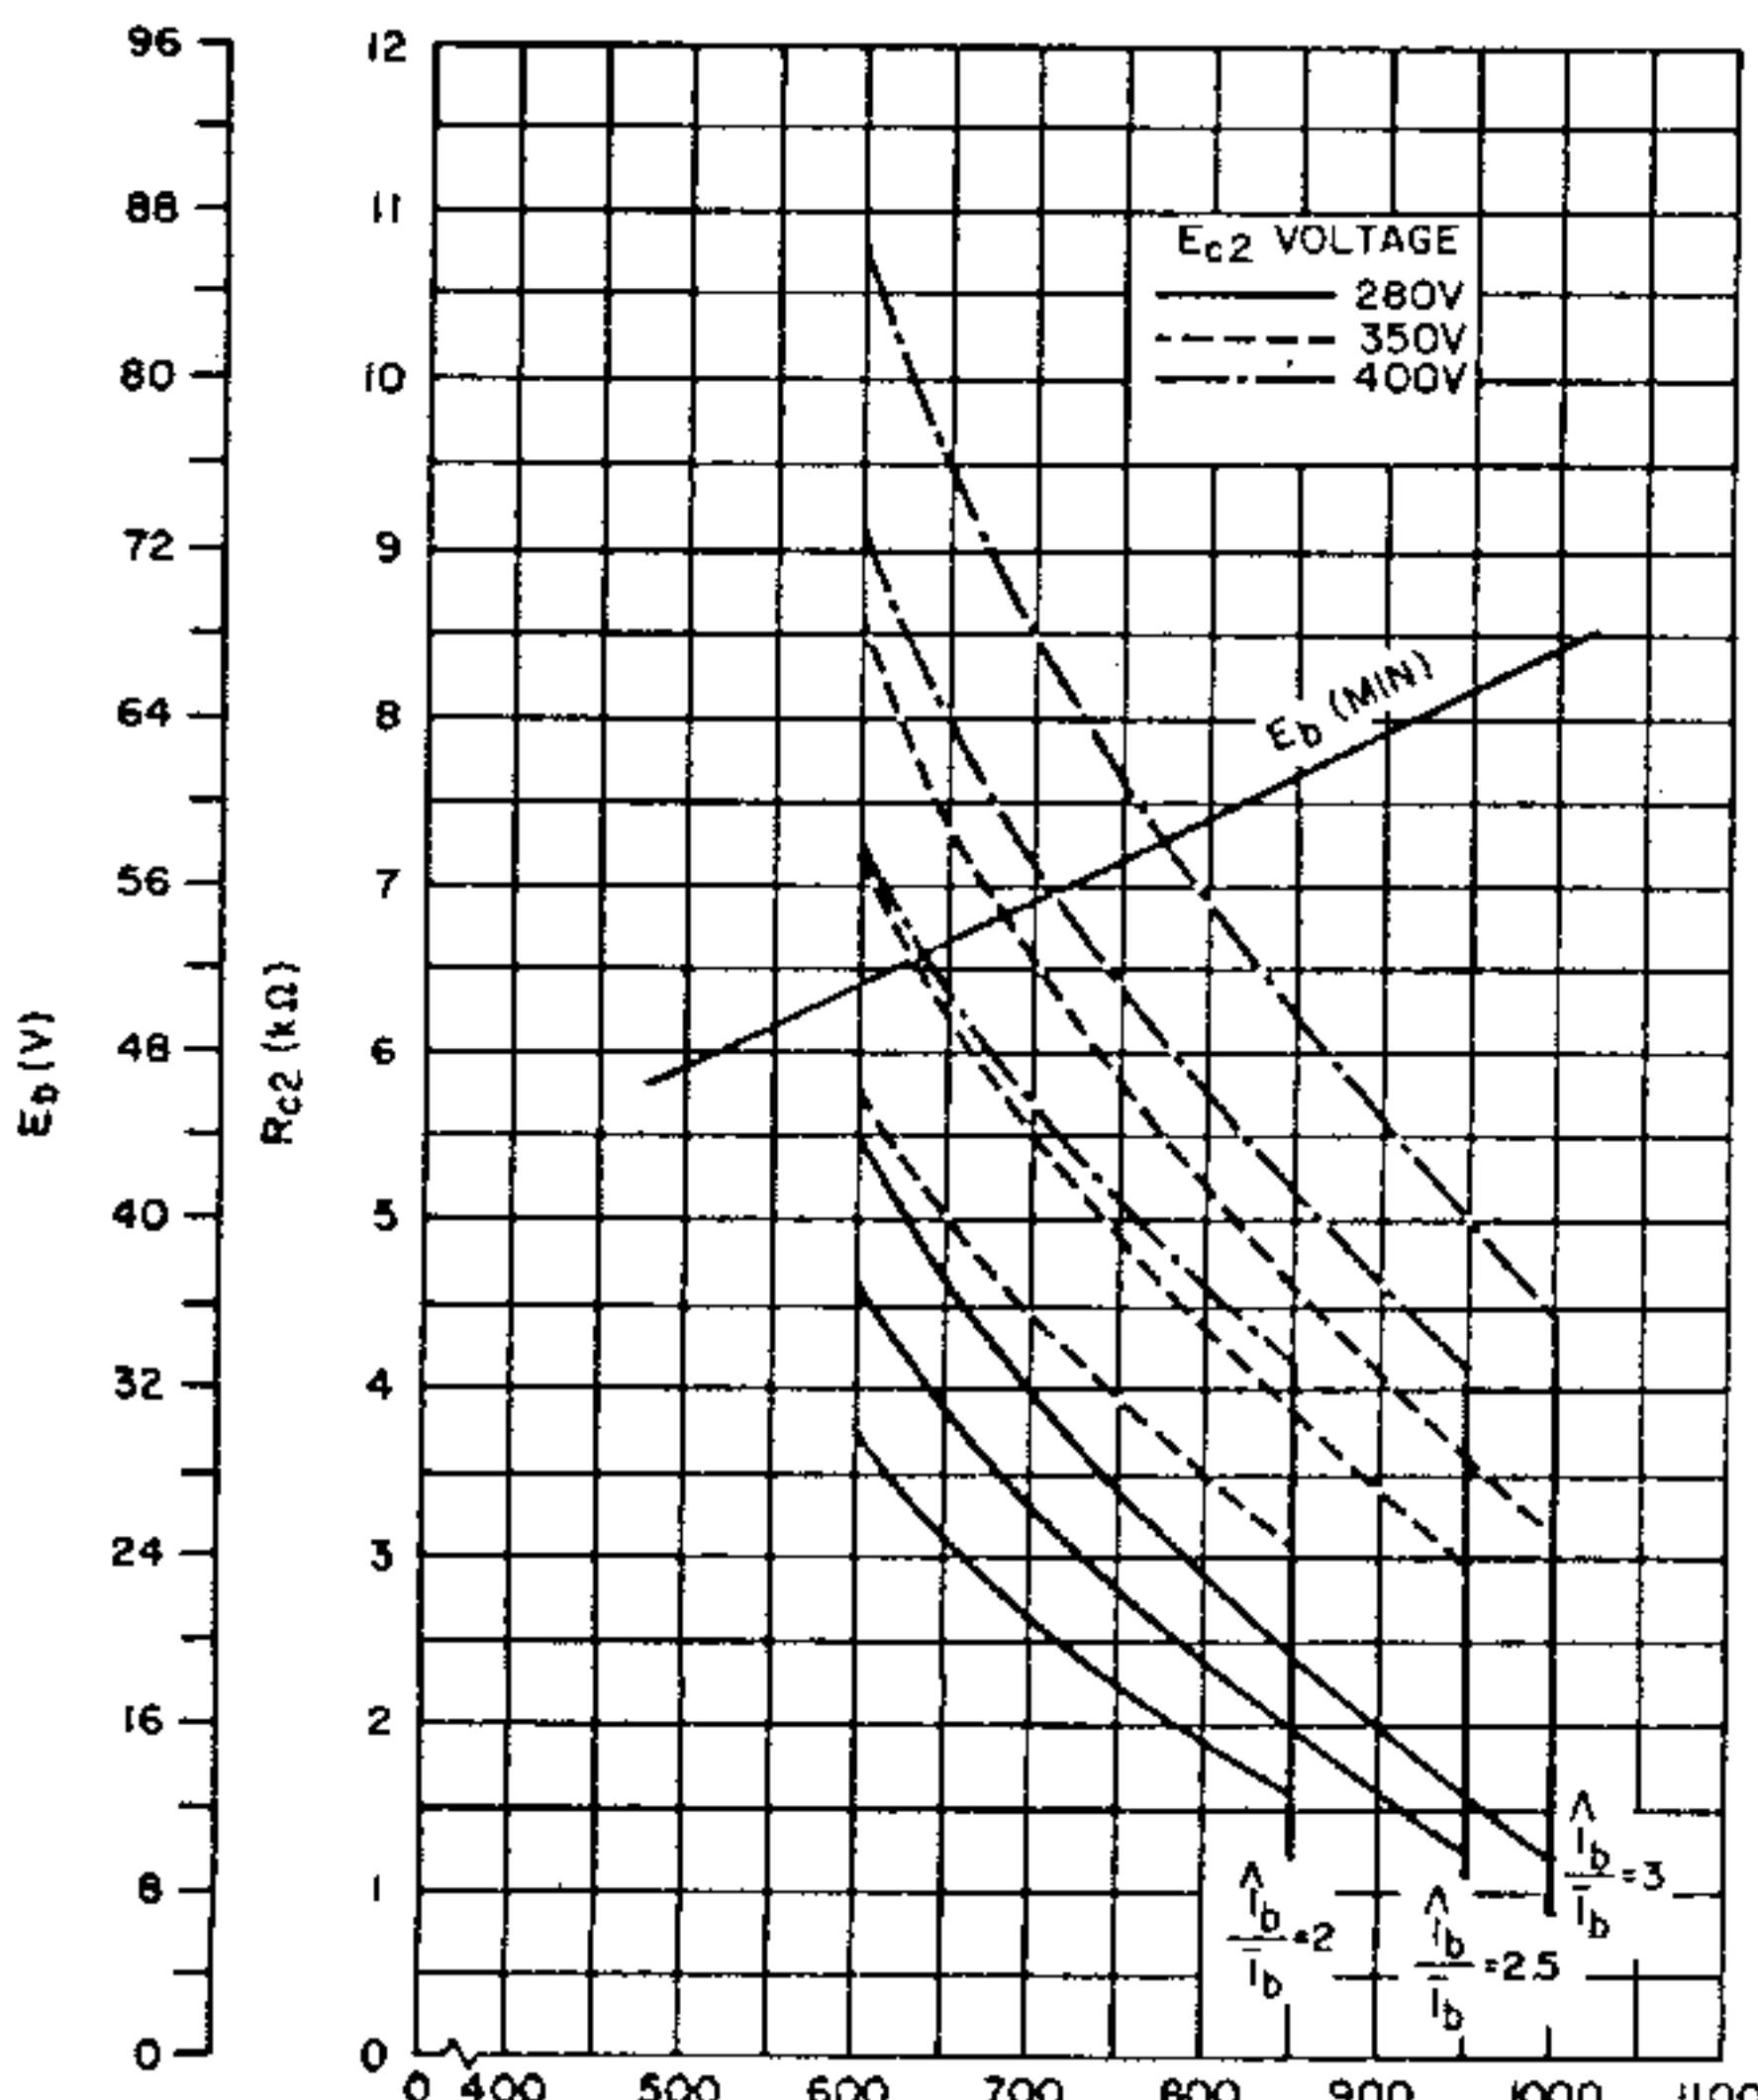

6KG6A

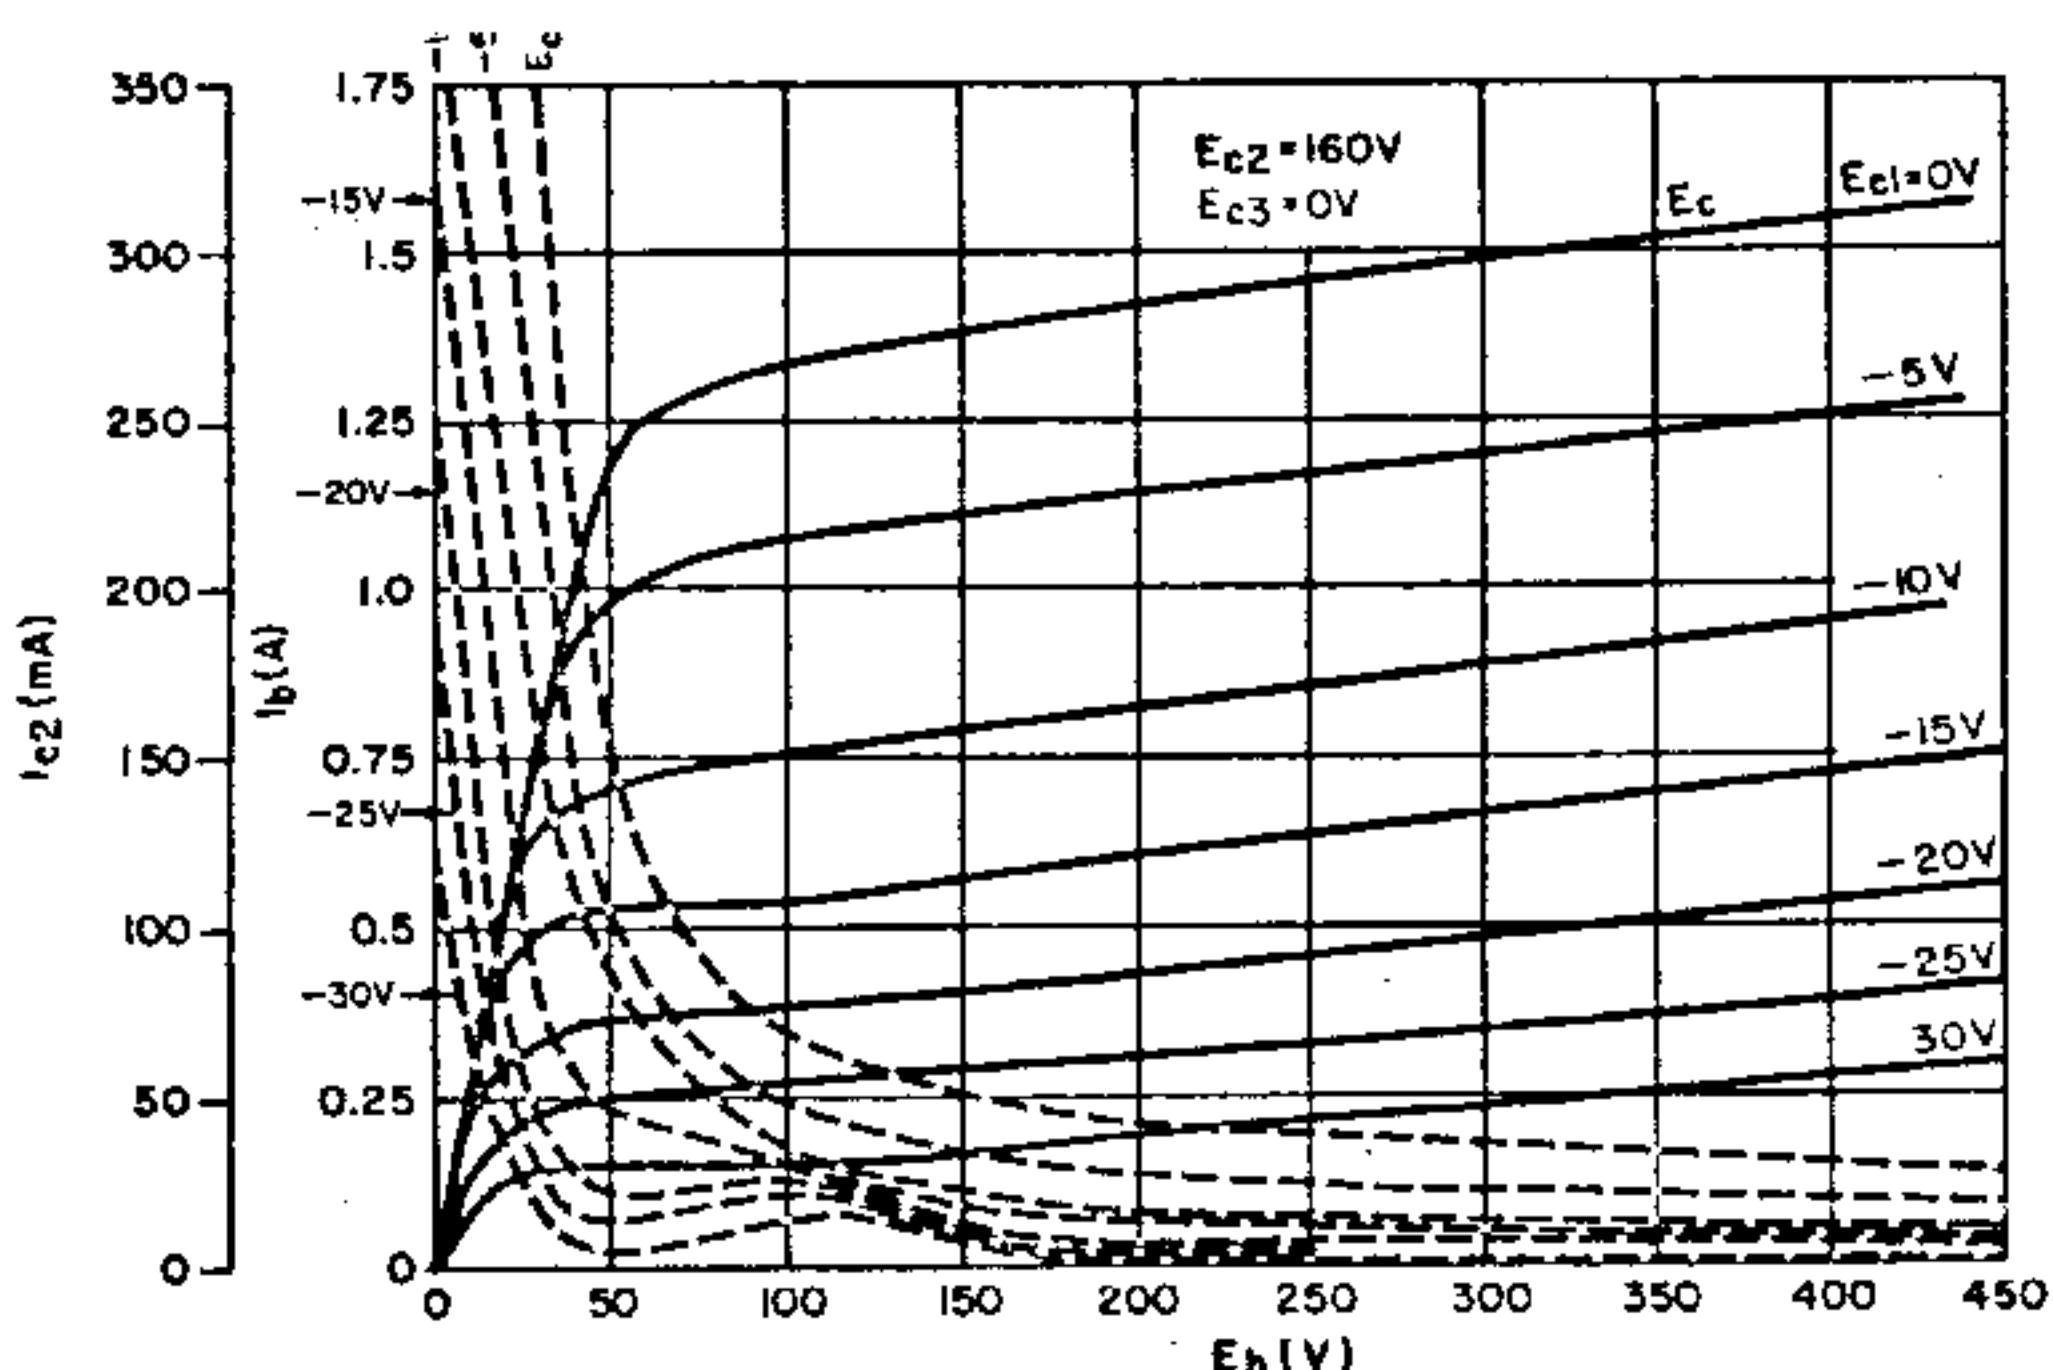


Plate Characteristics

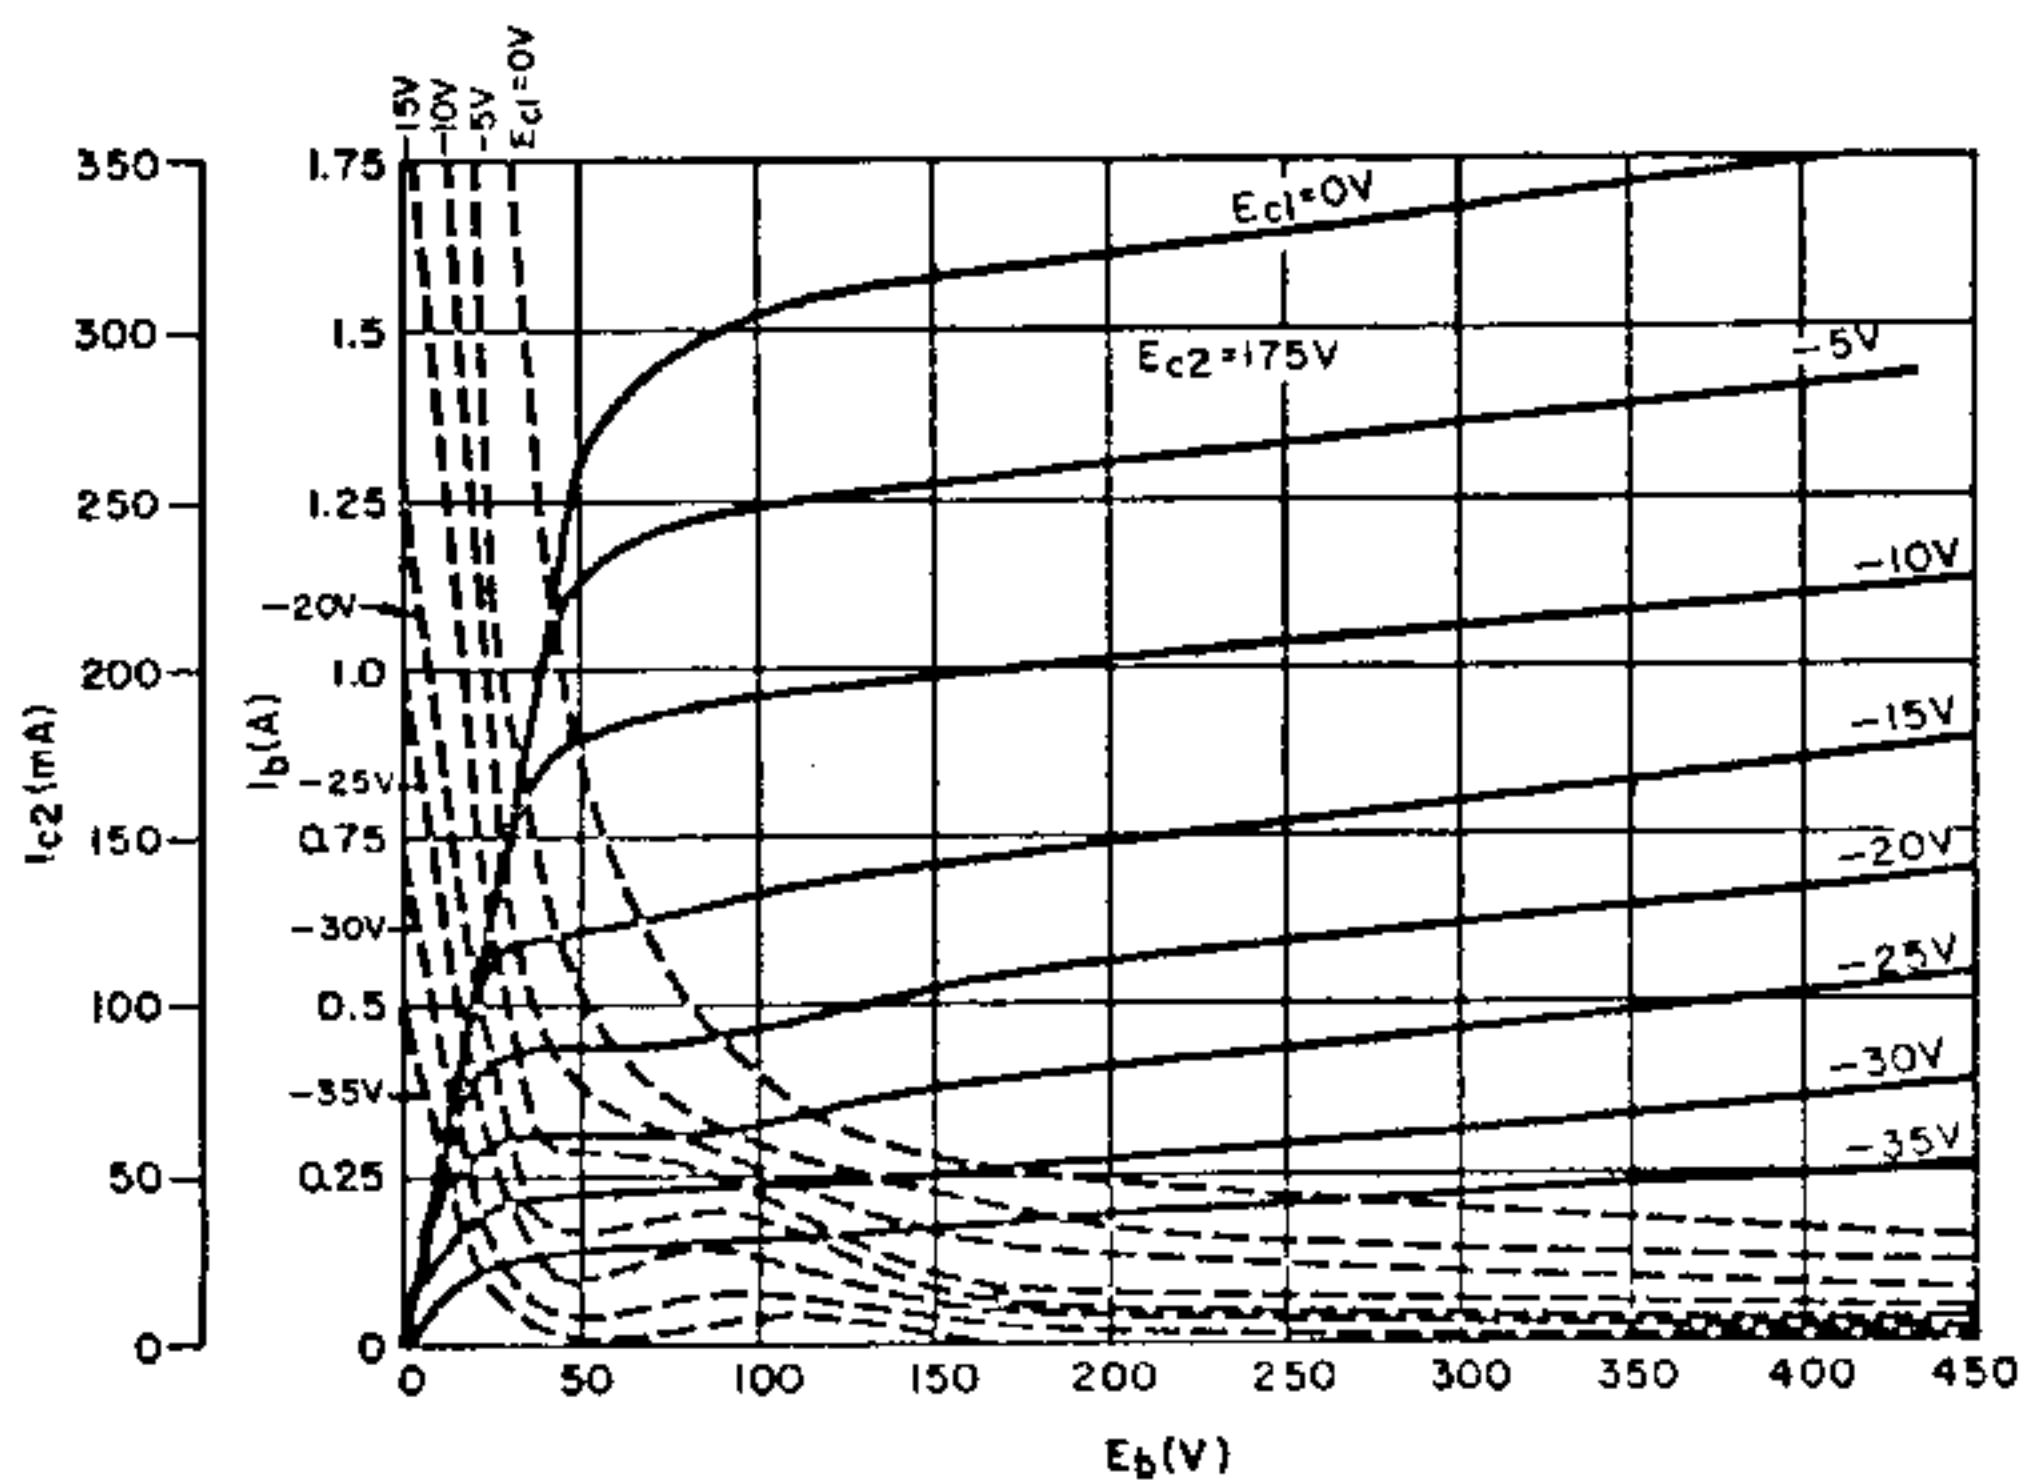


Plate Characteristics


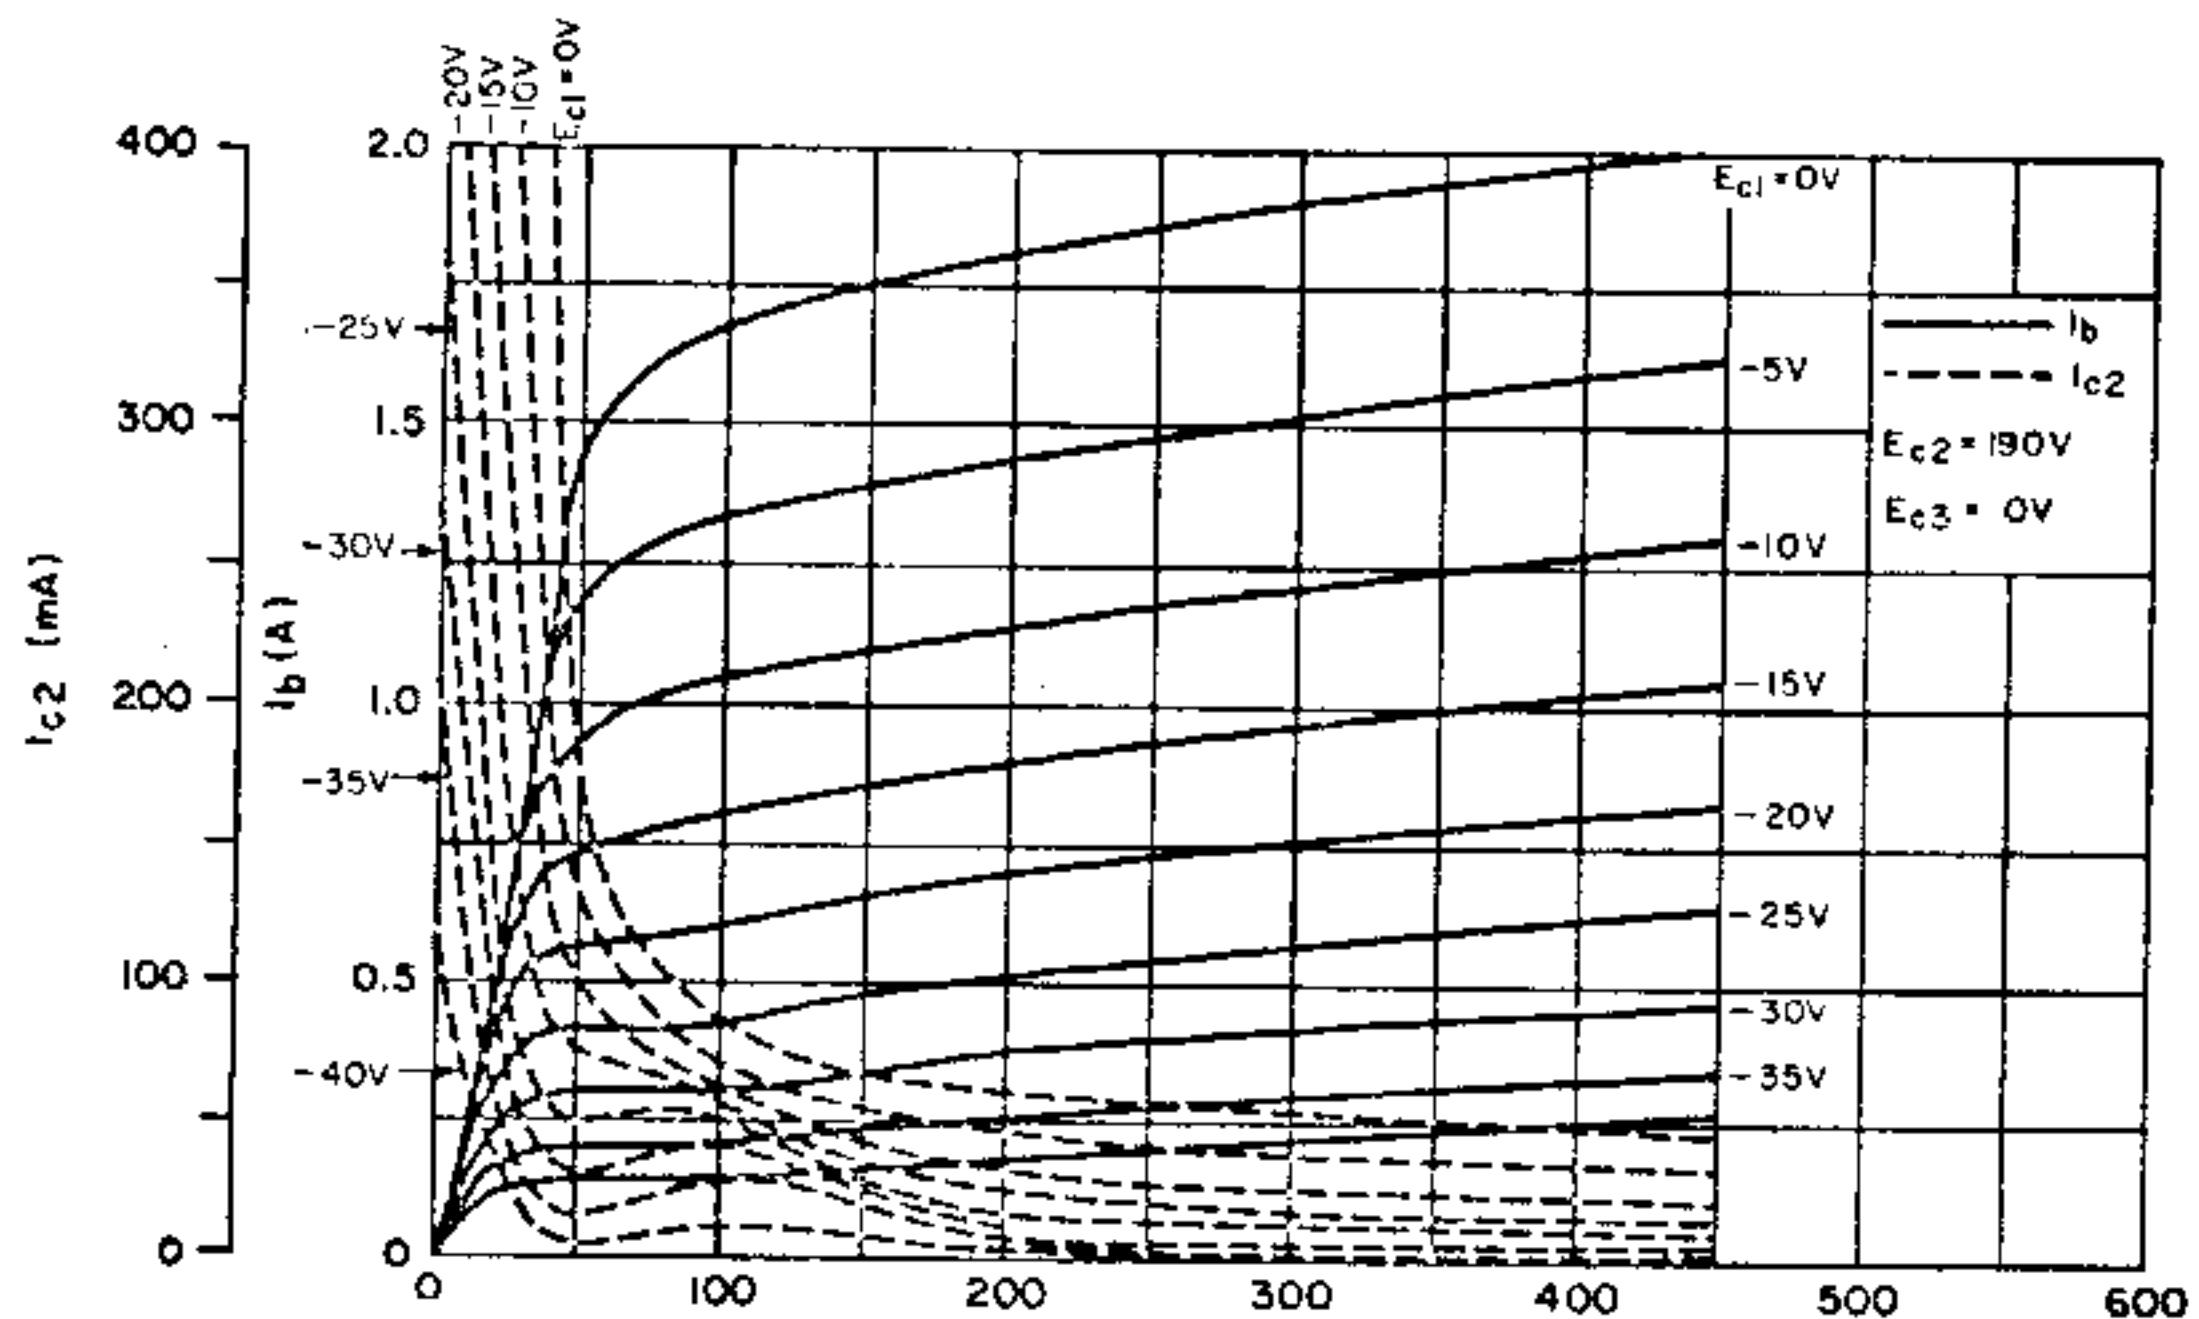


Plate Characteristics

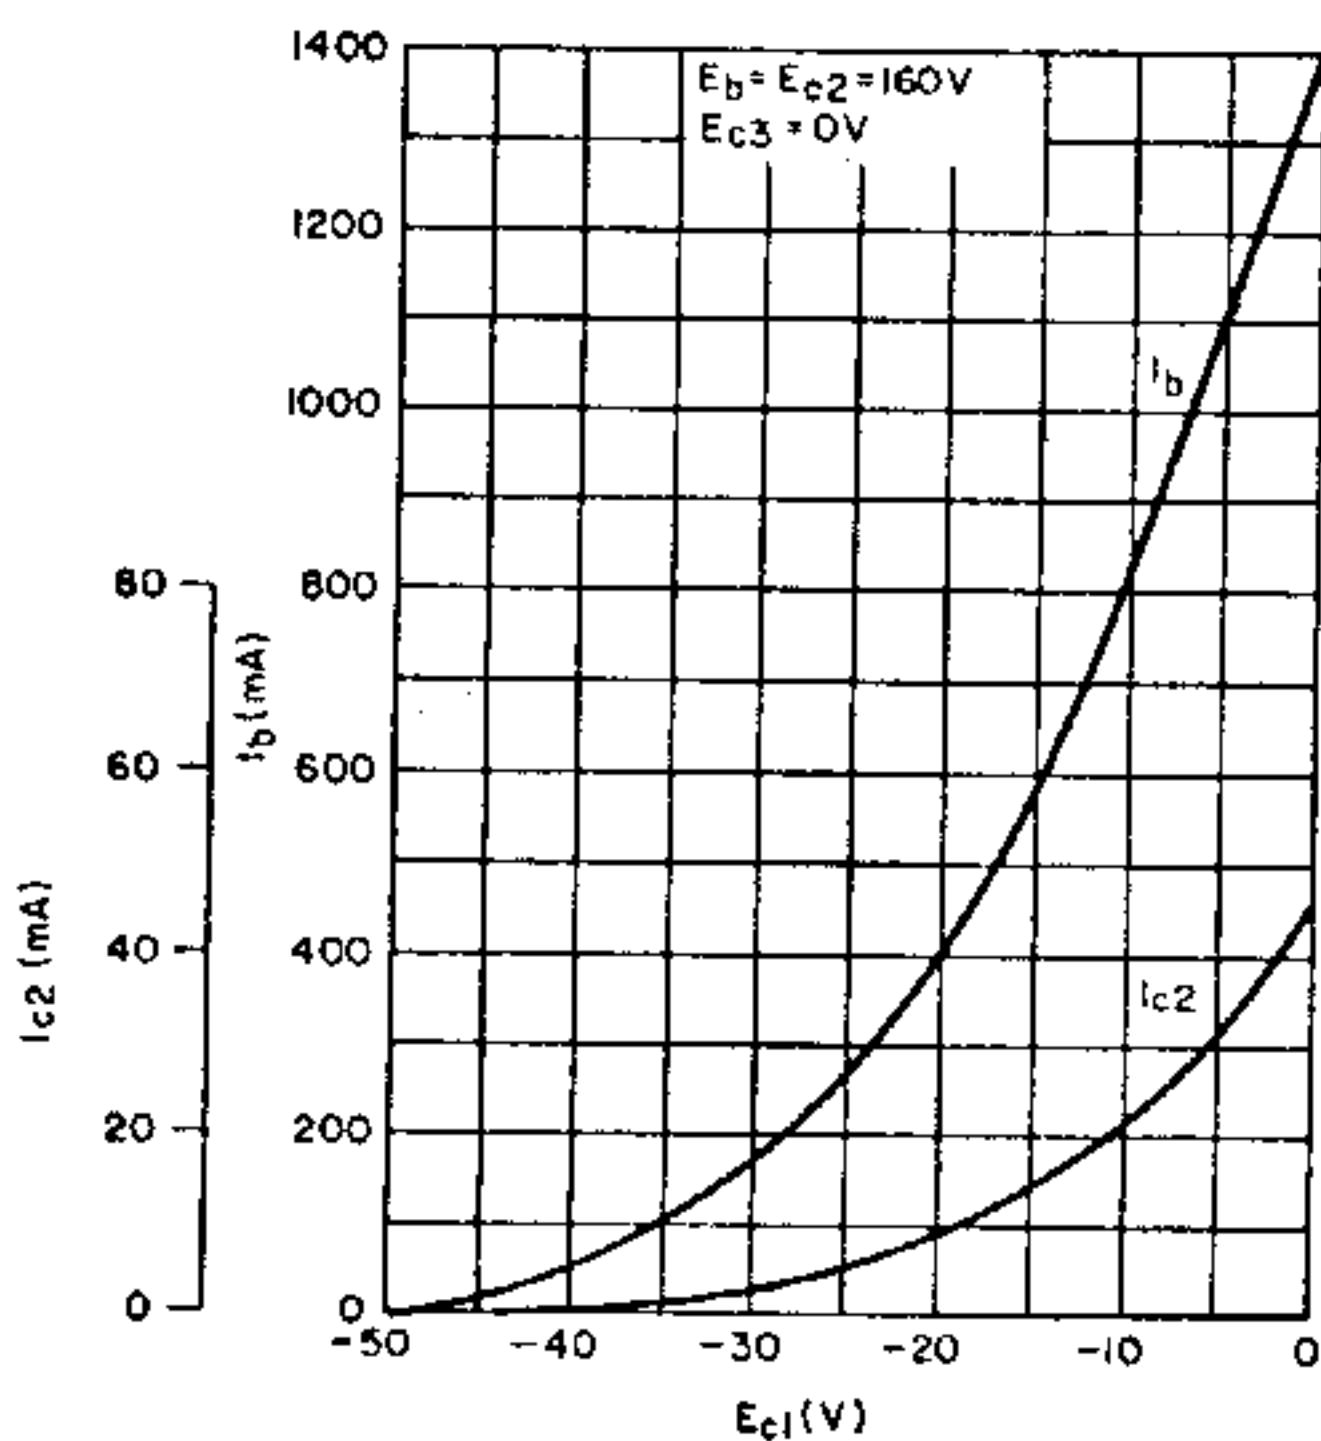

Transfer Characteristics