

Discover What's Possible™


Anritsu

MP1590A

Network Performance Tester



PDH/DSn/SDH/SONET/OTN/Jitter Measurement with One Unit




Supports ITU-T G.709 OTN Measurement

The MP1590A Network Performance Tester is a measuring instrument capable of testing PDH, DSn, SDH/SONET and OTN equipment as well as making jitter measurements with only one unit.

It also can perform OTN, SDH/SONET testing using the input wavelength from an external Tunable Laser Source. Jitter measurement and external optical input functions are provided by plug-in units that can be used in various combinations as needed.

The MP1590A is equipped with Random error insertion and variable optical output power functions. So it can efficiently evaluate Forward Error Correction (FEC) used with OTN equipment.

For SDH/SONET equipment, the MP1590A can perform Tandem Connection and Automatic Protection Switch (APS) tests. For PDH or DSn equipment, it can perform function tests using multiplexer/demultiplexer (MUX/DEMUX) measurement, error insertion or alarm addition.

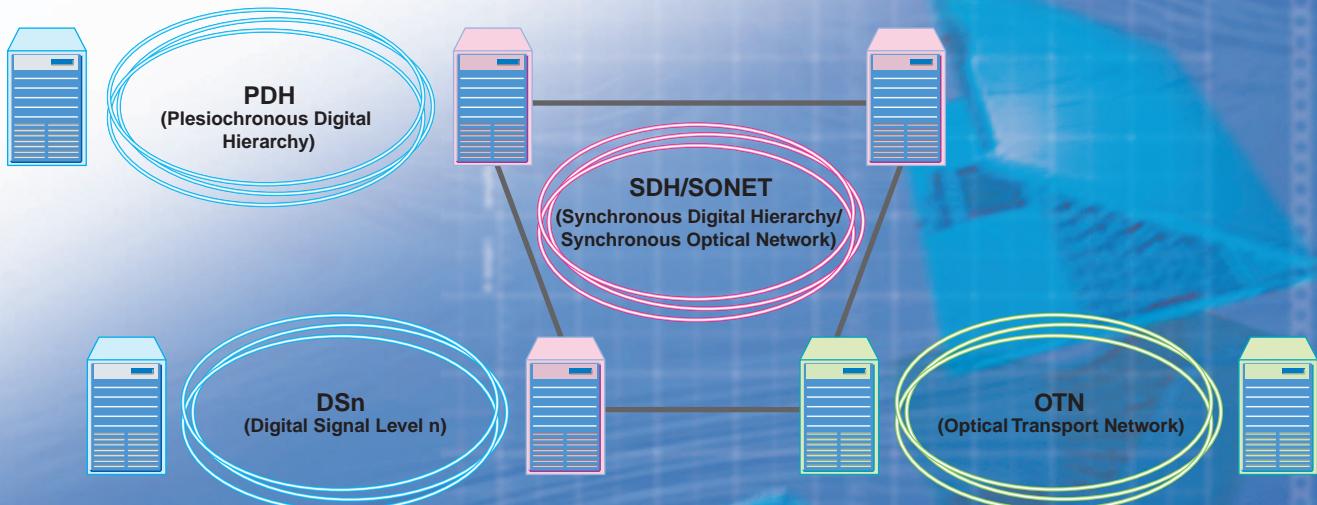

■ Supports 1.5 Mbit/s to 10.7 Gbit/s interfaces with only one unit

The MP1590A supports the following electrical and optical interfaces.

Electrical interfaces: PDH (2.048, 8.448, 34.368, 139.264 Mbit/s), DSn (1.544, 44.736 Mbit/s), STM-0/1/64, STS1/3/192 (51.84, 155.52, 9953.28 Mbit/s), OTU-2 (10.71 Gbit/s)
Optical interfaces: STM-0/1/4/16/64, OC-1/3/12/48/192 (51.84, 155.52, 622.08, 2488.32, 9953.28 Mbit/s), OTU-1 (2.66 Gbit/s), OTU-2 (10.71 Gbit/s)

Because a plug-in system is employed, units can be used in various combinations as needed.

■ ITU-T G.709 OTN measurement

Supports setting/monitoring of all overhead for OTU-1 (2.66 Gbit/s) and OTU-2 (10.71 Gbit/s) conforming to ITU-T G.709. OTN equipment can be tested by error/alarm generation/detection functions. In particular, the Random error insertion function on the MP1590A enables FEC function evaluation. The built-in optical output power adjustable function allows one MP1590A to test the error correction ratio of OTN equipment based on its input power specification.

■ Concatenation mapping

In addition to traditional concatenation mapping, the MP1590A supports arbitrary concatenation.

Arbitrary concatenation

SONET	STS3-nc (n = 2 to 16)
SDH	VC-4-nc (n = 2 to 16)

■ SDH/SONET functions

The MP1590A is applicable for both SDH and SONET frames. It is easy to switch between SDH and SONET. Transmission/reception with Tandem Connection pattern and "No frame" pattern are possible. Also, APS switching time testing is supported. Moreover, various error/alarm generation functions enable stress testing of SDH/SONET equipment.

■ SDH/SONET overhead setting and monitoring

SOH/TOH and POH within an SDH/SONET frame can be set and transmitted. Real-time monitoring is supported for K1/K2 bytes within SOH/TOH, K3/K4 bytes within POH, AU/STS pointer, TU/VT pointer, path trace and N1/Z5, N2 of the received signal.

■ Error analysis (error performance)

Measurements conforming to ITU-T Rec. G.821/G.826/G.828/G.829, M.2100/M.2101/M.2110/M.2120 and Telcordia GR-820 can be performed.

■ Jitter generation/measurement

Installing a 10/10.7G jitter unit enables SDH/SONET (52 to 9953 MHz), OTU-1 (2.66 GHz), OTU-2 (10.71 GHz) and 10.3 GHz jitter generation/measurement. Jitter tolerance and jitter transfer characteristic measurements conforming to ITU-T Rec. G.783, G.825, G.8251 and Telcordia GR-253 can be performed. The measured results are displayed in numeric values and graphs, allowing user evaluation and simplifying pass/fail judgment.

■ Through mode


Through mode operation can be used for all bit rates of PDH/DSn, SDH/SONET and OTU-1/OTU-2. For SDH/SONET and OTU-1/OTU-2, either transparent through or overhead overwrite modes can be selected.

■ Clock/frame synchronization signal output

Divided-by-16 clock or frame synchronization signals can be output. Connecting this signal output to an external sampling oscilloscope allows the MP1590A to evaluate errors/alarms and the oscilloscope to evaluate the input waveform simultaneously. The MP1590A can provide both a transmission signal and the synchronized recovered clock from its received signal, making waveform analysis possible for devices that do not have their own synchronized signal output.


■ External optical input function

By using the MU150134A 10/10.7G Optical Unit (Transmission External Modulation), OTN and SDH/SONET tests based on a user-provided input wavelength can be performed. This is best suited to provide the reference optical source for jitter measurement because of its very fine waveform quality and low jitter characteristics.



OTN Test Solution

Transmission/reception with OTU-1 (2.66 Gbit/s) and OTU-2 (10.71 Gbit/s) frames conforming to ITU-T G.709 or with "No frame" can be performed. When mapping client is set to STM-64/STS192 or STM-16/STS48, various mappings used for SDH/SONET can be selected.

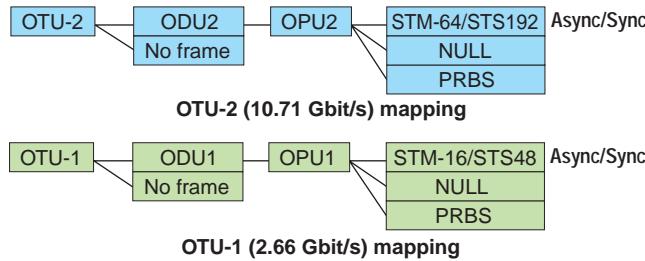


Overhead setting

All overhead (except for parity, MFAS, and JC) can be set arbitrarily. Moreover, multi-frame overhead such as TTI can also be set up easily.

Error/alarm test

A stress test on OTN equipment can be performed by arbitrarily generating FAS, BIP-8 or BEI errors as well as LOF, LOM and AIS alarms and monitoring them with the MP1590A.

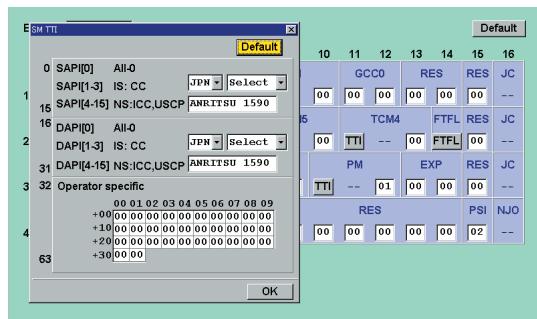


Overhead setting



Overhead monitor

FEC decode test

The MP1590A random error insertion function can evaluate whether the FEC function of the DUT meets the requirements of ITU-T G.709. By using the optional optical output power adjustable function, the error correction ratio vs optical input power to DUT can be tested by a single MP1590A unit.

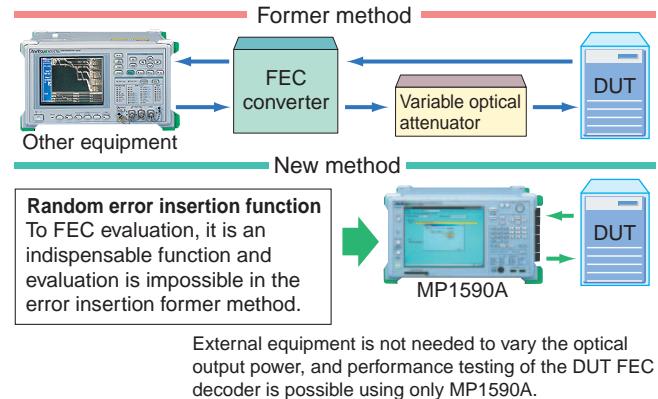


External equipment is not needed to vary the optical output power, and performance testing of the DUT FEC decoder is possible using only MP1590A.

Through mode

Two types of through mode testing are provided for OTN mapping: transparent through mode and overhead overwrite mode. Various errors can be inserted and alarms can be added to through signals.


Transparent


Loops the received signal back and outputs it as is. Random error insertion is possible.

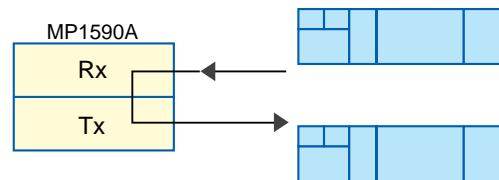

Overhead overwrite

Replaces the overhead part of the received signal with the overhead set on the MP1590A, or with programmed data.


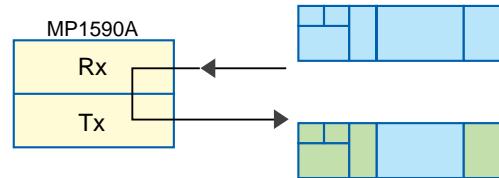




SDH/SONET, PDH, DSn Test Solution


Mapping structures from 1.5 Mbit/s to 10 Gbit/s can be selected.

Mappings for SDH, SONET, Japan, PDH (Europe) and DSn (North America) are supported.

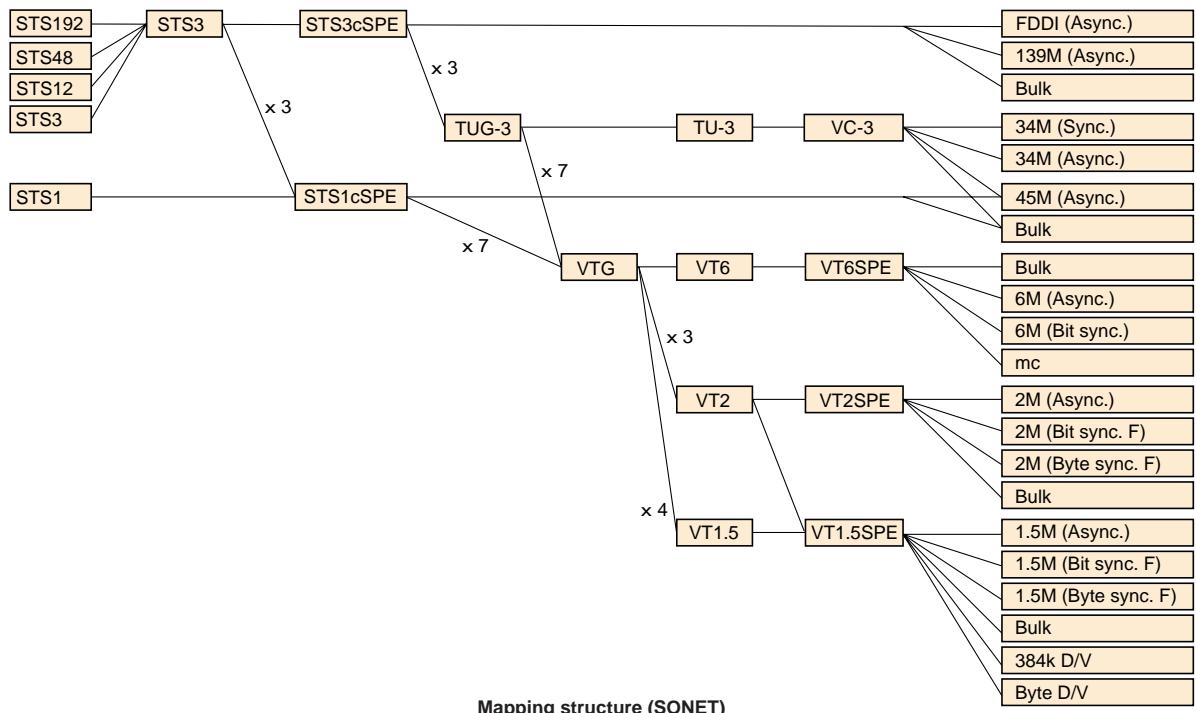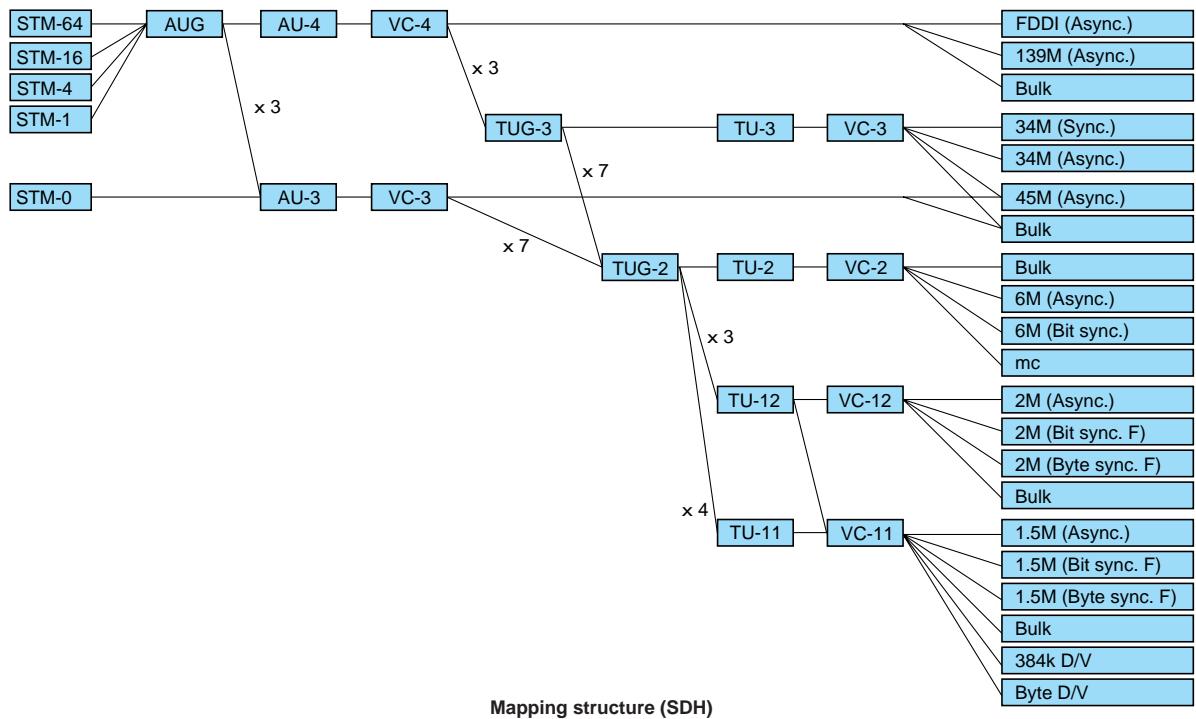


● Concatenation mapping

In concatenation mapping, STM-1c to STM-64c/STS3c to STS192c can be selected. In addition to traditional concatenation mappings such as VC4-64c/STS192cSPE and VC4-16c/STS48cSPE, the MP1590A supports VC4-nc/STS3ncSPE arbitrary concatenation.

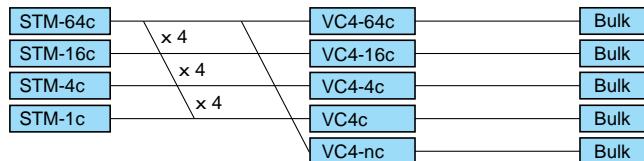

Concatenation mapping (SDH)

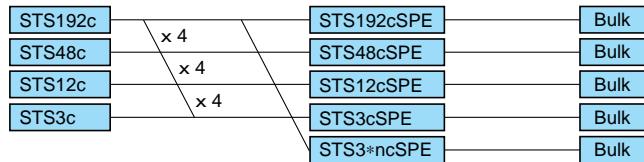




Concatenation mapping (SONET)


● Add/Drop function

When PDH/DSn asynchronous mapping is selected for a SDH/SONET bit rate, the PDH/DSn signal can be added to or dropped from the SDH/SONET signal.

● APS Function

Automatic Protection Switch (APS) testing can be performed. The switching time test measures the time from error/alarm occurrence to release. Switching time is measured with 0.1 msec resolution.

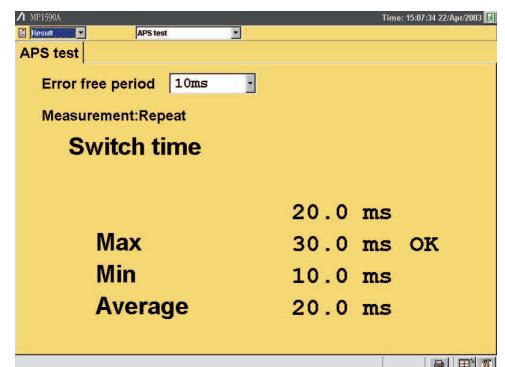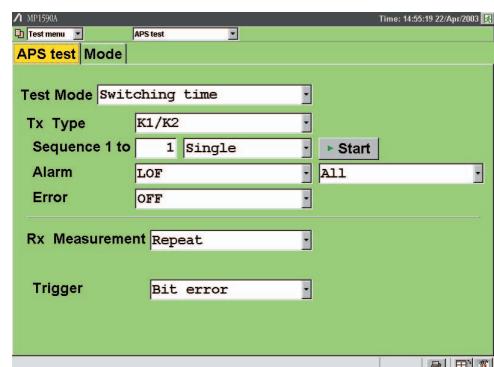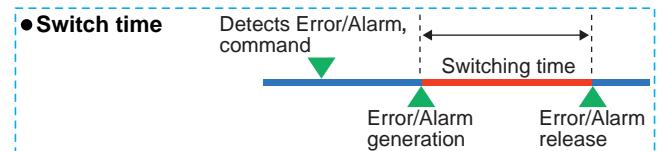



Jitter, Wander Test Solution



The 10/10.7G Jitter Unit can generate and measure jitter for SDH/SONET rates from 52 Mbit/s to 10 Gbit/s. Options enable jitter measurement at the 2.66 Gbit/s and 10.71 Gbit/s OTU-1 and OTU-2 rates as well as 10.3 GHz (clock) jitter measurement.

MU150125A 10/10.7G Jitter Unit

Bit rate	Tx range	Modulation frequency
9953M/10.7G/ 10.3G	4000 UI	0.1 to 600 Hz
	80 UI	0.1 to 1 MHz
	8 UI	0.1 to 4 MHz
	0.5 UI	500 kHz to 80 MHz
2488M/2666M	1000 UI	0.1 to 600 Hz
	20 UI	0.1 to 1 MHz
	2 UI	0.1 to 4 MHz
	0.5 UI	500 kHz to 20 MHz
622M	250 UI	0.1 to 15 kHz
	80 UI	0.1 to 60 kHz
	20 UI	0.1 to 600 kHz
	2 UI	0.1 to 5 MHz
156M	80 UI	0.1 to 150 kHz
	20 UI	0.1 to 1.5 MHz
	2 UI	0.1 to 3.8 MHz
52M	20 UI	0.1 to 500 kHz
	2 UI	0.1 to 1.3 MHz

Jitter tolerance and Jitter transfer tests can be performed automatically. Masks conforming to ITU-T Rec. G.783/G.825/G.8251, and Telcordia GR-253* are provided. This means that standard measurements can be performed by just pressing the Start key. In addition, users can freely set customized masks via on-screen editing.

*: Maximum value of jitter transfer tests mask is 100 times as much modulation frequency as a break point (fc).

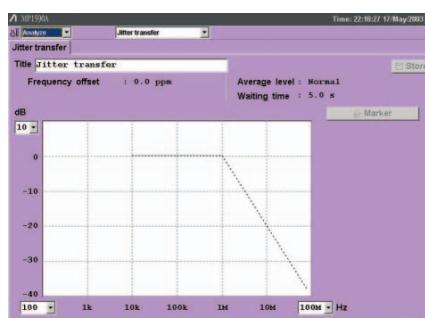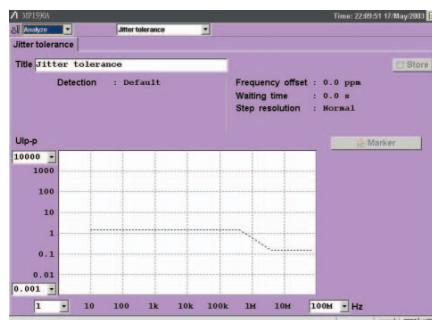


● Re-evaluation setting function

When re-evaluating measurements after having performed jitter tolerance or jitter transfer tests, users can change the mask while viewing the measured results.


● Peak jitter


Long term jitter evaluation tests can be performed simultaneously with error/alarm measurements. This enables analyzing the relationship between error/alarm occurrence and jitter.

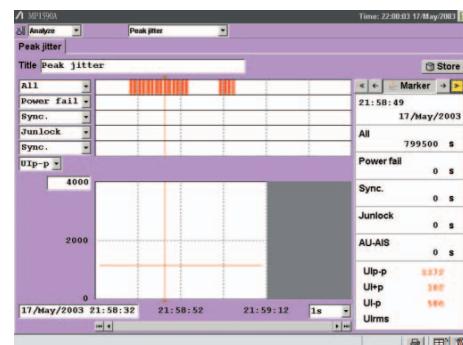

● Wander

Wander up to 400,000 Ulip-p can be generated. Measured results in three bands can be displayed: DC to 10 Hz, DC to 0.01 Hz and 0.01 to 10 Hz (Wander measurement is an Option).

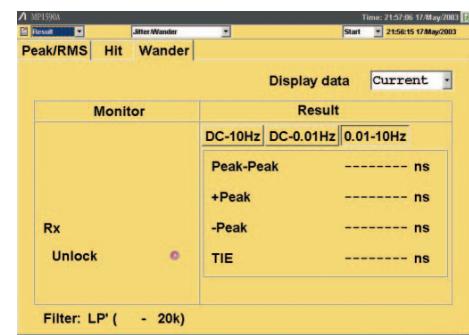




Additional Functions

External optical input function


By using the MU150134A 10/10.7G Optical Unit (Tx External Modulation), OTN and SDH/SONET tests can be performed based on externally generated wavelengths.

This is best suited to provide the reference optical source for jitter measurement because of its very fine waveform quality and low jitter characteristics.

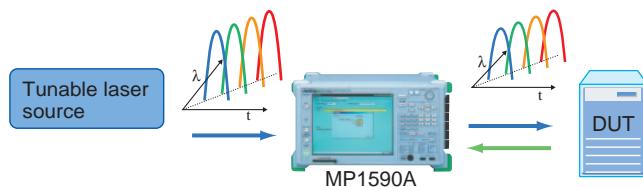


Error performance

Measurements conforming to ITU-T Rec. G.821/G.826/G.828/G.829, M.2100/M.2101/M.2110/M.2120 and Telcordia GR-820 can be performed. Error performance measurement parameters can be generated automatically.

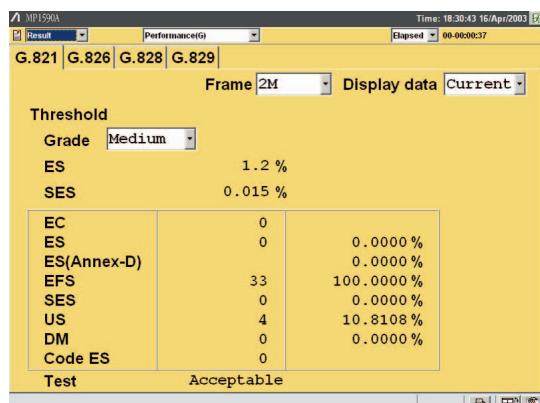

Optical power measurement and optical attenuation functions

When using an optical interface, the average power of the input optical signal can be measured. With the optical output power adjustment option it is possible to attenuate the optical output level up to 30 dB (for 2.6 Gbit/s or lower) or 20 dB (for 10 Gbit/s and higher).

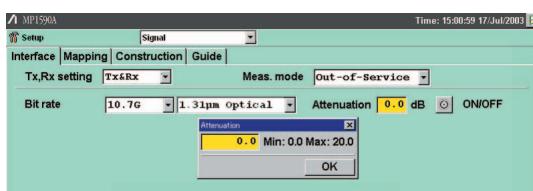


Order wire

The MP1590A is equipped with a CODEC, so communication over a selected channel is possible. A microphone and speaker with 8-level volume control are built into the MP1590A.

Trigger output


The MP1590A can output a trigger derived from the received signal to external units. The trigger output can be clock output, clock-divided output or frame-synchronized output.


For example, connecting the trigger output to an external oscilloscope allows the MP1590A to evaluate errors/alarms and the oscilloscope to evaluate the input waveform at the same time.

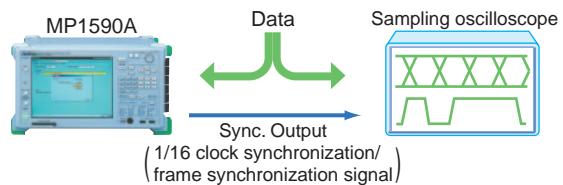

Help function

By simply pushing the HELP key, help screen is displayed in a dedicated screen with cursor-selectable topics.

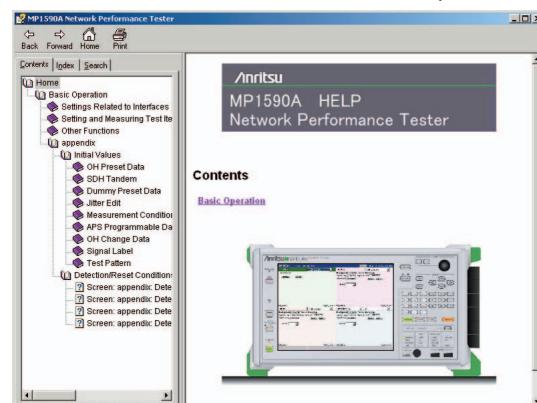



External Interface


■ Portable unit with Microsoft® Windows® XP operating system and built-in screen

The MP1590A is equipped with Windows XP. A pointing device, USB port and compact flash interface slot are built in. This gives it high expandability with printers or external storage units and excellent data retention. The MP1590A is compact and portable with a built-in screen, so it is applicable to a variety of purposes including R&D, manufacturing, and maintenance.

Note: Windows is a registered trademark of Microsoft Corporation in the United States and other countries.

■ Pointing device

The screen employs a graphical user interface. This means you can use a mouse to select items and change settings easily. In field tests, the MP1590A can be operated solely by its built-in pointing device and input keys.

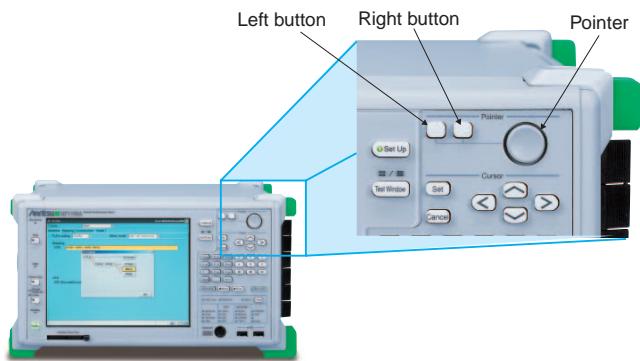

■ Automatic test by remote commands

On the manufacturing line, it is often necessary to execute pre-set tests automatically and record the measured results. The MP1590A supports SCPI commands to enable control from an external controller (PC). It supports RS-232C, GPIB and Ethernet as remote control interfaces.

■ External clock input

The MP1590A can synchronize its internal clock to an input signal from an external device.

Synchronization can be performed on a 1/1 clock of 1.5 Mbit/s to 10.7 Gbit/s as well as 2 MHz, 1.5 MHz and 64k + 8k clocks etc.

■ Typical unit configurations

The MP1590A tester is used in the configurations shown below. Either MU150121A or MU150134A can be inserted in slot 3. Either MU150122A or MU150123A can be inserted in slot 4.

All 6 interface slots fully populated

1	MU150100A
2	
3	MU150121A or MU150134A
4	MU150122A or MU150123A
5	MU150125A
6	

Jitter testing up to 10.7G

1	MU150100A
2	
3	MU150121A or MU150134A
4	MU150123A
5	MU150125A
6	

Testing up to 10G without jitter

1	MU150100A
2	
3	MU150121A or MU150134A
4	MU150122A
5	Blank
6	

With OTN option

Jitter testing up to 2.7G


1	MU150100A
2	
3	Blank
4	Blank
5	MU150125A
6	

Testing up to 2.5G without jitter



1	MU150100A
2	
3	Blank
4	Blank
5	Blank
6	

With OTN option

With 10/10.7G Minus Option




MP1590A Key Layout

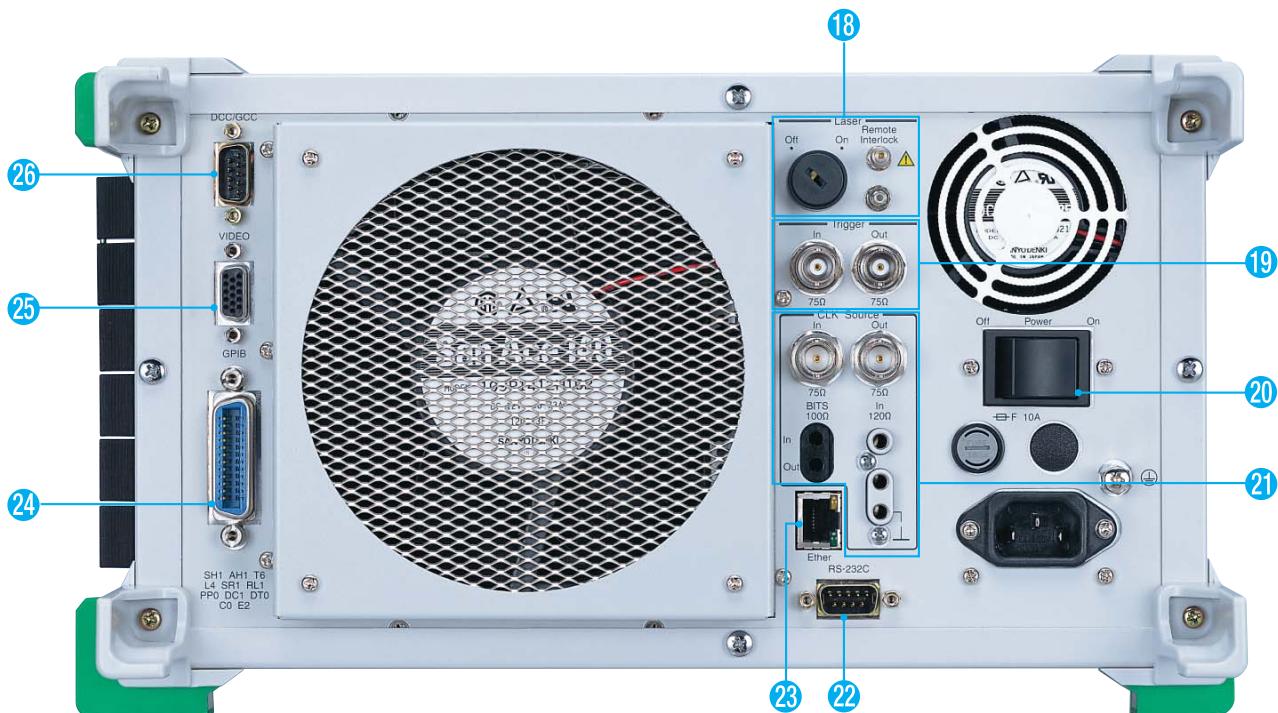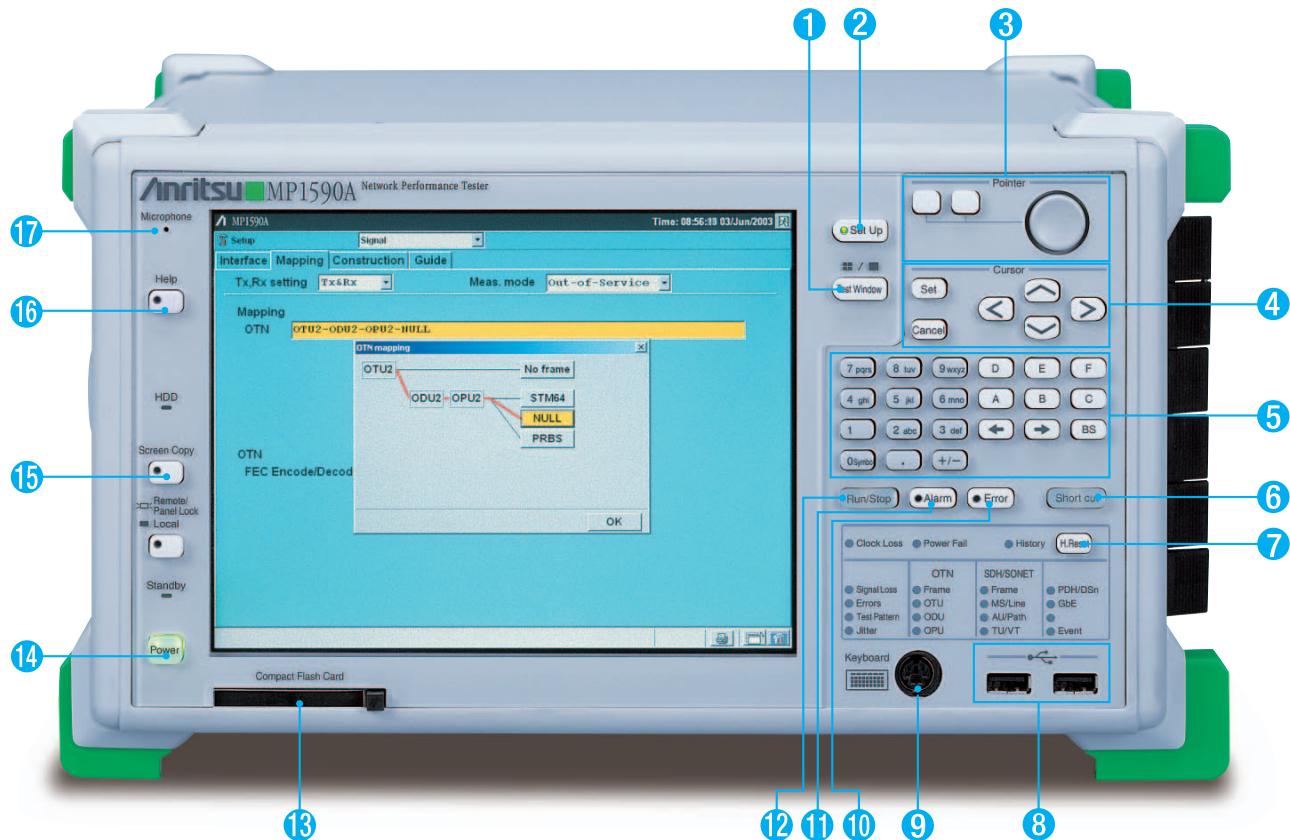

- ① Test Window:** Switches Test window screen between full and 1/4 split screens.
- ② Setup:** Switches between Setup and Test window screens.
- ③ Pointer:** Same function as mouse.
- ④ Cursor**
- Set: Sets data.
 - Cancel: Cancel data setting.
 - $\wedge \vee < >$: Scrolls screen cursor.
- ⑤ Input keys:** Inputs numeric data.
- ⑥ Short cut:** (future capability)
- ⑦ H.Reset:** Resets history data.
- ⑧ USB Connector:** Connector for USB devices.
- ⑨ Keyboard:** Connector for external keyboard.
- ⑩ Error:** Starts/stops Error insertion.
- ⑪ Alarm:** Starts/stops Alarm insertion.
- ⑫ Run/Stop:** Starts/stops measurements and tests.
- ⑬ Compact Flash Card:** Compact Flash memory interface.
- ⑭ Power:** In operating condition (the power indicator is on), when power button is pushed, the MP1590A application ends, it automatically changes to Standby condition.
In Standby condition (the Standby indicator is on), when power button is pushed, the MP1590A application software can be started and operated.
- ⑮ Screen Copy:** Copies the displayed screen.
- ⑯ Help:** Displays the Help screen.

- ⑰ Microphone:** Microphone for order wire communication.
- ⑱ Laser**
- Key Switch: Switches optical signals "On" and "Off".
 - Remote interlock: Connector for laser remote interlock.
- ⑲ Trigger**
- In: Input connector for external trigger to control APS test and capture.
 - Out: Output connector for error/alarm and capture trigger.
- ⑳ Power (Main power):** Switches MP1590A power on and off.
- ㉑ CLK Source**
- In: Reference signal input connector for synchronizing the transmission signal with an external reference signal.
 - Out: Reference signal output connector for synchronized signal with an transmission signal.
- ㉒ RS-232C:** RS-232C remote control interface.
- ㉓ Ether:** 10BASE-T/100BASE-TX Ethernet remote control interface.
- ㉔ GPIB:** GPIB remote control interface.
- ㉕ VIDEO:** Connector for external VGA display.
- ㉖ DCC/GCC:** Input/output connector for add/drop of DCC (SDH/SONET), GCC (OTN) byte.





Specifications


● MP1590A (main frame)

Reference Clock input	Frequency Clock: 1.544 MHz, 2.048 MHz, 64 kHz + 8 kHz, 5 MHz, 10 MHz Data: 1.544 Mbit/s (BITS), 2.048 Mbit/s Input range: ±50 ppm Level/Code 1.544 Mbit/s: ANSI T1.403 (B8ZS) 2.048 Mbit/s: ITU-T G.703 Table10 (HDB3) 1.544 MHz, 2.048 MHz, 5 MHz, 10 MHz: TTL (Rectangle, Sine Wave) 64 kHz + 8 kHz: 0.63 to 1.1 Vo-p (AMI, 8 kHz violation) Connector 1.544 MHz, 2.048 MHz, 2.048 Mbit/s, 5 MHz, 10 MHz: BNC 75 Ω 2.048 MHz, 2.048 Mbit/s, 64 kHz + 8 kHz: SIEMENS 120 Ω 1.544 Mbit/s: BANTAM 100 Ω Effective SDH/SONET/OTN bit rate.
Reference Clock output	Frequency Clock: 1.544 MHz, 2.048 MHz, 5 MHz, 10 MHz Data: 1.544 Mbit/s (BITS), 2.048 Mbit/s Level/Code 1.544 Mbit/s: ANSI T1.403 (B8ZS) 2.048 Mbit/s: ITU-T G.703 Table10 (HDB3) 1.544 MHz, 2.048 MHz, 5 MHz, 10 MHz: TTL (Rectangle) Connector 1.544 MHz, 2.048 MHz, 2.048 Mbit/s, 5 MHz, 10 MHz: BNC 75 Ω 1.544 Mbit/s: BANTAM 100 Ω *5 MHz is possible to use when the MU150125A is installed. Effective SDH/SONET/OTN bit rate.
Trigger	Trigger input: For capture/APS measurement Trigger output: Transmit Error/Alarm, Receive Error/Alarm, Capture trigger Level: TTL (active High) Connector: BNC 75 Ω
DCC/GCC	Data input/output: D1-D3 (192 kbit/s), D4-D12 (576 kbit/s), GCC0-2 (13124 kbit/s, 326.7 kbit/s) Clock output: 192 kHz, 576 kHz, 13124 kHz, 326.7 kHz Level: V.11 Connector: D-sub 9 pin
Remote interface	RS-232C (installed Option 01), GPIB (installed Option 02), Ethernet (10BASE-T/100BASE-TX, installed Option 03)
Peripheral connection	VGA output (SVGA), USB (2 port, Rev. 1.1), keyboard (PS/2)
External memory	Compact flash (2 to 512 MB, recommended by CFA)
Pointing device	By standard pointing device for a main frame, cursor movement in a screen is possible.
Display size	8.4 inch, color TFT (800 x 600)
LED	OTN: Frame, OTU, ODU, OPU SDH/SONET: Frame, MS/Line, AU/Path, TU/VT Standby, HDD, Clock Loss, Power Fail, History, Signal Loss, Errors, Test Pattern, Jitter, PDH/DSn, Event
EMC	EN61326: 1997/A2: 2001 (Class A), EN61000-3-2: 2000 (Class A), EN61326: 1997/A2: 2001 (Annex A)
LVD	EN61010-1: 2001 (Pollution degree 2)
Power	85 to 132/170 to 250 Vac (100/200 V system automatic change), 47.5 to 63 Hz
Power consumption	≤500 VA
Operational temperature	0° to +40 °C
Dimensions and mass	320 (W) x 177 (H) x 350 (D) mm, ≤13 kg (excluding plug-in units)

● MU150100A 10G/10.7G Unit

Electrical interface (1.544 to 155.52 Mbit/s)	<p>Bit rate PDH/DSn: 1.544 Mbit/s, 2.048 Mbit/s, 8.448 Mbit/s, 34.368 Mbit/s, 44.736 Mbit/s, 139.264 Mbit/s SDH/SONET: 51.84 Mbit/s, 155.52 Mbit/s</p> <p>Code 1.544 Mbit/s: AMI/B8ZS 2.048 Mbit/s, 8.448 Mbit/s, 34.368 Mbit/s: HDB3 44.736 Mbit/s, 51.84 Mbit/s: B3ZS 139.264 Mbit/s, 155.52 Mbit/s: CMI</p> <p>Connector 1.5M: BANTAM 100 Ω Balanced 2M: 3 pin Siemens 120 Ω Balanced 2/8/34/139/45/52/156M: BNC 75 Ω</p> <p>Level ANSI T1.102 (1.5/45M) ITU-T G.703 (2/8/34/139/156M) DSX output (1.5M): 0/655 feet DSX output (45M, 52M): 0/450/900 feet</p> <p>Monitor gain 20 dB, 26 dB: 1.5M/2M/8M/34M/45M/52M 20 dB: 139M/156M</p>
Electrical interface (9953.28 M, 10709.225 Mbit/s)	<p>Bit rate SDH/SONET: 9953.28 Mbit/s OTN: 10709.225 Mbit/s (Installed Option 05)</p> <p>Code: NRZ</p> <p>Connector: SMA 50 Ω</p> <p>Level Clock Output: 1.3 to 0.6 Vp-p Data Output: 0 to -0.2 V (High), -0.85 to -1.5 V (Low) Data Input: 1.5 to 0.3 Vp-p</p>
Optical interface	<p>Bit rate SDH/SONET: 51.84 Mbit/s, 155.52 Mbit/s, 622.08 Mbit/s, 2488.32 Mbit/s OTN: 2666.057 Mbit/s (Installed Option 05)</p> <p>Code: NRZ</p> <p>Connector: FC-PC (SMF), replaceable</p>
Optical output	<p>Level: -1 to +3 dBm (ATT = 0 dB, Option 04) Extinction ratio: ≥10 dB SMSR: ≥30 dB</p> <p>Peak wavelength: 1550 nm ±20 nm (Option 02,03), 1310 nm ±20 nm (Option 01,03) -20 dB width: ≤1 nm</p> <p>Safety classification: IEC 60825-1: CLASS 1M, 21CFR 1040.10: CLASS III b</p>
Optical input	<p>Optical input level: -8 to -33 dBm (52/156M), -8 to -29 dBm (622M/2.5G/2.6G) Wavelength: 1260 to 1610 nm Overload: +3 dBm (Average)</p>
Clock	<p>Internal, External (Reference input, 1/1 input), Receive</p> <p>Internal Accuracy: ±0.1 ppm Offset range: ±100 ppm/0.1 ppm step</p>
Frame	<p>1.544 Mbit/s: D4/ESF/Japan ESF 2.048 Mbit/s: 30, 31ch with or without CRC4 8.448 Mbit/s: G.742 34.368 Mbit/s: G.751 44.736 Mbit/s: M13/C-bit 139.264 Mbit/s: G.751 51.84 Mbit/s: SDH/SONET 155.52 Mbit/s: SDH/SONET 622.08 Mbit/s: SDH/SONET 2488.32 Mbit/s: SDH/SONET 9953.28 Mbit/s: SDH/SONET</p>
No frame	<p>1.544, 2.048, 8.448, 34.368, 44.736, 139.264 Mbit/s 51.84, 155.52, 622.08, 2488.32, 9953.28 Mbit/s</p>

Test pattern	PRBS, Word, all0, all1, 3 in 24 (only 1.5M) PRBS (SDH/SONET) No Frame: $2^{15} - 1$ (only 52/156M), $2^{23} - 1$, $2^{31} - 1$ Concatenation mapping: $2^{15} - 1$ (1c/4c), $2^{23} - 1$, $2^{31} - 1$ Another mapping: $2^{11} - 1$, $2^{15} - 1$, $2^{20} - 1$, $2^{20} - 1z$ (only 1.5M/45M), $2^{23} - 1$ Invert ON/OFF PRBS (PDH/DSn) $2^{11} - 1$, $2^{15} - 1$, $2^{20} - 1$, $2^{20} - 1z$ (only 1.5M/45M), $2^{23} - 1$ Invert ON/OFF Word: 16-bit programmable Transmit/Receive: An independent setup is possible
OH preset	SOH/TOH/POH: All bytes (except parity byte, K1/K2 byte, H1, H2 and H3) Dummy channel POH: All bytes (except parity byte)
Error addition/ measurement	PDH/DSn: Bit all (only addition), Code, Bit info, Bit 1.5M, Bit 2M, Bit 8M, Bit 34M, Bit 45M, Bit 139M, FAS 1.5M, FAS 2M, FAS 8M, FAS 34M, FAS 45M, FAS 139M, EXZ, CRC6, Ebit, Parity, Cbit, REI SDH: FAS, Frame (only measurement), B1, B2, HP-B3, LP-B3, BIP-2, MS-REI (M0/M1), HP-REI, LP-REI, Bit all (only addition), Bit info, OH bit, HP-IEC, LP-IEC, N2 BIP-2, HP-TC-REI, LP-TC-REI, HP-OEI, LP-OEI SONET: FAS, Frame (only measurement), B1, B2, HP-B3, LP-B3, BIP-2, REI-L (M0/M1), REI-P, REI-V, Bit all (only addition), Bit info, OH bit, HP-IEC, LP-IEC, N2 BIP-2, HP-TC-REI, LP-TC-REI, HP-OEI, LP-OEI
Error addition timing	Rate, Alternative, Single, Burst, All, Frame Rate Fix rate: 1×10^{-n} (n: 3 to 9), User program: $A \times 10^{-B}$ (A: 1.0 to 9.9 step 0.1, B: 2 to 10) Alternative Error frame: 0 to 64000, Normal frame: 1 to 64000 Frame (only PDH/DSn) : n in 16 frame (n: 1 to 4) B1, B2, B3, BIP-2 can be set Error bit.
Alarm addition/ measurement	PDH/DSn: LOS, LOF, AIS, RDI, RDI (MF) SDH: LOS, LOF, OOF (only measurement), RS-TIM, MS-AIS, MS-RDI, AU-AIS, AU-LOP, HP-RDI, HP-ERDIP, HP-ERDIS, HP-ERDIC, HP-TIM, HP-UNEQ, HP-SLM, TU-AIS, TU-LOP, TU-LOM, LP-RDI, LP-ERDIP, LP-ERDIS, LP-ERDIC, ISF, LP-RFI, LP-TIM, LP-UNEQ, LP-SLM, Sync. loss, OH Sync., HP-VC-AIS, LP-VC-AIS, HP-FAS, LP-FAS, HP-Incoming AIS, LP-Incoming AIS, HP-TC-RDI, LP-TC-RDI, HP-ODI, LP-ODI, HP-TC-TIM, LP-TC-TIM, HP-LTC, LP-LTC SONET: LOS, LOF, OOF (only measurement), RS-TIM, AIS-L, RDI-L, AIS-P, LOP-P, RDI-P, ERDIP-P, ERDIS-P, ERDIC-P, TIM-P, UNEQ-P, PLM-P, AIS-V, LOP-V, LOM-V, RDI-V, ERDIP-V, ERDIS-V, ERDIC-V, ISF, RFI-V, TIM-V, UNEQ-V, PLM-V, Sync. loss, OH Sync., HP-VC-AIS, LP-VC-AIS, HP-FAS, LP-FAS, HP-Incoming AIS, LP-Incoming AIS, HP-TC-RDI, LP-TC-RDI, HP-ODI, LP-ODI, HP-TC-TIM, LP-TC-TIM, HP-LTC, LP-LTC
Alarm addition timing	Single, Burst, Alternative, All Alternative Error frame = 0 to 64000, Normal frame = 1 to 64000
Monitor	PDH/DSn: FAS 1.5M, FW 2M, NFW 2M, MFW 2M, FAS 8M, FAS 34M, FAS 45M, FAS 139M, Info byte (only 2M) SDH/SONET: SOH/TOH/POH, Path Trace, Tandem byte, K1/K2 byte, AU/STS, TU/VT pointer
Through	Transparent, Overhead overwrite (only SDH/SONET/OTN)
MUX/DEMUX	MUX/DEMUX is possible to 64 k units in PDH and DSn
Add/Drop	PDH/DSn signal can be added to or dropped from the SDH/SONET mapping. Bit rate: 1.5 Mbit/s, 2 Mbit/s, 34 Mbit/s, 45 Mbit/s, 139 Mbit/s
Delay measurement	Measurement period: 0.5, 1, 2, 5, 10 s Measurement range: 0.1 to 999 μ s, 1.0 to 999.9 ms, 1.0 to 10.0 s, >Time out
Dummy channel	Mode: Copy/Dummy Dummy pattern: all 0, all 1, $2^{11} - 1$, $2^{15} - 1$ (Invert)
Path Trace	J0, J1, J2 byte can be set arbitrarily. 16 byte (CRC On), 32 byte (CRC Off)
Tandem connection	N1/Z5, N2 byte can be set arbitrarily. It can set ON/OFF
Pointer generation	AU/STS, TU/VT pointer Action: NDF, ±Justification Timing: Manual, Burst (2 to 64), NDF
Pointer measurement	AU/STS, TU/VT pointer, C bit Measurement item: NDF, +PJC, -PJC, Cons, C, C1/C2

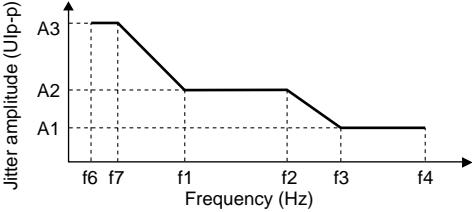Payload offset	Offset range: ± 100 ppm/0.1 ppm step can set at the Async. mapping.																																																												
APS test	<p>Switching time measurement Measurement time: 0.1 to 2000.0 ms, Timeout</p> <p>APS Sequence Generator Generator timing: 2 to 64 word, Max. 8000 frame/word It can be set for each K1/K2, K3, K4.</p>																																																												
Overhead sequence capture	Capture byte: K1/K2, K3, K4, AU/STS-Pointer, TU/VT-Pointer Size: 64 sequence Repeat: Max. 8000 frame/sequence																																																												
Overhead test	SOH/TOH/POH 1byte, A1/A2, K1/K2, RSOH, MSOH, SOH, POH (except parity byte) Timing: Alternative (A: 1 to 8000 times, B: 1 to 8000 times), A and B can be set up to 256 frames.																																																												
OH BERT test	<p>Test byte: SOH/TOH/POH 1 byte, D1-D3, D4-D12 (except parity byte)</p> <p>Pattern: $2^{11} - 1$, $2^{15} - 1$ (Invert)</p> <p>Error addition: Bit (only Single)</p> <p>Measurement: Bit error, Sync loss</p>																																																												
OH Add/Drop	Test byte: D1-D3, D4-D12																																																												
Performance	G.821, G.826, G.828, G.829, M.2100, M.2101, M.2110, M.2120, GR.820																																																												
Optical power meter	<p>Wavelength: 1310 nm/1550 nm</p> <p>Measurement range: -7 to -40 dBm</p> <p>Measurement accuracy: ± 1 dB (-10 to -30 dBm), ± 2 dB (-7 to -9.9 dBm, -30.1 to -40 dBm)</p>																																																												
Frequency counter	<p>Measurement frequency (f0): 1.544, 2.048, 8.448, 34.368, 44.736, 139.264 MHz 51.84, 155.52, 622.08, 2488.320, 2666.057 MHz 9953.28, 10709.225 MHz</p> <p>Measurement range: f0 ± 100 ppm</p> <p>Accuracy: ± 0.1 ppm</p>																																																												
Jitter tolerance	 <table border="1"> <thead> <tr> <th>Bit rate (Mbit/s)</th> <th>A1 (UIp-p)</th> <th>A2 (UIp-p)</th> <th>A3 (UIp-p)</th> <th>f6 (Hz)</th> <th>f7 (Hz)</th> <th>f1 (Hz)</th> <th>f2 (Hz)</th> <th>f3 (Hz)</th> <th>f4 (Hz)</th> </tr> </thead> <tbody> <tr> <td>51.84</td> <td>20</td> <td>2</td> <td>0.2</td> <td>10</td> <td>30</td> <td>300</td> <td>2k</td> <td>20k</td> <td>400k</td> </tr> <tr> <td>155.52</td> <td>50</td> <td>2</td> <td>0.2</td> <td>10</td> <td>19.3</td> <td>500</td> <td>6.5k</td> <td>65k</td> <td>1.3M</td> </tr> <tr> <td>622.08</td> <td>200</td> <td>2</td> <td>0.2</td> <td>10</td> <td>10</td> <td>1k</td> <td>25k</td> <td>250k</td> <td>5M</td> </tr> <tr> <td>2488.32</td> <td>800</td> <td>2</td> <td>0.2</td> <td>10</td> <td>12.1</td> <td>20k</td> <td>400k</td> <td>4M</td> <td>20M</td> </tr> <tr> <td>2666.05*</td> <td>800</td> <td>2</td> <td>0.2</td> <td>10</td> <td>12.1</td> <td>20k</td> <td>400k</td> <td>4M</td> <td>20M</td> </tr> </tbody> </table> <p>Measurement condition: MU150100A loop-back measurement (*Built-in MU150125A-05) Temperature condition: +10° to +40°C Optical input level: -10 to -12 dBm (2488M, 2666M), -10 to -20 dBm (52M, 156M, 622M) Error threshold: 10^{-8} (52M), 10^{-9} (156M, 622M), 10^{-10} (2488M, 2666M) Optical input wavelength: 1310 nm/1550 nm Mapping SDH: VC3-Bulk (52M), VC4-nc (n = 1, 4, 16) (156M/622M/2488M) SONET: STSnc (n = 1, 3, 12, 48) OTU-1: ODU1-OPU1-PRBS Test pattern: PRBS23 (SDH/SONET), PRBS31 (OTU-1), Mark ratio 1/2, Scramble "On" Clock: internal</p>	Bit rate (Mbit/s)	A1 (UIp-p)	A2 (UIp-p)	A3 (UIp-p)	f6 (Hz)	f7 (Hz)	f1 (Hz)	f2 (Hz)	f3 (Hz)	f4 (Hz)	51.84	20	2	0.2	10	30	300	2k	20k	400k	155.52	50	2	0.2	10	19.3	500	6.5k	65k	1.3M	622.08	200	2	0.2	10	10	1k	25k	250k	5M	2488.32	800	2	0.2	10	12.1	20k	400k	4M	20M	2666.05*	800	2	0.2	10	12.1	20k	400k	4M	20M
Bit rate (Mbit/s)	A1 (UIp-p)	A2 (UIp-p)	A3 (UIp-p)	f6 (Hz)	f7 (Hz)	f1 (Hz)	f2 (Hz)	f3 (Hz)	f4 (Hz)																																																				
51.84	20	2	0.2	10	30	300	2k	20k	400k																																																				
155.52	50	2	0.2	10	19.3	500	6.5k	65k	1.3M																																																				
622.08	200	2	0.2	10	10	1k	25k	250k	5M																																																				
2488.32	800	2	0.2	10	12.1	20k	400k	4M	20M																																																				
2666.05*	800	2	0.2	10	12.1	20k	400k	4M	20M																																																				
Auxiliary interface	External clock input, Receive clock output, Clock/Frame sync. output																																																												
Optical output power adjustable (Option 04)	Variable range: 0 to 30 dB, Accuracy: ≤ 0.5 dB (0 to 10 dB), ≤ 1.0 dB (10.1 to 30 dB), Setting resolution: 0.1 dB																																																												

● MU150100A Option 05 (OTU-1/OTU-2)

Bite rate	10709.225 Mbit/s, 2666.057 Mbit/s
Frame	10709.225 Mbit/s: OTU-2, 2666.057 Mbit/s: OTU-1
No frame	10709.225 Mbit/s, 2666.057 Mbit/s
Test pattern	PRBS, Word, all 0, all 1 PRBS No frame: $2^{15} - 1, 2^{23} - 1, 2^{31} - 1$ PRBS mapping: $2^{15} - 1, 2^{23} - 1, 2^{31} - 1$ SDH/SONET mapping: According to SDH/SONET mapping Invert ON/OFF Word: 16-bit programmable Transmit/Receive: An independent setup is possible
OH preset	OTU, ODU, OPU, FAS (except parity byte, MFAS and JC byte) TTI (SPA1 [1] - [15], DAPI [1] - [15]) can be set character. PT is set automatically according to mapping (can be edit).
FEC	G.709, RS (255, 239) It can set ON/OFF.
Justification	Generation Action: ±Justification Timing: Single, Burst (2 to 64) Measurement item: + JC, -JC
Payload offset	Offset range: ±65.9 ppm/0.1 ppm step can set at the Async. mapping.
Error addition/measurement	FAS, BIP-8 (SM, PM, TCM1-6), BEI (SM, PM, TCM1-6), Bit all (only addition for OTN frame), Bit, Corrected error bit (only measurement), Uncorrectable FEC block (only measurement)
Error addition timing	Single, Rate, All, Alternate, Random (only Bit all) Rate Fix rate: 1×10^{-n} (n: 3 to 9), User program: $A \times 10^{-B}$ (A: 1.0 to 9.9, B: 2 to 10) Alternative Error frame: 0 to 64000, Normal frame: 1 to 64000 Random: Only Bit all When the Parity error is set, it can be select Error position
Alarm addition/measurement	LOF, OOF (only measurement), LOM, OOM (only measurement), BDI (SM, PM, TCM1-6), AIS (OTU, ODU), ODU-OCI, ODU-LCK, ODU-PLM (only measurement), IAE (SM, TCM1-6), TIM (SM, PM, TCM1-6), LTC (TCM1-6), BIAE (SM, TCM1-6)
Alarm addition timing	Alternative, All, Burst, Single Alternative Error frame: 0 to 64000, Normal frame: 1 to 64000
Monitor	All OH (OTU, ODU, OPU), TTI, FTFL, Payload Multi-frame indicate is possible at the TTI and FTFL.
Overhead sequence capture	Capture byte: FAS, APS/PCC, EXP, FTFL, GCC0-2, PM, PSI, SM, TCMACT, TCM1-6, OPU Size: 64 sequence Repeat: Max. 8000 frame/sequence
Overhead test	OTU/ODU/OPU 1byte, FAS, APS/PCC, TCM1-6, SM, PM, GCC0-2, EXP (except parity byte, MFAS and JC byte) Timing: Alternative (A: 1 to 8000 times, B: 1 to 8000 times), A and B can be set up to 256 frames.
OH BERT test	GCC0-2, OH 1byte (except Parity byte) Pattern: $2^{11} - 1, 2^{15} - 1$ (Invert) Error addition: Bit (only Single) Measurement: Bit error, Sync.loss
OH Add/Drop	Test byte: GCC0-2

● MU150100A Option 07 (10/10.7G Minus option)

Function	This Option removes the 10/10.7G electrical capability from the MU150100A. This Option must be installed in the factory.
----------	-----------------------------------------------------------------------------------------------------------------------------




● MU150121A 10/10.7G Optical Unit (Tx)

Bit rate	9953.28 Mbit/s, 10709.225 Mbit/s Depends on frequency accuracy and external input frequency of the MU150100A.
Peak wavelength	1310 ±20 nm (Option 01, 03), 1550 ±20 nm (Option 02, 03)
-20 dB width	≤0.5 nm (@-20 dB)
SMSR	≥30 dB
Extinction ratio	≥10 dB
Optical output power	0 to +3 dBm
Signal code	NRZ
Connector	FC-PC (SMF), replaceable
Electrical input	9953.28 Mbit/s ±100 ppm, 10709.225 Mbit/s ±100 ppm Input level H: 0 to -0.2 V, L: -0.85 to -1.5 V Impedance: 50 Ω Connector: SMA
Safety classification	IEC 60825-1: CLASS 1M, 21CFR 1040.10: CLASS III b
Optical output power adjustable (Option 04)	Variable range: 0 to 20 dB, Accuracy: ≤±0.5 dB (0 to 10 dB), ≤±1.0 dB (10.1 to 20 dB), Setting resolution: 0.1 dB




● MU150122A 10/10.7G Optical Unit (Rx narrow)

Bit rate	9953.28 Mbit/s ±100 ppm, 10709.225 Mbit/s ±100 ppm
Optical input wavelength	1260 to 1610 nm
Optical input sensitivity	-14 to 0 dBm
Absolute maximum optical input	+3 dBm (average)
Optical input signal code	NRZ
Optical input return loss	≥27 dB
Optical connector	FC-PC (SMF), replaceable
Electrical output signal	9953.28 Mbit/s, 10709.225 Mbit/s Output level: 0.2 to 1.0 Vp-p Signal code: NRZ Impedance: 50 Ω Connector: SMA
Optical input power measurement	Measurement range: -20 to +2 dBm Measurement accuracy: ≤±0.5 dB (+2 to -10 dBm), ≤±1.0 dB (-10.1 to -20 dBm)

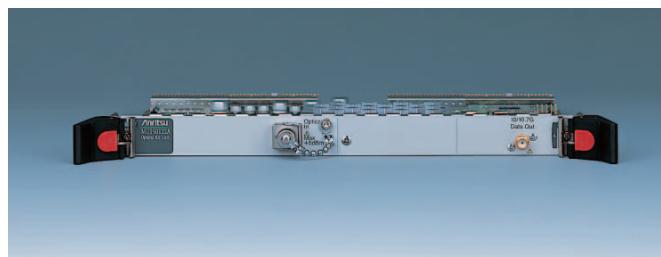

● MU150123A 10/10.7G Optical Unit (Rx wide)

Bit rate	9953.28 Mbit/s ±100 ppm, 10709.225 Mbit/s ±100 ppm (Option 05)
Optical input wavelength	1260 to 1610 nm
Optical input sensitivity	-14 to 0 dBm
Absolute maximum optical input	+3 dBm (average)
Optical input signal code	NRZ
Optical input return loss	≥27 dB
Optical connector	FC-PC (SMF), replaceable
Electrical output signal	Data output: 9953.28 Mbit/s, 10709.225 Mbit/s (Option 05) Output level: 1.0 ±0.25 Vp-p Signal code: NRZ Clock output 9953.28 MHz, 10709.225 MHz (Option 05) Output level: 0.8 ±0.25 Vp-p Impedance: 50 Ω Connector: SMA
Optical input power measurement	Measurement range: -20 to +2 dBm Measurement accuracy: ≤±0.5 dB (+2 to -10 dBm), ≤±1.0 dB (-10.1 to -20 dBm)

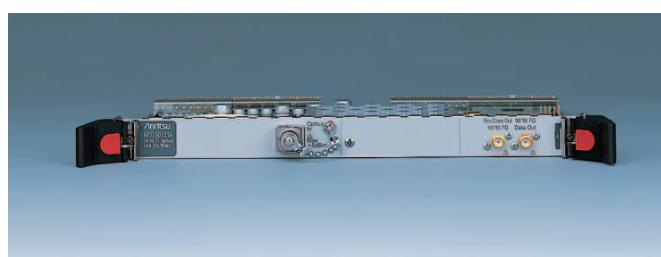

● MU150125A 10/10.7G jitter Unit

Frequency	51.84 MHz, 155.52 MHz, 622.08 MHz, 2488.32 MHz, 9953.28 MHz 2666.06 MHz (Option 05), 10709.225 MHz (Option 05) 10312.5 MHz (Option 06)																																																																												
Jitter generation	<p>Frequency: 51.84 MHz \pm100 ppm, 155.52 MHz \pm100 ppm, 622.08 MHz \pm100 ppm, 2488.32 MHz \pm100 ppm, 2666.057 MHz \pm100 ppm, 9953.28 MHz \pm100 ppm, 10312.5 MHz \pm100 ppm, 10709.225 MHz \pm100 ppm</p> <p>Level: 0.8 Vp-p \pm0.25 V</p> <p>Connector: SMA, 50 Ω</p> <p>Modulation frequency: 0.1 to 80 MHz</p> <p>Amplitude: 0 to 4040 UIp-p</p> <p>Modulation value: 52M, 156M, 622M</p> <table border="1"> <thead> <tr> <th>Bit rate (bit/s)</th> <th>f0 (Hz)</th> <th>f1 (kHz)</th> <th>f2 (kHz)</th> <th>f3 (kHz)</th> <th>f4 (kHz)</th> <th>f5 (MHz)</th> <th>A0 (UIp-p)</th> <th>A1 (UIp-p)</th> <th>A2 (UIp-p)</th> <th>A3 (UIp-p)</th> <th>A4 (UIp-p)</th> </tr> </thead> <tbody> <tr> <td>52M</td> <td>0.1</td> <td>—</td> <td>—</td> <td>50</td> <td>500</td> <td>1.3</td> <td>0.776</td> <td>2.02</td> <td>20.20</td> <td>—</td> <td>—</td> </tr> <tr> <td>156M</td> <td>0.1</td> <td>—</td> <td>38</td> <td>150</td> <td>1500</td> <td>3.8</td> <td>0.797</td> <td>2.02</td> <td>20.20</td> <td>80.8</td> <td>—</td> </tr> <tr> <td>622M</td> <td>0.1</td> <td>4.8</td> <td>15</td> <td>60</td> <td>600</td> <td>5</td> <td>0.242</td> <td>2.02</td> <td>20.20</td> <td>80.8</td> <td>253.0</td> </tr> </tbody> </table> <p>2488M, 2666M</p> <table border="1"> <thead> <tr> <th>Bit rate (bit/s)</th> <th>f0 (Hz)</th> <th>f1 (Hz)</th> <th>f2 (Hz)</th> <th>f3 (kHz)</th> <th>f4 (kHz)</th> <th>f5 (MHz)</th> <th>f6 (MHz)</th> <th>f7 (MHz)</th> <th>A1 (UIp-p)</th> <th>A2 (UIp-p)</th> <th>A3 (UIp-p)</th> <th>A4 (UIp-p)</th> <th>A5 (UIp-p)</th> </tr> </thead> <tbody> <tr> <td>2488M 2666M</td> <td>0.1</td> <td>15</td> <td>600</td> <td>100</td> <td>500</td> <td>1</td> <td>4</td> <td>20</td> <td>0.505</td> <td>2.02</td> <td>20.2</td> <td>25</td> <td>1010</td> </tr> </tbody> </table>	Bit rate (bit/s)	f0 (Hz)	f1 (kHz)	f2 (kHz)	f3 (kHz)	f4 (kHz)	f5 (MHz)	A0 (UIp-p)	A1 (UIp-p)	A2 (UIp-p)	A3 (UIp-p)	A4 (UIp-p)	52M	0.1	—	—	50	500	1.3	0.776	2.02	20.20	—	—	156M	0.1	—	38	150	1500	3.8	0.797	2.02	20.20	80.8	—	622M	0.1	4.8	15	60	600	5	0.242	2.02	20.20	80.8	253.0	Bit rate (bit/s)	f0 (Hz)	f1 (Hz)	f2 (Hz)	f3 (kHz)	f4 (kHz)	f5 (MHz)	f6 (MHz)	f7 (MHz)	A1 (UIp-p)	A2 (UIp-p)	A3 (UIp-p)	A4 (UIp-p)	A5 (UIp-p)	2488M 2666M	0.1	15	600	100	500	1	4	20	0.505	2.02	20.2	25	1010
Bit rate (bit/s)	f0 (Hz)	f1 (kHz)	f2 (kHz)	f3 (kHz)	f4 (kHz)	f5 (MHz)	A0 (UIp-p)	A1 (UIp-p)	A2 (UIp-p)	A3 (UIp-p)	A4 (UIp-p)																																																																		
52M	0.1	—	—	50	500	1.3	0.776	2.02	20.20	—	—																																																																		
156M	0.1	—	38	150	1500	3.8	0.797	2.02	20.20	80.8	—																																																																		
622M	0.1	4.8	15	60	600	5	0.242	2.02	20.20	80.8	253.0																																																																		
Bit rate (bit/s)	f0 (Hz)	f1 (Hz)	f2 (Hz)	f3 (kHz)	f4 (kHz)	f5 (MHz)	f6 (MHz)	f7 (MHz)	A1 (UIp-p)	A2 (UIp-p)	A3 (UIp-p)	A4 (UIp-p)	A5 (UIp-p)																																																																
2488M 2666M	0.1	15	600	100	500	1	4	20	0.505	2.02	20.2	25	1010																																																																

	<p>9953M, 10.3G, 10.7G</p> <table border="1"> <thead> <tr> <th>Bit rate (bit/s)</th><th>f0 (Hz)</th><th>f1 (Hz)</th><th>f2 (Hz)</th><th>f3 (kHz)</th><th>f4 (kHz)</th><th>f5 (kHz)</th><th>f6 (MHz)</th><th>f7 (MHz)</th><th>A1 (UIp-p)</th><th>A2 (UIp-p)</th><th>A3 (UIp-p)</th><th>A4 (UIp-p)</th><th>A5 (UIp-p)</th><th>A6 (UIp-p)</th></tr> </thead> <tbody> <tr> <td>9953M 10.3G 10.7G</td><td>0.1</td><td>15</td><td>600</td><td>100</td><td>500</td><td>1</td><td>4</td><td>80</td><td>0.505</td><td>2.02</td><td>8.08</td><td>80.8</td><td>110</td><td>4040</td></tr> </tbody> </table> <p>Accuracy:</p> <ul style="list-style-type: none"> 0.5 UI range: $\pm Q$ % of setting ± 0.02 UIp-p 2 UI range: $\pm Q$ % of setting ± 0.02 UIp-p 8 UI range: $\pm Q$ % of setting ± 0.8 UIp-p 20 UI range: $\pm Q$ % of setting ± 0.2 UIp-p 20 UI range: $\pm Q$ % of setting ± 1.2 UIp-p (2488M, 2666M) 80 UI range: $\pm Q$ % of setting ± 1.2 UIp-p 80 UI range: $\pm Q$ % of setting ± 4.8 UIp-p (9953M, 10.3G, 10.7G) 250 UI range: $\pm Q$ % of setting ± 6 UIp-p 1000 UI range: $\pm Q$ % of setting ± 6 UIp-p 4000 UI range: $\pm Q$ % of setting ± 24 UIp-p <table border="1"> <thead> <tr> <th>Frequency</th><th>Variable error Q</th><th>Frequency range</th></tr> </thead> <tbody> <tr> <td rowspan="2">52 MHz</td><td>± 8 %</td><td>0.1 to 500 kHz</td></tr> <tr> <td>± 12 %</td><td>500 kHz to 1.3 MHz</td></tr> <tr> <td rowspan="3">156 MHz</td><td>± 8 %</td><td>0.1 to 500 kHz</td></tr> <tr> <td>± 12 %</td><td>500 kHz to 1.5 MHz</td></tr> <tr> <td>± 15 %</td><td>1.5 MHz to 3.8 MHz</td></tr> <tr> <td rowspan="3">622 MHz</td><td>± 8 %</td><td>0.1 to 500 kHz</td></tr> <tr> <td>± 12 %</td><td>500 kHz to 2 MHz</td></tr> <tr> <td>± 15 %</td><td>2M to 5 MHz</td></tr> <tr> <td rowspan="3">2488 MHz 2666 MHz</td><td>± 8 %</td><td>0.1 to 500 kHz</td></tr> <tr> <td>± 12 %</td><td>500 kHz to 2 MHz</td></tr> <tr> <td>± 15 %</td><td>2M to 20 MHz</td></tr> <tr> <td rowspan="3">9953MHz 10.3 GHz 10.7 GHz</td><td>± 8 %</td><td>0.1 to 500 kHz</td></tr> <tr> <td>± 12 %</td><td>500 kHz to 2 MHz</td></tr> <tr> <td>± 15 %</td><td>2M to 80 MHz</td></tr> </tbody> </table>	Bit rate (bit/s)	f0 (Hz)	f1 (Hz)	f2 (Hz)	f3 (kHz)	f4 (kHz)	f5 (kHz)	f6 (MHz)	f7 (MHz)	A1 (UIp-p)	A2 (UIp-p)	A3 (UIp-p)	A4 (UIp-p)	A5 (UIp-p)	A6 (UIp-p)	9953M 10.3G 10.7G	0.1	15	600	100	500	1	4	80	0.505	2.02	8.08	80.8	110	4040	Frequency	Variable error Q	Frequency range	52 MHz	± 8 %	0.1 to 500 kHz	± 12 %	500 kHz to 1.3 MHz	156 MHz	± 8 %	0.1 to 500 kHz	± 12 %	500 kHz to 1.5 MHz	± 15 %	1.5 MHz to 3.8 MHz	622 MHz	± 8 %	0.1 to 500 kHz	± 12 %	500 kHz to 2 MHz	± 15 %	2M to 5 MHz	2488 MHz 2666 MHz	± 8 %	0.1 to 500 kHz	± 12 %	500 kHz to 2 MHz	± 15 %	2M to 20 MHz	9953MHz 10.3 GHz 10.7 GHz	± 8 %	0.1 to 500 kHz	± 12 %	500 kHz to 2 MHz	± 15 %	2M to 80 MHz
Bit rate (bit/s)	f0 (Hz)	f1 (Hz)	f2 (Hz)	f3 (kHz)	f4 (kHz)	f5 (kHz)	f6 (MHz)	f7 (MHz)	A1 (UIp-p)	A2 (UIp-p)	A3 (UIp-p)	A4 (UIp-p)	A5 (UIp-p)	A6 (UIp-p)																																																					
9953M 10.3G 10.7G	0.1	15	600	100	500	1	4	80	0.505	2.02	8.08	80.8	110	4040																																																					
Frequency	Variable error Q	Frequency range																																																																	
52 MHz	± 8 %	0.1 to 500 kHz																																																																	
	± 12 %	500 kHz to 1.3 MHz																																																																	
156 MHz	± 8 %	0.1 to 500 kHz																																																																	
	± 12 %	500 kHz to 1.5 MHz																																																																	
	± 15 %	1.5 MHz to 3.8 MHz																																																																	
622 MHz	± 8 %	0.1 to 500 kHz																																																																	
	± 12 %	500 kHz to 2 MHz																																																																	
	± 15 %	2M to 5 MHz																																																																	
2488 MHz 2666 MHz	± 8 %	0.1 to 500 kHz																																																																	
	± 12 %	500 kHz to 2 MHz																																																																	
	± 15 %	2M to 20 MHz																																																																	
9953MHz 10.3 GHz 10.7 GHz	± 8 %	0.1 to 500 kHz																																																																	
	± 12 %	500 kHz to 2 MHz																																																																	
	± 15 %	2M to 80 MHz																																																																	

	<p>Frequency: 51.84 MHz \pm100 ppm, 155.52 MHz \pm100 ppm, 622.08 MHz \pm100 ppm, 2488.32 MHz \pm100 ppm, 2666.057 MHz \pm100 ppm, 9953.28 MHz \pm100 ppm, 10312.5 MHz \pm100 ppm, 10709.225 MHz \pm100 ppm Level: 0.8 Vp-p \pm0.3 V (52 MHz to 2.6 GHz), 0.8 Vp-p \pm0.25 V (10/10.3/10.7 GHz) Connector: SMA, 50 Ω Manual jitter measurement: Ul-p, UI+p, UI-p/Ulrms Ul-p measurement: 2 UI range (-1.010 to 1.010 Ul-p/Step 0.001 Ul-p) 20 UI range (-10.10 to 10.10 Ul-p/Step 0.01 Ul-p) 80 UI range (-40.4 to 40.4 Ul-p/Step 0.25 Ul-p) 250 UI range (-123.0 to 123.0 Ul-p/Step 0.5 Ul-p) 1000 UI range (-510.0 to 510.0 Ul-p/Step 1 Ul-p) 4000 UI range (-2020 to 2020 Ul-p/Step 2 Ul-p) Ulrms measurement: 2 UI range (0.000 to 0.714 Ulrms/Step 0.001 Ulrms) 20 UI range (0.00 to 7.14 Ulrms/Step 0.01 Ulrms)</p> <p>Filter</p> <table border="1"> <thead> <tr> <th>Frequency (Hz)</th> <th>HP0 (Hz)</th> <th>HP1 (Hz)</th> <th>HP1' (Hz)</th> <th>HP2 (Hz)</th> <th>HP' (Hz)</th> <th>HP (Hz)</th> <th>LP (Hz)</th> <th>LP' (Hz)</th> </tr> </thead> <tbody> <tr> <td>52M</td> <td>10</td> <td>100</td> <td>—</td> <td>20k</td> <td>—</td> <td>12k</td> <td>400k</td> <td>—</td> </tr> <tr> <td>156M</td> <td>10</td> <td>500</td> <td>—</td> <td>65k</td> <td>—</td> <td>12k</td> <td>1.3M</td> <td>500</td> </tr> <tr> <td>622M</td> <td>10</td> <td>1k</td> <td>—</td> <td>250k</td> <td>—</td> <td>12k</td> <td>5M</td> <td>1k</td> </tr> <tr> <td>2488M 2666M</td> <td>10</td> <td>5k</td> <td>—</td> <td>1M</td> <td>—</td> <td>12k</td> <td>20M</td> <td>5k</td> </tr> <tr> <td>9953M 10.3G 10.7G</td> <td>10</td> <td>20k</td> <td>10k</td> <td>4M</td> <td>50k</td> <td>12k</td> <td>80M</td> <td>20k</td> </tr> </tbody> </table> <p>Jitter measurement</p> <p>Accuracy (Ul-p, UI+p, UI-p): 2 UI range: \pmR% \pmW Ul-p 20 UI range: \pmR% \pmW Ul-p 80 UI range: \pmR% \pmW Ul-p 250 UI range: \pmR% \pmW Ul-p 1000 UI range: \pmR% \pmW Ul-p 4000 UI range: \pmR% \pmW Ul-p</p> <table border="1"> <thead> <tr> <th rowspan="3">Frequency (Hz)</th> <th colspan="7">W Clock signal</th> </tr> <tr> <th colspan="2">HP1+LP</th> <th colspan="2">HP2+LP</th> <th colspan="2">HP+LP*</th> <th>HP0+LP'</th> </tr> <tr> <th>2 UI</th> <th>20 UI</th> <th>2 UI</th> <th>20 UI</th> <th>2 UI</th> <th>20 UI</th> <th>80/250/1000/4000 UI</th> </tr> </thead> <tbody> <tr> <td>52M</td> <td>0.035</td> <td>0.5</td> <td>0.03</td> <td>0.3</td> <td>0.03</td> <td>0.3</td> <td>—</td> </tr> <tr> <td>156M</td> <td>0.035</td> <td>0.5</td> <td>0.02</td> <td>0.2</td> <td>0.03</td> <td>0.3</td> <td>2</td> </tr> <tr> <td>622M</td> <td>0.035</td> <td>0.5</td> <td>0.03</td> <td>0.3</td> <td>0.03</td> <td>0.3</td> <td>8</td> </tr> <tr> <td>2488M 2.6G</td> <td>0.035</td> <td>0.5</td> <td>0.03</td> <td>0.3</td> <td>0.03</td> <td>0.3</td> <td>20</td> </tr> <tr> <td>9953M 10.3G 10.7G</td> <td>0.05</td> <td>0.5</td> <td>0.03</td> <td>0.3</td> <td>0.03</td> <td>0.3</td> <td>80</td> </tr> </tbody> </table> <p>*: Apply HP+LP' at 9953M, 10.3G, 10.7G</p>	Frequency (Hz)	HP0 (Hz)	HP1 (Hz)	HP1' (Hz)	HP2 (Hz)	HP' (Hz)	HP (Hz)	LP (Hz)	LP' (Hz)	52M	10	100	—	20k	—	12k	400k	—	156M	10	500	—	65k	—	12k	1.3M	500	622M	10	1k	—	250k	—	12k	5M	1k	2488M 2666M	10	5k	—	1M	—	12k	20M	5k	9953M 10.3G 10.7G	10	20k	10k	4M	50k	12k	80M	20k	Frequency (Hz)	W Clock signal							HP1+LP		HP2+LP		HP+LP*		HP0+LP'	2 UI	20 UI	2 UI	20 UI	2 UI	20 UI	80/250/1000/4000 UI	52M	0.035	0.5	0.03	0.3	0.03	0.3	—	156M	0.035	0.5	0.02	0.2	0.03	0.3	2	622M	0.035	0.5	0.03	0.3	0.03	0.3	8	2488M 2.6G	0.035	0.5	0.03	0.3	0.03	0.3	20	9953M 10.3G 10.7G	0.05	0.5	0.03	0.3	0.03	0.3	80
Frequency (Hz)	HP0 (Hz)	HP1 (Hz)	HP1' (Hz)	HP2 (Hz)	HP' (Hz)	HP (Hz)	LP (Hz)	LP' (Hz)																																																																																																													
52M	10	100	—	20k	—	12k	400k	—																																																																																																													
156M	10	500	—	65k	—	12k	1.3M	500																																																																																																													
622M	10	1k	—	250k	—	12k	5M	1k																																																																																																													
2488M 2666M	10	5k	—	1M	—	12k	20M	5k																																																																																																													
9953M 10.3G 10.7G	10	20k	10k	4M	50k	12k	80M	20k																																																																																																													
Frequency (Hz)	W Clock signal																																																																																																																				
	HP1+LP		HP2+LP		HP+LP*		HP0+LP'																																																																																																														
	2 UI	20 UI	2 UI	20 UI	2 UI	20 UI	80/250/1000/4000 UI																																																																																																														
52M	0.035	0.5	0.03	0.3	0.03	0.3	—																																																																																																														
156M	0.035	0.5	0.02	0.2	0.03	0.3	2																																																																																																														
622M	0.035	0.5	0.03	0.3	0.03	0.3	8																																																																																																														
2488M 2.6G	0.035	0.5	0.03	0.3	0.03	0.3	20																																																																																																														
9953M 10.3G 10.7G	0.05	0.5	0.03	0.3	0.03	0.3	80																																																																																																														

Jitter measurement	Accuracy (UIrms) 2 UI range: $\pm R\% \pm Y$ UIp-p 20 UI range: $\pm R\% \pm Y$ UIp-p							
	Bit rate (bit/s)/ frequency (Hz)	Y Clock signal						
		HP+LP*						
		2 UI	20 UI					
	52M	0.008	0.04					
	156M	0.008	0.04					
	622M	0.008	0.04					
	2488M 2666M	0.008	0.04					
	9953M 10.3G 10.7G	0.008	0.05					
	*: Apply HP+LP at 9953M, 10.3G, 10.7G							
MU150100A loop back measurement								
Jitter measurement	Bit rate (Mbit/s)	W data signal						
		UIp-p		UIrms				
		HP1+LP	HP+LP	HP2+LP				
		2 UI	2 UI	2 UI				
	51.84 (Optical)	0.070	0.070	0.035				
	51.84 (Electrical)	0.070	0.070	0.035				
	155.52 (Optical)	0.070	0.070	0.035				
	155.52 (Electrical)	0.070	0.070	0.035				
	622.08 (Optical)	0.070	0.070	0.035				
	2488.32 (Optical)	0.080	0.080	0.060				
Jitter measurement	2666.05* (Optical)	0.080	0.080	0.060				
	*: Built-in MU150125A-05							
MU150100A with MU150125A Receiver only								
Jitter measurement	Bit rate (Mbit/s)	W data signal (Typical)						
		UIp-p		UIrms				
		HP1+LP	HP+LP	HP2+LP				
		2 UI	2 UI	2 UI				
	51.84 (Optical)	0.035	0.035	0.035				
	51.84 (Electrical)	0.035	0.035	0.035				
	155.52 (Optical)	0.035	0.035	0.035				
	155.52 (Electrical)	0.035	0.035	0.025				
	622.08	0.035	0.035	0.035				
	2488.32	0.035	0.035	0.035				
Jitter measurement	2666.05*	0.035	0.035	0.035				
	*: Built-in MU150125A-05							
Measurement condition								
Temperature condition: +10° to +40°C								
Optical input level: -10 to -12 dBm								
Measurement time: 1 min								
Optical input wavelength: 1310 nm/1550 nm								
Mapping								
SDH: VC3-Bulk (52M), VC4-nc ($n = 1, 4, 16$) (156M/622M/2488M)								
SONET: STSnc ($n = 1, 3, 12, 48$)								
				OTU-1: ODU1-OPU1-PRBS				
				Test pattern: PRBS23 (SDH/SONET), PRBS31 (OTU-1), Mark ratio 1/2, Scramble "On"				
				Clock: internal				

	MU150100A, MU150121A, MU150123A loop back measurement																											
	<table border="1"> <thead> <tr> <th rowspan="4">Bit rate (Mbit/s)</th> <th colspan="4">W data signal</th> </tr> <tr> <th colspan="2">UIp-p</th> <th colspan="2">UIrms</th> </tr> <tr> <th>HP1+LP</th> <th>HP'+LP</th> <th>HP2+LP</th> <th>HP'+LP</th> </tr> <tr> <th>2 UI</th> <th>2 UI</th> <th>2 UI</th> <th>2 UI</th> </tr> </thead> <tbody> <tr> <td>9953.280</td><td>0.080</td><td>0.080</td><td>0.060</td><td>0.010</td></tr> <tr> <td>10709.225*</td><td>0.080</td><td>0.080</td><td>0.060</td><td>0.010</td></tr> </tbody> </table>	Bit rate (Mbit/s)	W data signal				UIp-p		UIrms		HP1+LP	HP'+LP	HP2+LP	HP'+LP	2 UI	2 UI	2 UI	2 UI	9953.280	0.080	0.080	0.060	0.010	10709.225*	0.080	0.080	0.060	0.010
Bit rate (Mbit/s)	W data signal																											
	UIp-p		UIrms																									
	HP1+LP		HP'+LP	HP2+LP	HP'+LP																							
	2 UI	2 UI	2 UI	2 UI																								
9953.280	0.080	0.080	0.060	0.010																								
10709.225*	0.080	0.080	0.060	0.010																								
	*: Built-in MU150125A-05																											
	Measurement condition																											
	Temperature condition: +10° to +40°C																											
	Optical input level: -10 to -12 dBm																											
	Measurement time: 1 min																											
	Optical input wavelength: 1310 nm/1550 nm																											
	Mapping																											
	SDH: VC4-64c (9953M)																											
	SONET: STS192c (9953M)																											
	OTU-2: ODU2-OPU2-PRBS																											
	Test pattern: PRBS23 (SDH/SONET), PRBS31 (OTU-2), Mark ratio 1/2, Scramble "On"																											
	Clock: internal																											
	MU150100A, MU150134A, MU150123A loop back measurement																											
	<table border="1"> <thead> <tr> <th rowspan="4">Bit rate (Mbit/s)</th> <th colspan="4">W data signal</th> </tr> <tr> <th colspan="2">UIp-p</th> <th colspan="2">UIrms</th> </tr> <tr> <th>HP1+LP</th> <th>HP'+LP</th> <th>HP2+LP</th> <th>HP'+LP</th> </tr> <tr> <th>2 UI</th> <th>2 UI</th> <th>2 UI</th> <th>2 UI</th> </tr> </thead> <tbody> <tr> <td>9953.280</td><td>0.065</td><td>0.065</td><td>0.060</td><td>0.010</td></tr> <tr> <td>10709.225*</td><td>0.065</td><td>0.065</td><td>0.060</td><td>0.010</td></tr> </tbody> </table>	Bit rate (Mbit/s)	W data signal				UIp-p		UIrms		HP1+LP	HP'+LP	HP2+LP	HP'+LP	2 UI	2 UI	2 UI	2 UI	9953.280	0.065	0.065	0.060	0.010	10709.225*	0.065	0.065	0.060	0.010
Bit rate (Mbit/s)	W data signal																											
	UIp-p		UIrms																									
	HP1+LP		HP'+LP	HP2+LP	HP'+LP																							
	2 UI	2 UI	2 UI	2 UI																								
9953.280	0.065	0.065	0.060	0.010																								
10709.225*	0.065	0.065	0.060	0.010																								
Jitter measurement	*: Built-in MU150125A-05																											
	Measurement condition																											
	Temperature condition: +10° to +40°C																											
	Optical input level: -10 to -12 dBm																											
	Measurement time: 1 min																											
	Optical input wavelength: 1550 nm																											
	Mapping																											
	SDH: VC4-64c (9953M)																											
	SONET: STS192c (9953M)																											
	OTU-2: ODU2-OPU2-PRBS																											
	Test pattern: PRBS23 (SDH/SONET), PRBS31 (OTU-2), Mark ratio 1/2, Scramble "On"																											
	Clock: internal																											
	MU150123A with MU150125A Receiver only																											
	<table border="1"> <thead> <tr> <th rowspan="4">Bit rate (Mbit/s)</th> <th colspan="4">W data signal (Typical)</th> </tr> <tr> <th colspan="2">UIp-p</th> <th colspan="2">UIrms</th> </tr> <tr> <th>HP1+LP</th> <th>HP'+LP</th> <th>HP2+LP</th> <th>HP'+LP</th> </tr> <tr> <th>2 UI</th> <th>2 UI</th> <th>2 UI</th> <th>2 UI</th> </tr> </thead> <tbody> <tr> <td>9953.280</td><td>0.050</td><td>0.035</td><td>0.035</td><td>0.009</td></tr> <tr> <td>10709.225*</td><td>0.050</td><td>0.035</td><td>0.035</td><td>0.009</td></tr> </tbody> </table>	Bit rate (Mbit/s)	W data signal (Typical)				UIp-p		UIrms		HP1+LP	HP'+LP	HP2+LP	HP'+LP	2 UI	2 UI	2 UI	2 UI	9953.280	0.050	0.035	0.035	0.009	10709.225*	0.050	0.035	0.035	0.009
Bit rate (Mbit/s)	W data signal (Typical)																											
	UIp-p		UIrms																									
	HP1+LP		HP'+LP	HP2+LP	HP'+LP																							
	2 UI	2 UI	2 UI	2 UI																								
9953.280	0.050	0.035	0.035	0.009																								
10709.225*	0.050	0.035	0.035	0.009																								
	*: Built-in MU150125A-05																											
	Measurement condition																											
	Temperature condition: +10° to +40°C																											
	Optical input level: -10 to -12 dBm																											
	Measurement time: 1 min																											
	Optical input wavelength: 1310 nm/1550 nm																											
	Mapping																											
	SDH: VC4-64c (9953M)																											
	SONET: STS192c (9953M)																											
	OTU-2: ODU2-OPU2-PRBS																											


	<p>Test pattern: PRBS23 (SDH/SONET), PRBS31 (OTU-2), Mark ratio 1/2, Scramble "On" Clock: internal</p> <p>Additional error [R]</p> <table border="1"> <thead> <tr> <th>Additional error</th><th>Frequency range</th></tr> </thead> <tbody> <tr> <td>$\pm 15\%$</td><td><100 Hz (52M) <500 Hz (156M) <1 kHz (622M) <5 kHz (2488M, 2666M) <20 kHz (9953M/10.3G/10.7G)</td></tr> <tr> <td>$\pm 7\%$</td><td>100 Hz to 300 kHz (52M) 500 Hz to 300 kHz (156M) 1 kHz to 300 kHz (622M) 5 kHz to 300 kHz (2488M, 2666M) 20 kHz to 300 kHz (9953M/10.3G/10.7G)</td></tr> <tr> <td>$\pm 8\%$</td><td>300 kHz to 400 kHz (52M) 300 kHz to 1 MHz ($\geq 156M$)</td></tr> <tr> <td>$\pm 10\%$</td><td>1 MHz to 1.3 MHz (156M) 1 MHz to 3 MHz ($\geq 622M$)</td></tr> <tr> <td>$\pm 15\%$</td><td>3 MHz to 5 MHz (622M) 3 MHz to 10 MHz ($\geq 2448M$)</td></tr> <tr> <td>$\pm 20\%$</td><td>10 MHz to 20 MHz (2488M, 2666M) 10 MHz to 80 MHz (9953M/10.3G/10.7G)</td></tr> </tbody> </table>	Additional error	Frequency range	$\pm 15\%$	<100 Hz (52M) <500 Hz (156M) <1 kHz (622M) <5 kHz (2488M, 2666M) <20 kHz (9953M/10.3G/10.7G)	$\pm 7\%$	100 Hz to 300 kHz (52M) 500 Hz to 300 kHz (156M) 1 kHz to 300 kHz (622M) 5 kHz to 300 kHz (2488M, 2666M) 20 kHz to 300 kHz (9953M/10.3G/10.7G)	$\pm 8\%$	300 kHz to 400 kHz (52M) 300 kHz to 1 MHz ($\geq 156M$)	$\pm 10\%$	1 MHz to 1.3 MHz (156M) 1 MHz to 3 MHz ($\geq 622M$)	$\pm 15\%$	3 MHz to 5 MHz (622M) 3 MHz to 10 MHz ($\geq 2448M$)	$\pm 20\%$	10 MHz to 20 MHz (2488M, 2666M) 10 MHz to 80 MHz (9953M/10.3G/10.7G)
Additional error	Frequency range														
$\pm 15\%$	<100 Hz (52M) <500 Hz (156M) <1 kHz (622M) <5 kHz (2488M, 2666M) <20 kHz (9953M/10.3G/10.7G)														
$\pm 7\%$	100 Hz to 300 kHz (52M) 500 Hz to 300 kHz (156M) 1 kHz to 300 kHz (622M) 5 kHz to 300 kHz (2488M, 2666M) 20 kHz to 300 kHz (9953M/10.3G/10.7G)														
$\pm 8\%$	300 kHz to 400 kHz (52M) 300 kHz to 1 MHz ($\geq 156M$)														
$\pm 10\%$	1 MHz to 1.3 MHz (156M) 1 MHz to 3 MHz ($\geq 622M$)														
$\pm 15\%$	3 MHz to 5 MHz (622M) 3 MHz to 10 MHz ($\geq 2448M$)														
$\pm 20\%$	10 MHz to 20 MHz (2488M, 2666M) 10 MHz to 80 MHz (9953M/10.3G/10.7G)														
Hit measurement	Count, Hit seconds, % free seconds														
Jitter tolerance	<p>Evaluate jitter tolerance by selected Mask Mask selection: Telcordia GR-253, ANSI T1.105.03 ITU-T G.783, G.825, G.813, G.8251 ETSI EN 302 084 User</p>														
Jitter transfer	<p>Evaluate jitter transfer by selected Mask Accuracy: ± 0.05 dB $\pm 0.12^*g$ Applicable frequency range 0.01^*fc to 100^*fc, or maximum frequency setting value The maximum frequency setting value is applied in the case of 100^*fc g: Transfer gain (dB) for every frequency point fc: Cut-off frequency of transfer mask Measurement condition Average level: Fine Waiting time: 20 s Input jitter value: ≥ 0.15 Ulp-p Jitter modulation frequency: ≥ 300 Hz Dynamic range: ≤ -40 dB (at the above measurement condition) Mask selection [Maximum value of a mask is 100 times as much modulation frequency as a break point (fc)]: Telcordia GR-253 ANSI T1.105.03 ITU-T G.783, G.8251 ETSI 300 417-1-1 User</p>														


	<p>Modulation frequency: 10 µHz to 10 Hz Amplitude: 0 to 400,000 UI/Step 1 Ulip-p</p> <table border="1"> <thead> <tr> <th>Bit rate (bit/s)</th> <th>F0 (Hz)</th> <th>F1 (Hz)</th> <th>F2 (Hz)</th> <th>A0 (Ulip-p)</th> <th>A1 (Ulip-p)</th> <th>Step (Ulip-p)</th> </tr> </thead> <tbody> <tr> <td>52M</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>156M</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>622M</td> <td>10 µ</td> <td>400m</td> <td>10</td> <td>400,000</td> <td>16,000</td> <td>1</td> </tr> <tr> <td>2488M</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>9953M</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table> <p>Accuracy ±Q% of setting ±100 Ulip-p</p> <table border="1"> <thead> <tr> <th>Error Q</th> <th>Frequency range</th> </tr> </thead> <tbody> <tr> <td>±8 %</td> <td>10 µHz to 0.125 Hz</td> </tr> <tr> <td>±12 %</td> <td>0.125 to 1 Hz</td> </tr> <tr> <td>±15 %</td> <td>1 to 10 Hz</td> </tr> </tbody> </table>	Bit rate (bit/s)	F0 (Hz)	F1 (Hz)	F2 (Hz)	A0 (Ulip-p)	A1 (Ulip-p)	Step (Ulip-p)	52M							156M							622M	10 µ	400m	10	400,000	16,000	1	2488M							9953M							Error Q	Frequency range	±8 %	10 µHz to 0.125 Hz	±12 %	0.125 to 1 Hz	±15 %	1 to 10 Hz
Bit rate (bit/s)	F0 (Hz)	F1 (Hz)	F2 (Hz)	A0 (Ulip-p)	A1 (Ulip-p)	Step (Ulip-p)																																													
52M																																																			
156M																																																			
622M	10 µ	400m	10	400,000	16,000	1																																													
2488M																																																			
9953M																																																			
Error Q	Frequency range																																																		
±8 %	10 µHz to 0.125 Hz																																																		
±12 %	0.125 to 1 Hz																																																		
±15 %	1 to 10 Hz																																																		
Wander measurement (Option 01)	<p>Bit rate (bit/s): 52M, 156M, 622M, 2488M, 9953M Evaluation mode: TIE (P-P, +P, -P) MTIE, TDEV measurement is a future function Range p-p: 0.0 to 2E10 ns +p, -p: 0.0 to 1E10 ns Resolution: 0.1 ns Accuracy: TIE ±0.5% ±Z0 (τ)</p> <table border="1"> <thead> <tr> <th>Z0 (τ)(ns)</th> <th>Observation time τ (s)</th> </tr> </thead> <tbody> <tr> <td>2.5 + 0.0275 τ</td> <td>0.05 ≤ τ ≤ 1000</td> </tr> <tr> <td>29 + 0.001 τ</td> <td>τ > 1000</td> </tr> </tbody> </table> <p>Filter selection: DC to 10 Hz, DC to 0.01 Hz, 0.01 to 10 Hz</p>	Z0 (τ)(ns)	Observation time τ (s)	2.5 + 0.0275 τ	0.05 ≤ τ ≤ 1000	29 + 0.001 τ	τ > 1000																																												
Z0 (τ)(ns)	Observation time τ (s)																																																		
2.5 + 0.0275 τ	0.05 ≤ τ ≤ 1000																																																		
29 + 0.001 τ	τ > 1000																																																		



● MU150134A 10/10.7G Optical Unit (Tx external modulation)

Bit rate	9953.28 Mbit/s 10709.225 Mbit/s Depends on frequency accuracy of the MU150100A and external input frequency.
Optical output modulation	Output power: +3 dBm (C band) However, typical value when using built-in CW light source, and modulating by data signal of mark ratio 1/2. Extinction ratio: ≥10 dB Signal code: NRZ Connector: FC-PC (SMF) replaceable
External optical input	Light source: CW light source, polarization preservation fiber is used Peak wavelength: C band, L band Maximum input power: +15 dBm Minimum input power: +6 dBm Insertion loss: ≤7 dB (C band), ≤8 dB (L band) Connector: FC-PC (PMF), replaceable
Clock input	Frequency: 9953.28 MHz ±100 ppm, 10709.225 MHz ±100 ppm Input voltage: 1.3 to 0.6 Vp-p Connector: SMA (50 Ω GND)
Data input	Bit rate: 9953.28 Mbit/s ±100 ppm, 10709.225 Mbit/s ±100 ppm Input voltage Hi: 0.0074 to -0.2074 V, Lo: -0.8426 to -1.3074 V Connector: SMA (50 Ω GND)
Optical reference output	Optical source: CW light source Peak wavelength: 1550 ±20 nm (C band) -20 dB width: ≤1 nm Side mode suppression ratio: ≥30 dB Output power: +10 to +13 dBm Polarization Extinction ratio: ≥20 dB Connector: FC-PC (PMF), replaceable
Safety classification	IEC 60825-1: CLASS 1M, 21CFR 1040.10: CLASS III b
Optical output power adjustable (Option 04)	Variable range: 0 to 20 dB, Accuracy: ≤±0.5 dB (0 to 10 dB), ≤±1.0 dB (10.1 to 20 dB), Setting resolution: 0.1 dB

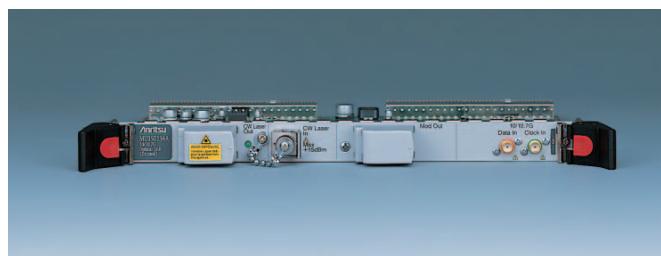



Ordering Information

Please specify model/order number, name and quantity when ordering.

Model/Order No.	Name	Model/Order No.	Name
MP1590A	Main frame Network Performance Tester	MU150122A-43 ^{*15}	HMS-10/A connector
J0491A ^{*1}	Shield power cord, 2.6 m:	MU150123A-05	OTU2
J0670A ^{*1}	Power cord L type (C7), 2.5 m:	MU150123A-37 ^{*15}	FC connector
F0105	Fuse, 10 A:	MU150123A-38 ^{*15}	ST connector
E0008A	Optical output control key:	MU150123A-39 ^{*15}	DIN connector
E0010	Side cover:	MU150123A-40 ^{*15}	SC connector
J0907Q	Remote inter lock cord:	MU150123A-43 ^{*15}	HMS-10/A connector
J0908	Remote inter lock terminator:	MU150125A-01	Wander measurement
B0329G	Front cover (3/4MV4U):	MU150125A-05	OTU1/OTU2
W2234AE ^{*2}	MP1590A operation manual CD-ROM:	MU150125A-06	10.3G
J0617B ^{*3, *4}	Replaceable optical connector (FC-PC):	MU150134A-04	Optical output power adjustable
J0739G ^{*5}	Optical adapter FC PANDA:	MU150134A-37 ^{*15}	FC connector
J0635A ^{*6}	Optical fiber cable (FC · PC-FC · PC-1M-SM), 1 m:	MU150134A-38 ^{*15}	ST connector
J1200 ^{*7}	Promptical fiber cord, 0.5 m:	MU150134A-39 ^{*15}	DIN connector
J0747B ^{*8}	Fixed optical attenuator (10 dB):	MU150134A-40 ^{*15}	SC connector
J0747C ^{*9}	Fixed optical attenuator (15 dB):	MU150134A-43 ^{*15}	HMS-10/A connector
J1003N ^{*10}	Semi-rigid cable (136.6 mm):	MP1590A-90	Maintenance service
J1003P ^{*10}	Semi-rigid cable (96 mm):	MU150100A-90	Extended three year warranty service
J1003Q ^{*11, *12}	Semi-rigid cable (75.6 mm):	MU150121A-90	Extended three year warranty service
J1003R ^{*10}	Semi-rigid cable (55.3 mm):	MU150122A-90	Extended three year warranty service
J1003S ^{*9}	Semi-rigid cable (56.5 mm):	MU150123A-90	Extended three year warranty service
	Units	MU150125A-90	Extended three year warranty service
MU150100A ^{*13}	10/10.7G Unit	MU150134A-90	Extended three year warranty service
MU150121A ^{*13}	10/10.7G Optical Unit (Tx)	J0796A	Optional accessories
MU150122A	10/10.7G Optical Unit (Rx Narrow)	J0796B	ST connector (replaceable, with protective caps, 1 set)
MU150123A	10/10.7G Optical Unit (Rx Wide)	J0796C	DIN connector (replaceable, with protective caps, 1 set)
MU150125A	10/10.7G Jitter Unit	J0796D	SC connector (replaceable, with protective caps, 1 set)
MU150134A	10/10.7G Optical Unit (Tx. Ex. mod)	J0796E	HMS-10/A connector (replaceable, with protective caps, 1 set)
MP1590A-01	RS-232C	J0617B	FC connector (replaceable, with protective caps, 1 set)
MP1590A-02	GPIB	J1003N	Replaceable optical connector (FC-PC)
MP1590A-03	LAN	J1003P	Semi-rigid cable (136.6 mm)
MU150100A-01	Wavelength 1.31 µm	J1003Q	Semi-rigid cable (96 mm)
MU150100A-02	Wavelength 1.55 µm	J1003R	Semi-rigid cable (75.6 mm)
MU150100A-03	Wavelength 1.31/1.55 µm	J1003S	Semi-rigid cable (55.3 mm)
MU150100A-04	Optical output power adjustable	J1200	Semi-rigid cable (56.5 mm)
MU150100A-05	OTU1/OTU2	J0747B	Promptical fiber cord (both-end SFC-SP connector), 0.5 m
MU150100A-07 ^{*14}	10/10.7G Minus Option	J0747C	Fixed optical attenuator (10 dB)
MU150100A-37 ^{*15}	FC connector	J0747D	Fixed optical attenuator (15 dB)
MU150100A-38 ^{*15}	ST connector	J0775D	Fixed optical attenuator (20 dB)
MU150100A-39 ^{*15}	DIN connector	J0776D	Coaxial cable (BNC-P620 · 3C-2WS · BNC-P620, 75 Ω), 2 m
MU150100A-40 ^{*15}	SC connector	J0322B	Coaxial cable (BNC-P-3W · 3D-2W · BNC-P-3W, 50 Ω), 2 m
MU150100A-43 ^{*15}	HMS-10/A connector	J0162A	Coaxial cable (11SMA · SUCOFLEX104 · 11SMA), 1 m
MU150121A-01	Wavelength 1.31 µm	J0162B	Balanced cable (Siemens 3P- Siemens 3P), 1 m
MU150121A-02	Wavelength 1.55 µm	J0845A	Balanced cable (Siemens 3P- Siemens 3P), 2 m
MU150121A-03	Wavelength 1.31/1.55 µm	J0635A	Balanced cable (BANTAM 3P/BANTAM 3P), 6 ft
MU150121A-04	Optical output power adjustable	J0635B	Optical fiber cable (SM, FC-SPC connector both ends), 1 m
MU150121A-37 ^{*15}	FC connector	J0635C	Optical fiber cable (SM, FC-SPC connector both ends), 2 m
MU150121A-38 ^{*15}	ST connector	J0008	Optical fiber cable (SM, FC-SPC connector both ends), 3 m
MU150121A-39 ^{*15}	DIN connector	MZ8012A	GPIB cable, 2 m
MU150121A-40 ^{*15}	SC connector	Z0478	Connector Cleaning Set
MU150121A-43 ^{*15}	HMS-10/A connector	B0336C	Polarization rotating module (for MU150134A)
MU150122A-37 ^{*15}	FC connector	B0448	Carrying case
MU150122A-38 ^{*15}	ST connector	W2188AE	Soft case
MU150122A-39 ^{*15}	DIN connector	W2189AE	MP1590A SDH operation manual
MU150122A-40 ^{*15}	SC connector	W2216AE	MP1590A remote control manual
		W2217AE	MP1590A SONET operation manual
			MP1590A specification

*1: J0491 or J0670A is attached.

*2: Supplied with main frame only, include W2188AE, W2189AE, W2216AE, W2217AE.

*3: Supplied with MU150100A, MU150121A, MU150122A, MU150123A, MU150134A.

- *4: In MU150100A, 2 pcs are supplied.
- *5: Supplied with MU150134A.
- *6: Supplied with MU150100A, MU150122A, MU150123A. SM, FC-SPC connector both ends.
- *7: Supplied with MU150134A, FC · PANDA cord.
- *8: Supplied with MU150122A, MU150123A.
- *9: Supplied with MU150100A.
- *10: Supplied with MU150125A.
- *11: Supplied with MU150121A, MU150122A, MU150123A, MU150134A.
- *12: MU150122A/MU150123A: 1 pc, MU150121A/MU150134A: 2 pcs are supplied.
- *13: Requires Option 01, 02 or 03.
- *14: This Option must be installed in the factory.
- *15: Replaceable



Specifications are subject to change without notice.

ANRITSU CORPORATION

1800 Onna, Atsugi-shi, Kanagawa, 243-8555 Japan
 Phone: +81-46-223-1111
 Fax: +81-46-296-1264

● U.S.A.

ANRITSU COMPANY

TX OFFICE SALES AND SERVICE
 1155 East Collins Blvd., Richardson, TX 75081, U.S.A.
 Toll Free: 1-800-ANRITSU (267-4878)
 Phone: +1-972-644-1777
 Fax: +1-972-644-3416

● Canada

ANRITSU ELECTRONICS LTD.

700 Silver Seven Road, Suite 120, Kanata,
 ON K2V 1C3, Canada
 Phone: +1-613-591-2003
 Fax: +1-613-591-1006

● Brasil

ANRITSU ELETROÔNICA LTDA.

Praca Amadeu Amaral, 27 - 1 andar
 01327-010 - Paraiso, Sao Paulo, Brazil
 Phone: +55-11-3283-2511
 Fax: +55-11-3886940

● U.K.

ANRITSU LTD.

200 Capability Green, Luton, Bedfordshire LU1 3LU, U.K.
 Phone: +44-1582-433280
 Fax: +44-1582-731303

● Germany

ANRITSU GmbH

Grafenberger Allee 54-56, 40237 Düsseldorf, Germany
 Phone: +49-211-96855-0
 Fax: +49-211-96855-55

● France

ANRITSU S.A.

9, Avenue du Québec Z.A. de Courtabœuf 91951 Les
 Ulis Cedex, France
 Phone: +33-1-60-92-15-50
 Fax: +33-1-64-46-10-65

● Italy

ANRITSU S.p.A.

Via Elio Vittorini, 129, 00144 Roma EUR, Italy
 Phone: +39-06-509-9711
 Fax: +39-06-502-2425

● Sweden

ANRITSU AB

Fagelviksvagen 9E S145 84 Stockholm, Sweden
 Phone: +46-853470700
 Fax: +46-853470730

● Singapore

ANRITSU PTE LTD.

10, Hoe Chiang Road #07-01/02, Keppel Towers,
 Singapore 089315
 Phone: +65-6282-2400
 Fax: +65-6282-2533

● Hong Kong

ANRITSU COMPANY LTD.

Suite 923, 9/F., Chinachem Golden Plaza, 77 Mody
 Road, Tsimshatsui East, Kowloon, Hong Kong, China
 Phone: +852-2301-4980
 Fax: +852-2301-3545

● P. R. China

ANRITSU COMPANY LTD.

Beijing Representative Office

Room 1515, Beijing Fortune Building, No. 5 North Road,
 the East 3rd Ring Road, Chao-Yang District
 Beijing 100004, P.R. China
 Phone: +86-10-6590-9230

● Korea

ANRITSU CORPORATION

8F Hyun Juk Bldg. 832-41, Yeoksam-dong,
 Gangnam-ku, Seoul, 135-080, Korea
 Phone: +82-2-553-6603
 Fax: +82-2-553-6604

● Australia

ANRITSU PTY LTD.

Unit 3/170 Forster Road Mt. Waverley, Victoria, 3149,
 Australia
 Phone: +61-3-9558-8177
 Fax: +61-3-9558-8255

● Taiwan

ANRITSU COMPANY INC.

7F, No. 316, Sec. 1, NeiHu Rd., Taipei, Taiwan
 Phone: +886-2-8751-1816
 Fax: +886-2-8751-1817

031113