



Vector Network Analyzers

MS46522A Series ShockLine™ Vector Network Analyzers

Introduction

The MS46522A is part of the ShockLine™ family of Vector Network Analyzers from Anritsu. It is a low-cost, 2U high, 2-port VNA series available in two frequency ranges: 50 kHz to 4.5 GHz and 50 kHz to 8.5 GHz. It is capable of measuring s-parameters and time domain characteristics of passive RF devices.

The series supports SCPI command programming and has software driver support for the most common programming environments. The MS46522A use industry standard LAN communications for robust remote control in test applications. ShockLine™ VNAs provide a powerful graphical user interface for manual testing of devices. The full-featured user interface is enabled by attaching a (user-supplied) touchscreen monitor, keyboard, and mouse.

This document provides detailed specifications for the MS46522A Vector Network Analyzers (VNAs) and related options.

Instrument Models and Operating Frequencies

- Base Model: MS46522A, 2-Port ShockLine™ VNA
- Requires one Frequency Option:
 MS46522A-004, 50 kHz to 4.5 GHz
 MS46522A-010, 50 kHz to 8.5 GHz

Principal Options

- MS46522A-002, Time Domain
- MS46522A-005, Handler Interface



MS46522A ShockLine™ VNA

Description	Page
Definitions	2
System Dynamic Range	3
Receiver Compression Levels	3
High Level Noise	3
Output Power Range	3
Output Default Power	3
Power Accuracy.	3
Setting Resolution.	3
Measurement Stability	3
Frequency Resolution, Accuracy, and Stability	3
Source Harmonics and Non-Harmonics (Spurious).	3
Uncorrected (Raw) Port Characteristics	4
VNA System Performance for MS46522A-004 and MS46522A-010 Frequency Options	4
MS46522A VNA System Performance with 8.5 GHz MN25208A SmartCal™	5
MS46522A VNA System Performance with 36585K AutoCal	6
Measurement Throughput Summary	7
Standard Capabilities.	7
Calibration and Correction Capabilities.	9
Optional Capabilities	9
Remote Operability	9
Front Panel Connections.	10
Rear Panel Connections	10
CPU, Memory, and Security Features.	11
Mechanical	11
Environmental	11
Electromagnetic Compatibility.	11
Safety	11
Warranty	11
Ordering Information.	12

Definitions

	All specifications and characteristics apply under the following conditions, unless otherwise stated:
Warm-Up Time	After 45 minutes of warm-up time, where the instrument is left in the ON state.
Temperature Range	Over the 25 °C ± 5 °C temperature range.
Frequency Range	The instrument operates from 50 kHz to 300 kHz without any implied or warranted specifications.
Error-Corrected Specifications	For error-corrected specifications, over 23 °C ± 3 °C, with < 1 °C variation from calibration temperature. For error-corrected specifications are warranted and include guard-bands, unless otherwise stated.
Frequency Bands in Tables	When a frequency is listed in two rows of the same table, the specification for the common frequency is taken from the lower frequency band.
User Cables	Specifications do not include effects of any user cables attached to the instrument.
Discrete Spurious Responses	Specifications may exclude discrete spurious responses.
Internal Reference Signal	All specifications apply with internal 10 MHz Crystal Oscillator Reference Signal.
Interpolation Mode	All specifications are with Interpolation Mode Off.
Standard	Refers to instruments without Options.
Typical Performance	Typical performance indicates the measured performance of an average unit. It does not include guard-bands and is not covered by the product warranty. Typical specifications are shown in parenthesis, such as (-102 dB), or noted as Typical.
Characteristic Performance	Characteristic performance indicates a performance designed-in and verified during the design phase. It does include guard-bands and is not covered by the product warranty.
Recommended Calibration Cycle	12 months (Residual specifications also require calibration kit calibration cycle adherence.)
Specifications Subject to Change	All specifications subject to change without notice.

System Dynamic Range

System dynamic range is calculated as the difference between the maximum specified source power and the noise floor (RMS) at the specified reference plane at 10 Hz IF Bandwidth.

Frequency Range	Standard (dB)	Typical (dB)
300 kHz to < 500 kHz	95	105
500 kHz to < 3 MHz	100	110
3 MHz to < 6 GHz	110	118
6 GHz to < 8 GHz	105	115
8 GHz to 8.5 GHz	100	110

Receiver Compression Levels

Port power level beyond which the response may be compressed more than 0.2 dB relative to the normalization level. Measured at 300 Hz IF bandwidth. Match not included. Performance is characteristic.

Frequency Range	Standard (dBm)
300 kHz to 8.5 GHz	+10

High Level Noise

Measured at 300 Hz IF bandwidth and at default power level, RMS. Performance is characteristic.

Frequency	Magnitude (dB)	Phase (deg)
300 kHz to 8.5 GHz	0.006 (0.003, typical)	<0.05, typical

Output Power Range

Minimum to maximum rated power level. Performance is characteristic.

Frequency	Standard (dBm)
300 kHz to < 6 GHz	-30 to +15
6 GHz to < 8 GHz	-30 to +12
8 GHz to 8.5 GHz	-30 to +10

Output Default Power

Instrument default power is +5 dBm. For maximum rated power, refer to Output Power Range above.

Power Accuracy

Performance is characteristic.

Output Power	Accuracy (dB)
At +5 dBm	± 1.0
At 0 dBm	± 1.0
At -30 dBm	± 3.0

Setting Resolution

Output Power	Setting Resolution (dB)
300 kHz to 8.5 GHz	0.01

Measurement Stability

Ratio measurement, with ports shorted. Typical.

Frequency	Magnitude (dB/°C)
300 kHz to 8.5 GHz	0.01

Frequency Resolution, Accuracy, and Stability

Resolution	Accuracy	Stability
1 Hz	± 2.5 ppm (at time of calibration)	< 10 ppm over 0 °C to 55 °C temperature < 3 ppm/year aging

Source Harmonics and Non-Harmonics (Spurious)

Measured at 0 dBm. All specifications typical.

Frequency	Harmonics (second and third) (dBc)	Non-Harmonic Spurious (dBc)	Phase Noise @ 10 kHz Offset (dBc/Hz)
300 kHz to < 50 MHz	< -20	< -30	> 60
50 MHz to 8.5 GHz	< -30	< -30	> 60

Uncorrected (Raw) Port Characteristics

User and system correction off. All specifications typical.

Frequency Range	Directivity (dB)	Port Match (dB) ^a
300 kHz to < 1 GHz	> 9	> 15
1 GHz to < 4 GHz	> 7	> 7
4 GHz to 8.5 GHz	> 4	> 7

a. Port Match is defined as the worst of source and load match.

VNA System Performance for MS46522A-004 and MS46522A-010 Frequency Options

Error-Corrected Specifications


With 12-term SOLT Calibration using the 3653A N Type Connector Calibration Kit.

Frequency Range	Directivity (dB)	Source Match (dB)	Load Match ^a (dB)	Reflection Tracking ^a (dB)	Transmission Tracking ^a (dB)
300 kHz to < 30 MHz	> 42	> 35	> 38	±0.15	±0.09
30 MHz to < 5 GHz	> 42	> 35	> 38	±0.08	±0.05
5 GHz to < 8 GHz	> 36	> 35	> 33	±0.08	±0.05
8 GHz to 8.5 GHz	> 36	> 35	> 33	±0.10	±0.08

a. Characteristic performance.

Measurement Uncertainties

The graphs give measurement uncertainties after the above error-corrected calibration. The errors are a worst-case contribution of residual directivity, load and source match, frequency response and isolation, network analyzer dynamic accuracy, and connector repeatability. 10 Hz IF Bandwidth is used. For transmission uncertainties, it is assumed that $S_{11} = S_{22} = 0$. For reflection uncertainties, it is assumed that $S_{21} = S_{12} = 0$. All calibrations and measurements were performed at 0 dBm or default port power, whichever is less. For other conditions, please use our free Exact Uncertainty Calculator software, available for download from the Anritsu web site at www.anritsu.com.

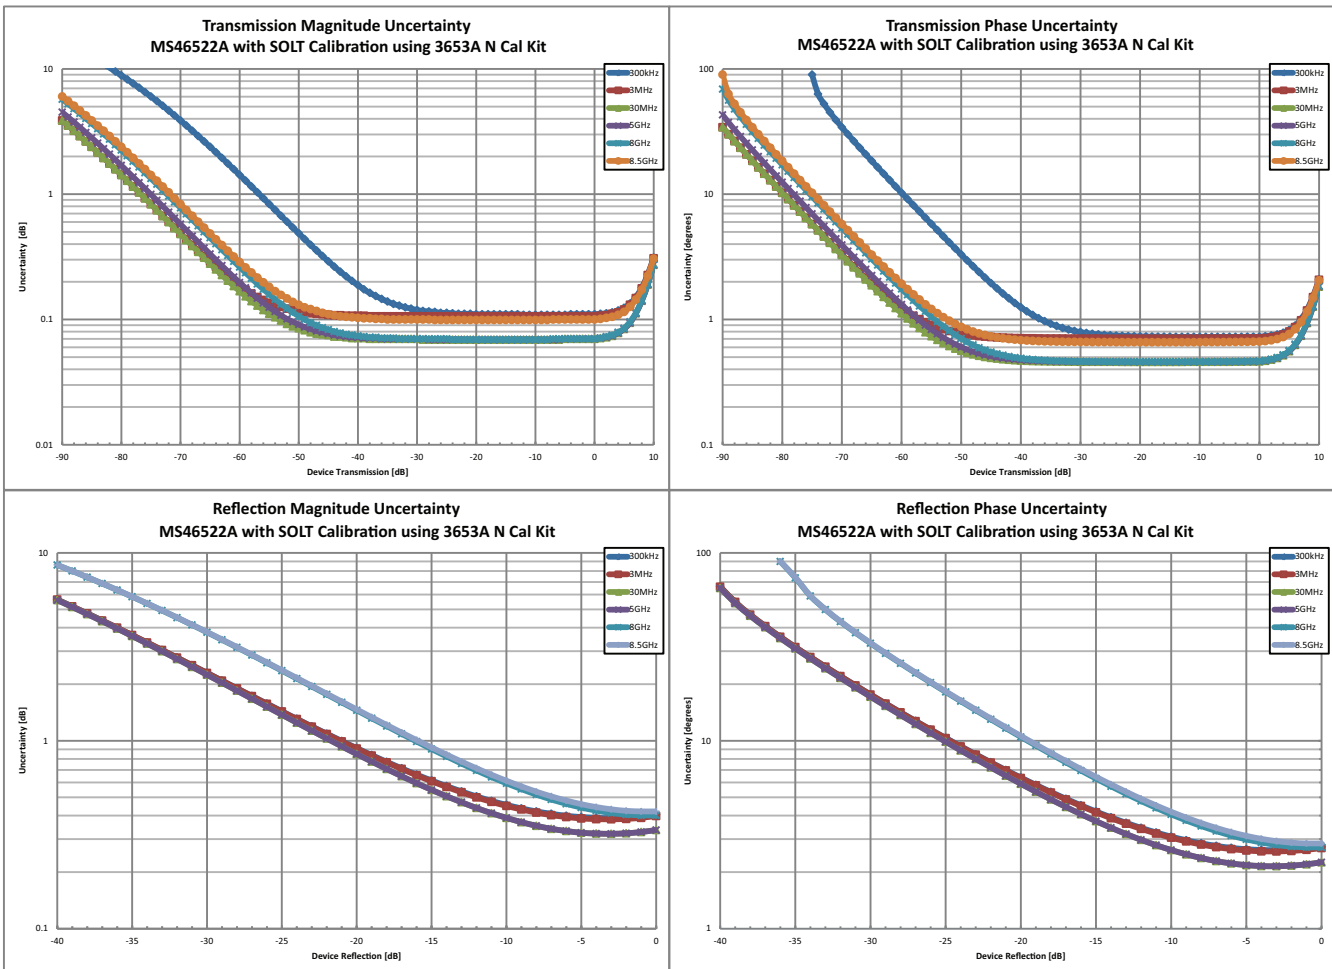

MS46522A VNA System Performance with 8.5 GHz MN25208A SmartCal™

Error-Corrected Specifications


With 12-term calibration using the MN25208A SmartCal™ automatic calibration kit with N(f) type connectors (option -001).

Frequency Range	Directivity (dB)	Source Match (dB)	Load Match ^a (dB)	Reflection Tracking ^a (dB)	Transmission Tracking ^a (dB)
300 kHz to < 30 MHz	> 42	> 35	> 38	±0.15	±0.08
30 MHz to < 5 GHz	> 42	> 35	> 38	±0.08	±0.08
5 GHz to < 8 GHz	> 36	> 35	> 33	±0.08	±0.08
8 GHz to 8.5 GHz	> 36	> 35	> 33	±0.10	±0.08

a. Characteristic performance.

Measurement Uncertainties

The graphs give measurement uncertainties after the above error-corrected calibration. The errors are a worst-case contribution of residual directivity, load and source match, frequency response and isolation, network analyzer dynamic accuracy, and connector repeatability. 10 Hz IF Bandwidth is used. For transmission uncertainties, it is assumed that $S_{11} = S_{22} = 0$. For reflection uncertainties, it is assumed that $S_{21} = S_{12} = 0$. All calibrations and measurements were performed at 0 dBm or default port power, whichever is less. For other conditions, please use our free Exact Uncertainty Calculator software, available for download from the Anritsu web site at www.anritsu.com.

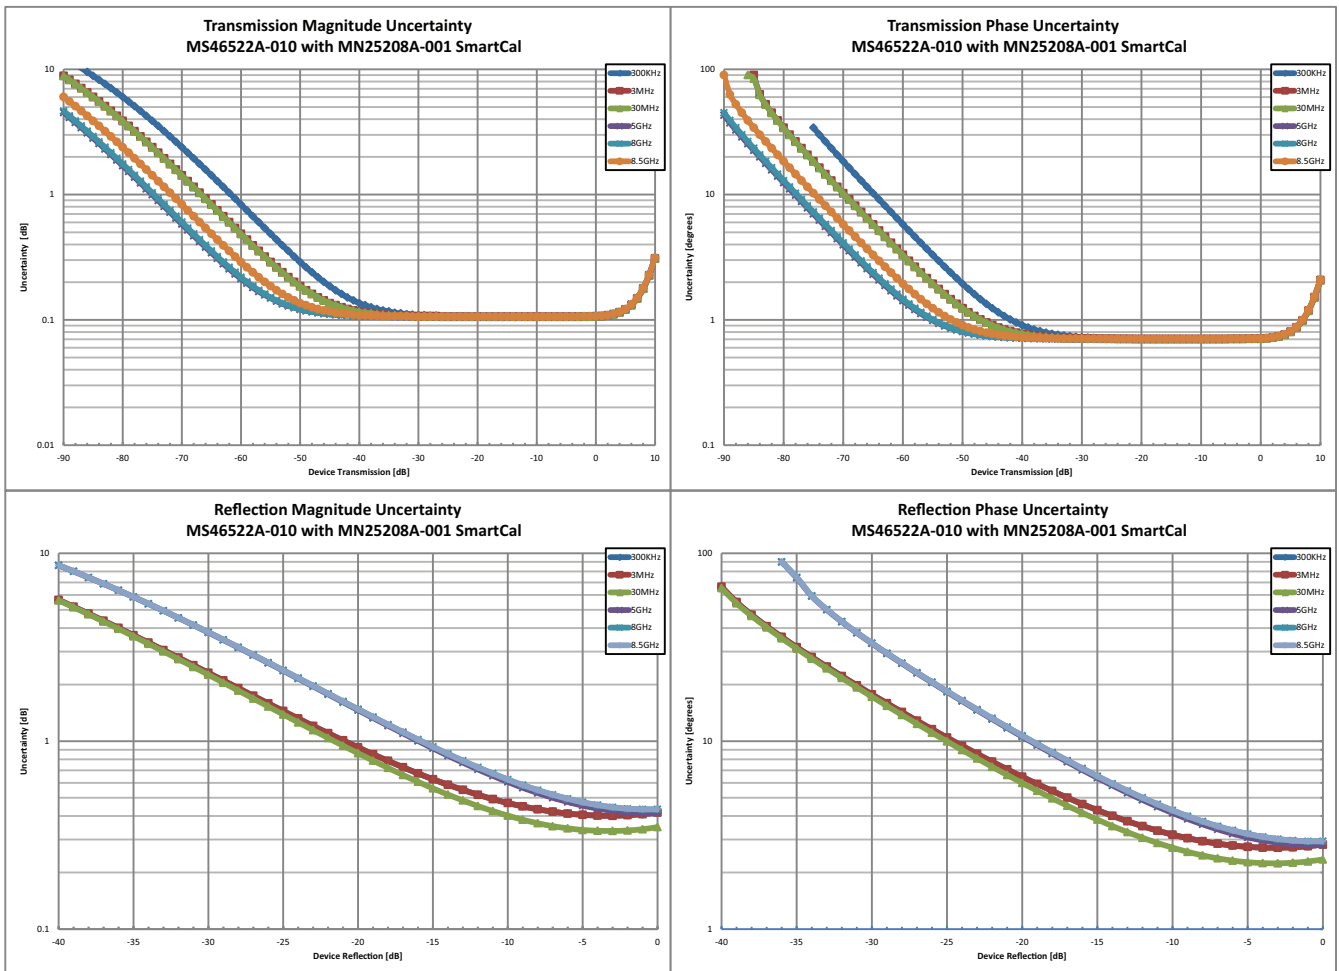

MS46522A VNA System Performance with 36585K AutoCal


Error-Corrected Specifications

With 12-term calibration using the 36585K automatic calibrator (AutoCal). Performance is characteristic.

Frequency Range	Directivity (dB)	Source Match (dB)	Load Match (dB)	Reflection Tracking (dB)	Transmission Tracking (dB)
300 kHz to < 30 MHz	> 53	> 36	> 38	±0.15	±0.09
30 MHz to < 5 GHz	> 43	> 44	> 38	±0.08	±0.05
5 GHz to < 8 GHz	> 43	> 44	> 33	±0.08	±0.05
8 GHz to 8.5 GHz	> 43	> 44	> 33	±0.08	±0.08

Measurement Uncertainties

The graphs give measurement uncertainties after the above error-corrected calibration. The errors are a worst-case contribution of residual directivity, load and source match, frequency response and isolation, network analyzer dynamic accuracy, and connector repeatability. 10 Hz IF Bandwidth is used. For transmission uncertainties, it is assumed that $S_{11} = S_{22} = 0$. For reflection uncertainties, it is assumed that $S_{21} = S_{12} = 0$. All calibrations and measurements were performed at 0 dBm or default port power, whichever is less. For other conditions, please use our free Exact Uncertainty Calculator software, available for download from the Anritsu web site at www.anritsu.com.

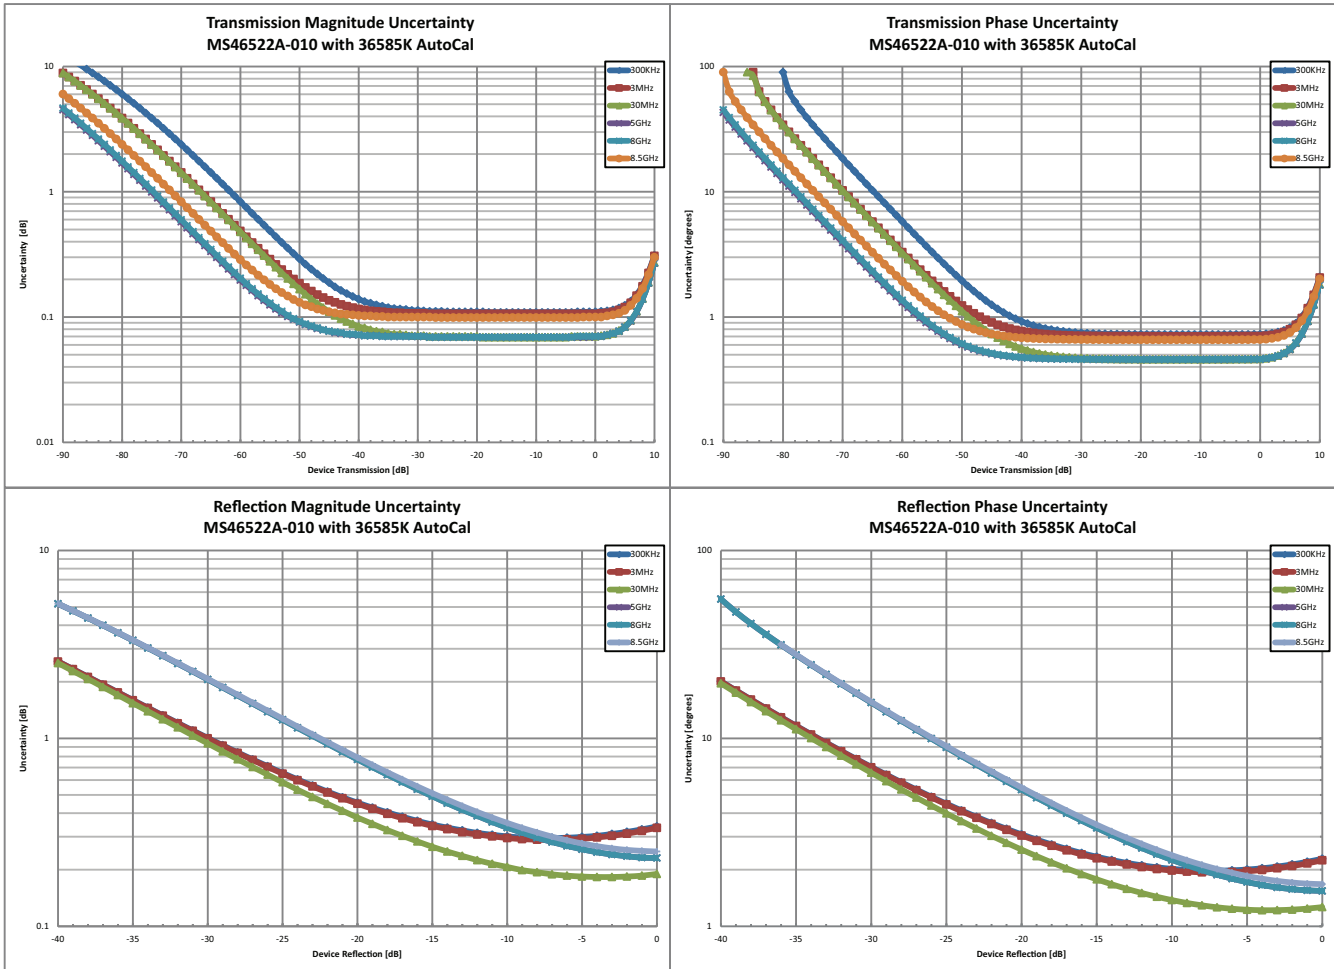

Measurement Throughput Summary

Cycle Time for Measurement Completion (ms)

Number of traces = 1; system error correction on. Typical performance data.

Number of Points	500 kHz IF Bandwidth				100 kHz IF Bandwidth				1 kHz IF Bandwidth			
	51	201	401	1601	51	201	401	1601	51	201	401	1601
Start 1 GHz, stop 1.2 GHz												
Uncorrected	8	16	27	95	9	17	30	109	58	224	446	1781
2-Port Cal	12	27	49	181	13	30	55	207	126	449	897	3550
Start 300 kHz, stop 4.5 GHz												
Uncorrected	9	18	30	97	10	20	32	111	59	229	450	1787
2-Port Cal	15	32	54	187	16	35	60	213	122	462	896	3554
Start 300 kHz, stop 8.5 GHz												
Uncorrected	10	19	31	98	11	20	33	112	60	230	451	1791
2-Port Cal	17	34	56	189	17	36	62	215	132	460	900	3557

Data Transfer Time (ms)

Transferred complex S11 data, using "CALC:DATA:SDATA?" command. Typical performance data.^a

Number of Points	51	201	401	1601
SCPI over LAN				
REAL 64	4	4	4	8
REAL 32	4	4	4	8
ASCII	14	34	60	209

a. Data transfer time varies depending on the PC and control software used with the VNA.

Standard Capabilities

Operating Frequencies

MS46522A-004	50 kHz to 4.5 GHz
MS46522A-010	50 kHz to 8.5 GHz

Measurement Parameters

2-Port Measurements Domains	S_{11} , S_{21} , S_{22} , S_{12} , and any user-defined combination of a_1 , a_2 , b_1 , b_2 , 1 Frequency Domain, and Time (Distance) Domain
-----------------------------	---

Sweeps

Sweep Configurations	Standard or Simultaneous
Frequency Sweep Types	Linear, Log, or Segmented
Power Sweep Types	Linear

Display Graphs

Single Rectilinear Graph Types	Log Magnitude, Phase, Group Delay, Linear Magnitude, Real, Imaginary, SWR, and Impedance
Dual Rectilinear Graph Types	Log Mag and Phase, Linear Mag and Phase, Real and Imaginary
Circular Graph Types	Smith Chart (Impedance), Polar

Measurements Data Points

Maximum Data Points	2 to 20,001 points
---------------------	--------------------

Limit Lines

Limit Lines	Single or segmented. 2 limit lines per trace. 50 segments per trace.
Single Limit Readouts	Uses interpolation to determine the intersection frequency.
Test Limits	Both single and segmented limits can be used for PASS/FAIL testing.

Averaging

Point-by-Point	Point-by-point (default), maximum number of averages = 4096
Sweep-by-Sweep	Sweep-by-sweep, maximum number of averages = 4096

IF Bandwidth

10, 20, 30, 50, 70, 100, 200, 300, 500, 700 Hz
1, 2, 3, 5, 7, 10, 20, 30, 70, 100, 200, 300, 500 kHz

Reference Plane

Line Length or Time Delay	The reference planes of a calibration or other normalization can be changed by entering a line length or time delay.
Dielectric Constants	Dielectric constants may be entered for different media so the length entry can be physically meaningful.
Dispersion Modeling	Dispersion modeling is used in the cases of microstrip and waveguide to take into account frequency dependent phase velocities.
Attenuations	Attenuations and constant phase offsets can be entered to better describe any reference plane distortions.
De-embedding	For more complete reference plane manipulation, the full de-embedding system can also be used.

Measurement Frequency Range

Frequency Range Change	Frequency range of the measurement can be narrowed within the calibration range without recalibration.
CW Mode	CW mode permits single frequency measurements also without recalibration.
Interpolation Not Activated	If interpolation is not activated, the subset frequency range is forced to use calibration frequency points.
Interpolation Activated	If interpolation is activated, any frequency range that is a subset of the calibration frequency range can be used, but there may be some added interpolation error.

Group Delay

Group Delay Aperture	Defined as the frequency span over which the phase change is computed at a given frequency point.
Aperture	The aperture can be changed without recalibration.
Minimum Aperture	The minimum aperture is the frequency range divided by the number of points in calibration and can be increased to 20 % of the frequency range.
Group Delay Range	< 180° of phase change within the aperture

Channels, Display, and Traces

Channels and Traces	16 channels, each with up to 16 traces
Display Colors	Unlimited colors for data traces, memory, text, markers, graticules, and limit lines
Trace Memory and Math	A separate memory for each trace can be used to store measurement data for later display or subtraction, addition, multiplication or division with current measurement data. The trace data can be saved and recalled.
Intra-trace Math	Any two traces within a channel can be combined (via addition, subtraction, multiplication, or division) and displayed on another trace.

Scale Resolution

	Minimum per division, varies with graph type.
Log Magnitude	0.001 dB
Linear Magnitude	10 μU
Phase	0.01°
Group Delay	0.1 ps
Time	0.0001 ps
Distance	0.1 μm
SWR	10 μU
Power	0.01 dB

Markers

Markers	12 markers + 1 reference marker per trace
Marker Coupling	Coupled or decoupled
Marker Data	Data displayed in graph area or in table form
Reference Marker	Additional marker per trace for reference
Marker Statistics	Mean, maximum, minimum, standard deviation Per trace or over a marker region
Marker Search and Tracking	Search and/or track for minimum, maximum, peak, or target value

Other

Filter Parameters	Display bandwidth (user-selectable loss value), corner and center frequencies, loss, Q, and shape factors.
-------------------	--

Calibration and Correction Capabilities

Calibration Methods	Short-Open-Load-Through (SOLT) Short-Open-Load-Reciprocal (SOLR) Offset-Short-Offset-Short-Load-Through (SSLT) Triple-Offset-Short-Through (SSST) Line-Reflect-Line (LRL) / Line-Reflect-Match (LRM) AutoCal Thru Update available
Correction Models	2-Port (Forward, Reverse, or both directions) 1-Port (S_{11} , S_{22} , or both) Transmission Frequency Response (Forward, Reverse, or both directions) Reflection Frequency Response (S_{11} , S_{22} , or both)
Coefficients for Calibration Standards	Use the Anritsu calibration kit USB memory device to load kit coefficients and characterization files. Enter coefficients into user-defined locations. Use complex load models.
Interpolation	Allows interpolation between calibration frequency points.
Adapter Removal Calibration	Characterizes and “removes” an adapter that is used during calibration that will not be used for subsequent device measurements; for accurate measurement of non-insertable devices.
Dispersion Compensation	Selectable as Coaxial, other non-dispersive (e.g., for coplanar waveguide), Waveguide, or Microstrip
Embedding/De-embedding	The MS46522A is equipped with an Embedding/De-embedding system.
De-embedding	De-embedding is generally used for removal of test fixture contributions, modeled networks, and other networks described by S-parameters (s2p files) from measurements.
Embedding	Similarly, the Embedding function can be used to simulate matching circuits for optimizing amplifier designs or simply adding effects of a known structure to a measurement.
Multiple Networks	Multiple networks can be embedded/de-embedded and changing the port and network orientations is handled easily.
Extraction Utility	An extraction utility is part of this package that allows easier computation of de-embedding files based on additional calibration steps and measurements.
Impedance Conversion	Allows entry of different reference impedances (complex values) for different ports

Optional Capabilities

Time Domain Measurements Option 002	Displays all S-parameters and overlays with Frequency Domain, Low-pass Mode with added harmonics frequency list flexibility, Band-pass Mode, Phasor Impulse Mode, Windowing, Gating (pass-band or reject-band), and Frequency with Time Gate.
--	---

Remote Operability

ShockLine supports several remote operability options.

Communication Type	Data Format	Performance	Description
Via LAN	Using VXI-11 Protocol	Gigabit Data Transfer Speed	Use SCPI commands
Drivers for LAN	IVI-C drivers are available for download from the Anritsu website. The IVI-C package supports National Instruments LabVIEW and LabWindows, C#, .NET, MATLAB, and Python34 programming environments.		
Triggering	Start Trigger	Software and digital edge	
	Input Range	+3.3 V logic level (+5 V tolerant)	
	Minimum Trigger Width	50 ns	
	Trigger Delay	6 μ s, typical	

Front Panel Connections



MS46522A Front Panel

Test Ports 1 and 2

MS46522A-004	N(f)
MS46522A-010	N(f)
Damage Input Levels	+27 dBm maximum, 50 VDC maximum

USB Ports

Two type A USB 2.0 Ports for peripherals such as keyboard, mouse, memory stick, hardware key, and similar devices.

Chassis Grounding Port

Banana(f)

Rear Panel Connections



MS46522A Rear Panel

AC Power Input

AC Input connector, with On/Off switch, and fuses 350 VA maximum, 90 to 264 VAC, 47 to 63 Hz (power factor controlled)

USB and LAN

USB Ports	Two type A USB 2.0 Ports and two type A USB 3.0 for peripherals such as keyboard, mouse, memory stick, USB monitor, and hardware key.
LAN Port	Gigabit Ethernet

HDMI Port

Video output, touchscreen compatible

10 MHz In

Connector Type	BNC(f)
Signal	+0 dBm, typical; 50 Ω , nominal

10 MHz Out

Connector Type	BNC(f)
Signal	+8 dBm, typical; 50 Ω , nominal

External Trigger Input

Connector Type	BNC(f)
Voltage Input	0 to 3.3 V input (5 V tolerant)
Impedance	High impedance (> 100 k Ω)
Pulse Width	50 ns minimum input pulse width
Trigger Delay	6 μ s typical

External Trigger Output

Connector type	BNC(f)
Voltage Output	0 to 3.3 V (HCMOS logic)
Drive Current	24 mA maximum
Pulse Width	1 µs, typical

CPU, Memory, and Security Features

CPU	Intel Core™ i5
Storage	Serial-ATA (SATA) Solid State Drive (SSD, removable), for OS, Programs, and Data. (> 30 GB)

Security Features

Virus Protection, Best Practices	If the VNA is attached to a network, best practices recommend installing anti-virus software.
----------------------------------	---

Mechanical**Dimensions**

	Dimensions listed are for the instrument body without rack mount option attached.
H x W x D	108 mm x 484 mm x 590 mm

Weight

< 11 kg (< 25 lb), typical weight for a fully-loaded MS46522A-010 VNA

Environmental**Operating**

	Specification Conforms to MIL-PRF-28800F (class 3)
Temperature Range	0 °C to +50 °C
Relative Humidity	5 % to 95 % at +40 °C, Non-condensing

Non-Operating

Temperature Range	-40 °C to +75 °C
Relative Humidity	0 % to 90 % at +65 °C, Non-condensing

Electromagnetic Compatibility

EMI Conforms to and meets the requirements of:

EMC Directive	2004/108/EC
Low Voltage Directive	2006/95/EC
Emissions	EN55011:2009+A1:2010 Group 1 Class A
Immunity	EN 61000-4-2:2009, 4 kV CD, 8 kV AD EN 61000-4-3:2006+A2:2010, 3 V/m EN 61000-4-4:2004, 0.5 kV S-L, 1 kV P-L EN 61000-4-5:2006, 0.5 kV S-L, 1 kV L-E EN 61000-4-6:2009, 3 V EN 61000-4-11:2004, 100% @ 20 ms

Safety

European Union	CE Mark
Standard:	EN 61010-1:2010

Warranty

Instrument and Built-In Options	3 years from the date of shipment (standard warranty)
Calibration Kits	Typically 1 year from the date of shipment
Test Port Cables	Typically 1 year from the date of shipment
Warranty Options	Additional warranty available

Ordering Information

Instrument Models		ShockLine™ Vector Network Analyzer, 50 kHz to 8.5 GHz
Base Model		MS46522A, 2-Port ShockLine™ VNA
Requires One Frequency Option		MS46522A-004, 50 kHz to 4.5 GHz MS46522A-010, 50 kHz to 8.5 GHz
Included Accessories		Each VNA comes with a set of included accessories.
User Documentation		The user documentation USB flash drive includes Adobe Acrobat PDF files for the ShockLine Operation Manual, User Interface Reference Manual, Programming Manual, Calibration and Measurement Guide, and the Technical Data Sheet.
Power		Power Cord
Main VNA Options		
MS46522A-001		Rack Mount, adds handles and removes feet for shelf-mounting into a 19 inch universal rack
MS46522A-002		Time Domain with Time Gating
MS46522A-005		Handler Interface
Calibration Options		
MS46522A-098		Standard Calibration, ISO 17025 compliant, without data
MS46522A-099		Premium Calibration, ISO 17025 compliant, with data
Precision Automatic Calibrator Modules		
MN25208A		2-port USB SmartCal Module, 300 kHz to 8.5 GHz, (available with various connector options)
36585K-2M		K Precision AutoCal Module, 70 kHz to 40 GHz, K(m) to K(m)
36585K-2F		K Precision AutoCal Module, 70 kHz to 40 GHz, K(f) to K(f)
36585K-2MF		K Precision AutoCal Module, 70 kHz to 40 GHz, K(m) to K(f)
Mechanical Calibration Kits		
3650		SMA/3.5 mm Calibration Kit
3653A		N Calibration Kit, Without Sliding Loads
OSLN50A-8		Precision N Male Open/Short/Load Mechanical Calibration Tee
OSLNF50A-8		Precision N Female Open/Short/Load Mechanical Calibration Tee
TOSLN50A-8		Precision N Male Through/Open/Short/Load Mechanical Calibration Tee
TOSLNF50A-8		Precision N Female Through/Open/Short/Load Mechanical Calibration Tee
OSLN50A-18		Precision N Male Open/Short/Load Mechanical Calibration Tee
OSLNF50A-18		Precision N Female Open/Short/Load Mechanical Calibration Tee
TOSLN50A-18		Precision N Male Through/Open/Short/Load Mechanical Calibration Tee
TOSLNF50A-18		Precision N Female Through/Open/Short/Load Mechanical Calibration Tee
TOSLK50A-20		Precision K Male Through/Open/Short/Load Mechanical Calibration Tee
TOSLKF50A-20		Precision K Female Through/Open/Short/Load Mechanical Calibration Tee
Verification Kits		
3663-2		N Verification Kit

RF Cables and Adapters

N120-6	RF Cables, Semi-Rigid, N(m) to N(m), 1 each, 0.01 to 18 GHz, 50 Ω, 15 cm (5.9 in)
NS120MF-6	RF Cables, Semi-Rigid, N(f) to N(f), 1 each, 0.01 to 18 GHz, 50 Ω, 15 cm (5.9 in)
1091-26-R	SMA(m) to N(m), DC to 18 GHz, 50 Ω
1091-27-R	SMA(f) to N(m), DC to 18 GHz, 50 Ω
1091-80-R	SMA(m) to N(f), DC to 18 GHz, 50 Ω
1091-81-R	SMA(f) to N(f), DC to 18 GHz, 50 Ω
34NN50A	Precision Adapter, N(m) to N(m), DC to 18 GHz, 50 Ω
34NFN50	Precision Adapter, N(f) to N(f), DC to 18 GHz, 50 Ω
34NK50	Precision Adapter, N(m) to K(m), DC to 18 GHz, 50 Ω
34NKF50	Precision Adapter, N(m) to K(f), DC to 18 GHz, 50 Ω
34NFK50	Precision Adapter, N(f) to K(m), DC to 18 GHz, 50 Ω
34NFKF50	Precision Adapter, N(f) to K(f), DC to 18 GHz, 50 Ω

Test Port Cables, Flexible, Ruggedized, Phase Stable

15NNF50-1.0B	Test Port Cable, Flexible, Phase Stable, N(f) to N(m), 1.0 m
15NNF50-1.5B	Test Port Cable, Flexible, Phase Stable, N(f) to N(m), 1.5 m
15NN50-1.0B	Test Port Cable, Flexible, Phase Stable, N(m) to N(m), 1.0 m
15LL50-1.0A	Test Port Cable, Armored, Phase Stable, DC to 20 GHz, 3.5 mm(m) to 3.5 mm(m), 1.0 m, 50 Ω
15LLF50-1.0A	Test Port Cable, Armored, Phase Stable, DC to 20 GHz, 3.5 mm(m) to 3.5 mm(f), 1.0 m, 50 Ω
15KK50-1.0A	Test Port Cable, Armored, Phase Stable, DC to 20 GHz, K(m) to K(m), 1.0 m, 50 Ω
15KKF50-1.0A	Test Port Cable, Armored, Phase Stable, DC to 20 GHz, K(m) to K(f), 1.0 m, 50 Ω
SC8267	Cable, 40 GHz, K(m) to K(f), 1 m (36 in), 50 Ω

Phase-Stable 18 GHz and 40 GHz Semi-Rigid Cables (Armored)

3670N50-1	0.3 m (12"), DC to 18 GHz, N(f) to N(m), 50 Ω
3670NN50-1	0.3 m (12"), DC to 18 GHz, N(m) to N(m), 50 Ω
3670N50-2	0.6 m (24"), DC to 18 GHz, N(f) to N(m), 50 Ω
3670NN50-2	0.6 m (24"), DC to 18 GHz, N(m) to N(m), 50 Ω

Transit Case

760-269	ShockLine™ VNA Transit Case, Hard plastic with wheels
---------	---

Tools

01-200	Calibrated Torque End Wrench, GPC-7 and Type N
01-201	Torque End Wrench, 5/16 in, 0.9 N·m (8 lbf·in), For tightening male devices, for SMA, 3.5 mm, 2.4 mm, K, and V connectors
01-204	End Wrench, 5/16 in, Universal, Circular, Open-ended, For SMA, 3.5 mm, 2.4 mm, K and V connectors

Documentation

User Documentation	Soft copies of the manuals as Adobe Acrobat PDF files are included on the User Documentation USB flash drive provided with the instrument. The Maintenance Manual is available from Anritsu Customer Service. For more information, please contact ShockLineVNA.support@Anritsu.com .
10410-00330	MS46522A/524A Series VNA Operation Manual (OM)
10410-00331	MS46522A Series VNA Calibration and Measurement Guide (MG)
10410-00332	MS46522A/524A Series VNA User Interface Reference Manual (UIRM)
10410-00333	MS46522A/524A Series VNA Programming Manual (PM), for IEEE 488.2 and SCPI Commands

Notes

Notes



Anritsu

• United States

Anritsu Company

1155 East Collins Blvd, Suite 100
Richardson, TX 75081, U.S.A.
Toll Free: 1-800-267-4878
Phone: +1-972-644-1777
Fax: +1-972-671-1877

• Canada

Anritsu Electronics Ltd.

700 Silver Seven Road, Suite 120
Kanata, Ontario K2V 1C3, Canada
Phone: +1-613-591-2003
Fax: +1-613-591-1006

• Brazil

Anritsu Eletrônica Ltda.

Praça Amadeu Amaral, 27 - 1 Andar
01327-010 Bela Vista, São Paulo, Brazil
Phone: +55-11-3283-2511
Fax: +55-11-3288-6940

• Mexico

Anritsu Company, S.A. de C.V.

Av. Ejército Nacional No. 579 Piso 9, Col. Granada
11520 México, D.F., México
Phone: +52-55-1101-2370
Fax: +52-55-5254-3147

• United Kingdom

Anritsu EMEA Ltd.

200 Capability Green
Luton, Bedfordshire LU1 3LU
United Kingdom
Phone: +44-1582-433280
Fax: +44-1582-731303

• France

Anritsu S.A.

12 Avenue du Québec
Bâtiment Iris 1-Silic 612
91140 Villebon-sur-Yvette, France
Phone: +33-1-60-92-15-50
Fax: +33-1-64-46-10-65

• Germany

Anritsu GmbH

Nemetschek Haus, Konrad-Zuse-Platz 1
81829 München, Germany
Phone: +49-89-442308-0
Fax: +49-89-442308-55

• Italy

Anritsu S.r.l.

Via Elio Vittorini 129
00144 Roma, Italy
Phone: +39-06-509-9711
Fax: +39-06-502-2425

• Sweden

Anritsu AB

Kistagången 20B
164 40 KISTA, Sweden
Phone: +46-8-534-707-00
Fax: +46-8-534-707-30

• Finland

Anritsu AB

Teknobulevardi 3-5
FI-01530 Vantaa, Finland
Phone: +358-20-741-8100
Fax: +358-20-741-8111

• Denmark

Anritsu A/S

Kay Fiskers Plads 9
2300 Copenhagen S, Denmark
Phone: +45-7211-2200
Fax: +45-7211-2210

• Russia

Anritsu EMEA Ltd.

Representation Office in Russia
Tverskaya str. 16/2, bld. 1, 7th floor
Russia, 125009, Moscow
Phone: +7-495-363-1694
Fax: +7-495-935-8962

• United Arab Emirates

Anritsu EMEA Ltd.

Dubai Liaison Office

P O Box 500413 - Dubai Internet City
Al Thuraya Building, Tower 1, Suite 701, 7th Floor
Dubai, United Arab Emirates
Phone: +971-4-3670352
Fax: +971-4-3688460

• Singapore

Anritsu Pte. Ltd.

11 Chang Charn Road, #04-01, Shriro House
Singapore 159640
Phone: +65-6282-2400
Fax: +65-6282-2533

• India

Anritsu India Private Limited

2nd & 3rd Floor, #837/1, Binnamangla 1st Stage
Indiranagar, 100ft Road, Bangalore - 560038, India
Phone: +91-80-4058-1300
Fax: +91-80-4058-1301

• P.R. China (Shanghai)

Anritsu (China) Co., Ltd.

27th Floor, Tower A
New Caohejing International Business Center
No. 391 Gui Ping Road Shanghai, Xu Hui Di District
Shanghai 200233, P.R. China
Phone: +86-21-6237-0898
Fax: +86-21-6237-0899

• P.R. China (Hong Kong)

Anritsu Company Ltd.

Unit 1006-7, 10/F., Greenfield Tower
Concordia Plaza
No. 1 Science Museum Road, Tsim Sha Tsui East
Kowloon, Hong Kong, P. R. China
Phone: +852-2301-4980
Fax: +852-2301-3545

• Japan

Anritsu Corporation

8-5, Tamura-cho, Atsugi-shi
Kanagawa, 243-0016 Japan
Phone: +81-46-296-1221
Fax: +81-46-296-1238

• Korea

Anritsu Corporation, Ltd.

5FL, 235 Pangyoyeok-ro, Bundang-gu
Seongnam-si
Gyeonggi-do, 463-400 Korea
Phone: +82-31-696-7750
Fax: +82-31-696-7751

• Australia

Anritsu Pty Ltd.

Unit 21/270 Ferntree Gully Road
Notting Hill, Victoria, 3168, Australia
Phone: +61-3-9558-8177
Fax: +61-3-9558-8255

• Taiwan

Anritsu Company Inc.

7F, No. 316, Sec. 1, Neihu Rd, Taipei 114, Taiwan
Phone: +886-2-8751-1816
Fax: +886-2-8751-1817

List Revision Date: 20141016



© Anritsu All trademarks are registered trademarks of their respective companies. Data subject to change without notice. For the most recent specifications visit: www.anritsu.com
Anritsu utilizes recycled paper and environmentally conscious inks and toner.

MS46522A ShockLine™ TDS
Copyright March 2015 Anritsu Company, USA
All Rights Reserved



11410-00750



F