


**Anritsu** envision : ensure

# Signalling Tester


## MD8430A

Rapid Test Designer (RTD) MX786201A

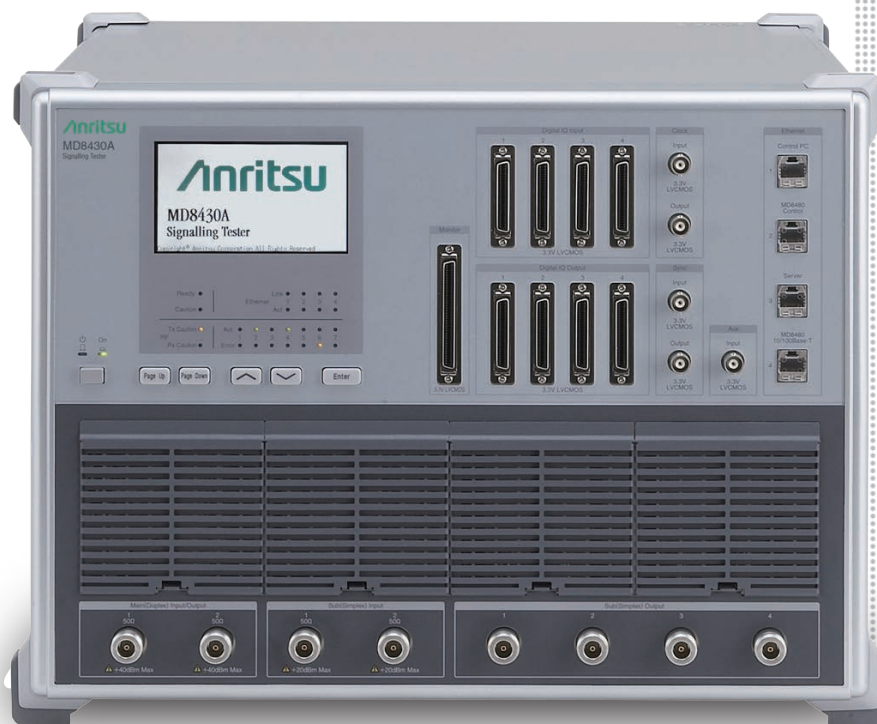

# Early Support for Developing LTE-Advanced (CA/MTC) Chipsets and Mobile UEs

LTE-Advanced is faster than LTE and becoming effect radio communications network. The Signalling Tester MD8430A is a key LTE-Advanced base station simulator for developing LTE/LTE-Advanced-compliant chipsets and mobile UEs. Using its extensive experience in 3G markets, Anritsu has developed the MD8430A as a powerful LTE-Advanced protocol R&D test solution to help developers bring LTE-Advanced terminals to market as fast as possible.

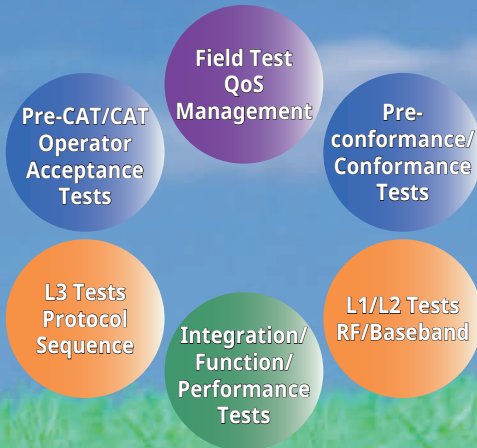

## Key Features

- Early support for 3GPP LTE-Advanced FDD/TDD Carrier Aggregation (CA) 2CCs and 3CCs
- Early support 3GPP LTE-Advanced FDD/TDD Release 12
  - TDD-FDD joint operation including CA
  - DL 256QAM
  - LTE MTC (Machine Type Communication)
- One MD8430A support CA handover, 4x4 MIMO and 8x2 MIMO Available to testing of full digital fading
- Support DL 450 Mbps, UL 100 Mbps throughput test at 3CCs
- Inter-RAT tests making effective use of previous MD8480C (UTRAN/GERAN), and MD8475A (CDMA2000) hardware investments
- Optimized investment from first R&D to protocol conformance testing
- Full development and analysis toolset cuts L1, L2 and L3 scenario development time and costs
- Support UMTS Release 10, HSPA Evolution, GSM/GPRS/EGPRS

## Main Applications

- Coding/Decoding tests (RF/Baseband)
- Protocol sequence tests
- Throughout and stress tests (Performance test)
- Intra-RAT/Inter-RAT performance tests
- LTE Pre-conformance/Conformance tests
- Network interoperability tests
- LTE network operator acceptance tests (CAT)
- Troubleshooting field test problems
- UE QC inspection
- W-CDMA/HSPA protocol sequence tests


## Main Test Functions

- LTE-Advanced Intra-RAT CA handover test (Hard handover)
- LTE ↔ UTRAN/GERAN Inter-RAT handover test
- eMBMS test
- Digital baseband slow clock test
- Protocol sequence analysis (Log analysis)
- Throughput monitoring
- UE Scheduling function (Time/MCS/Lowest RB/RB)
- H-ARQ Test (ACK/NACK/DTX)
- VoLTE test (SPS, TTI Bundling, DRX, RoHC, CA+VoLTE)
- W-CDMA/HSPA handover test
- Dual Connectivity
- Licensed Assisted Access (LAA)

## Basic Functions (LTE-Advanced)

- Transmit Downlink (DL) signal (Up to 6 GHz)
- Receive Uplink (UL) signal (Up to 6 GHz)
- Call processing
- Transmit Power Control (TPC)
- Baseband interface
- DL 2x2/4x2 MIMO (Test Model: ETM, PTM)
- DL 4x4/8x2/8x4 MIMO (Test Model: ETM)
- UL 2x2 MIMO (Test Model: ETM)
- CA 2CCs/3CCs/4CCs (Test Model: ETM)
- Encryption (option)

Please refer to page 6 for specifications of MD8430A models.

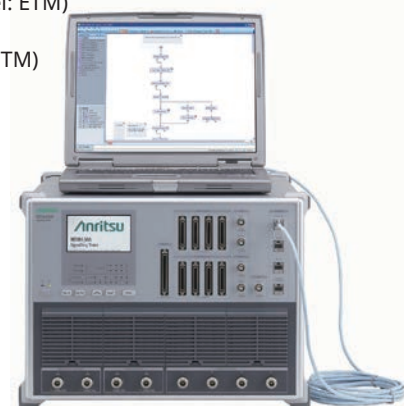



### Supports Newest UE Categories

The MD8430A supports UE Category 1 to 7, 9 to 12, UE DL Category 6, 7, 9 to 13, 15, UE UL Category 3, 5, 7 and will support all new future categories.

3GPP TS 36.306 V13.0.0 (2015-12)

#### LTE (DL)

UE Category	Maximum number of DL-SCH transport block bits received within a TTI	Maximum number of bits of a DL-SCH transport block received within a TTI	Total number of soft channel bits	Maximum number of supported layers for spatial multiplexing in DL
Category 1	10296	10296	250368	1
Category 2	51024	51024	1237248	2
Category 3	102048	75376	1237248	2
Category 4	150752	75376	1827072	2
Category 5	299552	149776	3667200	4
Category 6	301504	149776 (4 layers, 64QAM) 75376 (2 layers, 64QAM)	3654144	2 or 4
Category 7	301504	149776 (4 layers, 64QAM) 75376 (2 layers, 64QAM)	3654144	2 or 4
Category 8	2998560	299856	35982720	8
Category 9	452256	149776 (4 layers, 64QAM) 75376 (2 layers, 64QAM)	5481216	2 or 4
Category 10	452256	149776 (4 layers, 64QAM) 75376 (2 layers, 64QAM)	5481216	2 or 4
Category 11	603008	149776 (4 layers, 64QAM) 195816 (4 layers, 256QAM) 75376 (2 layers, 64QAM) 97896 (2 layers, 256QAM)	7308288	2 or 4
Category 12	603008	149776 (4 layers, 64QAM) 195816 (4 layers, 256QAM) 75376 (2 layers, 64QAM) 97896 (2 layers, 256QAM)	7308288	2 or 4

#### LTE (UL)

UE Category	Maximum number of UL-SCH transport block bits transmitted within a TTI	Maximum number of bits of an UL-SCH transport block transmitted within a TTI	Support for 64QAM in UL
Category 1	5160	5160	No
Category 2	25456	25456	No
Category 3	51024	51024	No
Category 4	51024	51024	No
Category 5	75376	75376	Yes
Category 6	51024	51024	No
Category 7	102048	51024	No
Category 8	1497760	149776	Yes
Category 9	51024	51024	No
Category 10	102048	51024	No
Category 11	51024	51024	No
Category 12	102048	51024	No

#### LTE (DL)

UE DL Category	Maximum number of DL-SCH transport block bits received within a TTI	Maximum number of bits of a DL-SCH transport block received within a TTI	Total number of soft channel bits	Maximum number of supported layers for spatial multiplexing in DL
DL Category 0	1000	1000	25344	1
DL Category 6	301504	149776 (4 layers, 64QAM) 75376 (2 layers, 64QAM)	3654144	2 or 4
DL Category 7	301504	149776 (4 layers, 64QAM) 75376 (2 layers, 64QAM)	3654144	2 or 4
DL Category 9	452256	149776 (4 layers, 64QAM) 75376 (2 layers, 64QAM)	5481216	2 or 4
DL Category 10	452256	149776 (4 layers, 64QAM) 75376 (2 layers, 64QAM)	5481216	2 or 4
DL Category 11	603008	149776 (4 layers, 64QAM) 195816 (4 layers, 256QAM) 75376 (2 layers, 64QAM) 97896 (2 layers, 256QAM)	7308288	2 or 4
DL Category 12	603008	149776 (4 layers, 64QAM) 195816 (4 layers, 256QAM) 75376 (2 layers, 64QAM) 97896 (2 layers, 256QAM)	7308288	2 or 4
DL Category 13	391632	195816 (4 layers, 256QAM) 97896 (2 layers, 256QAM)	3654144	2 or 4
DL Category 14	3916560	391656 (8 layers, 256QAM)	47431680	8
DL Category 15	749856-798800	149776 (4 layers, 64QAM) 195816 (4 layers, 256QAM) 75376 (2 layers, 64QAM) 97896 (2 layers, 256QAM)	9744384	2 or 4
DL Category 16	978960-1051360	149776 (4 layers, 64QAM) 195816 (4 layers, 256QAM) 75376 (2 layers, 64QAM) 97896 (2 layers, 256QAM)	12789504	2 or 4
DL Category 17	25065984	391656 (8 layers, 256QAM)	303562752	8


#### LTE (UL)

UE UL Category	Maximum number of UL-SCH transport block bits transmitted within a TTI	Maximum number of bits of an UL-SCH transport block transmitted within a TTI	Support for 64QAM in UL
UL Category 0	1000	1000	No
UL Category 3	51024	51024	No
UL Category 5	75376	75376	Yes
UL Category 7	102048	51024	No
UL Category 8	1497760	149776	Yes
UL Category 13	150752	75376	Yes
UL Category 14	9585664	149776	Yes

## For Developing LTE-Advanced Chipsets and Mobile UEs RF/Baseband Tests

### Coding/Decoding Test


Coding/Decoding tests of LTE-Advanced terminals are performed by making the RF connections shown in the following diagram.

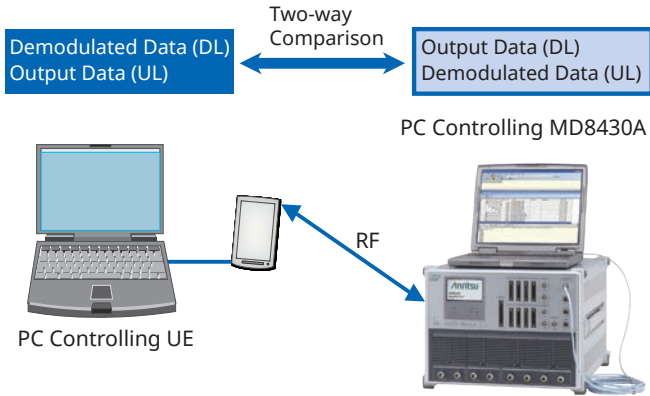

Coding/Decoding Test Example (RF, Patch Test)

The MD8430A supports digital baseband I/O as standard functions. Using the baseband interface offers high-reproducibility coding/decoding tests free from the RF section, supporting stable evaluation of LTE chipset baseband performance.


Moreover, LTE coding/decoding tests are supported because the baseband chip can be evaluated using a slower clock than the clock frequency. And connecting the second MD8430A fading function to the digital baseband interface supports slow clock evaluations in a fading environment, which are difficult to perform with an RF fading simulator.

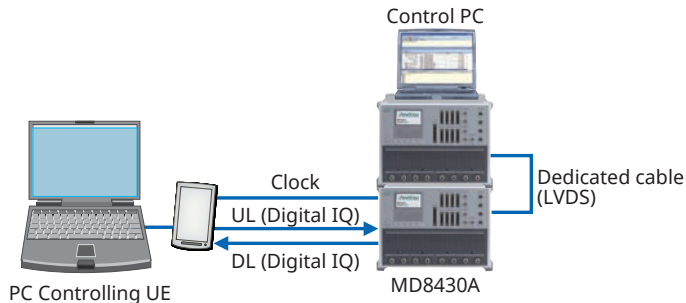

Slow Clock Test Setup (Digital Baseband, Fading)

### Easy MIMO Test Configuration Settings


The MD8430A has 8 main and sub RF connectors as well as 8 digital IQ connectors as standard equipment for use with the MX843010A/E LTE Control Software to easily configure and monitor various settings, including RF parameters, channel power, MIMO, fading, connector selections, frame timing, BTS cell selections, etc.

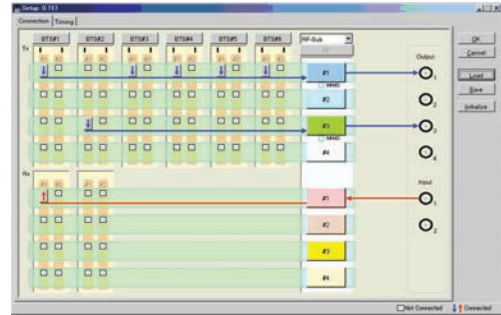


Setup Screen Example

### Fully Versatile L1/L2 Monitoring Functions

The MX843010A/E software supports LTE development by processing large volumes of low-layer data at very high speeds using a full line of versatile power monitoring, throughput monitoring and log analysis functions. The Measure (Counter) functions can monitor Layer 1/2 (L1/L2) throughputs in real time by counting parameter values such as ACK/NACK/DTX/CQI.

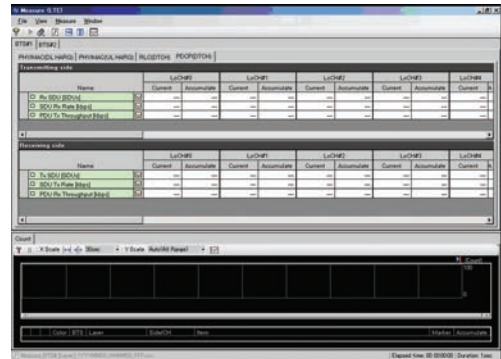

Measurement (Counter and Throughput) Screens

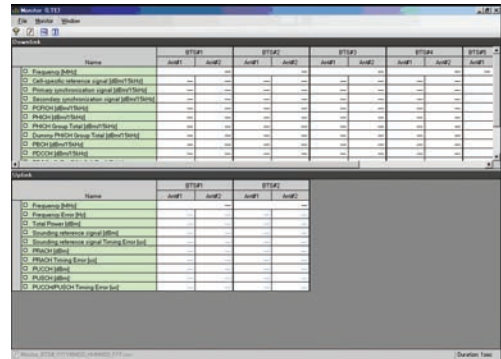

Monitor Screen Example

## Complete LTE-Advanced Protocol Test Environment

### Intelligent Test Creation

The Rapid Test Designer (RTD) MX786201A software tools gives users power to create tests that cannot be done with traditional language based tools. RTD Supports L1/L2/L3 testing using Lower Layer Configuration library and Layer 3 procedure library of UE development.

Moreover, each procedure auto-sets the connection with the lower Layers (L1/L2) based on full compliance with the 3GPP standards. RTD can simulator LTE ↔ UMTS Inter-RAT and LTE ↔ CDMA2000 Interworking by connecting MD8480C and/or MD8475A.

The Reference Library test cases provides a reference to build the customized test cases and libraries with ease.


### Cuts Test Case Development Time

The RTD GUI offers intuitive test case creation by linking procedures with parameters, such as network conditions and message data, at easy-to-understand setting screens, quickly increasing the number of working test cases.


In addition, the Built-in Analyzer function checks for programming errors prior to testing, which can start immediately without recompiling after editing and changing settings.

### Flexibility in Testing & Analysis


When the test finishes the execution, the RTD provides a preliminary judgment against predetermined criteria. This avoids the need to study complex message sequences and can show a test outcome explained in a local language. The Integrated protocol analyzer with RTD supports very detailed Message Sequence Analysis and provides a facility to export the Protocol Test logs in to HTML format which can be viewed at any PC with a Browser without a RTD license.

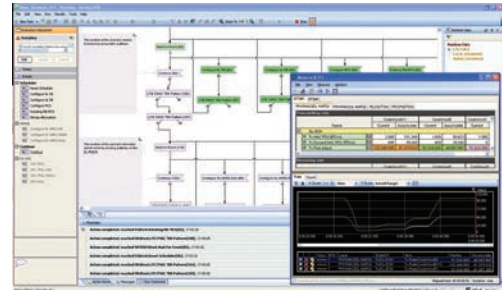

Test Execution Screen (RTD)

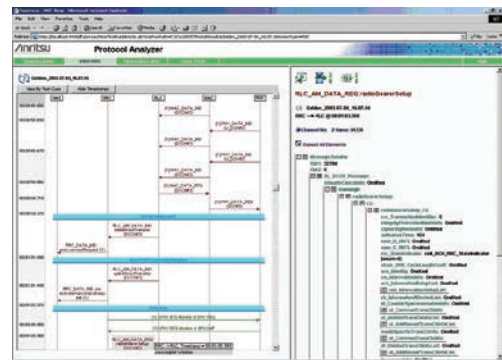

Log Analysis Screen (RTD)

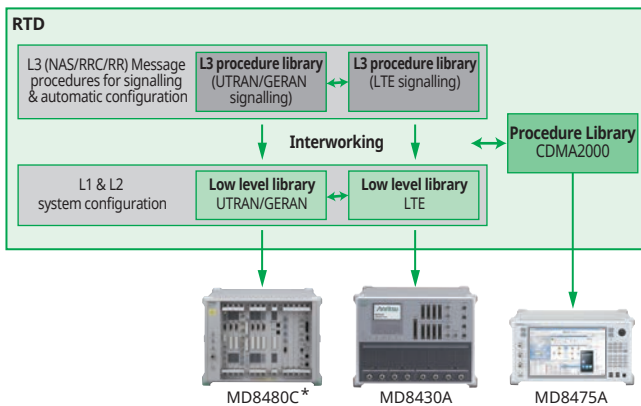

RTD Procedure Block

\*: MD8430A can be used on UMTS/GSM test in place of MD8480C.




## Efficient UE Integration and Performance Tests

### Testing Throughput for Various Conditions

The MD8430A supports the latest UE categories with download speeds of 450 Mbps and uploads speeds of 100 Mbps.

The bundled sample scenarios make it easy to change parameters such as bandwidth, scheduling, HARQ, etc., for testing LTE throughputs under various conditions.

In addition, combination with second MD8430A fading function supporting LTE MIMO via the dedicated digital interface simplifies complex power control procedures for easy throughput testing in a fading environment with simple test setup.

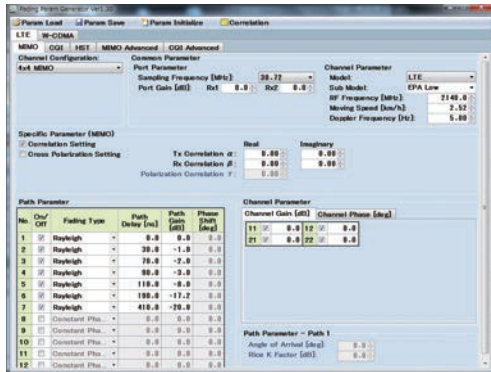


Fading Setting Screen (MF6900A Fading Simulator)

### Handover Tests Optimizing Hardware Investment

The MD8430A supports up to six cells (Four active cells) allowing handover tests between two LTE BTS with one tester. In addition, LTE-UTRAN/GERAN Inter-RAT handover tests are supported by connecting the W-CDMA Signalling Tester MD8480C. And the MD8480C is not limited to the globally dominant W-CDMA technology but also supports the HSPA/HSPA Evolution and GSM/GPRS/EGPRS technologies.

When combined with the Signalling Tester MD8475A, CDMA2000 Interworking tests are supported too, maximizing support for both worldwide communications technologies and investment in hardware.

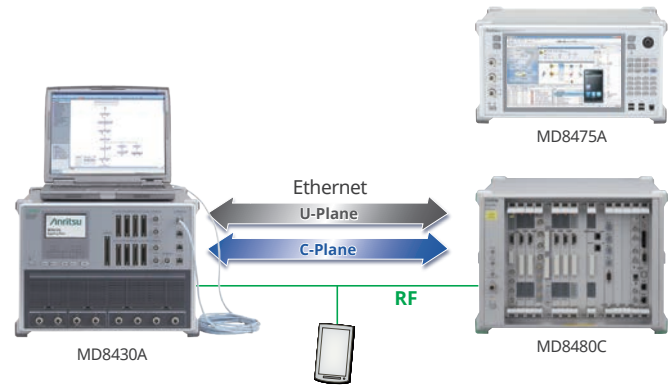

LTE-UTRAN/GERAN Handover Test Setup

### Specifications of Signalling Tester MD8430A Models

Model/Name	MD8430A-020 LTE Standard Test Model (STM)	MD8430A-030 LTE Performance Test Model (PTM)	MD8430A-035 LTE Enhanced Test Model (ETM)
Interface	RF, Digital IQ		RF, Digital IQ, Baseband Fading*1
Frequency Band	Max. 20 MHz		
UE Category	Category 1, 2, 3, 4, 6		Category 1, 2, 3, 4, 5, 6, 7, 9*2, 10*2, 11*2, 12*2 DL Category 6, 7, 9*2, 10*2, 11*2, 12*2, 13*2, 15*2 UL Category 3, 5, 7
Max. Data Rate (DL)	150 Mbps (PHY: 300 Mbps)		800 Mbps
Max. Data Rate (UL)	50 Mbps		100 Mbps
MIMO	2 × 2 MIMO	2 × 2 MIMO 4 × 2 MIMO	2 × 2 MIMO 4 × 2 MIMO 4 × 4 MIMO*3 8 × 2 MIMO*3 8 × 4 MIMO*4
Max. No. of Base Station	Active + adjacent BTS: 4 (Max. Active BTS: 2)	Active + adjacent BTS: 6*5 (Max. Active BTS: 2)	Active + adjacent BTS: 6 (Max. Active BTS: 4)
Hard Handover (including at MIMO)	Intra-frequency Inter-frequency handover*6		Available*7
Carrier Aggregation: No. of Component Carriers (DL)*8	2*9		4*10, *11
Carrier Aggregation: No. of Component Carriers (UL)*8	2		

\*1: Requires MD8430A-067 and two MD8430A sets for Baseband Fading. (ETM & ETM or ETM & BTM)

\*2: Requires two MD8430A sets. (ETM & ETM or ETM & BTM)

\*3: Requires MD8430A-075.

\*4: Requires MD8430A-076.

\*5: For 4 × 2 MIMO, available active base station is one.

Sum of an active base station and adjacent base stations are five.

\*6: Handover with Carrier Aggregation is not supported.

\*7: For inter-frequency handover with Carrier Aggregation, requires two MD8430A sets. (ETM & ETM or ETM & BTM)

\*8: Requires MD8430A-085.

\*9: A component carrier occupies an active base station.

\*10: 4 CA operation requires MD8430A-088.

\*11: For 3 CA MIMO and 4 CA MIMO, requires two MD8430A sets. (ETM & ETM or ETM & BTM)

# Signalling Tester MD8430A Features

## Powerful Platform for Both Conformance and Operator Acceptance Tests

Field Test QoS Management


Pre-CAT/CAT Operator Acceptance Tests

Pre-conformance/Conformance Tests

### Optimized Hardware Investment

The MD8430A supports to design for early chipset and mobile UE, function tests, and performance tests ranging from carrier acceptance tests to protocol conformance tests as well as retrofit upgrades between models allows developers to tailor their hardware investment to current needs with future flexible upgrade options.

The Protocol Conformance Test Toolkit (PCT) with MD8430A and GCF/PTCRB approved TTCN test package provide an optimum environment for LTE protocol conformance testing. Hence, a Single Hardware Platform that extends its usage from Platform development to Conformance Testing and Operator Acceptance Test.

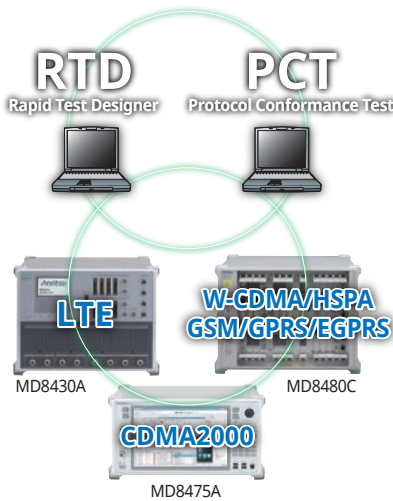


Full Line of Versatile L3 Analysis Tools

### Instant Firmware Switching

Because the MD8430A saves up to ten firmware versions, the right firmware is selected easily at startup. There is no need to install/uninstall firmware when executing a test case that determines the firmware version.

### Powerful Automated Testing

The RTD software supporting the UE control interface makes it easy to setup automated test systems. Furthermore, multiple test cases can be executed continuously and test reports generated automatically, and many functions, including repeat testing under different conditions with multiple settings, can be automated, offering carriers, etc., an ideal turnkey solution for acceptance testing.

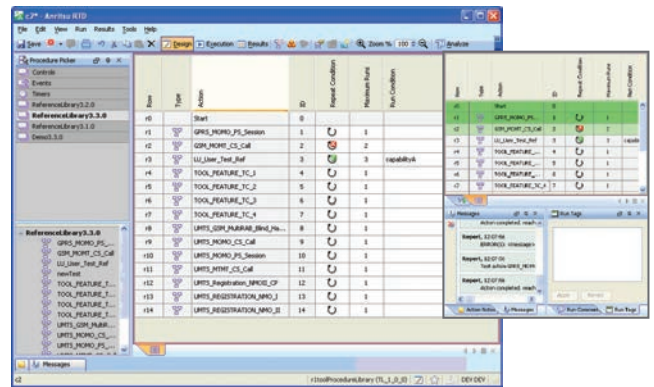

Example of Test Case Campaign

### Easy Test Case Maintenance


Test cases created by the RTD software can be updated easily when new 3GPP standard evolves, reducing the need for re-editing. In addition, guaranteed test case compatibility even when the MD8430A firmware version is changed removes the need to recompile, etc., resulting in greatly reduced costs for maintaining test cases to support regression testing when rolling out new terminals and performing pre-IOT to assure compatibility with network equipment worldwide.



Used as a component for test system

# Signalling Tester MD8430A Panel Layout

## Front Panel

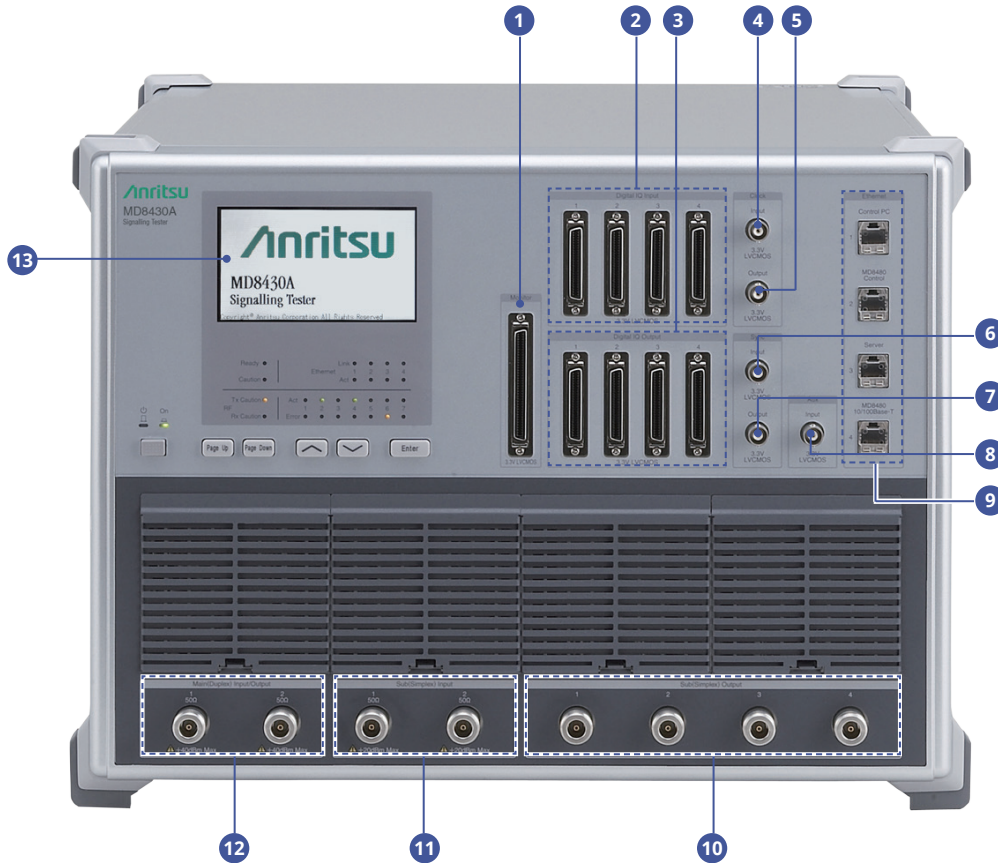

**1 Monitor**

Connector outputting signal internal data and status to accessory Monitor Board

**2 Digital IQ Input**

Connector for inputting digital IQ signal

**3 Digital IQ Output**

Connector for outputting digital IQ signal

**4 Clock Input**

BNC connector for inputting system clock to operate using external clock

**5 Clock Output**

BNC Connector for outputting system clock

**6 Sync Input**

BNC Connector for inputting and operating using external sync signal

**7 Sync Output**

BNC Connector for outputting sync signal

**8 Aux Input**

BNC Input connector reserved for adding future functions

**9 Ethernet**

- (1) Ethernet connector for connecting external PC controller
- (2) Ethernet connector to control MD8480C, connecting with 'Control PC' connector on MD8480C
- (3) Ethernet connector for server
- (4) Ethernet connector for connecting MD8480C using '10/100BASE-T' connector

**10 Sub (Simplex) Output**

N connector for RF output

**11 Sub (Simplex) Input**

N connector for RF input

**12 Main (Duplex) Input/Output**

N connector for RF input/output


**13 LCD**

Screen displaying equipment information such as firmware selection and maintenance software screens



# Signalling Tester MD8430A Panel Layout

## Rear Panel

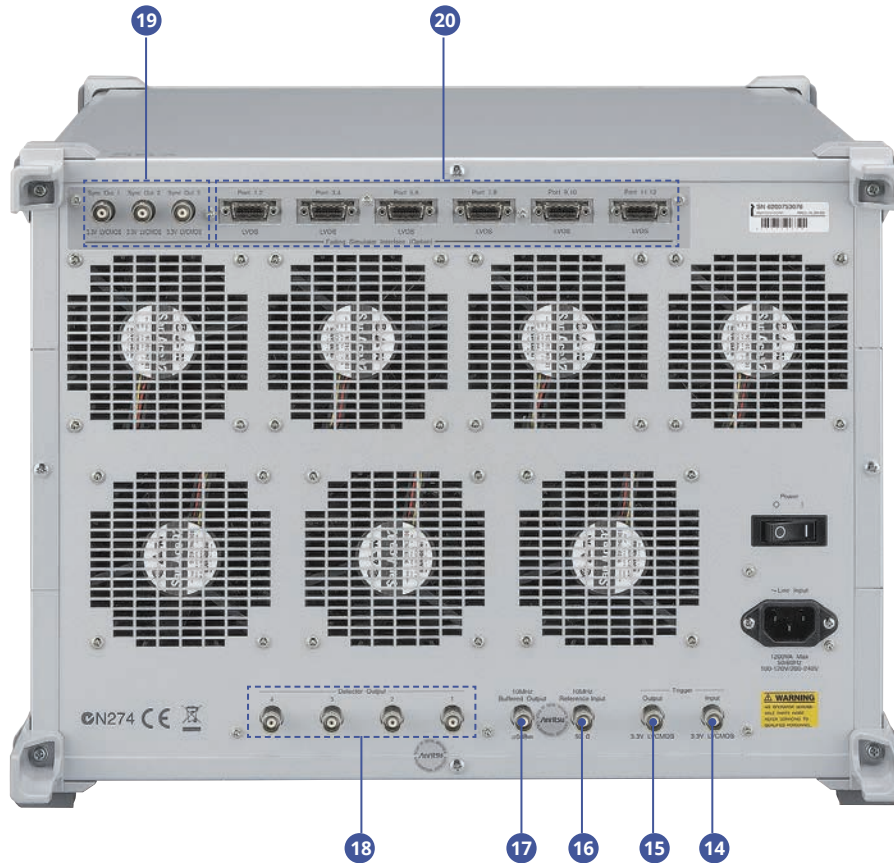

### 14 Trigger Input

BNC Connector for inputting a trigger signal from external equipment

### 15 Trigger Output

BNC Connector for outputting event timing to external equipment

### 16 10 MHz Reference Input

BNC Connector for inputting external reference signal

### 17 10 MHz Buffered Output

BNC Connector for outputting equipment reference signal

### 18 Detector Output

BNC Connector for outputting profile signal of RF signal power

### 19 Sync Out

BNC Connector for outputting sync signal to Fading Simulator

### 20 LVDS

Connector for connecting Fading Simulator using Digital IQ

# Signalling Tester MD8430A Configurations

## Test Models/Options/Software

### Test Models

**MD8430A-020 LTE Standard Test Model (STM)**

**MD8430A-025 Basic Test Model (BTM)**

**MD8430A-030 LTE Performance Test Model (PTM)**

**MD8430A-035 LTE Enhanced Test Model (ETM)**

Choose one of the above four models.

☆: Please refer to page 6 for more details.

### Test Model Upgrade

Required option when upgrading to higher order model.

#### Upgrade from Function Test Model (FTM)

Z1342A LTE FTM to STM Upgrade Kit  
Z1344A LTE FTM to PTM Upgrade Kit  
Z1670A LTE FTM to ETM Upgrade Kit  
Z1789A LTE FTM to ETM Upgrade Kit (FO)

#### Upgrade from Standard Test Model (STM)

Z1343A LTE STM to PTM Upgrade Kit  
Z1671A LTE STM to ETM Upgrade Kit  
Z1790A LTE STM to ETM Upgrade Kit (FO)

#### Upgrade from Performance Test Model (STM)

Z1672A LTE PTM to ETM Upgrade Kit  
Z1791A LTE PTM to ETM Upgrade Kit (FO)

#### Upgrade from Basic Test model

Z1873A LTE BTM to ETM Upgrade Kit

### Options

#### MD8430A-002 Extended Frequency Range to 3.8 GHz

Required software option when extending maximum frequency of MD8430A (Tx/Rx) to 3.8 GHz.

#### MD8430A-003 Extended Frequency Range to 3.8 GHz Hardware

Required hardware option when extending maximum frequency of MD8430A (Tx/Rx) to 3.8 GHz.

#### MD8430A-004 Enhanced DL Frequency Bandwidth Option

Required software option when extending downlink frequency bandwidth of MD8430A (Tx) to 60 MHz.

#### MD8430A-005 Extended Frequency Range to 3.8 GHz Hardware 2

Required hardware option when extending maximum frequency of MD8430A (Tx/Rx) to 3.8 GHz. (Test Model: BTM, ETM)

#### MD8430A-006 Extended Frequency Range to 6 GHz

Required software option when extending maximum frequency of MD8430A (Tx/Rx) to 6 GHz.

#### MD8430A-007 Extended Frequency Range to 6 GHz Hardware

Required hardware option when extending maximum frequency of MD8430A (Tx/Rx) to 6 GHz.

#### MD8430A-052 W-CDMA Fading Option

Required software option when W-CDMA fading testing.

#### MD8430A-055 LTE 2 × 2 MIMO Fading Option

Required software option when LTE 2 × 2 MIMO fading testing.

#### MD8430A-056 LTE 4 × 2 MIMO Fading Option

Required software option when LTE 4 × 2 MIMO fading testing.

#### MD8430A-057 LTE 4 × 4 MIMO Fading Option

Required software option when LTE 4 × 4 MIMO fading testing.

#### MD8430A-058 LTE 8 × 2 MIMO Fading Option

Required software option when LTE 8 × 2 MIMO fading testing.

#### MD8430A-059 LTE 8 × 4 MIMO Fading Option

Required software option when LTE 8 × 4 MIMO fading testing.

#### MD8430A-060 LTE FDD Option

Required option when simulating 3GPP LTE FDD.

#### MD8430A-061 LTE TDD Option

Required option when simulating TD-LTE.

#### MD8430A-065 W-CDMA Option

Required option when simulating W-CDMA.

#### MD8430A-066 GSM Option

Required option when simulating GSM.

#### MD8430A-067 RF/Fading Driver Option

Required software option when extending RF for MD8430A-025 BTM and executing the fading function (MD8430A-055, 056, 057, 058)

#### MD8430A-070 HSPA Multi Carrier Option

Required option when HSPA multi carrier testing.

#### MD8430A-071 W-CDMA/GSM Ciphering Option

Option for adding ciphering function for W-CDMA, GSM and GPRS. Supporting KASUMI and SNOW 3G to W-CDMA. A5/1, A5/2, A5/3 and A5/4 to GSM. GEA1, GEA2, GEA3 and GEA4 to GPRS.

#### MD8430A-072 LTE Licensed Assisted Access (LAA) Option

Required software option for executing LTE Licensed Assisted Access function.

#### MD8430A-073 LTE Dual Connectivity Option

Required software option for executing Dual Connectivity function.

#### MD8430A-075 LTE DL 4 × 4 MIMO Option

Required software option when LTE 4 × 4 MIMO testing.

#### MD8430A-076 LTE DL 8 × 4 MIMO Option

Required software option when LTE 8 × 4 MIMO testing.

#### MD8430A-078 LTE UL 2 × 2 MIMO Option

Required software option when LTE UL 2 × 2 MIMO testing.

#### MD8430A-080 LTE Ciphering Option

Option for adding ciphering function supporting EEA0, EEA1, and EEA2 (TS 33.401, TS 36.323) algorithms to LTE.

#### MD8430A-081 LTE ROHC Option

Option for adding LTE ROHC function supporting RTP/UDP/IP (RFC3095, RFC4815), UDP/IP (RFC3095, RFC4815), ESP/IP (RFC3095, RFC4815), and IP (RFC3843, RFC4815). Required this option for VoLTE testing.

#### MD8430A-082 LTE MBMS Option

Option for adding LTE MBMS function supporting (P) MCH Transmission Scheduling, MCCH Message Transmission, MSI MAC control element Transmission and MTCH Message Transmission described in 3GPP (TS 36.211, TS36.221).

#### MD8430A-083 LTE ZUC Ciphering Option

Option for adding ciphering function supporting EEA3 and EIA3 (TS 33.401, TS 35.221) algorithms to LTE.

#### MD8430A-085 LTE Carrier Aggregation Option

Option for adding Carrier Aggregation (CA) function supporting transmission of up to two component carriers on downlink.

# Signalling Tester MD8430A Configurations

## Test Models/Options/Software (Cont'd)

### MD8430A-086 Ciphering Option

Option for adding ciphering function supporting EEA0, EEA1, EEA2, EEA3 and EIA3 (TS 33.401, TS 35.221, TS 36.323) algorithms to LTE.

### MD8430A-087 LTE CoMP Option

Required software option when 3GPP Release 11 CoMP feature. It is available to test Dynamic Point Selection.

### MD8430A-088 LTE DL 4 Carrier Aggregation Option

Option for adding Carrier Aggregation (CA) function supporting transmission of up to four component carriers on downlink.

## Application Products

### MD8475A Signalling Tester

Base Station Simulator supporting CDMA2000 Multiple Sector/Carrier or 1xEV-DO Rev.A. Realizes Inter-working tests between LTE and CDMA2000 by controlling MD8430A and MD8475A simultaneously from MX786201A Rapid Test Designer (RTD).

### MD8480C W-CDMA Signalling Tester

Base Station Simulator supporting HSPA Evolution based on the 3GPP Release 8 specification, W-CDMA and GSM. Realizes Inter-RAT handover tests between LTE and UTRAN/GERAN by controlling MD8430A and MD8480C from MX786201A Rapid Test Designer (RTD).

CDMA2000® is a registered trademark of the Telecommunications Industry Association (TIA-USA).

## Software

### MX843010A LTE Control Software

Software for simulating L1 and L2 with test cases in C.

### MX843010E LTE Control Software

Software for simulating L1 and L2 with test cases in C. (Test Model: ETM)

### MX843070E W-CDMA/GSM Control Software

Software for simulating L1 and L2 with test cases in C. (Test Model: W-CDMA/GSM)

### MX786201A Rapid Test Designer (RTD)

Software for simulating L1 to L3 with test cases described by GUI for automating testing, analyzing test cases and creating reports.


## Software Maintenance Contract

### Service Provided

- Contract for adding/revising software functions in line with 3GPP revisions
- Technical support for troubleshooting user problems

### Annual Support Service (1 year)

Option providing 1 year of service support for LTE functions including web downloads of latest software and technical enquiries. Services depend on option configuration.

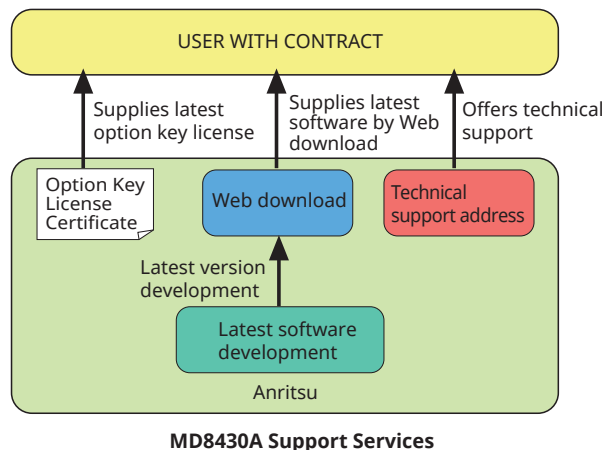

MD8430A Support Services

### MD8430A Support (FDD)

MD8430A-SS120	1 Year Support Service LTE FDD (STM)
MD8430A-SS130	1 Year Support Service LTE FDD (PTM)
MD8430A-SS135	1 Year Support Service LTE FDD (ETM)

### MD8430A Support (TDD)

MD8430A-SS121	1 Year Support Service LTE TDD (STM)
MD8430A-SS131	1 Year Support Service LTE TDD (PTM)
MD8430A-SS136	1 Year Support Service LTE TDD (ETM)

### MD8430A Support (W-CDMA/GSM)

MD8430A-SS170	1 Year Support Service W-CDMA/GSM
---------------	-----------------------------------

### MX843010A LTE Control Software Support

MX843010A-SS120	1 Year Support Service
-----------------	------------------------

### MX843010E LTE Control Software Support

MX843010E-SS120	1 Year Support Service (Test Model: ETM)
-----------------	--

## Signalling Tester MD8430A Specifications

Reference Oscillator	<p>Reference frequency: 10 MHz</p> <p>Start-up characteristics: 25°C, referenced to frequency 24-hour after power-on  <math>\pm 5 \times 10^{-7}</math> (2 min. after power-on)  <math>\pm 5 \times 10^{-8}</math> (5 min. after power-on)</p> <p>Aging rate: <math>\pm 1 \times 10^{-8}</math>/day (referenced to frequency 48-hour after power-on)  <math>\pm 1 \times 10^{-7}</math>/year (referenced to frequency 10-day after power-on)</p> <p>Temperature characteristics: <math>\pm 2 \times 10^{-8}</math> (0° to 45°C, referenced to frequency at 25°C)</p> <p>Internal reference output  Frequency adjusted at shipment: 10 MHz <math>\pm 0.02</math> ppm  Output level: <math>\geq 0</math> dBm (50Ω, AC coupling)  Connector: BNC-J, 50Ω (nom.)</p> <p>External reference input  Frequency: 10 MHz  Operating range: <math>\pm 1</math> ppm  Input level: <math>-15</math> dBm <math>\leq</math> level <math>\leq +20</math> dBm (50Ω, AC coupling)  Connector: BNC-J, 50Ω (nom.)</p>
Transmission Signal	<p>Frequency  Frequency range:  LTE: 350 MHz to 3.0 GHz, 350 MHz to 3.8 GHz (with MD8430A-002), 350 MHz to 6.0 GHz (with MD8430A-006)  W-CDMA: 400 MHz to 3.0 GHz, 400 MHz to 3.8 GHz (with MD8430A-002/006)  GSM: 400 MHz to 2.0 GHz  Setting resolution: 100 kHz</p> <p>Output level  Maximum output level: <math>-40</math> dBm (Main connector) (Maximum setting level: <math>-20</math> dBm)  0 dBm (Sub connector)  Level accuracy: <math>\pm 1.5</math> dB (Frequency Range: <math>\geq 350</math> MHz to <math>\leq 3800</math> MHz)  <math>\pm 2.0</math> dB (Frequency Range: <math>&gt; 3800</math> MHz to <math>\leq 6000</math> MHz)  18° to 28°C, after Cal, for calibration CW  Output level: <math>-113</math> to <math>-40</math> dBm, all ports output: <math>\leq -40</math> dBm (Main connector)  <math>-113</math> to 0 dBm (Sub connector)</p> <p>Modulation  Access method  LTE: OFDMA, W-CDMA: CDMA, GSM: TDMA</p> <p>Modulation method  LTE: QPSK, 16QAM, 64QAM, 256QAM  W-CDMA: QPSK, 16QAM, 64QAM  GSM: GMSK, 8PSK</p> <p>Modulation accuracy  LTE: <math>\leq 2\%</math>, 18° to 28°C, Sub output: 0 dBm, LTE (OFDM, 64QAM, 20 MHz band)  W-CDMA: <math>\leq 3.5\%</math>, 18° to 28°C, Sub output: 0 dBm, W-CDMA (transmitting CPICH, ICH)  GSM: <math>\leq 1.5</math> deg., 18° to 28°C, Sub output: 0 dBm, GMSK  <math>\leq 3.5\%</math>, 18° to 28°C, Sub output: 0 dBm, 8PSK</p>
Received Signal	<p>Frequency  Frequency range  LTE: 350 MHz to 3.0 GHz, 350 MHz to 3.8 GHz (with MD8430A-002), 350 MHz to 6.0 GHz (with MD8430A-006)  W-CDMA: 400 MHz to 3.0 GHz, 400 MHz to 3.8 GHz (with MD8430A-002/006)  GSM: 400 MHz to 2.0 GHz  Setting resolution: 100 kHz</p> <p>Input level  Demodulation range: <math>-28</math> to <math>+15</math> dB (QPSK), <math>-21</math> to <math>+15</math> dB (16QAM), <math>-15</math> to <math>+15</math> dB (64QAM)  Referenced to reference power setting value  Input signal: EVM <math>\leq 1\%</math>, BER <math>\leq 1 \times 10^{-12}</math>, 20 MHz band, SC-FDMA  Reference Power: <math>-20</math> to <math>+20</math> dBm, Input level: <math>-30</math> to <math>+35</math> dBm (Main connector)  Reference power: <math>-35</math> to <math>+5</math> dBm, Input level: <math>-45</math> to <math>+20</math> dBm (Sub connector)</p> <p>Level accuracy: <math>\pm 3.0</math> dB  18° to 28°C, after Cal, for calibration CW  Input level: <math>-30</math> to <math>+35</math> dBm (Main connector)  <math>-45</math> to <math>+20</math> dBm, Reference power: <math>\pm 15</math> dB (Sub connector)</p> <p>Modulation  Access method  LTE: SC-FDMA, W-CDMA: CDMA, GSM: TDMA</p> <p>Modulation method  LTE: QPSK, 16QAM, 64QAM  W-CDMA: BPSK, 4PAM  GSM: GMSK, 8PSK</p> <p>Synchronization acquirable range  LTE: <math>\pm 100</math> μs (PRACH), <math>\pm 30</math> μs (PUSCH)  W-CDMA: <math>\pm 100</math> chips (PRACH), <math>\pm 100</math> chips (DPCCCH)  GSM: 0 to 63 symbols (SACCH)</p>

# Signalling Tester MD8430A Specifications

Connector	<p>RF Connector</p> <p>Main Connector: N-J, 50Ω (nom.) VSWR: ≤1.3 (Frequency Range: ≥350 MHz to ≤3800 MHz) ≤1.4 (Frequency Range: &gt;3800 MHz to ≤6000 MHz)</p> <p>Sub (Downlink) Connector: N-J, 50Ω (nom.) VSWR: ≤1.5 (Frequency Range: ≥350 MHz to ≤3800 MHz) ≤1.6 (Frequency Range: &gt;3800 MHz to ≤6000 MHz)</p> <p>Sub (Uplink) Connector: N-J, 50Ω (nom.) VSWR: ≤1.5 (Frequency Range: ≥350 MHz to ≤3800 MHz) ≤1.6 (Frequency Range: &gt;3800 MHz to ≤6000 MHz)</p> <p>Other</p> <p>Digital IQ: Digital IQ signal Connector: DX20 (50-pin) × 8 IQ: 16-bit</p> <p>Monitor: Connection with the Monitor board (G0091) Connector: DX20 (80-pin) Signal level: 3.3V-CMOS</p> <p>Sync Output: Internal sync start signal output Connector: BNC Signal level: 3.3V-CMOS</p> <p>Sync Input: External sync start signal output Connector: BNC Signal level: 3.3V-CMOS</p> <p>Clock Output: Internal clock signal output Connector: BNC Signal level: 3.3V-CMOS</p> <p>Clock Input: External clock signal input Connector: BNC Signal level: 3.3V-CMOS Frequency: 10 kHz to 30.72 MHz</p> <p>Fading simulator interface</p> <p>Sync Out: Connection with the fading simulator (Sync start signal) Without MD8430A-008/108/208 Connector: BNC × 3 Signal level: 3.3V-CMOS With MD8430A-008/108/208 Connector: BNC × 2 Signal level: 3.3V-CMOS</p> <p>Port: Connection with the fading simulator (Digital IQ signal) Without MD8430A-008/108/208 Connector: HIB-B16LFYGA × 6 Signal level: LVDS With MD8430A-008/108/208 Connector: HIB-B16LFYGA × 2 (Digital IQ signal: 2 ports/connector) Signal level: LVDS Connector: HIB-B16LFYGA × 4 (Digital IQ signal: 8 ports/connector) Signal level: LVDS</p>
Power Supply	100 V (ac) to 120 V (ac)/200 V (ac) to 240 V (ac), 50 Hz/60 Hz ≤1200 VA
Dimensions and Mass	426 (W) × 310 (H) × 500 (D) mm ≤40 kg
Environmental Conditions	<p>Temperature</p> <p>Operating: 0° to +45°C, ≤90% RH (no condensation) 0° to +40°C, ≤90% RH (no condensation) (with MD8430A-005/007)</p> <p>Storage: -20° to +60°C, ≤85% RH (no condensation)</p> <p>EMC: EN61326-1, EN61000-3-2 LVD: EN61010-1</p>

# Signalling Tester MD8430A Ordering Information

Please specify the model/order number, name and quantity when ordering.  
The names listed in the chart below are Order Names. The actual name of the item may differ from the Order Name.

Model/Order No	Name
MD8430A MD8430A-003 MD8430A-020	<b>LTE Standard Test Model</b> Signalling Tester Extended Frequency Range to 3.8 GHz Hardware LTE Standard Test Model (STM)
MD8430A MD8430A-003 MD8430A-030	<b>LTE Performance Test Model</b> Signalling Tester Extended Frequency Range to 3.8 GHz Hardware LTE Performance Test Model (PTM)
MD8430A MD8430A-005 MD8430A-025	<b>LTE Basic Test Model</b> Signalling Tester Extended Frequency Range to 3.8 GHz Hardware 2 Basic Test Model (BTM)
MD8430A MD8430A-005 MD8430A-035	<b>LTE Enhanced Test Model</b> Signalling Tester Extended Frequency Range to 3.8 GHz Hardware 2 LTE Enhanced Test Model (ETM)
J1440A J1211 J0127A J0576B J1398A G0091 J1005 J1459A	<b>Standard Accessories</b> CD-ROM (Operation Manual and Maintenance Software): 1 pc LAN Cable: 2 pcs Power Cord, 3.0 m (15 A): 1 pc Coaxial Cord, 1.0 m (BNC-P · RG58A/U · BNC-P): 1 pc Coaxial Cord, 1.0 m (N-P · 5D-2W · N-P): 2 pcs N-SMA Adaptor: 6 units Monitor Board: 1 pc Monitor Cable 80: 1 pc Digital IQ Cable (50 cm): 1 pc
MD8430A-002 MD8430A-004 MD8430A-006 MD8430A-052 MD8430A-055 MD8430A-056 MD8430A-057 MD8430A-058 MD8430A-059 MD8430A-060 MD8430A-061 MD8430A-065 MD8430A-066 MD8430A-067 MD8430A-070 MD8430A-071 MD8430A-072 MD8430A-073 MD8430A-075 MD8430A-076 MD8430A-078 MD8430A-080 MD8430A-081 MD8430A-082 MD8430A-083 MD8430A-085 MD8430A-086 MD8430A-087 MD8430A-088	<b>Options</b> Extended Frequency Range to 3.8 GHz Enhanced DL Frequency Bandwidth Option Extended Frequency Range to 6 GHz W-CDMA Fading Option LTE 2 × 2 MIMO Fading Option LTE 4 × 2 MIMO Fading Option LTE 4 × 4 MIMO Fading Option LTE 8 × 2 MIMO Fading Option LTE 8 × 4 MIMO Fading Option LTE FDD Option LTE TDD Option W-CDMA Option GSM Option RF/Fading Driver Option HSPA Multi Carrier Option W-CDMA/GSM Ciphering Option LTE Licensed Assisted Access (LAA) Option LTE Dual Connectivity Option LTE DL 4 × 4 MIMO Option LTE DL 8 × 4 MIMO Option LTE UL 2 × 2 MIMO Option LTE Ciphering Option LTE ROHC Option LTE MBMS Option LTE ZUC Ciphering Option LTE Carrier Aggregation Option Ciphering Option LTE CoMP Option LTE DL 4 Carrier Aggregation Option
MD8430A-103 MD8430A-107 MD8430A-117 MD8430A-203 MD8430A-207 MD8430A-217	Extended Frequency Range to 3.8 GHz Hardware Retrofit (for Asia, Oceania) Extended Frequency Range 3 GHz to 6 GHz Hardware Retrofit (for Asia, Oceania) Extended Frequency Range 3.8 GHz to 6 GHz Hardware Retrofit (for Asia, Oceania) Extended Frequency Range to 3.8 GHz Hardware Retrofit (FO) Extended Frequency Range 3 GHz to 6 GHz Hardware Retrofit (FO) Extended Frequency Range 3.8 GHz to 6 GHz Hardware Retrofit (FO)

Model/Order No	Name
MX843010A MX843010E MX843070E MX786201A	<b>Software Options</b> LTE Control Software LTE Control Software W-CDMA/GSM Control Software Rapid Test Designer (RTD)
MD8430A-SS120 MD8430A-SS125 MD8430A-SS130 MD8430A-SS135	<b>Main frame Support Service</b> <b>[FDD]</b> 1 Year Support Service for LTE FDD (STM) 1 Year Support Service for LTE FDD (BTM) 1 Year Support Service for LTE FDD (PTM) 1 Year Support Service for LTE FDD (ETM)
MD8430A-SS121 MD8430A-SS126 MD8430A-SS131 MD8430A-SS136	<b>[TDD]</b> 1 Year Support Service for LTE TDD (STM) 1 Year Support Service for LTE TDD (BTM) 1 Year Support Service for LTE TDD (PTM) 1 Year Support Service for LTE TDD (ETM)
MD8430A-SS170	<b>[W-CDMA/GSM]</b> 1 Year Support Service for W-CDMA/GSM
MX843010A-SS120 MX843010E-SS120	<b>LTE Control Software Support Service</b> 1 Year Support Service 1 Year Support Service
Z1342A Z1344A Z1343A Z1670A Z1789A Z1671A Z1790A Z1672A Z1791A Z1873A	<b>Upgrade Options</b> LTE FTM to STM Upgrade Kit LTE FTM to PTM Upgrade Kit LTE STM to PTM Upgrade Kit LTE FTM to ETM Upgrade Kit LTE FTM to ETM Upgrade Kit (FO) LTE STM to ETM Upgrade Kit LTE STM to ETM Upgrade Kit (FO) LTE PTM to ETM Upgrade Kit LTE PTM to ETM Upgrade Kit (FO) LTE BTM to ETM Upgrade Kit
MD8475A MD8480C MN8150A J1416A J1609A	<b>Application Products</b> Signalling Tester W-CDMA Signalling Tester RF Combiner Unit LVDS CABLE Signal Divider

\*: A PC\*1 running Microsoft Visual C++ 2008 Express Edition, Microsoft Visual C++ 2010 Express Edition or Microsoft Visual Studio Express 2012 is required to use the MD8430A.  
It must be supplied by the customer.

The PC controller for the MD8430A must meet or exceed the following specifications:

- OS: Windows 7 (64 bit) or later
- CPU: Intel Core i5 processor 2.6 GHz or more
- RAM: 4 GB or more
- NIC: 1000BASE-T

Windows®, Visual C++® is a registered trademark of Microsoft Corporation in the USA and other countries.

Intel®, Core™ 2 Duo is registered trademarks of Intel Corporation or its subsidiaries in the USA and other countries.

**Note:**

---

## • United States

### Anritsu Company

1155 East Collins Blvd., Suite 100, Richardson,  
TX 75081, U.S.A.

Toll Free: 1-800-267-4878

Phone: +1-972-644-1777

Fax: +1-972-671-1877

## • Canada

### Anritsu Electronics Ltd.

700 Silver Seven Road, Suite 120, Kanata,  
Ontario K2V 1C3, Canada

Phone: +1-613-591-2003

Fax: +1-613-591-1006

## • Brazil

### Anritsu Eletronica Ltda.

Praça Amadeu Amaral, 27 - 1 Andar

01327-010 - Bela Vista - Sao Paulo - SP

Brazil

Phone: +55-11-3283-2511

Fax: +55-11-3288-6940

## • Mexico

### Anritsu Company, S.A. de C.V.

Av. Ejército Nacional No. 579 Piso 9, Col. Granada

11520 México, D.F., México

Phone: +52-55-1101-2370

Fax: +52-55-5254-3147

## • United Kingdom

### Anritsu EMEA Ltd.

200 Capability Green, Luton, Bedfordshire, LU1 3LU, U.K.

Phone: +44-1582-433200

Fax: +44-1582-731303

## • France

### Anritsu S.A.

12 avenue du Québec, Bâtiment Iris 1- Silic 612,

91140 VILLEBON SUR YVETTE, France

Phone: +33-1-60-92-15-50

Fax: +33-1-64-46-10-65

## • Germany

### Anritsu GmbH

Nemetschek Haus, Konrad-Zuse-Platz 1

81829 München, Germany

Phone: +49-89-442308-0

Fax: +49-89-442308-55

## • Italy

### Anritsu S.r.l.

Via Elio Vittorini 129, 00144 Roma, Italy

Phone: +39-6-509-9711

Fax: +39-6-502-2425

## • Sweden

### Anritsu AB

Kistagången 20B, 164 40 KISTA, Sweden

Phone: +46-8-534-707-00

Fax: +46-8-534-707-30

## • Finland

### Anritsu AB

Teknobulevardi 3-5, FI-01530 VANTAA, Finland

Phone: +358-20-741-8100

Fax: +358-20-741-8111

## • Denmark

### Anritsu A/S

Kay Fiskers Plads 9, 2300 Copenhagen S, Denmark

Phone: +45-7211-2200

Fax: +45-7211-2210

## • Russia

### Anritsu EMEA Ltd.

#### Representation Office in Russia

Tverskaya str. 16/2, bld. 1, 7th floor.

Moscow, 125009, Russia

Phone: +7-495-363-1694

Fax: +7-495-935-8962

## • Spain

### Anritsu EMEA Ltd.

#### Representation Office in Spain

Edificio Cuzco IV, Po. de la Castellana, 141, Pta. 5

28046, Madrid, Spain

Phone: +34-915-726-761

Fax: +34-915-726-621

## • United Arab Emirates

### Anritsu EMEA Ltd.

#### Dubai Liaison Office

902, Aurora Tower,

P O Box: 500311 - Dubai Internet City

Dubai, United Arab Emirates

Phone: +971-4-3758479

Fax: +971-4-4249036

## • India

### Anritsu India Private Limited

2nd & 3rd Floor, #837/1, Binnamangla 1st Stage,

Indiranagar, 100ft Road, Bangalore - 560038, India

Phone: +91-80-4058-1300

Fax: +91-80-4058-1301

## • Singapore

### Anritsu Pte. Ltd.

11 Chang Charn Road, #04-01, Shriro House

Singapore 159640

Phone: +65-6282-2400

Fax: +65-6282-2533

## • P.R. China (Shanghai)

### Anritsu (China) Co., Ltd.

Room 2701-2705, Tower A,

New Caohejing International Business Center

No. 391 Gui Ping Road Shanghai, 200233, P.R. China

Phone: +86-21-6237-0898

Fax: +86-21-6237-0899

## • P.R. China (Hong Kong)

### Anritsu Company Ltd.

Unit 1006-7, 10/F., Greenfield Tower, Concordia Plaza,

No. 1 Science Museum Road, Tsim Sha Tsui East,

Kowloon, Hong Kong, P.R. China

Phone: +852-2301-4980

Fax: +852-2301-3545

## • Japan

### Anritsu Corporation

8-5, Tamura-cho, Atsugi-shi, Kanagawa, 243-0016 Japan

Phone: +81-46-296-6509

Fax: +81-46-225-8359

## • Korea

### Anritsu Corporation, Ltd.

5FL, 235 Pangyoyeok-ro, Bundang-gu, Seongnam-si,

Gyeonggi-do, 13494 Korea

Phone: +82-31-696-7750

Fax: +82-31-696-7751

## • Australia

### Anritsu Pty. Ltd.

Unit 20, 21-35 Ricketts Road,

Mount Waverley, Victoria 3149, Australia

Phone: +61-3-9558-8177

Fax: +61-3-9558-8255

## • Taiwan

### Anritsu Company Inc.

7F, No. 316, Sec. 1, NeiHu Rd., Taipei 114, Taiwan

Phone: +886-2-8751-1816

Fax: +886-2-8751-1817