
Model : Network Interface Kit-TR4

Ref. No. : FF-T01-B3-000024-01

Date : June 17, 1999

© Canon (UK) Limited

Location : NETWORK INTERFACE KIT-TR4

Subject : NETWORK INTERFACE KIT-TR4 INSTALLATION PROCEDURE (NETWORK PRINTER BOARD-F1)

Reason : This bulletin provides instructions for installing the Network Interface Kit-TR4 to Network printer Board-F1.

Details : The pages that follow describe how the Network Interface Kit-TR4 may be installed. The product is an accessory designed in common for the following printer boards; see the respective Service Information bulletins for installation procedures.

- Network Multi-PDL Printer Board-D1/Network Printer Board-E1 (FF-T01-B3-000023-01)
- Network Multi-PDL Printer Board-H1/Network Printer Board-K1 (FF-T01-B3-000025-01)
- Network Printer Board-F1 (this bulletin)

Network Interface Kit-TR4 Installation Procedure

| | |
|---|------------------------------------|
| 1 | Points to Note during Installation |
|---|------------------------------------|

Before turning off the main power, be sure to check that the Data lamp is NOT on. If it is on, wait until the processing using the memory has ended and the lamp has turned off before starting the installation work..


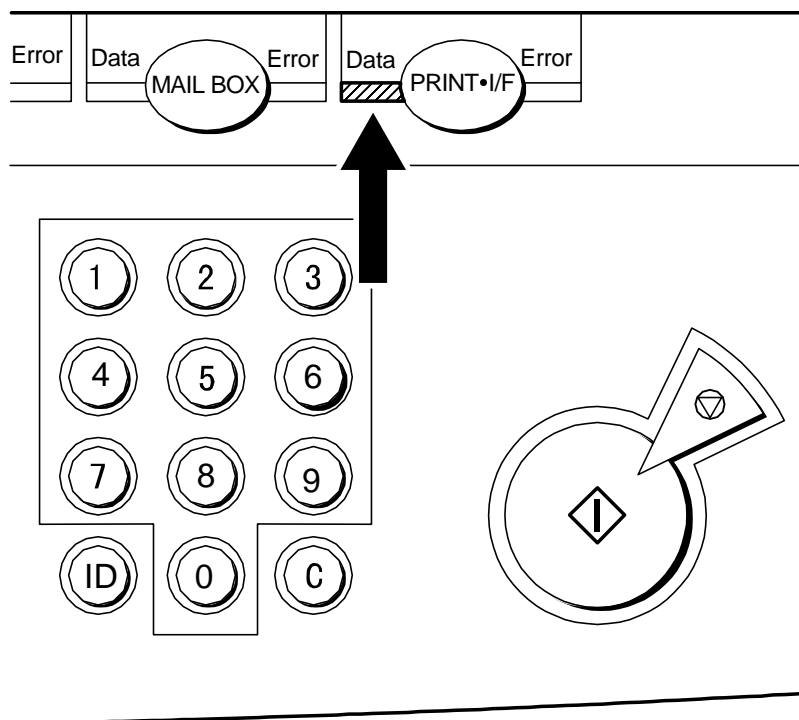


Fig. 1

| | |
|---|------------------------|
| 2 | Installation Procedure |
|---|------------------------|

A. Checking the Package Component

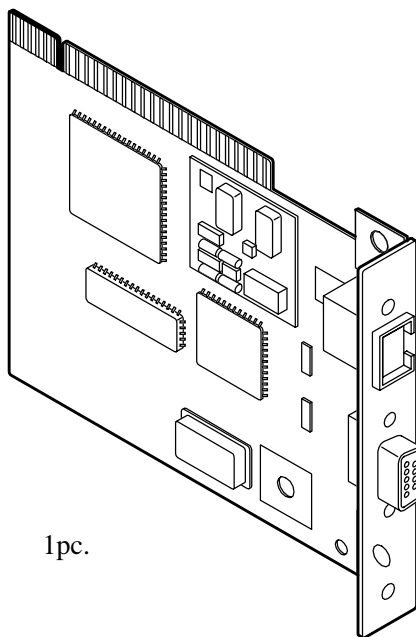

Network Interface Kit-TR4

1pc.

Fig. 2-1

B. Removing the Printer Board

- 1) Turn off the main power.
- 2) Disconnect the cable connected to the printer board.
- 3) Remove the two screws, and detach the printer board.

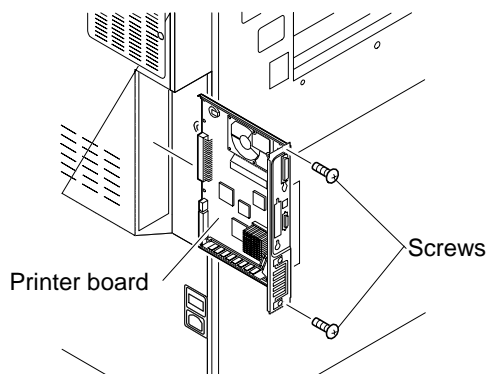


Fig. 2-2

C. Mounting the Network Interface Kit-TR4

- 1) Remove the two screws, and detach the TR4 dressing cover. (You will be using the screws later when securing the TR4 in place.)

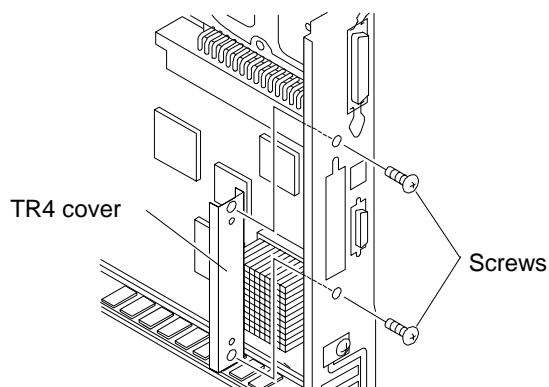


Fig. 2-3

- 2) Detach the connector cover.
- 3) Insert the Network Interface Kit-TR4 in the orientation shown.

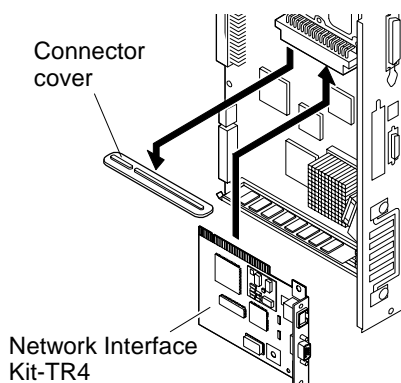


Fig. 2-4

- 4) Using the two screws you removed in step 1), secure the Network Interface Kit-TR4 in place to the network printer unit.

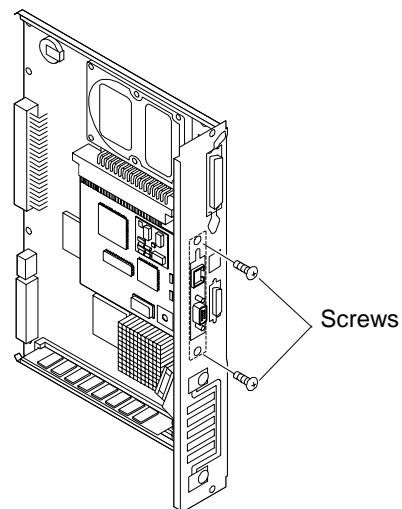


Fig. 2-5

D. Mounting the Printer Board

- 1) Insert the printer board along the slot in the copier.

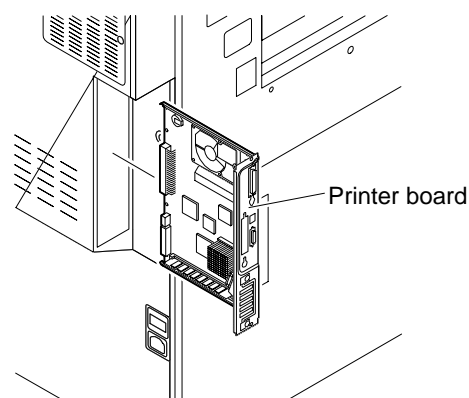


Fig. 2-6

- 2) Using two screws, secure the printer board in place.

E. Setting the Network Interface Kit-TR4

When you have finished mounting the Network Interface Kit-TR4, be sure to request the administrator of the user's network to perform the following:
By referring to the Administrator's Guide, make necessary settings for the Network Interface Kit-TR4.