

Finisher-M1 Installation Procedure

Go through the instructions herein when installing the Finisher to its host.

1	Unpacking
---	-----------

Unpack the Finisher, and check to make sure that none of the following items is missing:

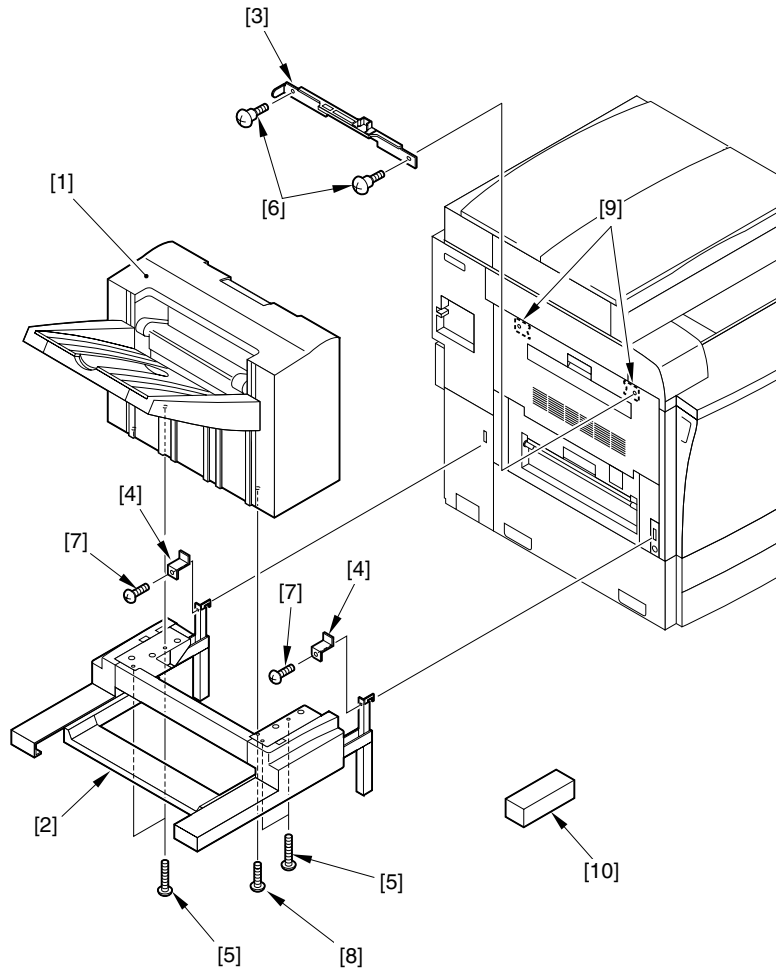


Fig. 1-1

[1] Finisher	1 unit	[6] Stepped screw	2 pc.
[2] Mounting base	1	[7] Screw (M4x6; white)	2 pc.
[3] Latch plate	1 pc.	[8] Screw (M4x20; black)	1 pc.
[4] Fixing claw	2 pc.	[9] Stop plate	2 pc.
[5] Screw (M4x25; black)	4 pc.	[10] Staple	1 pc.



Be sure to perform the following steps in sequence before starting the installation work on the host side:

1. Turn off the control panel power switch.
2. Turn off the main power switch.
3. Disconnect the power cable (for the outlet).

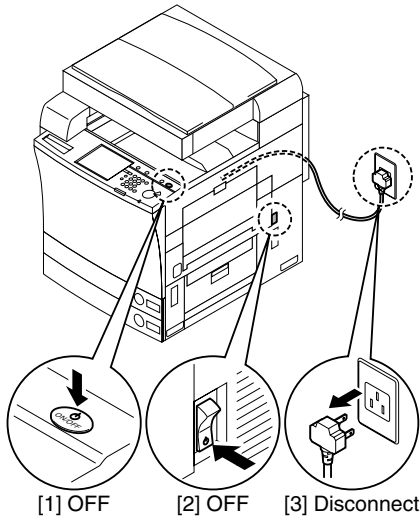


Fig. 1-2

2 Securing the Mounting Plate



Do not remove the cushioning material and the filament tape until instructed to do so.

- 1) Remove the top cushioning material [1] (2 pc.; Styrofoam) from inside the finisher shipping box.




Fig. 2-1

- 2) Place the removed cushioning material [1] (Styrofoam) as shown. Refer to the width of the shipping box when deciding on the distance [A] between the blocks.

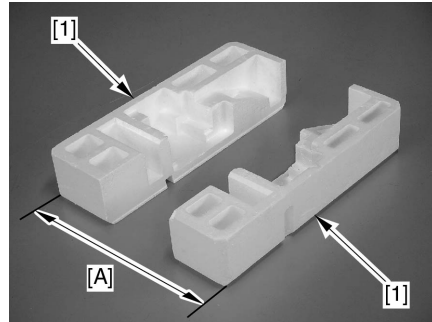


Fig. 2-2

- 3) Take out the Finisher [1] from the shipping box and then of its plastic bag, and place it upside down on the cushioning material (Styrofoam) as shown.

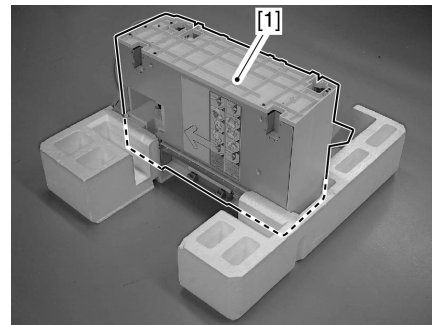


Fig. 2-3

- 4) Take out the mounting base [1] from the shipping box and of its bag, and place it on the Finisher as shown.

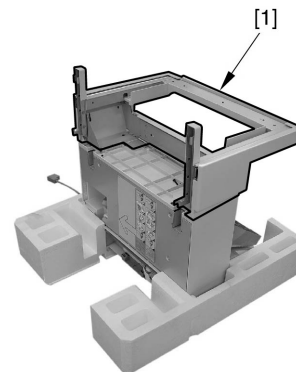


Fig. 2-4

5)



Keep the removed tape. You will be using it later as part of the installation work.

Remove the filament tape (3 pc.) used to hold the mounting plate in place.

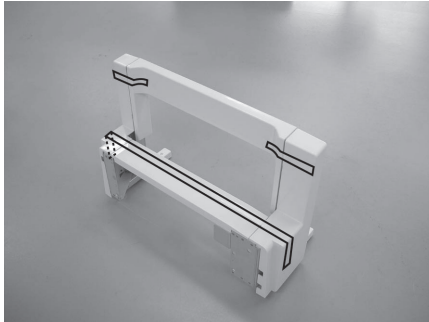


Fig. 2-5

6) Slide the feet [1] of the mounting plate so that segment A of the outside of the mounting base and the segment B of its inside match.

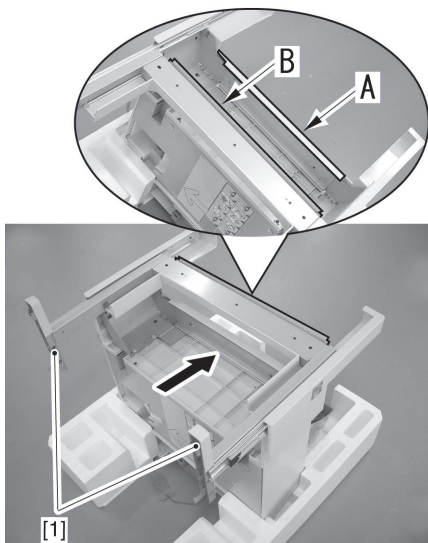


Fig. 2-6



When slid, the mounting will not drop on its own weight.

7)



Tighten the screw in the order indicated.

Secure the mounting base [2] using the four screws [1] (M4x25; black).

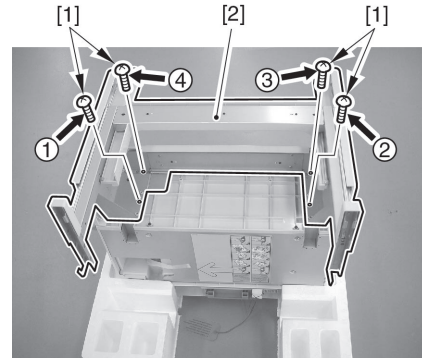


Fig. 2-7

8) Tighten the screw [1] (M4x20; black), making sure it is fully in its hole.

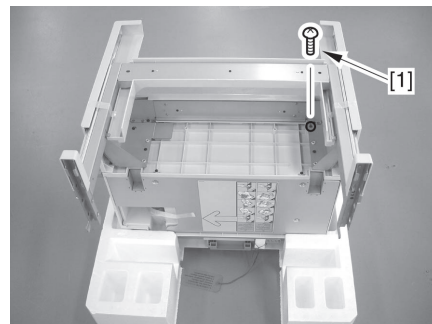


Fig. 2-8



The screw serves as the lower limit stopper of the stack tray.

9) Slide the feet of the mounting base so that segment A of the outside of the mounting plate and segment B of its inside match.

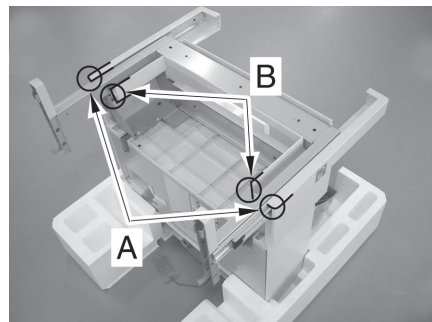


Fig. 2-9

10) Secure the rail using the filament tape [1] previously removed.

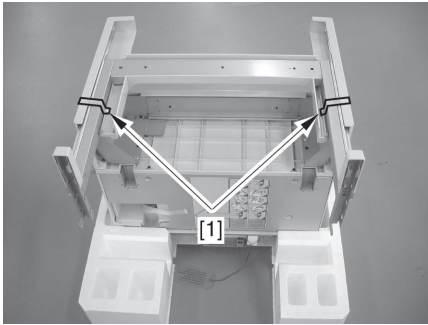


Fig. 2-10

11) While keeping it on the cushioning material [1], move the Finisher [3] to one side so that the Hold label [2] is on top.

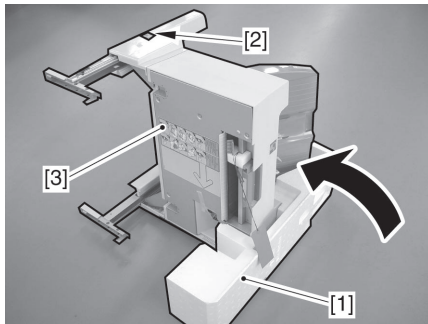


Fig. 2-11

3 Installation

1) Using the tip of a flat-blade screwdriver [2], remove the 2 blocking stickers [1] from the left side of the host machine.

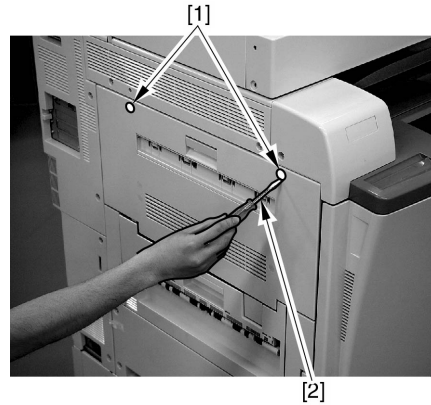


Fig. 3-1

2) Open the delivery vertical path cover [1] of the host machine; then, place the front and rear stop plates [2] that come with the Finisher at 2 locations.

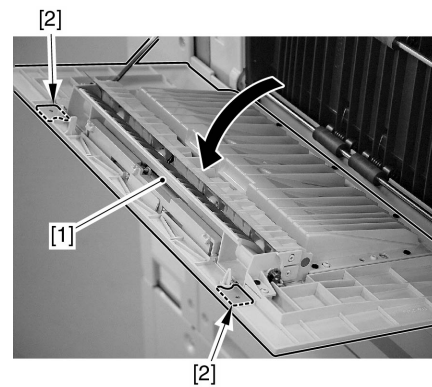


Fig. 3-2

- 3) With the delivery vertical path cover open, hold the latch plate [1] and the stop plate [2]; then, secure them with the stepped screw at the rear. Likewise, tighten the stepped screw at the front.

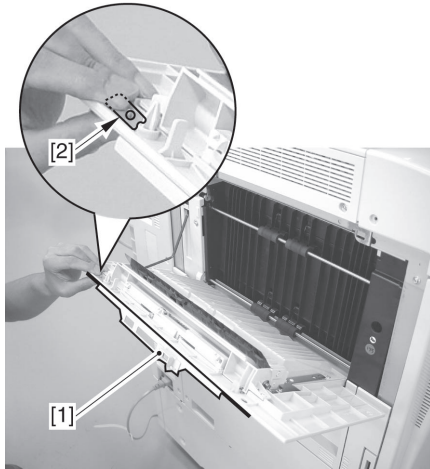


Fig. 3-3



Try to start with the stepped screw at the rear to facilitate the work.

- 4) Check to make sure that the stop plate [2] is in contact with the grounding plate found in front of the delivery vertical path cover.

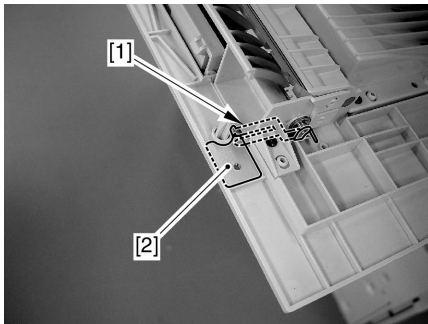


Fig. 3-4

- 5) Hold the 2 locations of the Hold label [1], and hook the keys [3] on the 2 openings [2] of the host machine.



Check to make sure that the keys [3] are hooked on the opening [2] of the host machine (to avoid a fall).

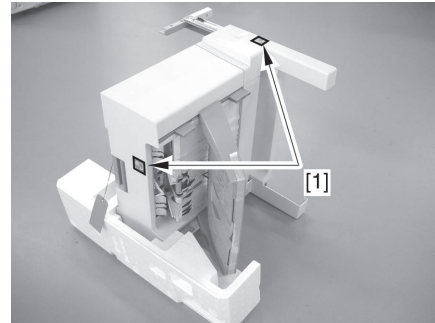


Fig. 3-5

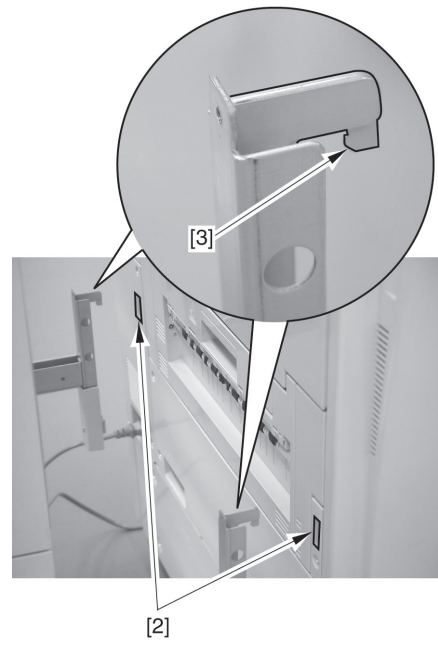


Fig. 3-6

6) To facilitate the insertion of the fixing claws easier, move the keys [1] to the front.

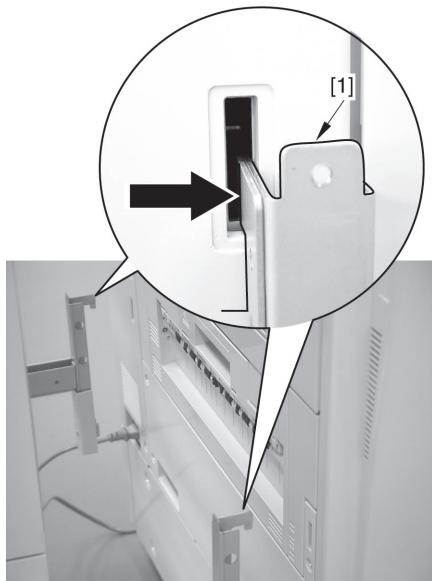


Fig. 3-7

7) Fit the 2 fixing claws [1] into the openings using the screws [2] (1 each; M4x6; white).

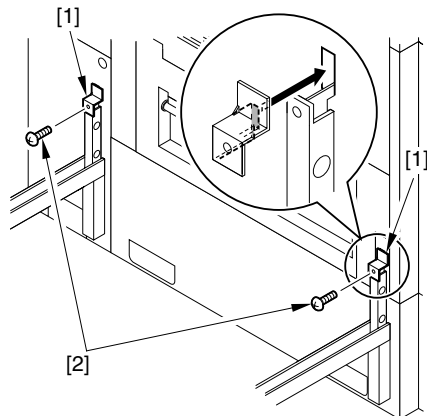


Fig. 3-8

8) Remove the filament tape so far used to keep the rail of the mounting base in place.

9) Remove the filament tape [1] and the cushioning material (Styrofoam) [2] used to hold the stapler in place.

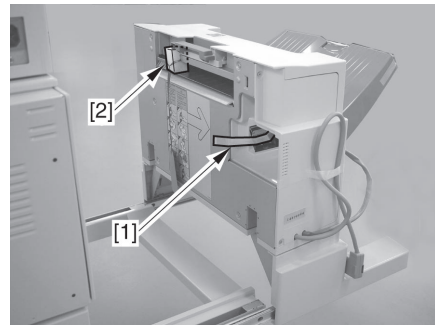


Fig. 3-9

10) Remove the cushioning material [1] (cardboard) from the Finisher and the filament tape [2] and the Hold label [3].

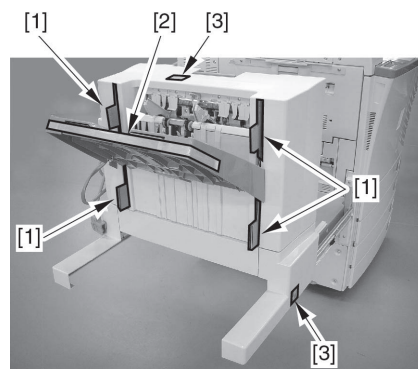


Fig. 3-10

11) Remove the connector cover for the pedestal, and fit the connector [1] of the machine.

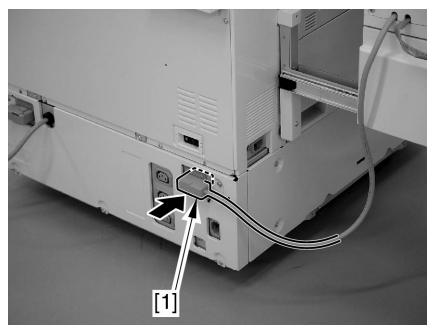


Fig. 3-11