




SM700 - series
600 / 700 watts DC POWER SUPPLIES




SM 1540-D

- * 600 W
- * 0 - 15 V 0- 40 A




SM 7020-D

- * 700 W
- * AUTORANGING
- 0 - 35 V 0- 20 A
- 35-70 V 0- 10 A



SM 3004-D

- * 600 W
- * AUTORANGING
- 0 - 150 V 0- 4 A
- 150-300 V 0- 2 A



- Efficiency 90 %
- Weight only 7.4 kg
- 100 kHz MOSFET power conversion technique
- 0- 5 V analog programmable (voltage and current)
- Isolated analog programming with ISO AMP MODULE to prevent earth loops
- IEEE 488, RS232 or Ethernet programming with external interface PSC 488 EXT, PSC 232 EXT, PSC-ETH EXT (pin compatible)
- Master / Slave parallel and series operation with equal current and voltage sharing
- Input / output insulation 3750 V rms
- Designed for long life at full power
- Voltage and current control with 10 turn potentiometers, resolution 0.03%
- Natural convection cooling, no blower, no noise
- 48 hours burn-in

	SM 1540-D	SM 7020-D	SM 3004-D
Output voltage range current range max. output power AUTORANGING (2 ranges) max. output current / volt. range	0 - 15 V 0 - 40 A 600 W no 40 A / 0 - 15 V -	0 - 70 V 0 - 20 A 700 W yes 20 A / 0 - 35 V 10 A / 35 - 70 V	0 - 300 V 0 - 4 A 600 W yes 4 A / 0 - 150 V 2 A / 150 - 300 V
Input AC input , 48 - 62 Hz 110 V range 230 V range current (110 V AC) current (230 V AC) DC input fuses 230 / 110 V standby input power ($V_o=I_o=0$) standby input power ($V_o=V_{max.}$)	90 - 132 V 185 - 265 V 8.4 A rms 3.9 A rms contact factory 8 AT / 16 AT 7.5 W 13.5 W	95 - 132 V 192 - 265 V 9.6 A rms 4.5 A rms contact factory 8 AT / 16 AT 7.5 W 16.5 W	95 - 132 V 192 - 265 V 8.3 A rms 3.9 A rms contact factory 8 AT / 16 AT 7.5 W 21.5 W
Efficiency AC input, full load	87 %	89 %	88 %
Regulation			
Load 0 - 100% CV Line 192 - 265 V AC CV	5 mV 5 mV	5 mV 5 mV	20 mV 20 mV
Load 0 - 100% CC Line 192 - 265 V AC CC	25 mA 25 mA	12 mA 12 mA	3 mA 3 mA
Ripple + noise rms (BW=300kHz) CV pp (BW=50MHz) CV rms (BW=300kHz) CC pp (BW=50MHz) CC	2 mV 10 mV 10 mA 25 mA	3 mV 15 mV 5 mA 15 mA	10 mV 50 mV 1 mA 3 mA
Temp. coeff., per °C CV CC		$5 \cdot 10^{-5}$ $1 \cdot 10^{-4}$	
Stability during 8 hrs after 1hr warm-up and $t_{amb} = 25 \pm 1 \text{ °C}$ CV CC		$3 \cdot 10^{-4}$ $1 \cdot 10^{-3}$	

Analog Programming	CV	CC
Programming inputs input range accuracy temp. coeff. offset input impedance	0 - 5 V $\pm 0.2\%$ + 0 mV ... + 8 mV (on 5 V) 10 $\mu\text{V} / \text{°C}$ 1 MOhm	0 - 5 V $\pm 0.5\%$ + 0 mV ... + 20 mV (on 5 V) 150 $\mu\text{V} / \text{°C}$ 1 MOhm
Monitoring output output range accuracy temp. coeff. offset output impedance	0 - 5 V $\pm 0.2\%$ - 3 mV ... + 11 mV (on 5 V) 10 $\mu\text{V} / \text{°C}$ 20 Ohm	0 - 5 V $\pm 0.5\%$ - 5 mV ... + 0 mV (on 5 V) 150 $\mu\text{V} / \text{°C}$ 20 Ohm

Reference voltage on prog. connector V_{ref} TC	5.165 \pm 31 mV typical 12 ppm / max. 30 ppm
Status outputs CC-status OVP / OVL-status	5V / 10 mA = logic 1 5V / 10 mA = logic 1
Remote shutdown	with + 5V or relay contact

Programming speed	SM 1540-D		SM 7020-D		SM 3004-D	
programming UP						
settling within	50 mV	500 mV	50 mV	1 V	200 mV	5 V
output voltage step	0 → 15 V	0 → 15 V	0 → 35 V	0 → 35 V	0 → 150 V	0 → 150 V
time, (100 % load)	30 ms	18 ms	50 ms	12 ms	50 ms	14 ms
time, (10 % load)	30 ms	10 ms	50 ms	12 ms	40 ms	12 ms
output voltage step	-	-	0 → 70 V	0 → 70 V	0 → 300 V	0 → 300 V
time, (100 % load)	-	-	100 ms	40 ms	100 ms	60 ms
time, (10 % load)	-	-	100 ms	12 ms	60 ms	16 ms
programming DOWN						
settling within	50 mV	500 mV	50 mV	1 V	200 mV	5 V
output voltage step	15 → 0.5 V	15 → 0.5 V	35 → 2 V	35 → 2 V	150 → 10 V	150 → 10 V
time, (100 % load)	30 ms	20 ms	50 ms	10 ms	50 ms	14 ms
time, (10 % load)	200 ms	200 ms	200 ms	100 ms	180 ms	120 ms
output voltage step	-	-	70 → 2 V	70 → 2 V	300 → 10 V	300 → 10 V
time, (100 % load)	-	-	100 ms	55 ms	100 ms	70 ms
time, (10 % load)	-	-	800 ms	120 ms	800 ms	700 ms
Programming bandwidth						
small signal	50 Hz		50 Hz		50 Hz	
large signal, 100 % load	50 Hz		50 Hz		50 Hz	
large signal, 10 % load	5 Hz		5 Hz		5 Hz	

	SM 1540-D	SM 7020-D	SM 3004-D
Recovery time			
recovery within	50 mV	50 mV	300 mV
di/dt of load step	4 A/μs	2 A/μs	0.5 A/μs
time, @ 50 - 100% load step	100 μs	150 μs	100 μs
max. deviation(high / low outp. range)	200 mV	80 / 150 mV	450 / 900 mV
@230VAC input, internal sensing			
Noise suppression			
line - line ⇒ output	88 dB	82 dB	75 dB
line - earth ⇒ output	88 dB	88 dB	75 dB
Output impedance			
CV, 0-100 kHz	< 40 mOhm	< 60 mOhm	< 700 mOhm
Pulsating load			
max. tolerable AC component of load current			
f > 1 kHz	10 A rms	5 A rms	1 A rms
f < 1 kHz	40 A peak	20 / 10 A peak	4 / 2 A peak

Insulation	
input / output	3750 Vrms (1 min.)
creepage / clearance	8 mm
input / case	2500 Vrms (1 min.)
output / case	600 V DC
Safety	EN 60950 / EN 61010
EMC Power Supply Standard	EN 61204-3 , Emission: residential, light industrial environment (CISPR22-Class B) Immunity: industrial environment
Generic Emission	EN61000-6-3 , residential, light industrial environment (EN55022 B)
Generic Immunity	EN61000-6-2 , industrial environment
Operating Temperature at full load	- 20 to + 50 °C
Humidity	max. 95% RH, non condensing, up to 40 °C max. 75% RH, non condensing, up to 50 °C
Storage temperature	- 40 to + 85 °C

Thermal protection	Output shuts down in case of insufficient cooling
MTBF	500 000 hrs

Hold-Up time 100% load Vin = 230V AC 50% load Vin = 230V AC	20 ms 45 ms
Turn on delay after mains switch on	500 ms
Inrush current	6,5 A @ 230V AC input 30 A @ 110V AC input

	SM 1540-D	SM 7020-D	SM 3004-D
Series operation max. total voltage Master / Slave operation	600 V yes	600 V yes	600 V yes
Parallel operation max. total current Master / Slave operation	no limit yes	no limit yes	no limit yes
Remote sensing max. voltage drop per load lead	2 V => total voltage drop will subtract from max. available Vout		not available
OVP / OVL adjust range	0 - 17 V	0 - 80 V	0 - 350 V

Potentiometers front panel control with knobs resolution	standard 0.03 %	standard 0.03 %	standard 0.03 %
screwdriver adjustment at front panel at rear panel	option P001 option P002	option P001 option P002	option P001 option P002
Meters scale voltage scale current accuracy	3.5 digit 0 - 15.00 V 0 - 40.0 A 0.5% + 2 digits	3.5 digit 0 - 70.0V 0 - 20.0 A 0.5% + 2 digits	3.5 digit 0 - 300 V 0 - 4.00 A 0.5% + 2 digits


Input Terminals input connections	10 Amp / 65 °C Euro-connector at rear panel		
Output Terminals at rear panel	M8 bolts	6 mm bind post	4 mm bind post
Programming connector	15 pole D-connector at rear panel (FEMALE)		
Cooling	convection cooling		
Enclosure degree of protection	IP20		
Dimensions behind front panel (h x w x d) front panel (h x w)	89 x 428 x 257 mm (with option P099, feet are removed) 89 x 483 mm (19", 2 U)		
Weight	7.4 kg		

Screwdriver adjustment**OPTION P001**


- For a **fixed setting** of the output values, avoids accidental adjusting of the CV and CC settings.
- The potmeters are moved backwards just behind the frontpanel and plastic caps are inserted to cover the holes, see picture.

screwdriver
adjustment**Master / slave operation**

- Parallel and Series operation with equal Current and Voltage sharing.
- This way two or more SM-units can be used together as one high power unit.
- Voltage and current of the units is controlled by the master (by potentiometers or by programming).
- For Parallel operation use 15 pole shielded cables, no special option required.
- For Series operation use the **Master / Slave Series Adapter** together with 15p shielded cables (1:1)

**Battery Charging****OPTION P021/022**

- The CV / CC regulated power supplies are ideal battery chargers. Once set at the correct output voltage, the battery will charge constantly without overcharging. This can be useful for **emergency power systems**.
- Use a circuit-breaker in series to protect the internal diode from reverse connection of the battery.
- Some units need an **external diode set** on the output as extra protection for the internal diode.
- *Ordering information for diode set:*



	SM7020-D	SM3004-D
optionnumber	P021	P022

Download the special datasheet for more details from 'www.DeltaPowerSupplies.com'.

Increased max. output voltage/current**OPTION P069**


- The maximum output voltage or current can be increased by approximately 10%. Normally this results in a derating of the maximum ambient temperature or other parameters.
 - Always add increased value for voltage or current in ordercode, for example **SM7020-D P069 output 76V**
- For exact details consult the technical department, email 'Support@Delta-Elektronika.nl'.

Enforced secondary isolation 1000 V**OPTION P089**

- The secondary isolation between output and ground is increased from standard 600 V to 1000 V .

Power Sink for 2 quadrant operation**OPTION P140/141**

- Can absorb **70W peak power**.
- Maintains output voltage regardless output power is positive or negative (source & sink).
- Ideal solution for supplying **electric motors** with PWM-speed control.
- Fast down programming at no load conditions.
- *Ordering information:*

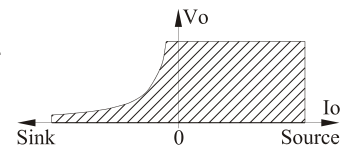

	SM1540-D	SM7020-D
optionnumber	P140	P141


Download the special datasheet for more details from 'www.DeltaPowerSupplies.com'.

External ISO AMP for isolated analog programming**ISO AMP Module**

- Provides galvanic isolation when programming and monitoring.
- Prevents problems with earth loops and common mode voltages.
- Pin compatible with the programming connector on the rear side.
- Bench operation and rail mounting.

External Ethernet Power Supply Controller**PSC ETH EXT**

- External Ethernet compatible Controller to program a unit by a computer.
- Pin compatible with the programming connector on the rear side.
- Bench operation and rail mounting.
- Available at the end of 2005.

**External RS232 Power Supply Controller****PSC 232 EXT**


- External RS232 compatible Controller to program a unit by a computer.
- Pin compatible with the programming connector on the rear side.
- Bench operation and rail mounting.

External IEEE488 Power Supply Controller**PSC 488 EXT**

- External IEEE488 compatible Controller to program a unit by a computer.
- Pin compatible with the programming connector on the rear side.
- Bench operation and rail mounting.





Note: there is only room to connect one of the external modules to the programming connector.

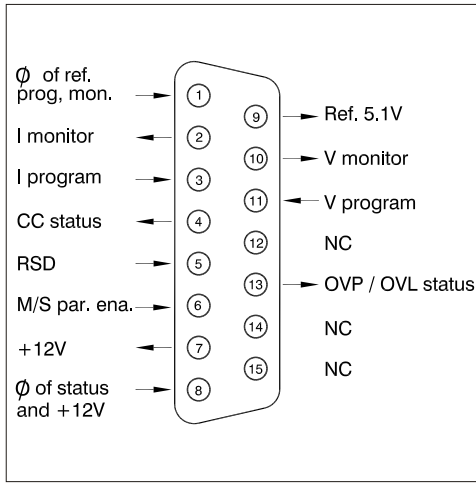

CV= Constant Voltage
 CC=Constant Current
 OVL=Over Voltage Limit=
 OVP=Over Voltage Protection

Specifications measured at
 $t_{amb} = 25 \pm 5 \text{ }^\circ\text{C}$ and $V_{in} = 230 \text{ V AC}$,
 50 Hz unless otherwise noted.

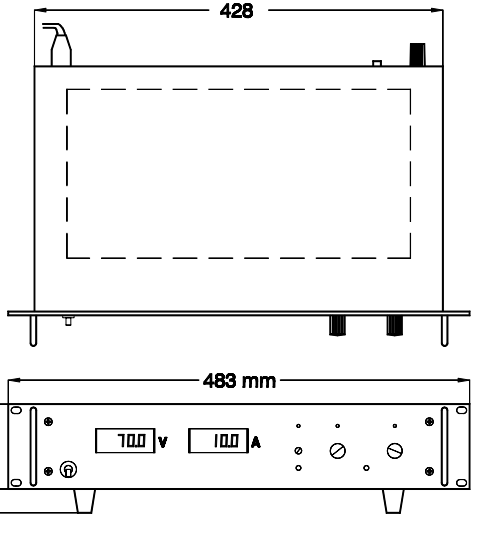

Connections programming connector

