

IMPORTANT

Analog A2 PCB assembly 5322 218 61465 can be used in all ScopeMeter versions. Take the following restrictions into account:

1. Firmware V3.15 and lower is not compatible with A2 PCB revision level 22 or higher. Update the firmware if you replace A2.
2. If an A2 PCB revision level 16 or lower is replaced by an A2 revision level 17 or higher, resistors R1423 and R1229 on the Digital A1 PCB must be modified:
 - R1423 into 82k5 (4822 051 58253)
 - R1229 into 681Ω (4822 051 56811)
 See section 11, Digital A1 PCB hardware modifications, revision level 07 and 08.

Table 9.5 Analog A2 PCB assembly (Figure 9.5)

When servicing the ScopeMeter, use only the replacement parts specified.

Item	Figure	Description	Ordering code	Qty
A2	9.5/9.6	Analog A2 PCB assembly	5322 218 61465	1

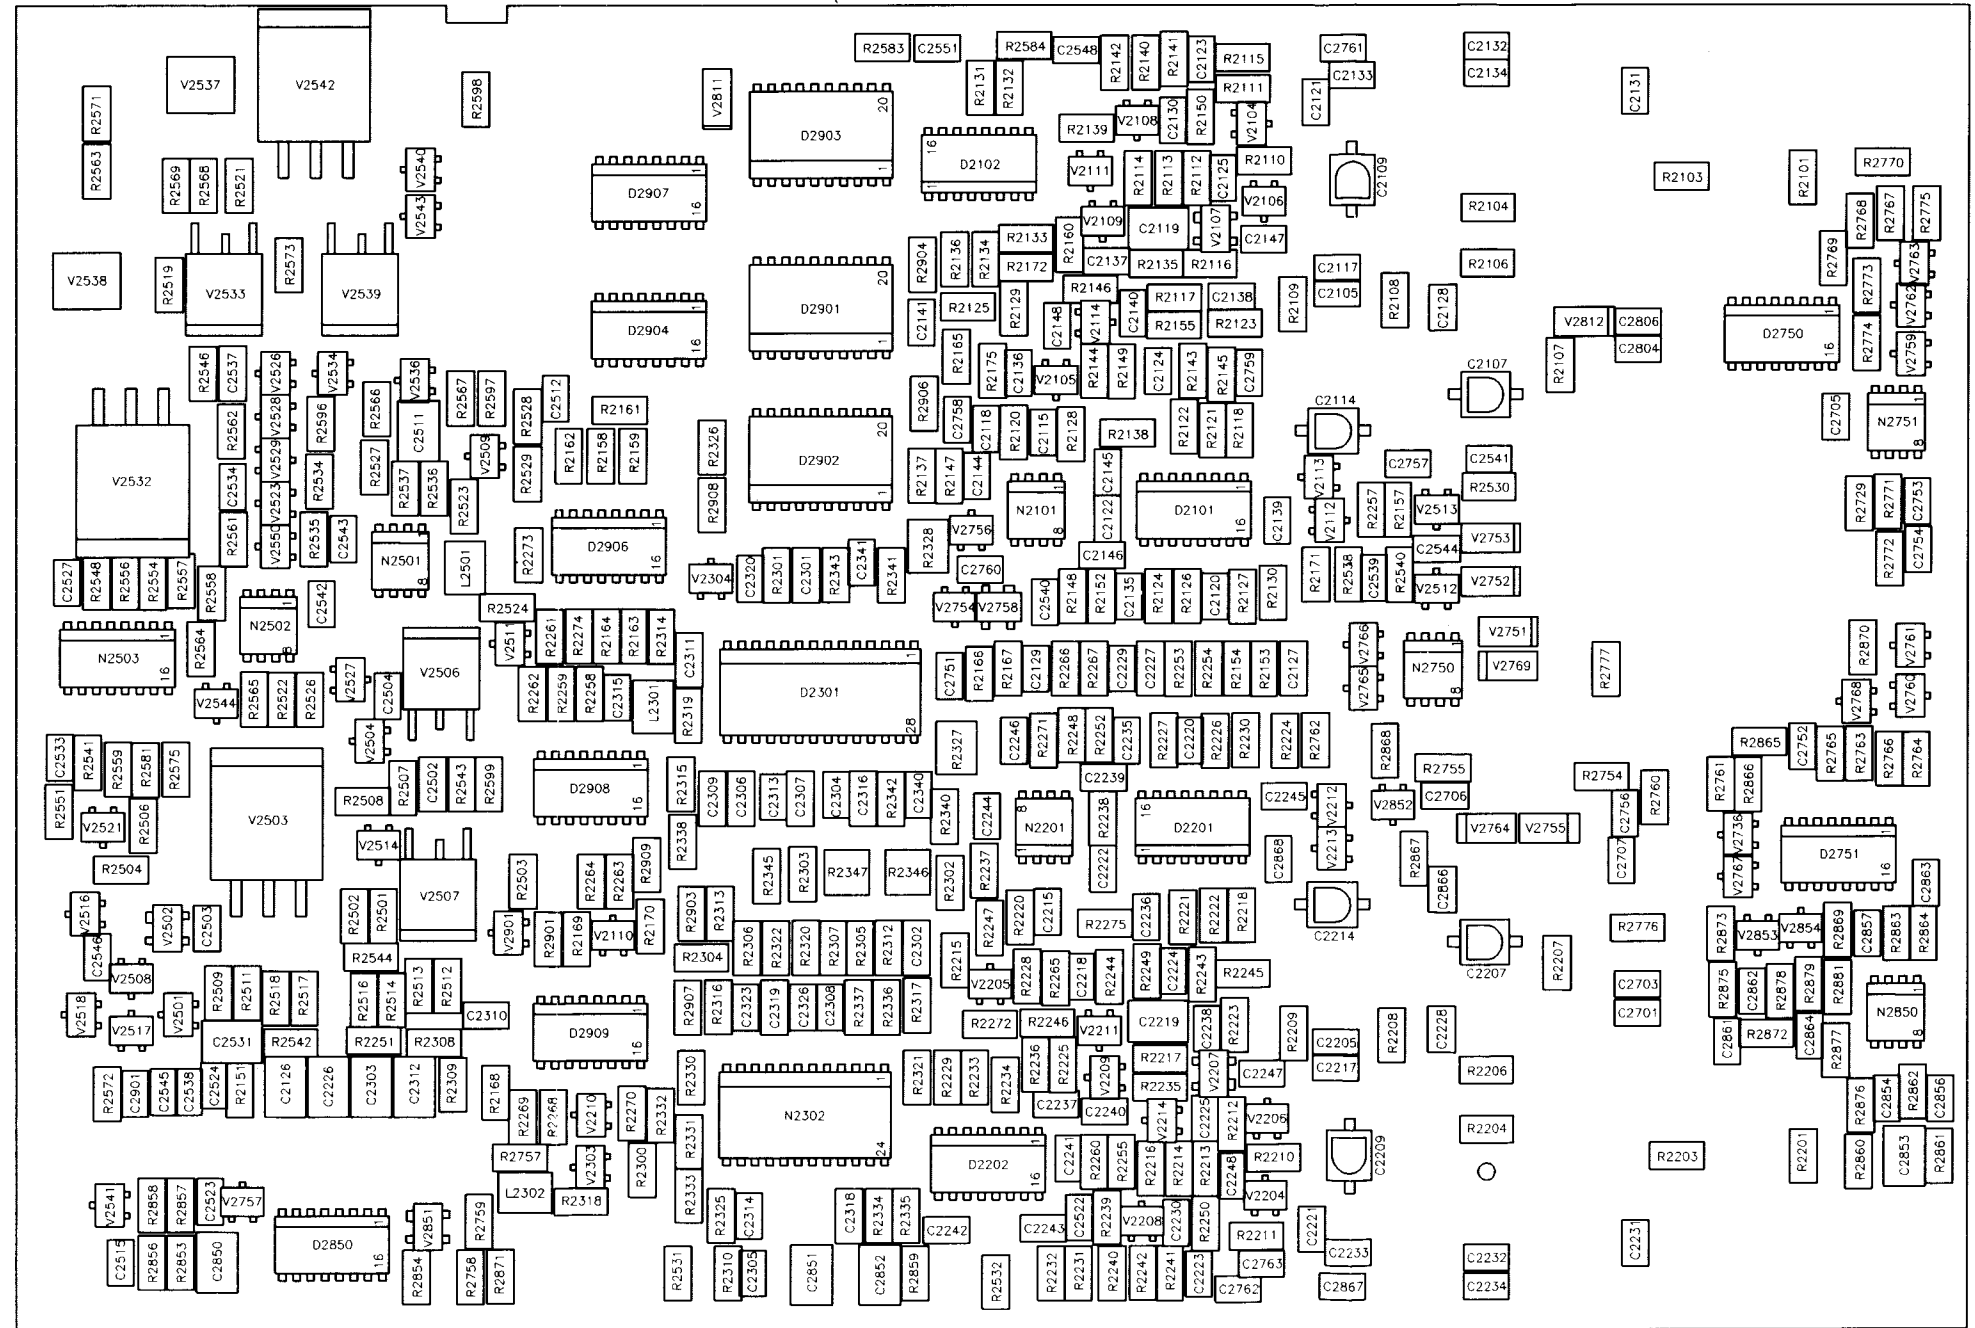


Figure 9.5 Analog A2 PCB assembly (SMD components side) revision level 22 and higher. For assembly drawings of older versions see Figures 10.3 a and 10.3b