SINEAX I 542

Transducer for AC current



Self-powered With 2 measuring ranges Carrying rail housing P8/35

Application

The transducer **SINEAX I 542** (Fig. 1) converts a sinusoidal AC current signal into an output signal that can serves several receiving instruments such as indicators, recorders, alarm units etc.

The transducer fulfils all the important requirements and regulations concerning electromagnetic compatibility **EMC** and **Safety** (IEC 1010 resp. EN 61 010). It was developed and is manufactured and tested in strict accordance with the **quality assurance standard** ISO 9001.



- Measuring input: 2 measuring ranges, 1/5 A or 1.2/6 A
- Self-powered / Less wiring expense
- Low power consumption / Smaller CT's can be used
- Standard version as per Germanischer Lloyd



The transducer comprises a transformer W, a rectifier unit G and an amplifier V (Fig. 2).

The measured variable is isolated from the electronics by the transformer, and is rectified and smoothed in the rectifier unit. The amplifier amplifies the resultant signal and converts it into the load-independent DC signal.

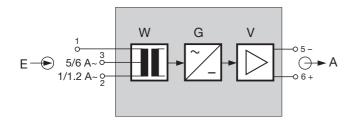


Fig. 2. Block diagram.

Table 1: Standard versions

The following transducer versions are available as standard versions. It is only necessary to quote the **Order No.:**

Description	Measuring range	Output signal	Order No.
	01 A / 5 A	0 5 mA	129 595
Transducer for	01 A / 5 A	010 mA	129 602
AC current,	01 A / 5 A	020 mA	129 610
nominal frequency 50 / 60 Hz	01.2 A / 6 A	0 5 mA	136 417
in housing P8/35	01.2 A / 6 A	010 mA	136 425
	01.2 A / 6 A	020 mA	136 433

Please complete the Order Code 542-4... . acc. to "Table 2: Specification and ordering information" for versions with user-specific input ranges and/or variable sensitivity.

Technical data

Measuring input E →

Nominal frequency: 50 / 60 Hz





Fig.1. SINEAX I 542 transducer in housing **P8/35** clipped onto a top-hat rail.

Nominal input current I_N (measuring range end value):

Own consumption at nominal frequency 50 Hz:

Measuring range limit values

0...0.5 to 0...7.5 A (only one measuring

range)


0 /	
I _{AN} [mA]	[VA]
1	1.5
5	1.7
10	2.0
20	2.5

Setting (special feature):

Admissible alteration of full scale output, variable sensitivity, adjustable with potentiometer

Setting range

approx. $0.9 ... 1.1 \cdot I_{N}$ (approx. $\pm 10\%$)



Overload capacity:

Measured	Number of	Duration of	Interval between
quantity	applications	one	two successive
I _N		application	applications
1.2 × I _N		continuously	
20 × I _N	10	1 s	100 s

Measuring output A →

Standard ranges: 0...1, 0...5, 0...10 or 0... 20 mA

Burden voltage: 15 \

External resistance: $R_{ext} \text{ max. } [k\Omega] = \frac{15 \text{ V}}{I_{AN} \text{ [mA]}}$

I_{AN} = full output value

Not superimposed

DC voltage U_A: 0 ... 10 V

External resistance \geq 200 k Ω

Current limit under overload: $\leq 1.7 \cdot I_{AN}$ Voltage limit under $R_{ext} = \infty$: $\leq 30 \text{ V}$ Residual ripple: $\leq 1\% \text{ p.p.}$ Response time: $\leq 300 \text{ ms}$

Camille Bauer I 542 Le 05.01

SINEAX I 542

Transducer for AC current

Accuracy (acc. to EN 60 688)

Reference value: Output end value

Class 0.5 Basic accuracy:

Reference conditions:

15 ... 30 °C Ambient temperature 0 ... 100% Input Frequency $f_N \pm 2 Hz$

Output burden Current: 0.5 · R_{ext} max.

Voltage: 2 · R_{ext} min.

Additional error:

Temperature influence

 $\pm 0.2\% / 10 K$ (– 10 ... 55 °C)

Safety

Protection class: II (protection isolated, EN 61 010) IP 40, housing (test wire, EN 60 529) Housing protection:

> IP 20, terminals (test finger, EN 60 529)

2 Pollution degree: Ш Installation category:

Test voltage: 50 Hz, 1 min. acc. to EN 61 010-1

3700 V, measuring input versus measuring

output and outer surface

490 V, measuring output versus outer

surface

Installation data

Mechanical design: Housing P8/35

Material of housing: Lexan 940 (polycarbonate),

flammability class V-0 acc. to UL 94, selfextinguishing, non-dripping, free of halo-

aen

Mounting: For rail mounting

Mounting position: Any

Weight: Approx. 0.26 kg

Connecting terminals

Connection elements: Screw-type terminals with indirect wire

pressure

Permissible cross section

of the connection leads: ≤ 4.0 mm² single-wire or $2 \times 2.5 \text{ mm}^2$ fine-wire

Environmental conditions

Operating temperature: -10 to +55 °C Storage temperature: $-40 \text{ to} + 70 \,^{\circ}\text{C}$

Relative humidity of

annual mean: ≤ 75%

Standard accessories

1 Operating Instructions in three languages: German, French, English

Table 2: Specification and ordering information

(see also Table 1: "Standard versions")

Order Code 542 –							
Featu	Features, Selection						
1. M	lechanical design Housing P8/35 for rail mounting		4				
2. M	leasuring range						
1)	01 /5A			1			
2)	01.2/6A			2			
9)	Non-standard [A]			9			
	00.5 to 07.5 A (for one measuring range only)						
Li	Lines 1 and 2: Lower or higher range depen-						
	ng on connection						
l	utput signal						
	0 5 mA, $R_{ext} \le 3$ k Ω				1		
	$010 \text{ mA}, R_{\text{ext}} \le 1.5 \text{ k}\Omega$				2		
3) 020 mA, $R_{\text{ext}} \le 750$ Ω 3							
	0 1 mA, $R_{ext} \le 15 \text{ k}\Omega$				4		
	010 V, R_{ext} ≥ 200 kΩ				Α		
\overline{Z}	Non-standard [V]				Ζ		
	01 to 0< 10						
4. M	leasuring range adjustable						
0)	Meas. range end value permanently set					0	
1)	Measuring range can be adjusted approx. ± 10%					1	
5. Te	est records						
0)	Without test records						0
D)) Test records in German						D
E)	Test records in English						Ε

Electrical connections

Connection	Connecting terminals
Measuring input E	1 and 2 or 1 and 3 acc. to version, see type label
Measuring output A →	5 – and 6 +

Dimensional drawing






Fig. 3. SINEAX I 542 in housing P8/35 clipped onto a top-hat rail (35 × 15 mm or 35 × 7.5 mm, acc. to EN 50 022).

Printed in Switzerland • Subject to change without notice • Edition 05.01 • Data sheet No. I 542 Le

Aargauerstrasse 7 CH-5610 Wohlen/Switzerland Phone +41 56 618 21 11 Fax +41 56 618 24 58

e-mail: cbag@gmc-instruments.com http://www.gmc-instruments.com

