

## D Montageanleitung

### Digital Satellite TV Receiver SNR DTR 2000 S Bestellnummer G.AF 1251 für TV-Chassis Digi Basic 3

bestehend aus:	DTR 2000 S	28016 019 1500	Netzkabel kpl.	82909 912 2000
	TP 820 SAT	29642 061 0300	Montageanleitung	72010 027 1003
	EURO-AV-Kabel	81320 010 6900	Bedienungsanleitung	29120 241 0100
	RS-232 Kabel	29210 441 2101		

**Achtung: MOS-Vorschriften beachten** 

#### Montage:

- Netzstecker ziehen.
- Rückwandabdeckung nach hinten abziehen (Fig. 1).
- Beigepacktes Netzkabel in die Gerätenetzbuchse (Fig. 3) des DTR 2000 S und in die im TV-Gerätesockel befindliche Netzbuchse (Fig. 2) stecken.
- Mit dem beigepackten RS-232 Kabel die Buchse "D-Sub RS 232" die sich im TV-Gerätesockel befindet (Fig. 2) mit der Buchse "Serial" des DTR 2000 S (Fig. 3) verbinden.
- Mit dem beigepackten EURO-AV-Kabel die Euro/AV-Buchse "AV3" am TV-Gerät mit der Euro/AV-Buchse "EURO AV TV" am DTR 2000 S verbinden.
- Gerät in die TV-Konsole einschieben (Fig. 2).
- SAT-Antenne an die Buchse "INPUT-SAT" anschließen.
- Rückwandabdeckung aufsetzen.
- Netzstecker einstecken.

**Nach dem Einbau sind folgende Einstellungen im Fachhändlermenü vorzunehmen:**

**Hinweis:** Bei Neu-Geräten muss zuerst die Installation der Programmplätze durch den automatischen Programmsuchlauf "ATS euro plus" erfolgen (siehe Bedienungsanleitung des TV-Gerätes).

- Taste "i" -> "OK".
- "SERVICE FÜR DEN FACHHANDEL" -> "OK".
- "Nur für den Fachhändler" -> "OK".
- Händler Kennzahl " \_ \_ \_ \_ ".
- "Installation von Zusatzgeräten" -> "OK".
- Menüpunkt "AV3" mit Cursor-Taste "+" auf "DVB" stellen.
- Menü mit der Taste "TXT" verlassen.
- Gerät mit der Netztaaste aus und wieder einschalten.

Programmtabelle wird vom DTR 2000 S automatisch eingelesen.

#### Bedienen des DTR 2000 S mit der Fernbedienung TP 820 SAT

- Netzstecker des DTR 2000 S ziehen.
- Netzstecker einstecken und dabei die Nahbedientaste "▶" am DTR 2000 S gedrückt halten bis nach ca. 3sec. im Display "DTR" erscheint.
- Der DTR 2000 S kann jetzt mit der beigepackte Fernbedienung TP 820 SAT bedient werden.

#### Bedienen des DTR 2000 S über das "FINE ARTS VISION"-TV-Gerät mit der Fernbedienung Personal Remote 10

**Hinweis:** Die RS-232-Schnittstellenverbindung zum TV-Gerät muss unterbrochen sein.

- Gerät auf "Standby" schalten.
- Die Nahbedientaste "P+" am DTR 2000 S drücken und danach sofort die Nahbedientaste "◀" gedrückt halten bis nach ca. 3sec. kurzzeitig im Display "STA" erscheint.
- Der DTR 2000 S kann jetzt nur noch über das "FINE ARTS VISION"-TV-Gerät mit der Fernbedienung Personal Remote 10 bedient werden.

## GB Fitting Instructions

### Digital Satellite TV Receiver SNR DTR 2000 S Order Number G.AF 1251 for Digi Basic 3 TV Chassis

consisting of:	DTR 2000 S	28016 019 1500	Mains Cable cpl.	82909 912 2000
	TP 820 SAT	29642 061 0300	Fitting Instructions	72010 027 1003
	EURO-AV Cable	81320 010 6900	Operating Instructions	29120 241 0100
	RS-232 Cable	29210 441 2101		

**Attention: Observe MOS regulations** 

#### Assembly:

- Disconnect the mains plug.
- Pull the cover of the rear cabinet off towards the back (Fig. 1).
- Connect the mains cable enclosed with the delivery into the mains socket of the DTR 2000 S receiver (Fig. 3) and into the mains socket (Fig. 2) on the base of the TV set.
- With the RS-232 cable enclosed with the delivery connect the socket "D-Sub RS 232" on the base of the TV set (Fig. 2) with the "Serial" socket of the DTR 2000 S (Fig. 3).
- With the EURO-AV cable enclosed with the delivery connect the Euro/AV socket "AV3" on the TV set with the Euro/AV socket "EURO AV TV" on the DTR 2000 S.

- Slide the digital receiver into the compartment of the TV set (Fig. 2).
- Connect the SAT aerial into the "INPUT-SAT" socket.
- Refit the cover to the rear cabinet.
- Connect the mains plug.

**On completion of this assembly the following adjustments are to be made in the SERVICE menu:**

**Note:** With new sets first the installation of the programme positions with the help of the automatic tuning system "ATS euro plus" must be carried out (see user manual of the TV set).

- Button "i" -> "OK".
- "SERVICE" -> "OK".
- "Only for the retailer" -> "OK".
- Dealer's code number " \_ \_ \_ \_ \_".
- "Installation of external units" -> "OK".
- Change the menu option "AV3" to "DVB" using cursor button "+".
- Leave the menu with the "TXT" button.
- Switch the set off and on again with the mains switch.

The channel table is automatically read in by the DTR 2000 S satellite receiver.

**Operating the DTR 2000 S with the remote control TP 820 SAT**

- Disconnect the mains plug from the DTR.
- Reconnect the mains plug while pressing and holding down the direct-control button "▶" on the DTR 2000 S until "DTR" appears after about 3 seconds in the display.
- Now the DTR 2000 S can be operated with the remote control TP 820 SAT enclosed with the delivery.

**Operating the DTR 2000 S via the "FINE ARTS VISION" TV set with the remote control Personal Remote 10**

**Note:** The RS-232 interface connection to the TV set must be disconnected.

- Switch the set to "standby".
- Press the direct-control button "P+" on the DTR 2000 S and then immediately press and hold down the direct-control button "◀" until "STA" appears after about 3 seconds briefly in the display.
- When this is done, the DTR 2000 S can only be operated via the "FINE ARTS VISION" TV set with the remote control Personal Remote 10.

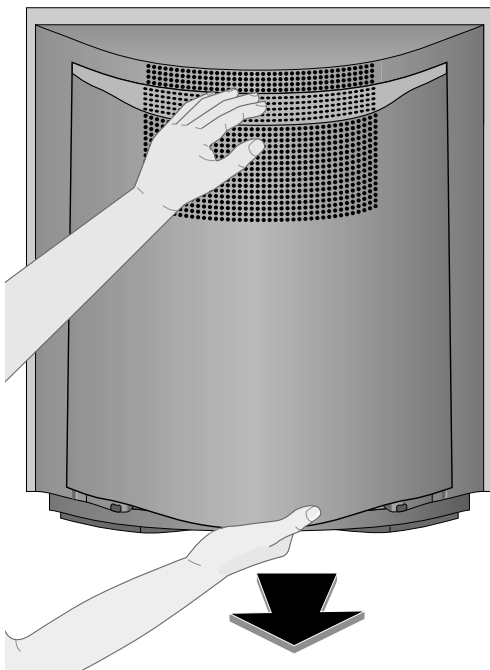


Fig. 1



Fig. 2

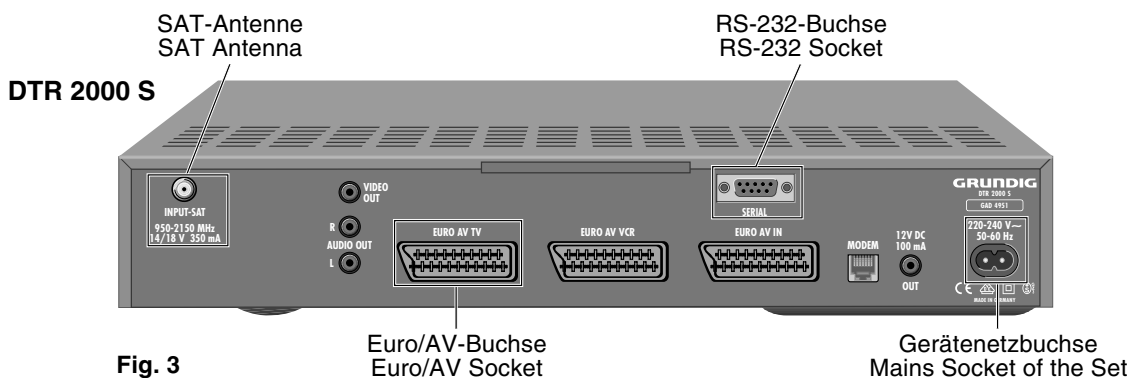


Fig. 3