


Keysight Technologies

Infiniium USB Test Option

E2645A, N2854A, N2855A, E2683A

Data Sheet

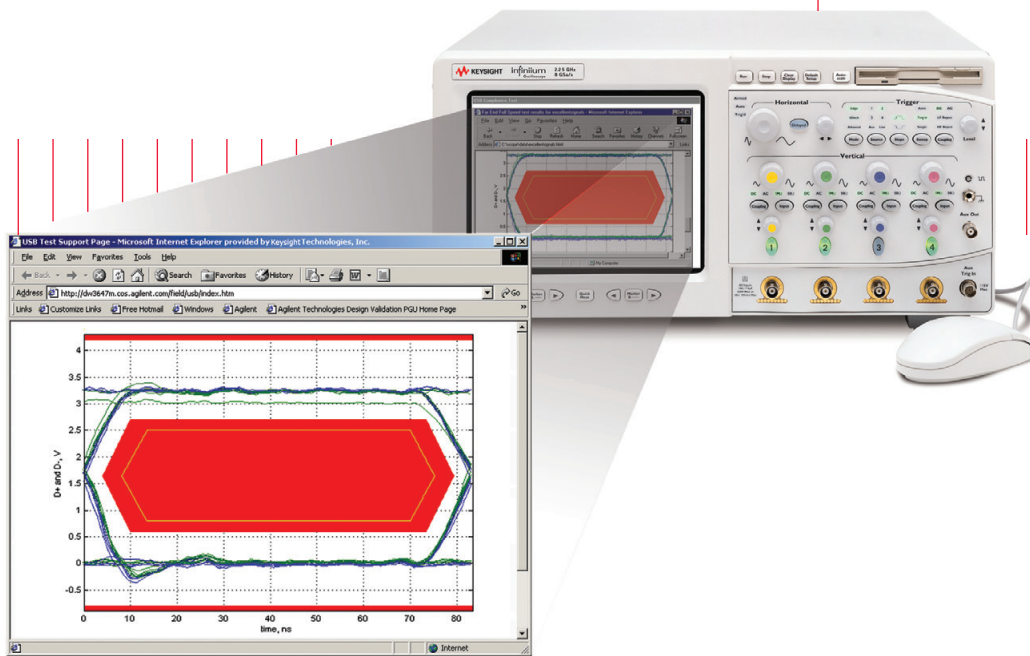

Introduction

- Recognized by the USB-IF for official compliance testing
- Fast electrical compliance testing
- USB-IF MATLAB script execution inside the Infiniium oscilloscope
- Award-winning Infiniium ease-of-use
- Test fixtures for low, full, and hi-speed compliance

The Infiniium USB Test Option provides a fast and reliable way to verify USB electrical specification compliance for USB 2.0 devices, hosts, and hubs. The Infiniium USB test option executes the official USB-IF MATLAB scripts with MATLAB's runtime engine embedded in the oscilloscope. Test procedures for Keysight Technologies, Inc. equipment can be found on the USB-IF website: www.usb.org/developers/docs

Features

With the Infiniium USB Test Option, you can take the Infiniium oscilloscope you use for everyday debugging and use it to verify USB electrical parameters with the same testing scripts the USB-IF created for official compliance testing at designated workshops. The Infiniium USB Test Option allows you to quickly and easily test all facets of electrical compliance of your device, host, or hub. Low, full, and hi-speed tests require compliance with signal quality, inrush current, droop, drop, and backdrive voltage tests. Hi-speed USB requires compliance with an additional suite of tests. Tests can be executed directly from the scope interface under the Analyze menu. The single menu structure of the Infiniium USB Test Option provides a level of simplicity not found with other vendors' multi-tiered menu structures for executing tests and documenting results.

One SQiDD (signal quality, inrush, droop/drop) test fixture is included with the software in the test option package. A set of six hi-speed test fixtures for signal quality, receiver sensitivity, TDR, and host disconnect can be ordered separately as part number E2649A.

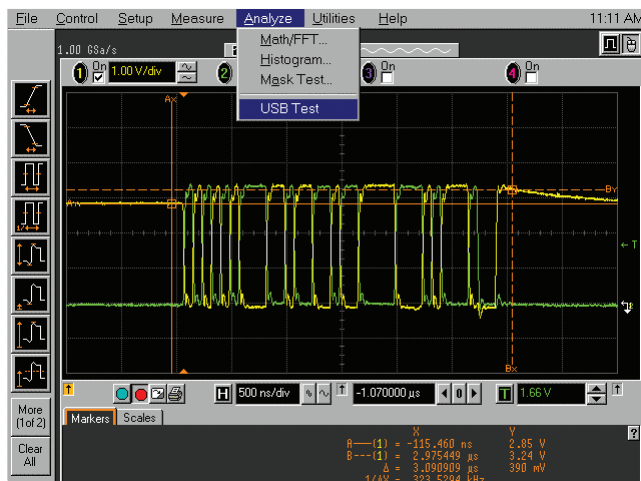


Figure 1. The Infiniium USB Test Option is incorporated directly into the oscilloscope's menu structure as a submenu under the Analyze menu.

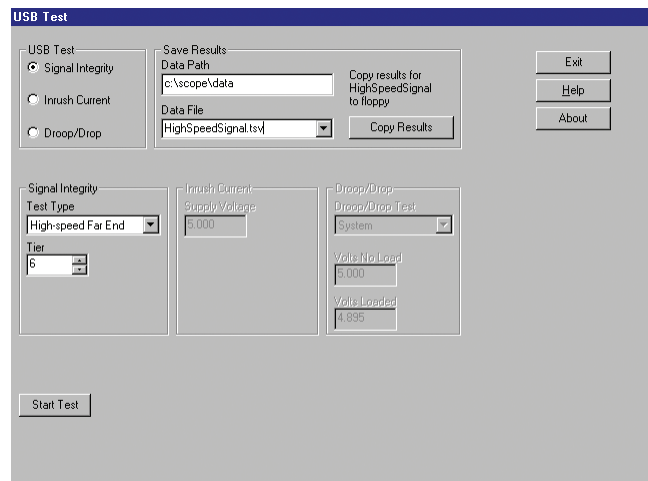


Figure 2. The Infiniium USB Test Option is configured and launched through a single window.

Benefits

In the past, pre-compliance testing in a lab environment involved capturing the data with an oscilloscope, transferring it to a PC, and post-processing it with a software program of choice. The Infiniium USB Test Option has simplified the process by installing a run-time version of MATLAB in the scope and integrating the USB Test Option into the Infiniium oscilloscope's menu structure. Test results are just one mouse-click away.

Once the test is executed, the test results appear on the Infiniium display in an .html window. Each test also automatically saves the .png, .html, and .tsv files required by the USB-IF.

The higher data rates associated with high-speed USB 2.0 demand a measurement system that will not interfere with your device/host/hub operation by loading the system. The award-winning InfiniiMax probing system, which is compatible with Infiniium oscilloscopes, provides unmatched signal fidelity—ensuring your measurement system does not load the signals under test, thus not compromising the specification margins for passing the electrical signal quality tests. The InfiniiMax probing system has been approved by the USB-IF for compliance testing.

The set of six hi-speed test fixtures are highly manageable in a test environment due to their smaller size. The six fixtures allow you the flexibility to run different tests concurrently when you have more than one host, hub, or device to verify for compliance.

Compatibility

The Infiniium USB test option is compatible with Infiniium 4-channel and 4+16 channel oscilloscopes.

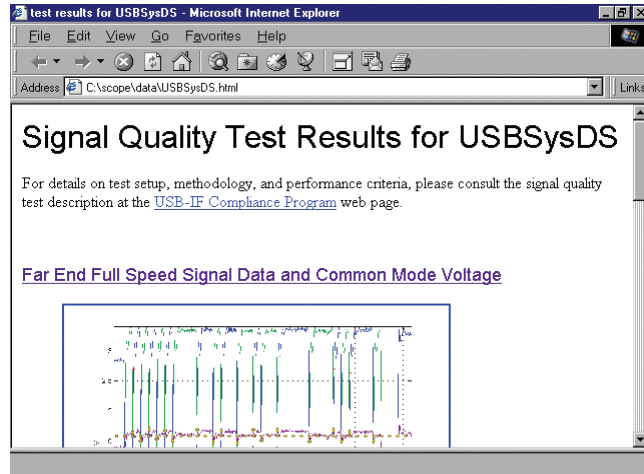


Figure 3. Infiniium automatically displays test results in an .html window immediately after test execution

Hi-Speed Recommended Equipment

(Using Keysight 54846A/B, 53A, 54A, 55A)

Part #	Description	Quantity
E2645A ¹	USB 2.0 test option. Includes one SQiDD test fixture for low/full speed USB 2.0 testing for 54846A	1
N2854A	for 54846B	
E2683A	for 54853A/54A/55A	
E2646A	Additional SQiDD (Signal Quality Inrush, Drop/Droop) test fixture for low/full speed USB 2.0 testing (Note that one E2646A is included in the USB test option)	-
E2649A	Hi-speed USB 2.0 test fixture set consists of: E2645-66501 Device Signal Quality test fixture E2645-66505 Host TDR test fixture E2645-66502 Host Signal Quality test fixture E2645-66506 Host Disconnect test fixture E2645-66503 Receiver Sensitivity test fixture 0950-2546 Power supply E2645-66504 Device TDR test fixture	1
54846B Option 004	Adds (four) 1161A passive probes to the 54846B oscilloscope	1
E2697A	High-impedance adapter with one 10073C passive probe for 54853A/54A/55A only (1156A can be used in lieu of E2697A)	3
1131A/32A/34A	InfiniiMax probe amplifier (qty 2 required for hub testing)	1
E2669A	Differential connectivity kit for InfiniiMax probes	1
01131-68703	Additional set of 10 damped adapters for use with InfiniiMax probes (Note that four damped adapters are included with the E2649A and the E2699A)	-
Digital Signal Generator ²	81130A Pulse/Pattern Generator	1
	1 MB SRAM Memory Card (#UFH)	1
	81132A 660 MHz option	2
	8493C #006 6 dB attenuator	2
	male SMA cable	2
TDR ³	86100A/B	1
	54745A	1
	male SMA cable	2
Multimeter	34401A	1
Hi-Speed USB Test Bed Computer	Hardware configuration: 815EEA2 motherboard, Pentium III 700 MHz, 256 MB ram, 40 GB HD, CD (CD-RW), FD, IOGear (or ATEN) USB 2.0 PCI card (5-port) Software configuration: Windows 2000 or Windows XP	1
USB Cable	1.5 meter cable	1
	1 meter cable	1
USB-IF Tool on Host System	USB Hi-speed Electrical Test Tool from USB-IF, Inc.	1

1. To use the E2645A option, you must have the following minimum Infiniium configuration: 300 MHz CPU, 64 MB RAM, Windows 98, Version A.04.20 or greater of the system software, LS-120 120 MB SuperDisk. To determine if your Infiniium meets these configuration criteria, look at the back of your unit. If the serial number of your unit starts with US3919 or higher, you meet these requirements. Or if there is a product tag with "E2633A," "E2633-68703," or "E2633-68701," you meet the requirements. If you do not meet the minimum requirements, you must order an Infiniium oscilloscope performance upgrade in addition to the E2645A. Please contact your Keysight representative for selecting the right performance upgrade for your Infiniium oscilloscope.
2. Digital Signal Generator is required when testing receiver sensitivity test for device/hub.
3. TDR test was deleted from Hi-speed Test Procedure (Rev. 1.0), but it is still recommended to test when at development stage.

Table 1. Recommended test equipment.

Low/Full Speed Recommended Equipment

(Using Keysight 54815A, 25A, 31B/D, 32B/D, 35A, 45A/B, 46A/B, 52A, 53A, 54A, 55A, DSO80804A/1004A/1204A/1304A Scopes)

Part #	Description	Quantity
E2645A ¹	USB 2.0 test option. Includes one SQiDD test fixture for low/full speed USB 2.0 testing for 54815A, 54825A, 54835A, 54845A, 54846A	1
N2854A	for 54845B, 54846B	
N2855A	for 54830B/D Series with software rev. A.02.30 or below	
E2683A	for 54830B/D Series, 54833A and 54850A Series with software A.03.10 or higher	
E2646A	Additional SQiDD (Signal Quality Inrush, Drop/Droop) test fixture for low/full speed USB 2.0 testing (Note that one E2646A is included in the USB test option)	-
54832B/32D Option 004	Adds (four) 1165A passive probes for new purchase of 54832B/32D scopes only	1
54846B Option 004	Adds (four) 1161A passive probes for new purchase of 54846B scopes only	1
E2697A	High-impedance adapter with one 10073C passive probe for 54852A/53A/54A/55A only	3
1147B	50 MHz current probe (for 54831B/D, 32B/D, 45B, 46B only)	1
N2774A & N2775A	50 MHz current probe and power supply (for 54852A/53A/54A/55A)	1
HUB	Intel Customer HUB (CHUB)	5
Adjacent Device	Intel Deluxe PC Camera (for full-speed), USB mouse (for low-speed)	1
Multimeter	34401A	1
USB Host System	Hardware Configuration: 815EEA2 motherboard, Pentium III 700 MHz, 256 MB ram, 40 GB HD, CD (CD-RW), FD, IOGear (or ATEN) USB 2.0 PCI card (5-port) Software Configuration: Windows 2000 or Windows XP	1
USB Cable	5 meter cable	6
	1 meter cable	1
USB-IF Tool on Host System ²	USBCheck or USBCV program from USB-IF, Inc.	1

- To use the E2645A option, you must have the following minimum Infiniium configuration: 300 MHz CPU, 64 MB RAM, Windows 98, Version A.04.20 or greater of the system software, LS-120 120 MB SuperDisk. To determine if your Infiniium meets these configuration criteria, look at the back of your unit. If the serial number of your unit starts with US3919 or higher, you meet these requirements. Or if there is a product tag with "E2633A," "E2633-68703," or "E2633-68701," you meet the requirements. If you do not meet the minimum requirements, you must order an Infiniium oscilloscope performance upgrade in addition to the E2645A. Please contact your Keysight representative for selecting the right performance upgrade for your Infiniium oscilloscope.
- USB Check is supported on Windows 2000 only and is being made obsolete by USBCV. When performing USBCV to test full/low device, USB 2.0 hi-speed HUB is also needed.

Table 2. Recommended test equipment.

Ordering Information

Infiniium Oscilloscope	Operating System	Software Revision	USB Test Option	Tests
5481xA, 5482xA	Windows 98	A.04.20 or higher	E2645A	Low/Full Speed
5483xB/D	Windows 98	A.01.10 or higher	N2855A	Low/Full Speed
5483xB/D	Windows XP Pro	A.03.10 or higher	E2683A	Low/Full Speed
54835A, 54845A	Windows 98	A.04.50 or higher	E2645A	Low/Full Speed
54846A	Windows 98	A.04.50 or higher	E2645A	Low/Full/Hi Speed
54845B	Windows 98	A.04.50 or higher	N2854A	Low/Full Speed
54846B	Windows 98	A.04.50 or higher	N2854A	Low/Full/Hi Speed
5485xA	Windows XP Pro	A.03.10 or higher	E2683A	Low/Full/Hi Speed
80000 Series	Windows XP Pro	A.03.90 or higher	E2683A	Low/Full/Hi Speed

Additional SQiDD fixtures may be ordered as part number E2646A.

Note that free upgrade media for Infiniium oscilloscopes is available for order online at http://www.keysight.com/find/infiniium_software.

myKeysight

myKeysight

www.keysight.com/find/mykeysight

A personalized view into the information most relevant to you.



www.axiestandard.org

AdvancedTCA® Extensions for Instrumentation and Test (AXIe) is an open standard that extends the AdvancedTCA for general purpose and semiconductor test. Keysight is a founding member of the AXIe consortium. ATCA®, AdvancedTCA®, and the ATCA logo are registered US trademarks of the PCI Industrial Computer Manufacturers Group.



www.lxistandard.org

LAN eXtensions for Instruments puts the power of Ethernet and the Web inside your test systems. Keysight is a founding member of the LXI consortium.



www.pxisa.org

PCI eXtensions for Instrumentation (PXI) modular instrumentation delivers a rugged, PC-based high-performance measurement and automation system.



Three-Year Warranty

www.keysight.com/find/ThreeYearWarranty

Keysight's commitment to superior product quality and lower total cost of ownership. The only test and measurement company with three-year warranty standard on all instruments, worldwide.



Keysight Assurance Plans

www.keysight.com/find/AssurancePlans

Up to five years of protection and no budgetary surprises to ensure your instruments are operating to specification so you can rely on accurate measurements.



www.keysight.com/quality

Keysight Technologies, Inc.
DEKRA Certified ISO 9001:2008
Quality Management System

Keysight Channel Partners

www.keysight.com/find/channelpartners

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: www.keysight.com/find/contactus

Americas

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

Europe & Middle East

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	0800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries:
www.keysight.com/find/contactus
(BP-07-10-14)

