

---

# System Information Guide

---

**Agilent Technologies E7478A GPRS and  
Data (GSM) Wireless Solutions**

**Manual part number  
E7478-90006**

**Edition/Print Date**

All Editions and Updates of this manual and their creation dates are listed below.

First Edition ..... March 2001

**Notices**

Copyright © Agilent Technologies, Inc 1997, 1998, 1999, 2000, 2001 All Rights Reserved.

No part of this manual may be reproduced in any form or by any means (including electronic storage and retrieval or translation into a foreign language) without prior agreement and written consent from Agilent Technologies, Inc. as governed by United States and international copyright laws.

**Trademarks**

ArcView ® is a registered trademark of Environmental Systems Research Institute, Inc.

MapInfo ® is a registered trademark of MapInfo Corporation.

Pentium ® is a registered trademark of Intel Corporation.

PlaNET ® is a registered trademark of Mobile Systems International.

Adobe ® is a trademark of Adobe Systems Incorporated.

Windows NT ® and Windows 95 ® and Windows 98 ® are U.S. registered trademarks of Microsoft Corporation.

Hewlett-Packard ® is a registered trademark of Hewlett-Packard Limited.

**Warranty**

This Agilent Technologies, Inc. instrument product is warranted against defects in material and workmanship for a period of one year from date of shipment. During the warranty period, Agilent Technologies, Inc. Company will, at its option, either repair or replace products which prove to be defective. For warranty service or repair, this product must be returned to a service facility designated by Agilent Technologies, Inc.. Buyer shall prepay shipping charges to Agilent Technologies, Inc. and Agilent Technologies, Inc. shall pay shipping charges to return the product to Buyer. However, Buyer shall pay all shipping charges, duties, and taxes for products returned to Agilent Technologies, Inc. from another country.

Agilent Technologies, Inc. warrants that its software and firmware designated by Agilent Technologies, Inc. for use with an instrument will execute its programming instructions when properly installed on that instrument. Agilent Technologies, Inc. does not warrant that the operation of the instrument, or software, or firmware will be uninterrupted or error-free.

**Limitation of Warranty**

The foregoing warranty shall not apply to defects resulting from improper or inadequate maintenance by Buyer, Buyer-supplied software or interfacing, unauthorized modification or misuse, operation outside of the environmental specifications for the product, or improper site preparation or maintenance.

No other warranty is expressed or implied.

Agilent Technologies, Inc. specifically disclaims the implied warranties of merchantability and fitness for a particular purpose.

**Exclusive Remedies**

The remedies provided herein are Buyer's sole and exclusive remedies. Agilent Technologies, Inc. shall not be liable for any direct, indirect, special, incidental, or consequential damages, whether based on contract, tort, or any other legal theory.

**Restricted Rights Legend**

If Software is for use in the performance of a U.S. Government prime contract or subcontract, Software is delivered and licensed as "Commercial computer software" as defined in DFAR 252.227-7014 (June 1995), or as a "commercial item" as defined in FAR 2.101(a) or as "Restricted computer software" as defined in FAR 52.227-19 (June 1987) or any equivalent agency regulation or contract clause. Use, duplication or disclosure of Software is subject to Agilent Technologies' standard commercial license terms, and non-DOD Departments and Agencies of the U.S. Government will receive no greater than Restricted Rights as defined in FAR 52.227-19(c)(1-2) (June 1987). U.S. Government users will receive no greater than Limited Rights as defined in FAR 52.227-14 (June 1987) or DFAR 252.227-7015 (b)(2) (November 1995), as applicable in any technical data.

Agilent Technologies  
1400 Fountaingrove Parkway  
Santa Rosa, CA 95403-1799

---

# Contents

<b>Welcome to Your System Information Guide</b> .....	5
<b>Introduction</b> .....	7
<b>Specifications and Hardware Information</b> .....	11
Calibration Cycle .....	11
<b>General System Software Functionality</b> .....	12
Data Export .....	12
Alarms and Alerts .....	16
Link Editor .....	19
Real-time Mapping (Option 160) .....	19
Report Generation .....	20
Virtual Front Panel Printing .....	21
Indoor Measurements (Option 180) .....	21
<b>Agilent E7478A Software Specifications</b> .....	23
Software Measurement Specifications .....	23
GPRS data Measurements .....	23
Data Call Control .....	25
Data Measurement .....	26
Data Server .....	27
<b>General Hardware Specifications</b> .....	29
Personal Computer Recommendations, Minimum .....	29
External GPS Receiver Requirements .....	30
GPS and Vehicle Fitted Navigation Systems Supported .....	30
Differential GPS Receiver Supported .....	30
Antennas .....	31
<b>Agilent E7478A Hardware Specifications</b> .....	33
<b>Agilent E7478A System Options</b> .....	35
Software License Options .....	35
Phone Options .....	37
Power Localization Opions .....	38
<b>Agilent 86154A General System Accessories</b> .....	39

General System Accessories ..... 39  
Agilent 86154A Option 540 Vehicle Based Drive Test Display System ..... 45  
Power Localization Options ..... 47  
**Part Number Summary** ..... 49

## Welcome to Your System Information Guide

Thank you for choosing Agilent Technologies. In this Guide, you'll find the necessary information needed to support your drive test system.

For Information on...	See This
Overview of the Agilent Wireless Solutions System	<a href="#">"Introduction" on page 7</a>
Software Specifications	<a href="#">"Agilent E7478A Software Specifications" on page 23</a>
Hardware Specifications	<a href="#">"General Hardware Specifications" on page 29</a>
E7478A System Options	<a href="#">"Agilent E7478A System Options" on page 35</a>
System Accessories	<a href="#">"Agilent 86154A, 86153A System Accessories" on page 57</a>
System Part Number Summary	<a href="#">"Part Number Summary" on page 49</a>

### If You Need Help...

To Do This...	See This
View and Print this Guide	Additional Documentation, Chapter 3, <i>Getting Started Guide</i>
Contact Agilent Technologies and the Product Web site	<a href="http://www.agilent.com/find/networks">http://www.agilent.com/find/networks</a>

## Welcome to Your System Information Guide

# Introduction

The E74xx drive test system is a scalable integrated air interface measurement system, used to obtain comprehensive RF measurement and call performance data versus location. Depending on the hardware options you have purchased, you will be able to make measurements on the following technology types:

- CDMA Cellular and PCS band
- TDMA Cellular and PCS band
- GSM900, DCS1800, GSM1900, or GSM900/DCS1800 Dual-band
- W-CDMA (UMTS) (currently not supporting phone measurements), or cdma2000
- GPRS (GSM) and Data (GSM)

Receiver-based, phone-based, or combined measurement capabilities are selected via stackable software licenses that reside on a supplied software protection key. Measurement receivers, which can be supplied with or without an internal GPS receiver, are supplied with magnetic mounting antennas, car mounting brackets, and RS-232 connection cables to link to a laptop PC (available as an accessory). Phone software licenses are supplied with dual-port ruggedized PCMCIA serial I/O cards.

The E74xx drive test system is a scalable measurement system for wireless optimization. It has four basic configurations:

- Phone-based measurement system using a single or multiple test mobile phones
- Receiver-based measurement system using a single or multiple digital measurement receivers
- Combined phone and receiver measurement system using a single or multiple receivers and phones
- Basestation Over Air Testing (Model E7490A, CDMA only)

## Introduction

All of the above configurations can be used for indoor measurement. Measurements are matched to an imported floor plan or map in the absence of GPS.


The system requires a PC with Windows 95/98 or NT 4.0 (or later) running the receiver and/or phone-based measurement software. A navigation system, such as a GPS receiver and GPS antenna, is required to obtain longitude and latitude information for logging the position at which the measurements are taken by the receiver or the phone. This type of measurement can also be accomplished by use of the indoor option in lieu of the GPS option. The GPS receiver may be integrated into the digital receiver or it may be an external device. A suitable laptop PC and external GPS receiver can be supplied as drive test accessory products. The complete system is transportable in a lightweight briefcase that can be supplied as an accessory product.

[Figure 1 on page 9](#) illustrates a four phone and four receiver system.



Introduction

Figure 1 Four phone and four receiver system

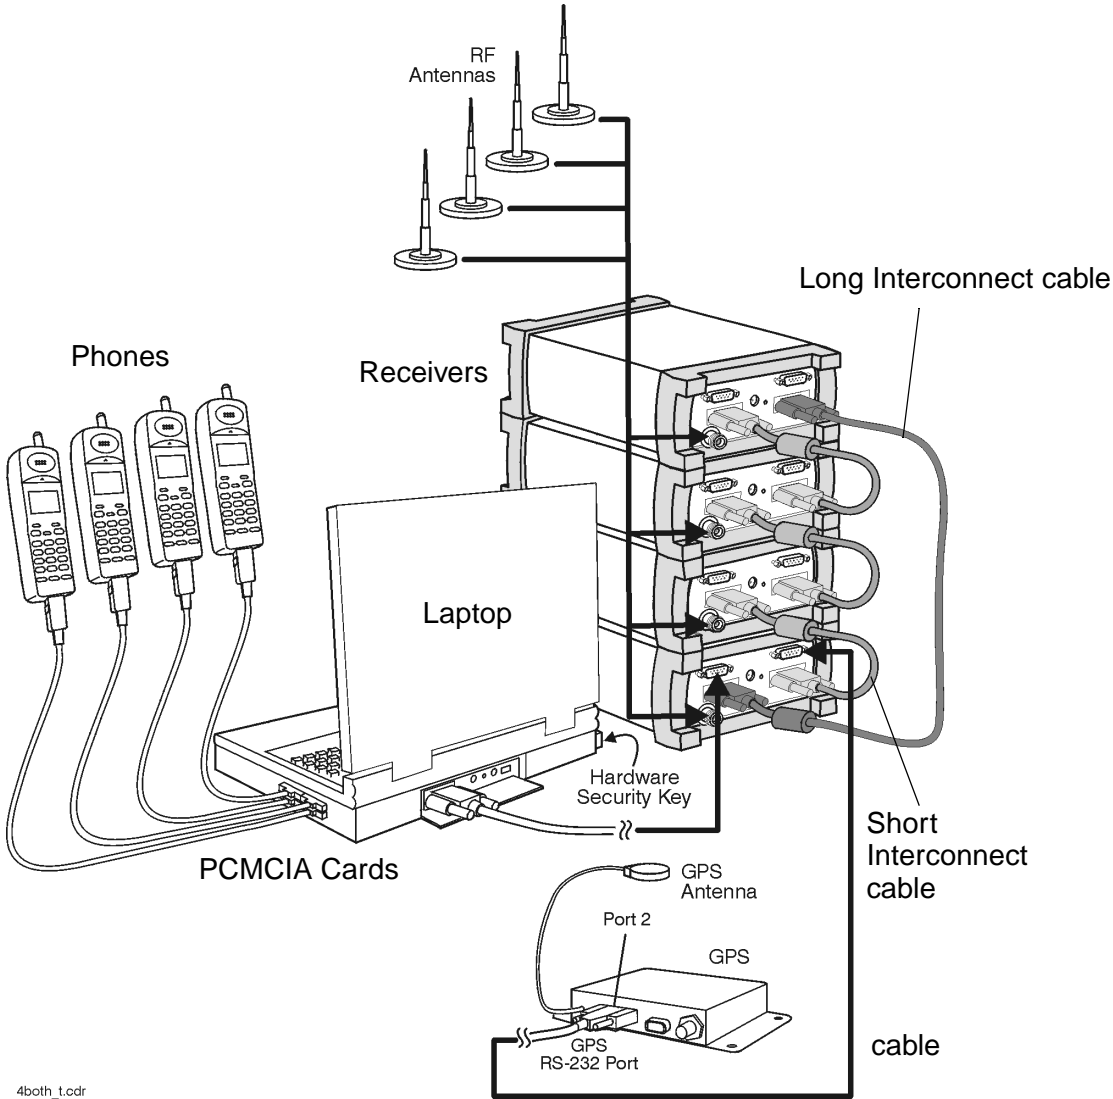

4both\_t.cdr

## Introduction

---

## Specifications and Hardware Information

This section lists specifications and characteristics of the systems.

Specifications	Describes warranted performance over the temperature range 0°C to +55°C (unless otherwise noted) after the temperature of the Receiver has been stabilized by 30 minutes of continuous operation.
Typical	Provides useful information by giving non-warranted performance parameters. Typical refers to test data at the fiftieth percentile for a 25°C room temperature.
Characteristics	Provides useful information by giving non-warranted performance parameters. Characteristics describe product information for parameters that are either not subject to variation, non-measurable, verifiable through functional pass/fail tests, or as a matter of routine, not measured. <i>Characteristics are printed in italics.</i>

### Calibration Cycle

Agilent Technologies warrants instrument specifications over the recommended calibration interval. To maintain specifications, periodic recalibrations are necessary. We recommend that the Receiver be calibrated at an Agilent Technologies service facility every 12 months.

## General System Software Functionality

Some of the functionality of the system is common across all wireless solutions. The following sections describe these cross-solution features.

- [“Data Export” on page 12](#)
- [“Alarms and Alerts” on page 16](#)
- [“Link Editor” on page 19](#)
- [“Real-time Mapping \(Option 160\)” on page 19](#)
- [“Report Generation” on page 20](#)
- [“Virtual Front Panel Printing” on page 21](#)
- [“Indoor Measurements \(Option 180\)” on page 21](#)

### Data Export

All measurement data can be exported from the Agilent Wireless Solutions database for display and post-processing. Any measurement data can be exported. The export function provides flexible filtering capability enabling you to define the specific data to be exported. Multiple data types can be exported to a single output file.

You can save export plans, and once saved, those plans can be quickly accessed for easy data export. An export plan is made up of:

Export Plan Element	Description
Data type	Defines which data will be exported. Column order is user-definable.
Alarm	Defines which alarms will be exported.
Note	Exports any user note or auto-note entered while recording data

## General System Software Functionality

Export Plan Element	Description
Processing functions	Defines the functions that will be applied to the data during export.
Exclusion rules	Defines a set of conditions that, if true, the associated data will be excluded from the export.
Geographic binning	Defines data-reduction process in which the data is averaged based on geographic area or distance

Several different operations can be executed in order to extract the desired data in the desired format.

### Processing functions

- None
- Choose
- Count - counts number of values above or below a specified threshold
- Field
- Match
- Maximum
- Minimum
- Sort - ascend or descend
- Value(x)

### Conditionals

- Greater than (>) a threshold
- Less than (<) a threshold
- All values

### Geographic binning methods

- **Bin size**  
User defines the size in meters of bin to be used.
- **Percentage of low and high values to discard**  
User defines the percentage of values to ignore from new raw data before calculating the bin.

## General System Software Functionality

- **Bin by location (grid binning)**

Define the reference bin and point of bin to be used, choices are:

- Center of bin
- Corner of bin

Each bin then has the following secondary choices:

- Southwest extent of drive data
  - ▲ Southeast extent of drive data
  - ▲ Northwest extent of drive data
  - ▲ Northeast extent of drive data
  - ▲ User-defined reference coordinates

- **Bin by distance travelled (linear binning)**

Data is averaged based on the distance traveled.

## Data Output Formats

The output formats supported by the Agilent Wireless Solutions are listed below. The system is designed to work with MapInfo®<sup>1</sup> in an integrated manner via an OLE (object link embedded) link to the MapInfo application (MapInfo via COM). With “Run MapBasic” checked, this exports the data, launches MapInfo, creates the necessary MapInfo table, and creates a thematic map display in MapInfo. This functionality requires MapInfo be present.

- Arcview®<sup>2</sup> compatible file
- MapInfo via COM (optional - run MapBasic program after export)
- MapInfo compatible file
- Planet ®<sup>3</sup> compatible file
- Text file

1. MapInfo® is a registered trademark of MapInfo Corp.
2. ArcView ® is a registered trademark of Environmental Systems Research Institute, Inc.
3. Planet ® is a registered trademark of Metapath.

## General System Software Functionality

### Export Column Data Delimiters

- Tab
- Comma
- Space

### Optional Data Parameters

- Position
- Altitude
- Time
- Date

### Optional Settings

- Fill column data
- Column headings
- Sequence Number

### Position Formats

- Decimal degrees with direction
- Deg: Min: Sec with direction
- Signed decimal degrees
- Signed Deg: Min: Sec
- UTM (Universal Transverse Mercator)

### Coordinate Datums

It is possible to change the coordinate datum being applied by the application. It can be changed during the plan configuration.

The following datums are available:

- AGD66
- AGD84
- European
- Hu-Tzu-Shan
- NAD27 (default) (North American)

## General System Software Functionality

- NAD83 (North American)
- OS36 (GB)
- SAD56 (North Chile)
- SAD56 (South Chile)
- SAD69 (Brazil)
- SAD69 (Mean)
- Tokyo (J6)
- Tokyo-Korea
- WGS72 (World Geodetic System)
- WGS84 (World Geodetic System)

## Alarms and Alerts

The Wireless Solutions Software has sophisticated alarm and alert capabilities. An alarm is a boolean expression made up of one or more conditions on single or multiple measurements, including comparisons of measurement results. An alert is a simplified alarm, defined as a single condition on a single measurement. An action, or actions, can be executed when an alarm or alert occurs. The re-trigger feature re-executes an alarm's actions if all the conditions have continuously been satisfied for a specified amount of time (alarm actions are normally executed only when the conditions transition from unsatisfied to satisfied). If an alert or alarm condition occurs, while data is being logged, each data record includes the alert/alarm information.

### Alarm Wizard

The alarm wizard can be used to simplify setting up some of the more common alarms.

#### Features of the Alarm Wizard Set up

- Specify type of alarm required
- Receive notification of new or changed measurements
- Receive notification of resources required
- Customize settings, actions and other user-definable aspects



## General System Software Functionality

- Set default Male and Female voice alarm messages

### Actions (Alarms and Alerts)

- Play a .WAV audio file
- Display a text message
- Pause recording, Continue (resume) recording, or Stop recording measurements

### Alert Conditions

- Greater than ( $>$ )
- Greater than or equal to ( $\geq$ )
- Less than ( $<$ )
- Less than or equal to ( $\leq$ )
- Equal to ( $=$ )
- Not equal to ( $\neq$ )

### Alert Operators

- Value
- Delta
- Maximum
- Minimum

### Alarm Conditions

- Greater than ( $>$ )
- Greater than or equal to ( $\geq$ )
- Less than ( $<$ )
- Less than or equal to ( $\leq$ )
- Equal to ( $=$ )
- Not equal to ( $\neq$ )
- Is a subset
- Is not a subset
- Sets intersect
- Sets do not intersect

## General System Software Functionality

- Range (inclusive)
- Range (exclusive)

## Alarm Preprocess Operators

- Value
- Maximum
- Minimum
- Subset
- Average
- Count
- Delta
- dField (a change in field value)
- Field
- MaxField
- MinField
- Median

## Alarm Condition Operators

- OR
- AND
- XOR (exclusive OR)

Any measurement can be an operand in an alert or alarm. Below are some examples of alerts and alarms.

- **Alerts**
  1. Minimum (CW Power Trace) > -90 dBm
  2. Maximum(Spectrum) < -100 dBm
- **Alarms**
  3. (Heading < 300) and (GPS FIX Type = GPS 3D)
  4. Subset (CW Power Trace) NOT Subset (value Channel Power List)

## General System Software Functionality

System status parameters can also be used as operands in alerts and alarms. For example, an alert can be set to trigger when the available disk space on the PC drops below 10 MB or when the GPS position fix is lost.

## Link Editor

The Link Editor is available from the Tools menu and enables you to link controls in one virtual front panel (the source) with parameters in another virtual front panel (the destination). Links can be configured from either Configuration mode or Collection mode. You can:

- Link simple measurement results to parameters for other measurements.
- Link measurement parameters to parameters for other measurements.
- Invoke an action (such as a button click) on all virtual front panels of the same type.
- Invoke an action (such as a button click) on a select set of virtual front panels of the same type.

## Real-time Mapping (Option 160)

Using the Positioning virtual front panel, you can display vector and raster-based maps against a real-time, plotted measurement result. The following features are available:

- Load and control map layers (TAB format).
- Add raster maps (GIF, TIF, and PNG format).
- Zoom in and Zoom out of map detail.
- Pan automatically and manually.
- Scale automatically and manually.
- Add labels and identify points.

## General System Software Functionality

- Display alarms or notes on map. Click on alarm or note symbol to display the message associated with the alarm or note.
- Link a measurement result, via the link editor for display on the map as a thematic value.
- Map result values, in color, via the legend button. Pre-defined legends exist for most common measurement results.
- Specify base stations in StationInfo.txt to have them display on the map.
- Link the active server for a phone to the map and the program will draw a vector line from the current position to the appropriate base station.

## Report Generation

The report generator is accessed using the **Tools > New Report (Ctrl+R)** menu option, or by clicking the report generator button in Collection mode. The reports generated are in HTML format with referenced images, which are captured in PNG format. The reports and images are stored in the report folder (if default installation was used:

C:\Program Files\Agilent Technologies\E74xx\Reports\reportname\). The following details can be entered by the user:

- Title (also used for the report folder name)
- User name
- Company name
- Time report generated. By default, this is the PC system time.
- Date. By default, this is the PC system date.
- Location. By default, these are the GPS coordinates identified at the time the report was generated.
- Comments. This is optional text, entered by the user.

## General System Software Functionality

- A report can include all opened Virtual Front Panels, or just those minimized.
- A report may also contain textual and/or table information for specific measurements.

Once the report has been generated, it is displayed on the screen, using your default browser. Reports can be viewed by selecting the Reports tab while in Configuration mode. Reports can be imported and exported.

## Virtual Front Panel Printing

It is possible to print virtual front panels. This feature is accessed from the File menu. There are two print commands:

- Print (Ctrl+P) prints the application main window and all other virtual front panels.
- Print VFP prints just the active virtual front panel.

The active virtual front panel is the window with the blue title bar (if default windows colors are used).

## Indoor Measurements (Option 180)

The Agilent Wireless Solutions Software can be used for testing and measuring indoor coverage areas. These measurements are taken without reference to GPS or dead-reckoning position information.

An indoor system supports the following hardware:

- Phones
- Receivers (no PN correlation for CDMA)
- Pen tablet computer
- Computer pen input devices

## General System Software Functionality

- Full set of backpack accessories
- Portable power supply for computer and receiver

The measurement control virtual front panel has the following features

- Selection of data points, such as user features like CW sources
- Waypoint information to specify distribution of data between two waypoints.
- Automatic interpolation of data between waypoints, during recording
- Imported maps converted to layer map files. Supports GIF, TIF, and PNG formats
- Zoom in and zoom out of map area.
- Automatic and manual pan.
- Automatic and manual scaling.
- Display alarms and notes on map. Click on alarm or note symbol to display the message associated with the alarm or note.
- Link measurements to display thematic values.
- Map result values in color via the legend button. Pre-defined legends exist for most common measurement results.

---

# Agilent E7478A Software Specifications

## Software Measurement Specifications

The Agilent E7478A measurement software has the following measurement capabilities and functionality:

- [“GPRS data Measurements” on page 23](#)
- [“Data Call Control” on page 25](#)
- [“Data Measurement” on page 26](#)
- [“Data Server” on page 27](#)

## GPRS data Measurements

Part of Agilent E7478A Option 100, 150.

The Agilent E7478A system extracts measurement data from the mobile handset. You control extraction of the specific measurement types by selecting the various groups of measurement information. The data types are listed below.

### Measurement Controls

- GPRS Mobility Management (GMM) Information
  - Packet TMSI
  - TLLI
  - Location Area Code (LAC)
  - Routing Area Code (RAC)
  - Mobile Network Code (MNC)
  - Mobile Country Code (MCC)
- RLC/MAC Information
  - C Value
  - Signal Variance

## Agilent E7478A Software Specifications

- Output Power
- MS Class
- Allocation Type
- Time slot allocation numbers (TS)
- Coding Schemes used (CS)
- Temporary Block Flow (TBF)
- Temporary Block Indicator (TBI)
- Quality of Service
  - RLC BLER
  - RLC/MAC Data Throughput information
  - Re-transmission RLC Block Rate
- Quality of Service Strip chart

This enables the strip chart. The chart displays the BLER and C Value used.

- Session Management (SM) and SNDCP information
  - GMM State
    - ▲ Idle
    - ▲ Stand-by
    - ▲ Ready
    - ▲ No Service
  - Session Management State
    - ▲ PDP Inactive  
The network has accepted a detach of the PDP context or has never had a PDP context established. This is usually the state found when the phone is first switched on.
    - ▲ PDP Active Pending  
The network has received a request to establish a PDP context. This is a request sent by the mobile.
    - ▲ PDP Inactive Pending  
The network or mobile has requested termination of the PDP context.
    - ▲ PDP Active  
The network has provided a PDP context and is ready to transfer data.
  - SNDCP Compression (green - ON, red - OFF)



## Agilent E7478A Software Specifications

- ▲ Header compression
- ▲ Data compression

### Display controls

Currently only the QoS Strip Chart markers are enabled.

## Data Call Control

Part of Agilent E7478A option 200.

The Agilent E7478A system is used to set up a data call sequence using the sequence editor. The simulates typical data transmission and receptions that can be found in a packet switched call environment. The data call sequence uses the dial-up instance setup by the user, using the dial-up configuration wizard supplied with the Windows operating system.

### Message type selection controls

- Data Call Sequence Editor
  - Predefined actions:
    - ▲ Connect
    - ▲ Disconnect
    - ▲ Ping
    - ▲ Traceroute
    - ▲ Small web
    - ▲ Medium web
    - ▲ Large web
    - ▲ Financial
    - ▲ Email
    - ▲ Wap
  - Address and Dialup selection. Allows for predefined dialup instances and IP address input.
- Action repeats
  - Validation of data sequence
  - Add and delete actions
  - Automatic Data Call Sequence parameters

## Agilent E7478A Software Specifications

- Sequence repeats
- Base time out (ms)
- Additional time out (ms/kb)
- Window length (integer)
- Action retries
- Data Call Sequence Information
  - Data call sequences remaining
  - Connection time
  - Dropped data call sequences
  - Message log
  - Sequence progress bar
  - Radio resource
  - Mobility management

## Data Measurement

Part of Agilent E7478A option 200.

The Agilent E7478A software provides data measurement analysis. The data measurements provide generic data, end-to-end measurement. The data measurement capability utilizes a client/server architecture, where the client is the test mobile and laptop combination and the server is a remote computer connected to an IP interface within the network. The system is designed to allow a single server to support up to 10 clients, depending on server link speed. The server is designed to be unmanned once configured.

### Measurements types

- IP Throughput (Kbps)
  - Line number
  - Rate
  - Average throughput
  - Maximum throughput
  - Minimum throughput
- Application throughput (Kbps)

## Agilent E7478A Software Specifications

- Line number
- Rate
- Average throughput
- Maximum throughput
- Minimum throughput
- IP BER
  - Line number
  - Ratio
  - Average
  - Maximum
  - Minimum
- Datagrams
  - Per page - transmitted and received
  - Lost - transmitted and received
  - Out of order - transmitted and received
  - main display continues to update

### Display controls

Currently only the display markers are enabled. The display shows the transmission and received IP and application throughputs.

## Data Server

Part of Agilent E7478A Option 220.

The Agilent E7478A data server software forms part of the client/server architecture set up for data measurements system. The software is designed to be operated without any user interaction or user interface.

The data server software is located on a remote computer connected to an IP interface within the network. As data is sent from the client(s), it is processed by the data server. Measurement reports and compatible data information is returned to the client for processing and display.

## **Agilent E7478A Software Specifications**

The information returned by the server to the client(s), enables the client to display the network data measurements. The client/server system is technology independent.

The data server software works with TCP/IP protocol and it is recommended that the data link be at least 512K link for a 10 client (phone) support.

## General Hardware Specifications

### Personal Computer Recommendations, Minimum

The PC requirements differ depending on the operating system, and on whether you wish to collect data from a single phone or multiple phones.

#### Single phone

- Windows 95/98
  - Minimum: 266 MHz Pentium II or III, 64 Mbytes RAM
  - Recommended: 500 MHz Pentium III, 128 Mbytes RAM
- Windows NT 4.0 +service pack 6 or later / Windows 2000
  - Minimum: 266 MHz Pentium II or III, 64 Mbytes RAM
  - Recommended: 500 MHz Pentium III, 128 Mbytes RAM

#### Multiple phone

- Windows 95/98
  - Minimum: 333 MHz Pentium II or III, 64 Mbytes RAM
  - Recommended: 500 MHz Pentium III, 128 Mbytes RAM
- Windows NT 4.0 +service pack 6 or later / Windows 2000
  - Minimum: 333 MHz Pentium II or III, 64 Mbytes RAM
  - Recommended: 500 MHz Pentium III, 128 Mbytes RAM

---

#### NOTE

Windows 95 can not be used for Data and GPRS measurement systems. Also, Dial Up Networking needs to be installed on Windows 98 and Windows NT 4.0 for Data and GPRS measurement systems.

---

## General Hardware Specifications

### Common Requirements

- RS-232 DB9 Serial Port
- Parallel port: 25-pin bidirectional
- 110 Mbytes disk space for software installation
- 200 Mbytes disk space for data (recommended)
- CD-ROM drive recommended
- 800 x 600 display resolution minimum
- For multiple phone capability
  - Two PCMCIA slots
  - USB port with USB/serial hub (recommended)

### External GPS Receiver Requirements<sup>1</sup>

- TSIP, TAIP, or NMEA communication protocol
- RS-232 (DB9) interface

### GPS and Vehicle Fitted Navigation Systems Supported

- Bosch Travel Pilot RGS08 Professional
- Magneti Marelli RP Nav200
- GARMIN GPSII/III/IIIplus
- Trimble DR
- Trimble 455/DR and 450
- Trimble SVeeSix
- Trimble 400

### Differential GPS Receiver Supported

- DCI RDS-3000

1. For Agilent E7473A CDMA options 110, 111, or 120 and Agilent E7490A option 111, any external GPS will have to output a GPS 1 pulse/second signal for improved frequency accuracy.

## General Hardware Specifications

### Antennas

- Receiver RF input specifications:
  - Input impedance: 50Ω
  - Connector type: Type-N

# General Hardware Specifications



## Agilent E7478A Hardware Specifications

For full details on receiver types and options, refer to the options offered with the Agilent E7475A system.

### Supported Phones

- Sagem OT 96MGPRS

This includes:

- Break out box
- Installation CD containing configuration documentation
- Connection cabling
- Power supply

## Agilent E7478A Hardware Specifications

## Agilent E7478A System Options

For details on how to set up and configure your system, refer to the documentation shipped with your system and your phone. Contact your local Agilent sales and service office for information about ordering these options.

Option	Description	More Details On Page
100	GPRS phone measurements software license	<a href="#">page 35</a>
150	Multiple GPRS test mobiles software license	<a href="#">page 36</a>
160	Real-Time Mapping software license	<a href="#">page 36</a>
180	Indoor Measurement software license	<a href="#">page 36</a>
200	Data Measurements software license	<a href="#">page 36</a>
220	Data Measurements Server software license	<a href="#">page 36</a>
560	GPRS GSM/DCS Test Mobile (Sagem OT96M-GPRS)	<a href="#">page 37</a>
A1X to ARS	Country Specific Power Localization	<a href="#">page 38</a>

### Software License Options

Option	Part Number	Description
100		<ul style="list-style-type: none"> <li>GPRS Phone software license</li> <li>Software CD</li> <li>Software License security key</li> </ul>
	E7474-90035	<ul style="list-style-type: none"> <li>Getting Started Guide</li> </ul>
	E7478-90006	<ul style="list-style-type: none"> <li>E7478A GPRS and Data System Information Guide</li> </ul>

## Agilent E7478A System Options

Option	Part Number	Description
150		<ul style="list-style-type: none"> <li>• Multiple GPRS Phone software license</li> <li>• Software CD</li> <li>• Software License security key</li> </ul>
	E7474-90035	<ul style="list-style-type: none"> <li>• Getting Started Guide</li> </ul>
	E7478-90006	<ul style="list-style-type: none"> <li>• E7478A GPRS and Data System InformationGuide</li> </ul>
160		<ul style="list-style-type: none"> <li>• Real-Time Mapping software license</li> <li>• Software CD</li> <li>• Software License security key</li> </ul>
180 <sup>a</sup>		<ul style="list-style-type: none"> <li>• Indoor Measurement software license</li> <li>• Software CD</li> <li>• Software License security key</li> </ul>
	E7474-90038	<ul style="list-style-type: none"> <li>• Indoor Getting Started Guide</li> </ul>
	E7478-90006	<ul style="list-style-type: none"> <li>• E7478A GPRS and Data System Information Guide</li> </ul>
200		<ul style="list-style-type: none"> <li>• Data Measurements software license</li> <li>• Software CD</li> <li>• Software License security key</li> </ul>
220		<ul style="list-style-type: none"> <li>• Data Measurements Server software license</li> <li>• Data Server software CD</li> <li>• Software License security key</li> </ul>
	E7475-90012	<ul style="list-style-type: none"> <li>• Server Installation Guide</li> </ul>

- a. Enables indoor measurement correlation to an imported floorplan/map in the absence of GPS. Indoor option must operate with other, 100-series, measurement software options in order to collect and record measurement data. Supports \*.tab, \*.gif, \*.tif formats for floorplan import.

## Phone Options

All phone options include a breakout box, interface cables, software CD containing installation and configuration documentation, battery charger.

Option	Description
560	GPRS and Data test mobile with accessories Sagem OT 96MGPRS

## Power Localization Options

In order that the correct power supplies and mains cables are supplied with your system, it is necessary to have the correct power localization. The localization options listed below only change the power cord and charger types supplied. They do not affect the software or manual language, which is U.S. English.

Option	Description	
ARM	Argentina - English	
ARS	Asia Pacific (UK Cord) / English	
ABG	Australia - English	
A1X	Chile - English	
AKM	China - English	
ACE	Denmark - English	
ABB	Europe - English	
AKJ	Israel - English	
ACQ	S. Africa - English	
ACD	Switzerland - English	
AKL	Thailand	
ABA	U.S. - English	
ABU	United Kingdom - English	

## Agilent 86154A General System Accessories

The following options are offered by Agilent Technologies. By following the general setup and specifications, you can build your own system according to your needs, based on the standard system. The system can be integrated with a GPS receiver and mapping software. The digital receiver is not intended for stand-alone usage and does not function unless properly connected to one of the Agilent Wireless Solutions Systems.

These accessory options can ordered for any technology.

### NOTE

To order any of the following options and accessories, specify model number 86154A and the option number, unless otherwise stated. For some accessories, such as Options 010, 030, 034, it is also necessary to indicate the Power Localization Options as shown on Page 48.

### General System Accessories

Agilent Order Number	Option	Description	More Details On Page
86154A	010	Laptop PC Omnibook 6000 series model	<a href="#">page 42</a>
86154A	020	Extra dual port ruggedized PCMCIA serial I/O card	<a href="#">page 42</a>
86154A	030	Fujitsu Pen Tablet PC	<a href="#">page 43</a>
86154A	032	Fujitsu Pen Tablet PC Accessories	<a href="#">page 43</a>
86154A	034	Fujitsu Pen Tablet PC Battery Kit	<a href="#">page 43</a>
86154A	036	Universal Serial Bus (USB) 4 port adapter	<a href="#">page 44</a>

## Agilent 86154A General System Accessories

Agilent Order Number	Option	Description	More Details On Page
86154A	099	Multi-Receiver Connection Kit	<a href="#">page 42</a>
86154A	210	Trimble Placer 455-DR GPS Receiver	<a href="#">page 41</a>
86154A	211	Adapter Cable for use with a Trimble Placer GPS/DR Receiver	<a href="#">page 41</a>
86154A	212	Adapter Box for use with Trimble Placer GPS 455 Receiver	<a href="#">page 41</a>
86154A	230	Differential GPS Receiver Kit <sup>a</sup>	<a href="#">page 41</a>
86154A	410	Magnetic Mount PCS Band Antenna	<a href="#">page 44</a>
86154A	425	Multiband Antenna	<a href="#">page 44</a>
86154A	430	Magnetic Mount Cellular Band Antenna	<a href="#">page 44</a>
86154A	500	Receiver Power Kit	<a href="#">page 45</a>
86154A	507	Indoor Backpack	<a href="#">page 45</a>
86154A	510	Vehicle Mounting Kit	<a href="#">page 45</a>
86154A	531	Briefcase Carrier	<a href="#">page 40</a>
86154A	540	Vehicle Based Drive Test Display System	<a href="#">page 45</a>
86154A	<b>ABA to ARS</b>	Country specific power localization	<a href="#">page 47</a>

a. Not available for the E7476A, which uses a receiver that only ships with internal GPS.



## Agilent 86154A General System Accessories

### External GPS Receiver Options

Option	Part Number	Description
210		Trimble Placer 455-DR GPS Receiver <sup>a</sup> with:
	E6450-80002	Magnetic Mount GPS Antenna for Trimble Placer
	8120-8650	Interconnect Cable (3) RS-232 DB9-M to DB9-F
	5182-1290	GPS Cigarette Lighter Power Adapter
	E7450-60005	Adapter Box Trimble Placer Receiver
		Documentation and software to calibrate the gyroscope and odometer is available on the Web at <a href="http://www.trimble.com">http://www.trimble.com</a>
211		GPS/DR Receiver Adapter Cable
	E7450-60003	Adapter Cable
212	E7471-60007	Adapter Box for GPS/DR 455 Receiver with:
	E7450-60005	Adapter Box
	8120-8650	Interconnect Cables (3) RS-232 DB9-M to DB9-F
230	1150-5057	Differential GPS Receiver, RDS 3000 manufactured by DCI (Differential Corrections, Inc.). Includes utilities disk and Installation and Operator's Manual and:
	0960-0979	FM Antenna
	8120-8650	Serial Cable DB9-M to DB9-F
	5182-4794	Interconnect Cable RS-232 DB9-F to DB9-F

a. The Trimble Placer GPS 455 provides Dead Reckoning for use when the GPS signal cannot be received.

## Agilent 86154A General System Accessories

### Laptop PC Option

Option	Part Number	Description
010	E7450-60014	Laptop PC with a minimum specification of:  Pentium II Processor  Windows 95/98 (loaded)  64 Mbytes RAM  6 Gbytes Hard Disc  24 x CD-ROM  Enhanced lithium ion battery pack
	F1455A	Auto power adapter  14.1 inch XGA TFT display

### Miscellaneous Accessories

Option	Part Number	Description
020		Dual Port Ruggedized PCMCIA Serial I/O Card
	E7471-80004	Socket dual port ruggedized serial I/O card connects to two phones to the computer through the PCMCIA slot. Connecting four phones requires two PCMCIA slots on the computer and two dual port ruggedized serial I/O cards.
099		Receiver Interconnect Cable Kit
	E7450-60001	15-pin Interconnection Cable 380mm (15in) (short)
	E7450-60002	15-pin Interconnection Cable 635mm (24in) (long)

## Agilent 86154A General System Accessories

### Fujitsu Pen Tablet PC Options

Option	Part Number	Description
030	86154-60007	Pen Computer Kit including Pen Tablet PC Stylistic 2300 with a 1 year warranty and the following minimum specification and parts. Note: More information on the Stylistic 2300 pen computer can be found on the Fujitsu web site, <a href="http://www.fpsi.fujitsu.com/product/st2300.htm">http://www.fpsi.fujitsu.com/product/st2300.htm</a>  Pentium II Processor  4 Gbytes Hard Drive  64 Mbytes RAM  Windows 98 (loaded)
	86154-60012	External 3.5" Floppy Disc Drive
	86154-90009	Pen Tablet Stylus
	86154-60008	AC Adapter
	E7474-90010	Pen Tablet Getting Started Guide
	86154-60055	Travel Case
	86154-60009	In Service Case
	86154-60056	Harness for Service Case
	86154-60054	Hands Free Platform
	86154-60015	PCMCIA LAN Card
032	86154-60016	Car Auto Power System (12-24 VDC input)
034		Pen Tablet PC Battery Kit, consisting of:
	86154-60010	Lithium Ion Battery Pack (spare)
	86154-60011	External Battery Charger
	86154-60008	AC Adapter

## Agilent 86154A General System Accessories

Option	Part Number	Description
036	86154-60004	Universal Serial Bus (USB) 4 Port Adapter kit
	86154-60021	4 Port USB Hub
	8121-0136	Extension Cable

## Antenna Options

Option	Part Number	Description
410	1150-5059	Magnetic Mount PCS Band Antenna
430	1150-2061	Magnetic Mount Cellular Band Antenna

## Indoor Antenna Options

Option	Part Number	Description
425	86154-60047	Multiband Antenna Kit
	86154-60059	PCS/Cellular/JCDMA Antenna (green)
	86154-60058	GSM/DCS/Korean CDMA Antenna (orange)
	86154-60061	3GPP Antenna (yellow)
	E6450-00013	Ground Plane
	E6450-60057	Cable: Antenna to Receiver
	1250-1753	F SMA Connector

## Portable Accessory Options

Option	Part Number	Description
500	86154-60005	Receiver Power Kit
	E6450-60051	Receiver Battery and Cable
	86154-60019	Receiver Battery Charger
507	86154-60006	Indoor Backpack and Accessories
	86154-60020	Indoor System Backpack
	86154-60057	Phone Pouch
	E7474-90010	Pen Computer Getting Started Guide
	E7474-90024	Back Pack Packing Information Sheet
510	86154-60033	Vehicle Mounting Kit
		Mounting Screws

## Agilent 86154A Option 540 Vehicle Based Drive Test Display System

The 86154A Option 540 is only available for order in the USA and Latin America.

All 86154A Option 540 vehicle-mounted display system components are independent of wireless access technology. They work with any Agilent wireless solutions.

### Display

- 12.1-inch diagonal, flat-panel color LCD display with 800 x 600 resolution
- View multiple virtual front panels (VFPs) at the same time
- Power cords included for use with both 120 V ac from a power inverter, or 12 V dc from a vehicle

## Agilent 86154A General System Accessories

- Laptop connections - RS232
- Large, bright display for use in direct sunlight, with adjustable brightness for nighttime viewing
- Pedestal mounted
- Application-specific keypad
- Transmission hump mounting (typical in sport utility vehicles)
- Flat floor mounting (typical in minivans)

### **Functions during the drive including:**

- "Freeze" and re-start measurements
- Start and stop recording
- Maximize, normalize and minimize measurement (VFPs)
- Navigate between VFPs
- Start and stop calls
- Show or hide measurement and display controls
- Show or hide toolbars
- Add an auto-numbered note to the measurement data
- Open and navigate the window menu in the drive-test software
- Create a report
- Perform a tools re-configure
- Clear alarms and other dialog boxes
- Move between open windows applications
- Turn alarms on and off
- Enable/disable links

## Power Localization Options

In order that the correct power supplies and mains cables are supplied with your system, it is necessary to have the correct power localization. The localization options listed below only change the power cord and charger types supplied. They do not affect the software or manual language, which is U.S. English.

Option	Description	
ARM	Argentina - English	
ARS	Asia Pacific (UK Cord) / English	
ABG	Australia - English	
AKM	China - English	
ACE	Denmark - English	
ABB	Europe - English	
AKJ	Israel - English	
ACD	Switzerland - English	
AKL	Thailand	
ABA	U.S. - English	
ABU	United Kingdom - English	

## Agilent 86154A General System Accessories



---

## Part Number Summary

The following list summarizes the part numbers that can be ordered from Agilent Technologies.

---

### NOTE

When ordering parts from Agilent Technologies, it is recommended that you **order using the system option numbers**

CDMA Systems - Agilent E7473A

TDMA Systems - Agilent E7474A

GSM Systems - Agilent E7475A

W-CDMA Systems - Agilent E7476A

cdma2000 Systems - Agilent E7477A

Over Air Systems - Agilent E7490A

Accessories - see Agilent 86154A options.

However, if you have a need for a specific part, the following numbers can be used.

---

For more information on ordering parts or options, contact your local Agilent Technologies sales and service office.

Description	Part Number
Receiver	
AC/DC Power Supply for receiver	0950-2679
Magnetic Mount Cellular Band Antenna	1150-2061
Magnetic Mount Mini GPS Antenna for internal GPS – SMA	1150-2085
Magnetic Mount Mini GPS Antenna for internal GPS (Obsolete) – SMB	E6450-80002
Magnetic Mount PCS Band Antenna	1150-5059

## Part Number Summary

Description		Part Number
Receiver (continued)	Antenna Adapter Connector (N Type to TNC)	1200-1897
	Firmware Write Enable Key	E6450-60007
	Cigarette Lighter Power Adapter	E6450-60010
	2 AMP, 32 V, FB fuse for Cigarette Power Adapter	2110-0002
	15-pin Interconnection Cable 380mm (15in) (short)	5182-4794
	15-pin Interconnection Cable 635mm (24in) (long)	E7450-60002
	Pulse trigger interface cable	E7450-60015
	Magnetic Mount 1.7-1.9 GHz Band Antenna	E7450-80004
	Magnetic Mount 1.9 - 2.1 GHz Band Antenna	E6455-80003
	Magnetic Mount 900 MHz Band Antenna	E7450-80005
	Magnetic Mount GSM 900 RF Antenna	E7471-60009
	Vehicle Mounting Kit	86154-60033
	Universal Adapter (TNC) for RF Antenna	1200-1897
	Magnetic Mount DCS 1800 RF Antenna	E7475-60006
	Magnetic Mount GSM/PCS 1900 RF Antenna	E7475-60007
Universal Adapter for RF Antenna	E7475-80005	
External GPS	Bulkhead Mount GPS antenna for Trimble Placer (Obsolete)	1150-5061
	Trimble Placer 455 GPS Receiver	1150-5058
	GPS Cigarette Lighter Power Adapter	5182-1290
	Interconnect Cable RS-232 DB9-M to DB9-F	8120-8650
	Magnetic Mount Mini GPS Antenna for internal GPS	E6450-80002
	Adapter Cable for use with a Trimble Placer GPS/DR Receiver	E7450-60003
	Adapter Box for use with Trimble Placer GPS 455 Receiver	E7450-60005

## Part Number Summary

Description	Part Number
Adapter Box and RS-232 Interconnect Cables (quantity 3)	E7471-60007
Differential GPS	FM Antenna 0960-0979
	Differential GPS Receiver, RDS 3000 manufactured by DCI (Differential Corrections, Inc.). Includes utilities disk and Installation and Operator's Manual. 1150-5057
	Interconnect Cable RS-232 DB9-F to DB9-F 5182-4794
Phone Parts	Kyocera QCP-2035.3035 Phone Data Cable 5060-8785
	Kyocera QCP 3035 Power Charger Adapter 5060-8786
	Interconnect Cable for QCP 2700, QCP 820, QCP-1920, Sony CM-M1300, Sony CM-B1201SPR, and Sony CM-S1101STR phones E6450-60030
	Interconnect Cable for QCP-800, QCP-1900, Sony CM-D500, Sony CM-D600 phones E6450-60029
	Interconnect Cable for the Samsung SCH-1000 phone 8120-8754
	Powered Interface Cable for QCP-800, QCP-1900, Sony CM-D500, Sony CM-D600 phones E6450-60034
	Powered Interface Cable for QCP 2700, QCP 820, QCP-1920, Sony CM-M1300, Sony CM-B1201SPR, and Sony CM-S1101STR phones E6450-60033
	Interface Cable for Toshiba CD-10T J-CDMA Phone E7452-60003
	Powered Interface Cable for Toshiba CD-10T J-CDMA Phone E7474-60008
	GSM Phone Data Cable E7471-62005
	GSM Car phone and data kit E7475-60028
	Interface Cable for Motorola StarTAC TDMA Phone E7474-60004
	Powered Interface Cable for Motorola StarTAC TDMA Phone E7474-60006
	Power Interface Cable for Sagem Test Mobile E7475-62010
	Interface Cable for QCP-860, 1960, 2760 Phones E7474-60023

## Part Number Summary

Description		Part Number
	Powered Interface Cable for QCP-860, 1960, 2760 Phones	E7474-60031
	Samsung SCH-X100 Phone Data Cable	86154-60050
	Samsung SCH-X100 Battery Charger Adapter	86154-80005
Accessories	Extra Dual Port Ruggedized PCMCIA Serial I/O Card	1150-2067
	Dual Port PCMCIA Serial I/O Card	E7471-80004
	Single Port PCMCIA Serial I/O Card	0960-0992
	Auto Power Adapter	86154-85001
	Blank Software License Security Key	E7474-10007
Documentation	Getting Started Guide	E7474-90035
	Indoor Getting Started Guide	E7474-90038
	E7473A CDMA System Information Guide	E7473-90019
	E7474A TDMA System Information Guide	E7474-90034
	E7475A GSM System Information Guide	E7475-90011
	E7476A W-CDMA (UMTS) System Information Guide	E7476-90004
	E7477A cdma2000 System Information Guide	E7477-90004
	E7478A GPRS and Data System Information Guide	E7478-90006
	E7490A Over Air Test System Information Guide	E7490-90003