



**Agilent N2732A
7000 Series Oscilloscope
Rack Mount Kit**

Installation Guide

Notices

© Agilent Technologies, Inc. 2008

No part of this manual may be reproduced in any form or by any means (including electronic storage and retrieval or translation into a foreign language) without prior agreement and written consent from Agilent Technologies, Inc. as governed by United States and international copyright laws.

Manual Part Number

N2732-92000

Edition

First Edition, January 2008

Printed in Malaysia

Agilent Technologies, Inc.
395 Page Mill Road
Palo Alto, CA 94303 USA

Warranty

The material contained in this document is provided “as is,” and is subject to being changed, without notice, in future editions. Further, to the maximum extent permitted by applicable law, Agilent disclaims all warranties, either express or implied, with regard to this manual and any information contained herein, including but not limited to the implied warranties of merchantability and fitness for a particular purpose. Agilent shall not be liable for errors or for incidental or consequential damages in connection with the furnishing, use, or performance of this document or of any information contained herein. Should Agilent and the user have a separate written agreement with warranty terms covering the material in this document that conflict with these terms, the warranty terms in the separate agreement shall control.

Technology Licenses

The hardware and/or software described in this document are furnished under a license and may be used or copied only in accordance with the terms of such license.

Restricted Rights Legend

If software is for use in the performance of a U.S. Government prime contract or subcontract, Software is delivered and licensed as “Commercial computer software” as defined in DFAR 252.227-7014 (June 1995), or as a “commercial item” as defined in FAR 2.101(a) or as “Restricted computer software” as defined in FAR 52.227-19 (June 1987) or any equivalent agency regulation or contract clause. Use, duplication or disclosure of Software is subject to Agilent Technologies’ standard commercial license terms, and non-DOD Departments and Agencies of the U.S. Government will receive no greater than Restricted Rights as

defined in FAR 52.227-19(c)(1-2) (June 1987). U.S. Government users will receive no greater than Limited Rights as defined in FAR 52.227-14 (June 1987) or DFAR 252.227-7015 (b)(2) (November 1995), as applicable in any technical data.

Safety Notices

CAUTION

A **CAUTION** notice denotes a hazard. It calls attention to an operating procedure, practice, or the like that, if not correctly performed or adhered to, could result in damage to the product or loss of important data. Do not proceed beyond a **CAUTION** notice until the indicated conditions are fully understood and met.

WARNING

A **WARNING** notice denotes a hazard. It calls attention to an operating procedure, practice, or the like that, if not correctly performed or adhered to, could result in personal injury or death. Do not proceed beyond a **WARNING** notice until the indicated conditions are fully understood and met.

In This Guide...

This guide contains instructions for installing the 7000 Series Oscilloscope Rack Mount Kit. The Rack Mount Kit provides a support shelf and hardware for mounting Agilent 7000 Series Oscilloscopes into Electronic Industries Association (EIA) standard 19-inch (487-mm) rack cabinets.

The Rack Mount Kit includes the following parts:

Quantity	Part Number	Description
1	N2732-68702	Tray, Rack Assembly
1	N2732-01201	Clamp, Top
2	N5470-03701	Rail, Rack Mount
2	N5470-24101	Trim Plate, Side
1	N5470-24102	Trim Plate, Top
1	N2732-68701	Trim Plate, Bottom
2	0515-0456	Screw, machine, pan head, with washer, Torx T20 M4 x 0.7, 20 mm
2	0515-2049	Screw, machine, flat head, Torx T20 M5 x 0.8, 16 mm
4	2360-0806	Screw, machine, pan head Philips, 10-32 x 0.5 in
12	0590-0804	Nut, sheet metal, 10-32 x .5
8	E9900-06001	Screw, special, pan head, Philips, 10-32 x 0.625 in



N5470-24102 Top Trim Plate



N5470-24101 Side Trim Plate, Qty. 2



N2732-68701 Bottom Trim Plate



HARDWARE

Quantity	Part Number		Description
2	0515-0456		Screw, machine, pan head, with washer, Torx T20 M4 x 0.7, 20 mm
2	0515-2049		Screw, machine, flat head, Torx T20 M5 x 0.8, 16 mm
4	2360-0806		Screw, machine, pan head Philips, 10-32 x 0.5 in
12	0590-0804		Nut, sheet metal, 10-32 x .5
8	E9900-06001		Screw, special, pan head, Philips, 10-32 x 0.625 in


Installation

You will need the following tools to install the Rack Mount Kit: T20 Torx driver, and a #2 Phillips screwdriver.

- 1 Set the oscilloscope on its back. Remove the T20 screw from each leg.




- 2 Set the oscilloscope onto the N2732-68702 Rack Tray Assembly.

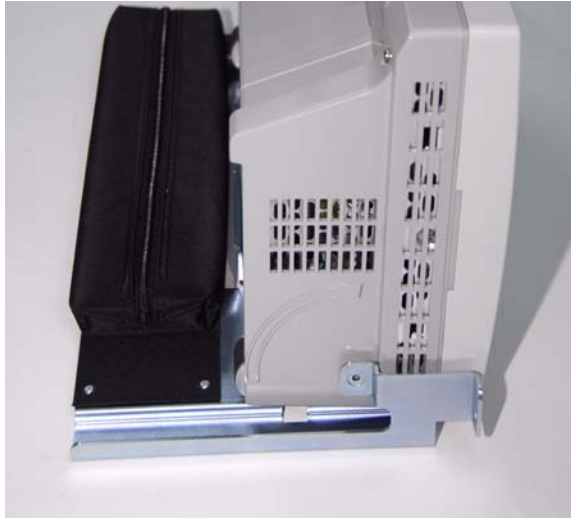

Installation

- 3 Secure the oscilloscope to the Rack Tray Assembly using (Qty. 2) 0515-0456 screws.

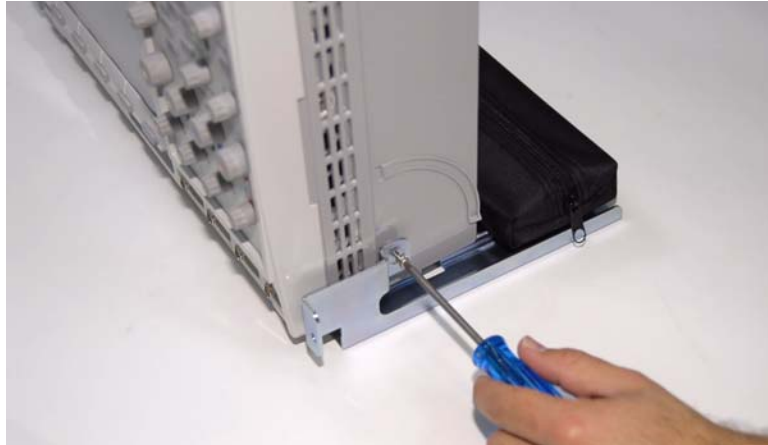

- 4 Remove the oscilloscope's strap handle using a Torx T20 driver.



Installation

- 5 Attach the N2732-01201 Top Clamp to the top of the oscilloscope using (Qty 2) 0515-2049 screws.



- 6 Attach the two N5470-03701 Rack Mount Rails to your rack using (Qty. 4) 2360-0806 screws and (Qty. 4) 0590-0804 nuts.



Installation

- 7 Slide the assembled oscilloscope and Rack Tray Assembly into the rack.



- 8 Secure the two Side Trim Plates to the rack using (Qty. 4) E9900-06001 screws and (Qty. 4) 0590-0804 nuts. Assembly may be easier if you slightly lift the oscilloscope to align the holes.



- 9** Secure the N5470-24102 Top Trim Plate to the rack using (Qty. 2) E9900-06001 screws and (Qty. 2) 0590-0804 nuts.



10 Bottom Trim Plate:

- a** Optional: If you plan to connect cables from the oscilloscope to the BNC feedthroughs, connect them now. It may be difficult to connect them after securing the bottom trim plate.
- b** Optional: If you plan to route the MSO cable through the notch in the Bottom Trim Plate, route it now.
- c** Secure the N2732-68701 Bottom Trim Plate to the rack using (Qty. 2) E9900-06001 screws and (Qty. 2) 0590-0804 nuts.



Installation

- 11 Store the oscilloscope's legs, strap handle, and related hardware in the zipper pouch on the rear of the Rack Tray.



You have completed installation of the Rack Mount Kit.



Manual Part Number N2732-92000

