

**Agilent Technologies**

Innovating the HP Way

---

# Agilent N2727A Printer Kit for Agilent 54600-series Oscilloscopes



Publication number N2727-92001

Printed February 2000

© Copyright Agilent Technologies 2000


All Rights Reserved

---

## Installation Guide

## Getting Started

- 1 Remove the screw from the rear tab on the accessory pouch.
- 2 Slide the tabs on the front of the accessory pouch into the recessed holes on top of the oscilloscope.
- 3 Rotate the rear of the accessory pouch down and insert the tab at the rear of the accessory pouch into the slot at the rear of the oscilloscope cabinet.

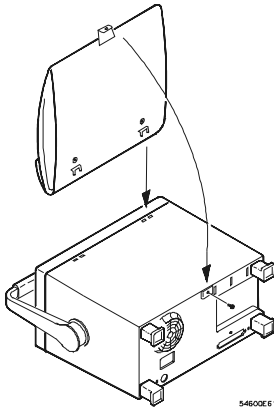

- 4 Install the screw you removed in step 1.
- 5 Connect the parallel and printer power cables to the instrument rear panel.

### **Printer power cable**


Plug the right-angle connector of the printer power cable into the instrument and plug the straight connector into the printer.

---

## Loading the Printer Paper

- 1 Unzip the accessory pouch to access the printer.
- 2 Make sure the printer is strapped into the pouch snugly.
- 3 Turn on power to the instrument and the printer. The printer power switch is located on the left side of the printer.
- 4 Cut the tip of the paper straight across using scissors.


- 5 Lightly push up on the front of the paper cover with your thumb and rotate it toward the back of the printer.



- 6 Push the tip of the paper into the inlet at the bottom of the paper holder, until the auto-loader catches it and feeds about 10 cm through the paper cutter.

The printing surface is the outside of the thermal paper roll

Insertion Slot



#### Hint

Load the paper in an area protected from direct sunlight. Place the paper on the cover to make feeding easier.

- 7 Press the FEED switch until the paper feeds straight and smoothly.
- 8 Close the paper cover.  
Make sure the end of the paper is not inside the cover. Push down on the cover to lock it into place.

#### Hints

- When the paper is installed correctly, the OFF LINE lamp stops blinking and the ON LINE lamp stays lit.
- When the paper is about to run out, red lines appear on both sides of the paper.

## Configure the Instrument

- 1 Press the **Utility** key on the front panel.
- 2 Press the **Print Config** softkey.
- 3 Set the **Print to:** softkey to **Parallel**.
- 4 Set the **Format** softkey to **Seiko**.
- 5 Press the **Quick Print** key on the front panel to print the screen image.

### **If nothing appears on the paper**

Check to make sure that the paper has not been loaded backwards. See step 6 in "Loading the Printer Paper" above.

---

## Operating Conditions

<b>Temperature</b>	0 °C to 40 °C (32 °F to 104 °F)
<b>Humidity</b>	30% to 80% RH (non-condensing)

---

## Paper Reorder

- Seiko #TP411-28CL (TP-411L) (1 roll)
- Agilent Technologies N2728A (10 rolls)

---

## Additional printer information

Refer to the supplied Seiko Operation Manual for additional printer information.



**Agilent Technologies**

Innovating the HP Way

---

# Agilent 54600 シリーズ オシロスコープ用 Agilent N2727A プリンタ・キット

マニュアル番号： N2727-92001  
印刷： 2000年2月


© Copyright Agilent Technologies 2000  
All Rights Reserved

---

## インストール・ガイド

## はじめに

- 1 アクセサリ・ポーチ上の裏面のポケットからネジを取り外します。
- 2 オシロスコープ上部のくぼんだ穴に、アクセサリ・ポーチ前面のタブをスライドさせてはめ込みます。
- 3 アクセサリ・ポーチをキャビネットの背面方向に倒し、アクセサリ・ポーチ背面のタブをオシロスコープ・キャビネット背面のスロットに挿入します(下図参照)。

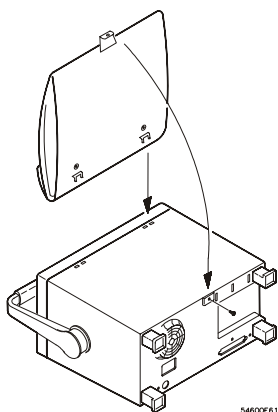

- 4 ステップ1で取り外したネジを取り付けます。
- 5 計測器のリア・パネルにパラレル・ケーブルとプリンタ電源ケーブルを接続します。


### プリンタ電源ケーブル

プリンタ電源ケーブルのアンクル・コネクタを計測器に、ストレート・コネクタをプリンタにそれぞれ差し込みます。

## プリンタ用紙の取り付け

- 1 アクセサリ・ポーチを開け、プリンタを操作できるようにします。
- 2 プリンタがポーチにしっかりと装着されていることを確認します。
- 3 計測器とプリンタの電源を入れます。プリンタの電源スイッチは、プリンタの左側面にあります。
- 4 プリンタ用紙の端をハサミでまっすぐ切り落とします。


- 5 ペーパー・カバーの前面を親指で軽く押し上げ、プリンタの背面方向に回転させます(下図参照)。



- 6 用紙の端をペーパー・ホルダー底部のはめ込み口に挿入し、用紙がオートローダ、ペーパー・カッターを通して10cmほど送られるようにします。

感熱紙ロールの外側が表  
(プリントされる側)です。

挿入スロット



#### ヒント

用紙は、直射日光の当たらない場所で設置してください。用紙をカバーの上に乗せると操作し易くなります。

- 7 用紙がまっすぐスムーズにフィードされるまで、FEEDスイッチを押し続けます。
- 8 カバーを閉めます。  
用紙の端がカバーの外に出ていることを確認してください。カバーを押して定位置にロックします。

#### ヒント

- 用紙が正しく設置されている場合、OFF LINEランプの点滅が止まりON LINEランプが点灯します。
- 用紙が少なくなってきたら、用紙の両端に赤い線が表示されます。

---

## 計測器の設定

- 1 フロント・パネルの **Utility** キーを押します。
- 2 **Print Config** ソフトキーを押します。
- 3 **Print to:** ソフトキーを **Parallel** にセットします。
- 4 **Format** ソフトキーを **Seiko** にセットします。
- 5 フロント・パネルの **Quick Print** キーを押し、表示画像を印刷します。

### なにも印刷されない場合

プリンタ用紙が裏返しにロードされていないか確認してください。「プリンタ用紙の取り付け」の、ステップ6を参照してください。

---

## 動作環境

温度	0°C～40°C
湿度	30%～80% RH(非結露)

---

## プリンタ用紙の再オーダー

- Seiko #TP411-28CL (TP-411L)(1 ロール)
- Agilent Technologies N2728A (10 ロール)

---

## 追加情報

プリンタに関する追加情報については、付属の『Seiko Operation Manual』を参照してください。