




COAXIAL DETECTORS FOR OEM & SYSTEMS USE

models
33330B
33330C

TECHNICAL DATA 1 SEPT 1976

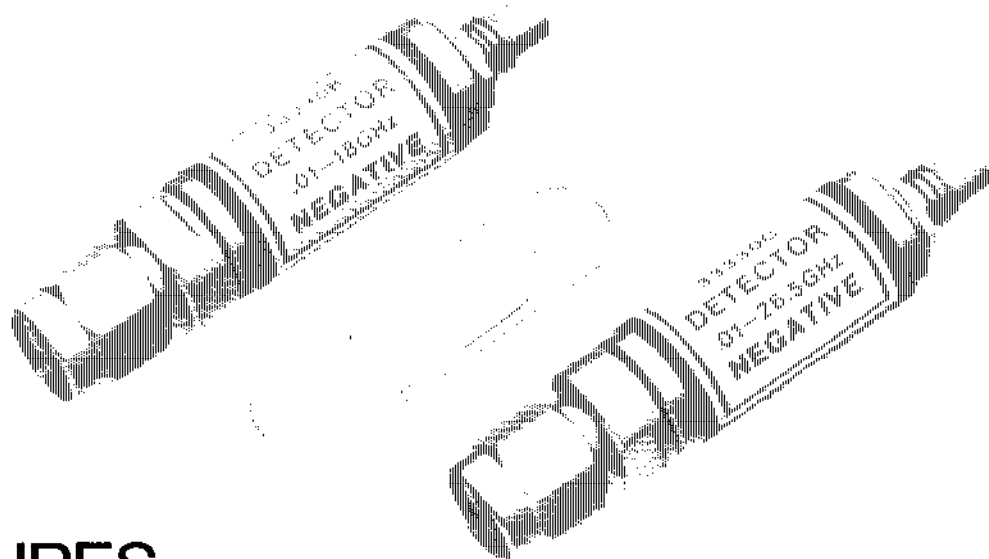

FEATURES

- *Broadband (0.01 to 26.5 GHz)*
- *Excellent Flatness (± 0.6 dB to 18 GHz)*
- *Low SWR (< 1.5 to 18 GHz)*
- *Environmentally Rugged (MIL-STD-883 Tests)*
- *Field Replaceable Diode Modules*
- *APC 3.5 mm Connector (Reliable, SMA Compatible)*
- *Low Barrier Schottky Diode (No Bias Required)*

General Information

The 33330B/C Series of broadband coaxial detectors are specifically designed for use in microwave instrumentation and systems applications such as the detecting element in leveling loops, power monitoring, and as wideband video detectors.

These detectors utilize a low barrier Schottky (LBS) diode that requires no bias, has exceptional broadband flatness and low SWR, and is environmentally rugged. For measurement accessory applications, Hewlett-Packard offers similar RF performance with a variety of input and output connectors in the Model 423B, 8470B, and 8472B Series.

For more information, call your local HP Sales Office or East (901) 948-6370 • Midwest (312) 677-0400 • South (404) 434-4000 • West (213) 877-1282. Or, write: Hewlett-Packard, 1501 Page Mill Road, Palo Alto, California 94304. In Europe, Post Office Box 349, CH-1217 Meyrin 1, Geneva, Switzerland. In Japan, Yokogawa-Hewlett-Packard, 1-59-1, Yoyogi, Shibuya-Ku, Tokyo, 151.

Product Information

The Low Barrier Schottky Diode Detector

The 33330B/C detectors consist of a Low Barrier Schottky (LBS) diode and a miniature thin film circuit that matches the diode to a 50 ohm transmission line. The diode is a specially fabricated Schottky diode using metalization designed to achieve low origin resistance, thus eliminating the need for bias. In addition to superior RF characteristics, the LBS detector offers significant advantages over other types of detectors. For example, a typical Schottky requires bias for proper operation; a tunnel diode detector has a limited power range because of its negative resistance region; and the point contact diode, because of its fragile construction, is unsuitable for many field applications.

Since only metallurgical bonds are used with the diode, the detectors are extremely rugged. As noted on page 4, the detectors have undergone extensive environmental testing to MIL-STD 883 procedures, an important factor in military systems applications. The detector can also withstand high RF power levels for short durations without burnout, important for power monitoring applications. For example, it can typically withstand 1 watt CW for a minute without permanent damage.

The equivalent circuit and pulse response equation for the 33330B/C detectors are shown in Figure 1, and extensive data on the performance of the detectors is given on the adjacent page. Using this information, the user can select a load to extend the square law region to higher power levels or to minimize the output variation over a given temperature range.

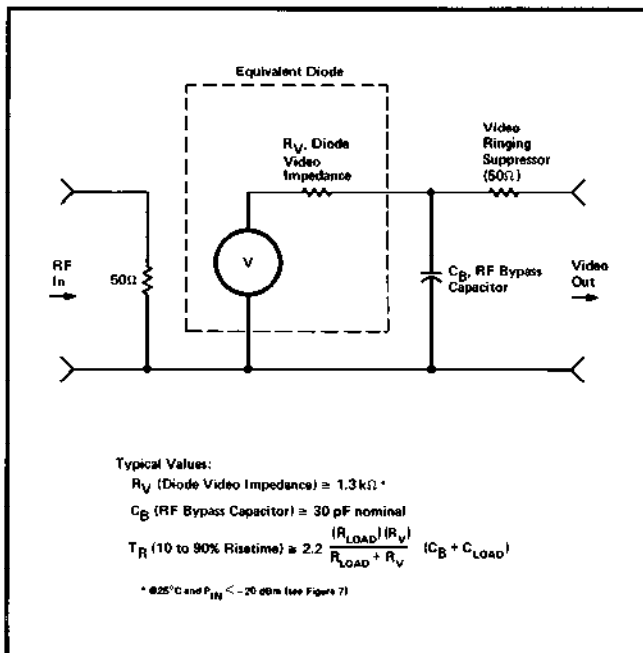


Figure 1. Equivalent Circuit for 33330B/C Detectors with Typical Parameter Values.

Excellent Broadband Flatness

The thin film input matching circuit was optimized for flat frequency response, and low SWR which yields improved performance in leveling loops and power monitoring applications. Use of thin film fabrication techniques for the circuit and diode results in excellent unit-to-unit repeatability of performance, and thus matched pairs will track within a few tenths of a dB over the entire frequency range (see Figure 2). This feature is especially important in the 20 to 26.5 GHz frequency range where diode capacitance causes the sensitivity to decrease by 3.3 dB, yet this "roll off" characteristic is very repeatable and matched pairs will track within $\pm 0.5 \text{ dB}$.

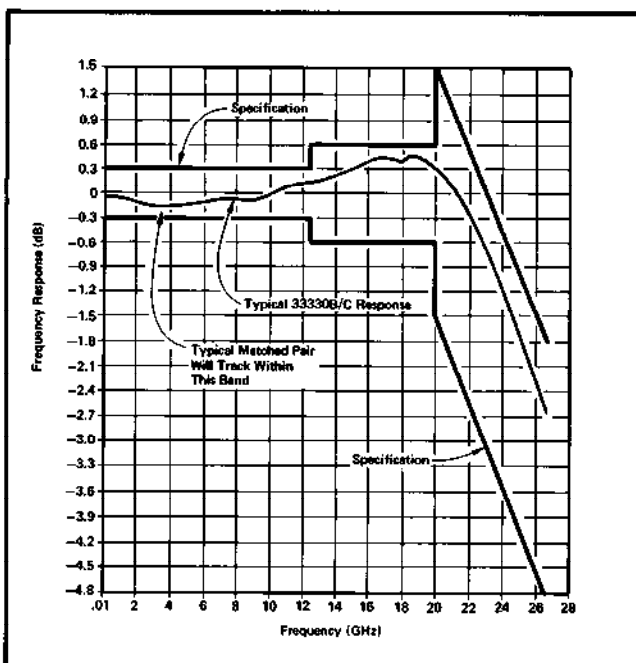


Figure 2. Typical Frequency Response of 33330B/C Detectors.

Low SWR

The miniature thin film circuit used provides an excellent 50 ohm match to the transmission line which minimizes reflections that cause frequency response ripple and power measurement inaccuracies. Such errors can be significant. For example, using a detector with a SWR of 2.5:1 in an application with a 2:1 source match can result in more than a $\pm 1.3 \text{ dB}$ ripple. For the same source match of 2:1, a typical 33330B detector with SWR less than 1.25 would have less than $\pm 0.4 \text{ dB}$ ripple.

APC 3.5 mm Connector Improves Performance and Extends Frequency Range

The 33330B/C detectors use the APC-3.5¹ connector which is compatible with the industry standard SMA but is more rugged and offers improved repeatability over hundreds of connections. Use of this connector extends the frequency range of the 33330C to 26.5 GHz.

¹ "A High Performance 3.5 mm Connector to 34 GHz" Microwave Journal, July 1976.

Detector Performance Characteristics

Typical Transfer Characteristics

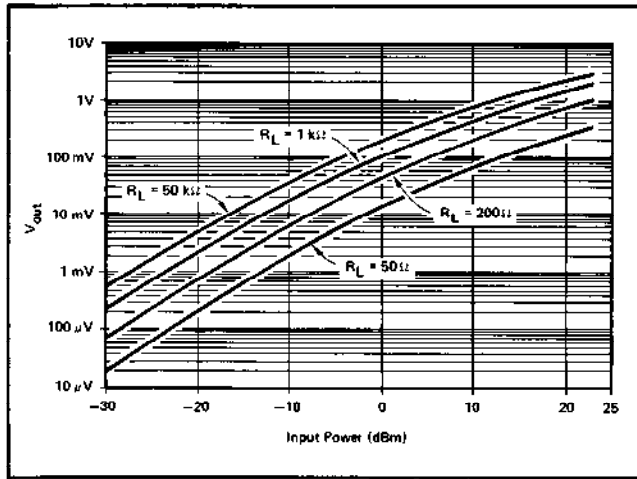


Figure 3. Typical Transfer Characteristics. ($T_a = 25^\circ\text{C}$)

Typical Temperature Characteristics

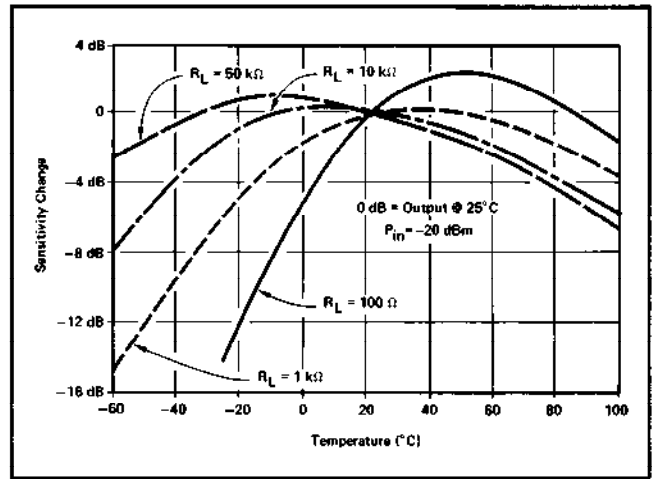


Figure 6. Typical Output Response with Temperature. ($P_{in} < -20\text{ dBm}$)

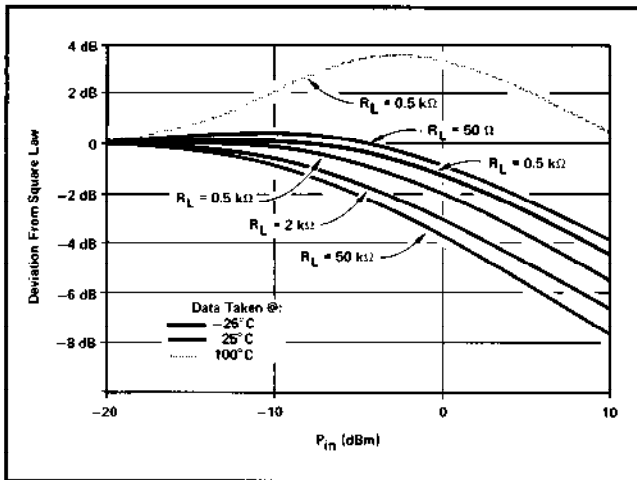


Figure 4. Typical Square Law Deviation.

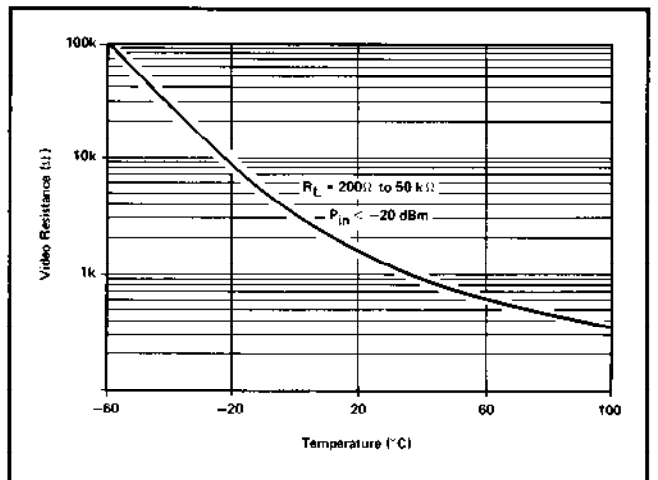


Figure 7. Typical Video Impedance Variation with Temperature.

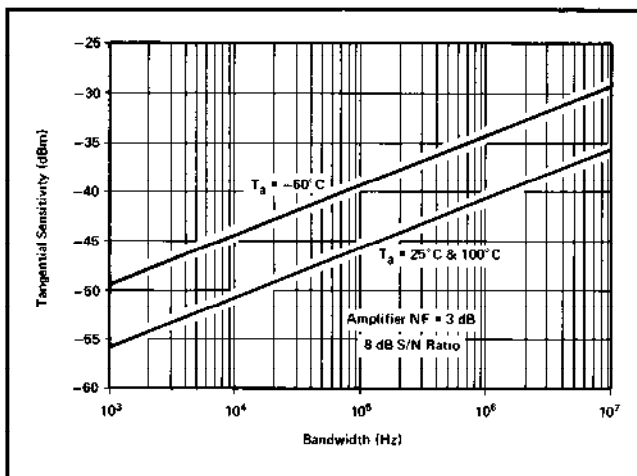


Figure 5. Typical Tangential Sensitivity.

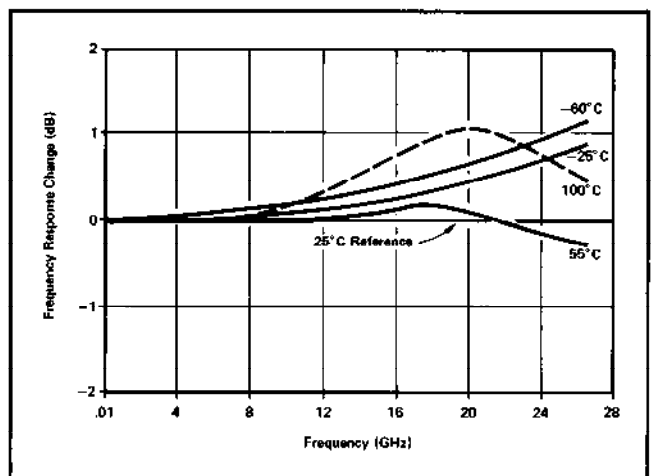


Figure 8. Typical Frequency Response Variation with Temperature.

Specifications¹

	33330B	33330C
Frequency Range²	0.01 to 18 GHz	0.01 to 26.5 GHz
Frequency Response: Octave Band Flatness Broadband Flatness	±0.2 dB over any octave to 8 GHz 0.01 to 12.4 GHz: ±0.3 dB 0.01 to 18 GHz: ±0.6 dB	±0.2 dB over any octave to 8 GHz 0.01 to 12.4 GHz: ±0.3 dB 0.01 to 20 GHz: ±0.6 dB 20 to 26.5 GHz: ±1.5 dB from a -3.3 dB linear slope
SWR	0.01 to 4 GHz: 1.2 0.01 to 18 GHz: 1.5	0.01 to 4 GHz: 1.2 4 to 18 GHz: 1.5 18 to 26.5 GHz: 2.2
Low Level Sensitivity	>0.5 mV/μW	0.01 to 18 GHz: >0.5 mV/μW 18 to 26.5 GHz: >0.18 mV/μW
Maximum Operating Input	200 mW	
Typical Short-Term Maximum Input (less than 1 minute)	1 watt (Typical)	
Noise (μV peak to peak with CW power applied to produce 100 mV output, 400 kHz BW)	<50 μV	
Output Polarity	Negative	
Options: Option 001 ³ : Matched Pair	0.01 to 12.4 GHz: ±0.2 dB 0.01 to 18 GHz: ±0.3 dB	0.01 to 12.4 GHz: ±0.2 dB 0.01 to 18 GHz: ±0.3 dB 0.01 to 26.5 GHz: ±0.5 dB
Option 003	Positive Output	
Environmental Capabilities⁴ Operating Temperature ⁵ Temperature Cycling Vibration Shock Acceleration Altitude ⁶ Salt Atmosphere ⁷ Moisture Resistance With Epoxy Coating ⁷ Without Coating	-65°C to 100°C MIL-STD 883. Method 1010.1: (-65°C to +100°C) MIL-STD 883. Method 2007: 0.6" D.A. (20 to 80 Hz) and 20 G (80 to 2000 Hz) MIL-STD 883. Method 2002.1: (500 G, 0.5 ms) MIL-STD 883. Method 2001: (5000 G) MIL-STD 883. Method 1001: (50 000 ft, 15 240 m) MIL-STD 883. Method 1009.1: (48 hr, 5% solution) MIL-STD 883. Method 1004.1: (25°C to 65°C, 95% RH) 25°C to 40°C, 95% RH	

Notes:

- ¹ Measured at 25°C and <-20 dBm unless otherwise specified.
- ² Below 1 GHz RF may leak through the video connector. If objectionable, this may be eliminated with a low pass filter.
- ³ Quantity two (2) must be ordered for each matched pair.
- ⁴ Additional information available upon request.
- ⁵ Typical variations with temperature are shown on page 3.
- ⁶ Tested only to 50 000 ft (15 240 m), capable of much higher performance.
- ⁷ Use of an epoxy coating is required for meeting these requirements. Contact your H-P Components Field Engineer for details.

Field Replaceable Diode Modules

In the event of diode burnout, the detector module can be replaced in the field. Since the replacement module includes the tested and sealed assembly of diode and thin-film matching circuit, the user is assured of performance to specifications. This offers an advantage over detector designs where only the diode is replaced and not tested in its final assembly.

Model Number	Description	Replacement Module Part Number
33330B	Negative Polarity	33330-80003
33330B Option 001	Matched Pair (Negative)	33330-80004
33330B Option 003	Positive Polarity	33330-80005
33330C	Negative Polarity	33330-80006
33330C Option 001	Matched Pair (Negative)	33330-80007
33330C Option 003	Positive Polarity	33330-80008

Mechanical Information

RF Connector: APC-3.5 Male (SMA compatible).
Output Connector: SMC (Male Center Conductor).
Net Weight: 14 g (0.5 oz).

Outline Drawing:

