


Agilent N5182A MXG Vector Signal Generator

Data Sheet *Performance optimized
for manufacturing*

- Fast switching speeds
- Industry-best ACPR
- Simplified self-maintenance
- Signal Studio software

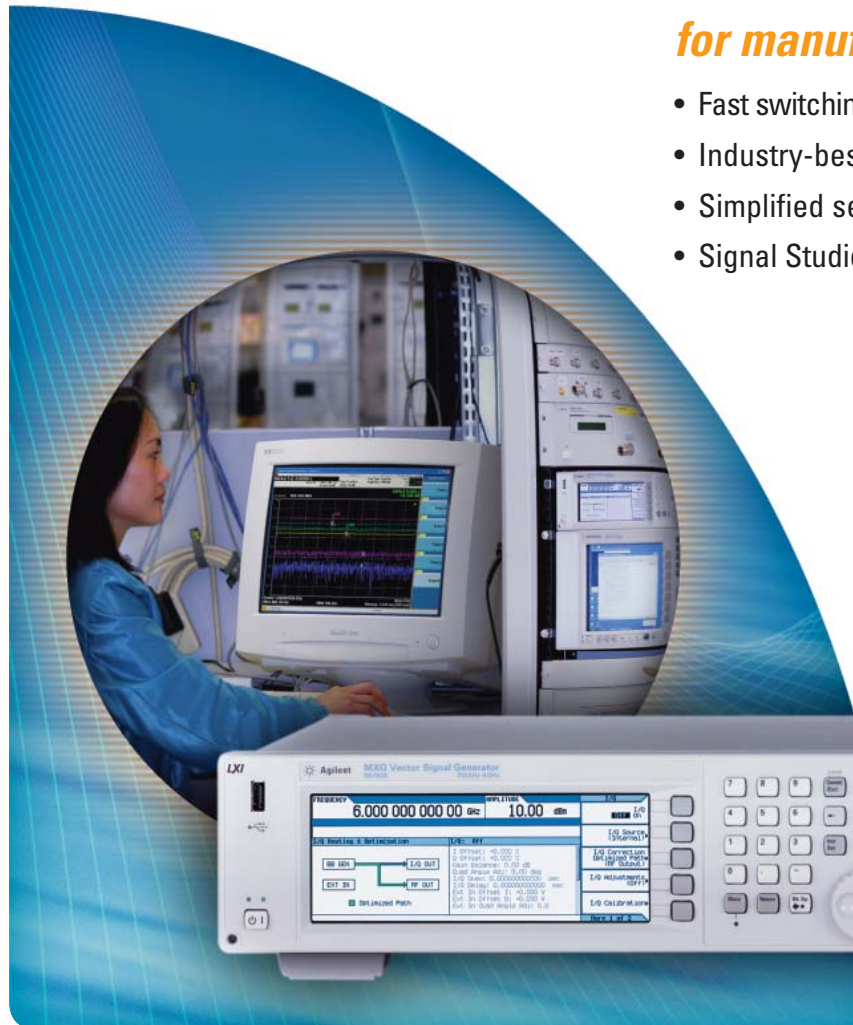

Agilent Technologies

Table of Contents

Definitions	3
Frequency	4
Amplitude	5
Spectral Purity	10
Analog Modulation	12
Frequency modulation	12
Phase modulation	12
Amplitude modulation	12
Pulse modulation	13
Internal analog modulation source	14
External modulation inputs	14
Simultaneous modulation	14
Vector Modulation	15
Baseband Generator	16
EVM performance data	18
3GPP W-CDMA distortion performance	19
3GPP2 cdma2000 distortion performance	19
GSM/EDGE output RF spectrum (ORFS)	19
802.16e mobile WiMax distortion performance	19
General Characteristics	22
Ordering Information	25
Related Literature	26
Application literature	26
Product literature	26

Definitions

Specification (spec): Represents warranted performance of a calibrated instrument that has been stored for a minimum of 2 hours within the operating temperature range of 0 to 55 °C, unless otherwise stated, and after a 45 minute warm-up period. The specifications include measurement uncertainty. Data represented in this document are specifications unless otherwise noted.

Typical (typ): Represents characteristic performance, which 80% of the instruments manufactured will meet. This data is not warranted, does not include measurement uncertainty, and is valid only at room temperature (approximately 25 °C).

Nominal (nom): The expected mean or average performance, or an attribute whose performance is by design, such as the 50 Ω connector. This data is not warranted and is measured at room temperature (approximately 25 °C).

Measured (meas): An attribute measured during the design phase for purposes of communicating expected performance, such as amplitude drift vs. time. This data is not warranted and is measured at room temperature (approximately 25 °C).

Note: All graphs contain measured data from several units at room temperature unless otherwise noted.

Frequency

Range	
Option 503	250 kHz to 3 GHz
Option 506	250 kHz to 6 GHz
Minimum frequency	100 kHz ¹
Resolution	0.01 Hz
Phase offset	Adjustable in nominal 0.01° increments

Frequency bands ²

<i>Band</i>	<i>Frequency range</i>	<i>N</i>
1	100 kHz to < 250 MHz	0.5
2	250 to < 375 MHz	0.125
3	375 to < 750 MHz	0.25
4	750 to < 1500 MHz	0.5
5	1500 to < 3000.001 MHz	1
6	3000.001 to 6000 MHz	2

Switching speed ^{3, 4}

<i>Type</i>	<i>Standard</i>	<i>Option UNZ</i>
Digital modulation off		
SCPI mode	≤ 5 ms (typ)	≤ 1.15 ms
List/Step sweep mode	≤ 5 ms (typ)	≤ 900 μs
Digital modulation on		
SCPI mode	≤ 5 ms (typ)	≤ 1.15 ms
List/Step sweep mode	≤ 5 ms (typ)	≤ 900 μs

Accuracy	± aging rate ± temperature effects ± line voltage effects
-----------------	---

Internal time base reference oscillator aging rate	≤ ± 5 ppm/10 yrs, < ± 1 ppm/yr
---	--------------------------------

Temperature effects	± 1 ppm (0 to 55 °C)
----------------------------	----------------------

Line voltage effects	± 0.1 ppm (nom)
-----------------------------	-----------------

Line voltage range	5% to -10% (nom)
---------------------------	------------------

Reference output	
Frequency	10 MHz
Amplitude	≥ +4 dBm (nom) into 50 Ω load

1. Performance below 250 kHz is unspecified.
2. N is a factor used to help define certain specifications within the document.
3. Time from receipt of SCPI command or trigger signal to within 0.1 ppm of final frequency or within 100 Hz, whichever is greater, and amplitude settled to within 0.2 dB.
4. Additional time may be required for the amplitude to settle within 0.2 dB when switching to or from frequencies < 500 kHz or amplitudes > +5 dBm

External reference input

	<i>Standard</i>	<i>Option 1ER</i>
Input frequency	10 MHz	1 to 50 MHz (in multiples of 0.1 Hz)
Lock range	± 1 ppm	
Amplitude	> -3.5 to 20 dBm (nom)	
Impedance	50 Ω (nom)	

Digital sweep modes

Operating modes	Step sweep (equally or logarithmically spaced frequency steps) List sweep (arbitrary list of frequency steps) Can also simultaneously sweep amplitude and waveforms. See amplitude and baseband generator sections for more detail.
Sweep range	Within instrument frequency range
Dwell time	100 μs to 100 s
Number of points	2 to 65535 (step sweep) 1 to 1601 (list sweep)
Step change	Linear or logarithmic
Triggering	Free run, trigger key, external, timer, bus (GPIB, LAN, USB)


Amplitude

Output power

*Range*¹

	<i>Standard</i>	<i>Option 1EQ</i> ²
250 kHz to 2.5 GHz	-110 to +13 dBm	-127 to +13 dBm
> 2.5 to 3.0 GHz	-110 to +10 dBm	-127 to +10 dBm
> 3.0 to 4.5 GHz	-110 to +13 dBm	-127 to +13 dBm
> 4.5 to 5.8 GHz	-110 to +10 dBm	-127 to +10 dBm
> 5.8 to 6 GHz	-110 to +7 dBm	-127 to +7 dBm

Maximum available output power

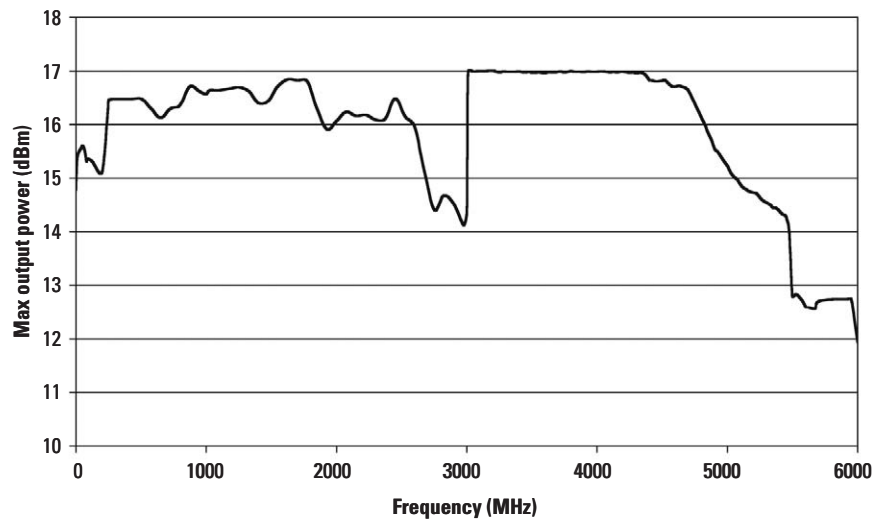

1. Quoted specifications between 20 and 30 °C. Maximum output power typically decreases by 0.2 dB/ °C for temperatures outside this range.
2. Settable to -144 dBm with option 1EQ, but unspecified below -127 dBm.

Resolution	0.02 dB (nom)
Step attenuator	0 to 130 dB in 5 dB steps, electronic type
Connector	50 Ω (nom)
SWR	
≤ 1.4 GHz	1.7:1 (typ)
> 1.4 GHz to 4 GHz	2.3:1 (typ)
> 4.0 GHz to 5.0 GHz	2.4:1 (typ)
> 5.0 GHz to 6.0 GHz	2:2:1 (typ)
Maximum reverse power	
Max DC voltage	50 VDC (nom)
250 kHz to 6 GHz	2 W (nom)

Switching speed ¹

<i>Type</i>	<i>Standard</i>	<i>Option UNZ</i>
Digital modulation off		
SCPI mode	≤ 5 ms (typ)	≤ 750 μ s
List/Step sweep mode	≤ 5 ms (typ)	≤ 500 μ s
Digital modulation on		
SCPI mode	≤ 5 ms (typ)	≤ 1.15 ms
List/Step sweep mode	≤ 5 ms (typ)	≤ 900 μ s

Absolute level accuracy in CW mode ² [ALC on]

	<i>Standard</i>		<i>Option 1EQ</i>
	+7 to -60 dBm	< -60 to -110 dBm	< -110 to -127 dBm
250 kHz to 1 MHz	±0.6 dB	±0.7 dB	±1.7 dB
> 1 MHz to 1 GHz	±0.6 dB	±0.7 dB	±1.0 dB
> 1 to 3 GHz	±0.7 dB	±0.9 dB	±1.4 dB
> 3 to 4 GHz	±0.8 dB	±0.9 dB	±1.0 dB
> 4 to 6 GHz	±0.8 dB	±1.1 dB	±1.3 dB

1. Time from receipt of SCPI command or trigger signal to amplitude settled within 0.2 dB when switching to or from amplitudes < +5 dBm.

2. Quoted specifications between 20 °C and 30 °C. For temperatures outside this range, absolute level accuracy degrades by 0.01 dB/degree C for frequencies ≤ 4.5 GHz and 0.02 dB/degree C for frequencies > 4.5 GHz.

Absolute level accuracy in CW mode [ALC off, relative to ALC on] ± 0.35 dB (typ)


Absolute level accuracy in digital I/Q mode [ALC on, relative to CW]

300 MHz to 2.5 GHz ± 0.25 dB


3.3 to 3.8 GHz ± 0.45 dB

5.0 to 6.0 GHz ± 0.25 dB


Level accuracy at -110 dBm

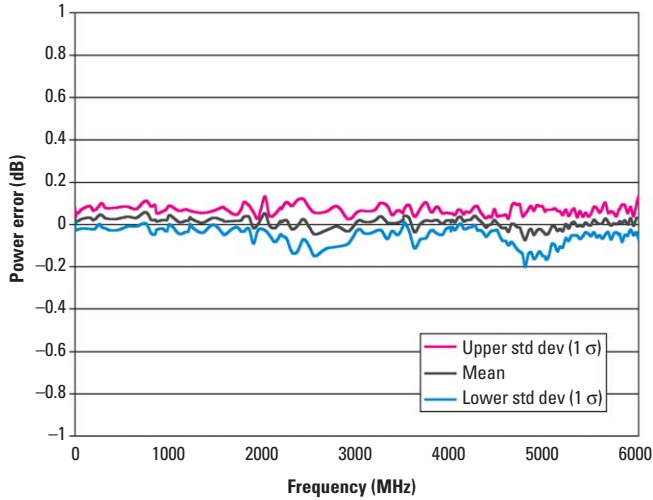


Level accuracy at -130 dBm

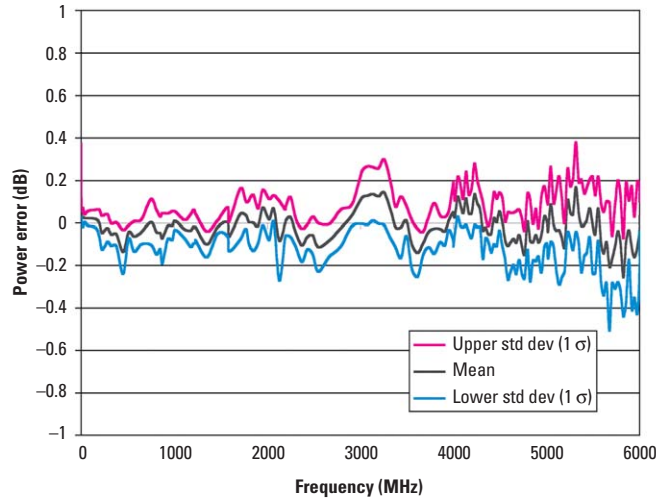

Level accuracy at -140 dBm

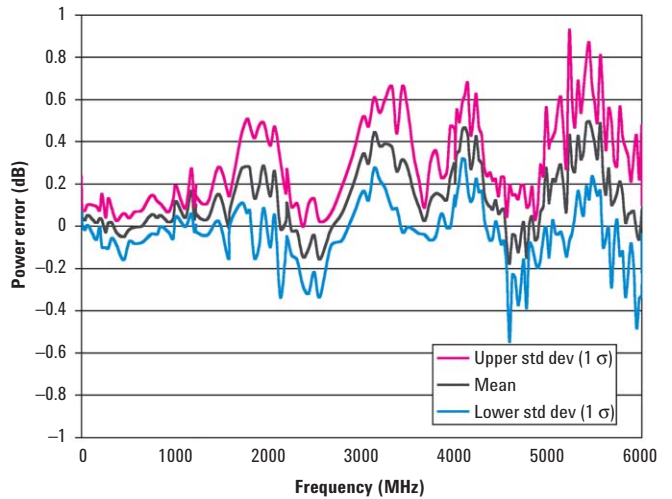


Amplitude repeatability +5 dBm ALC on




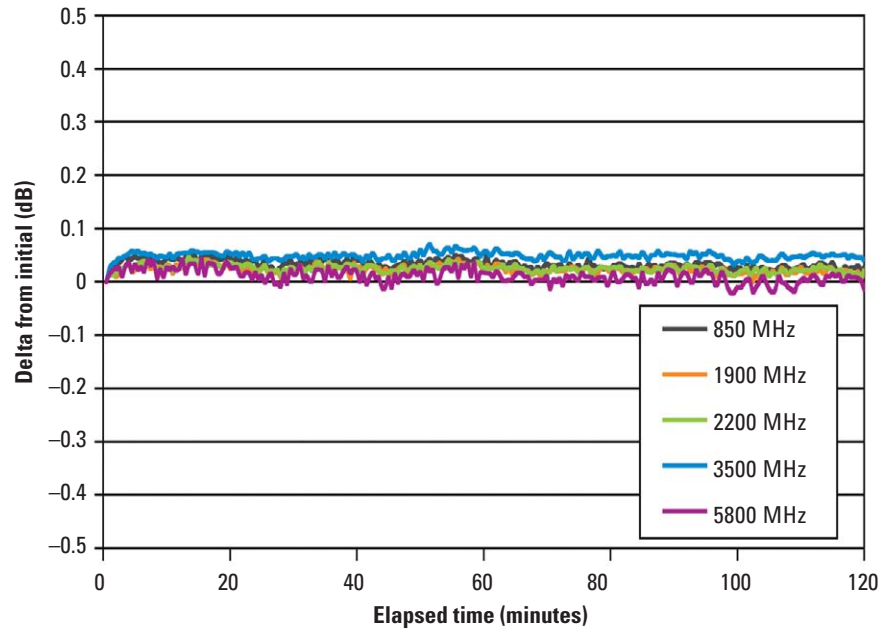


Repeatability measures the ability of the instrument to return to a given power setting after a random excursion to any other frequency and power setting. It should not be confused with absolute level accuracy.


Relative level accuracy at 850 MHz initial power +10 dBm

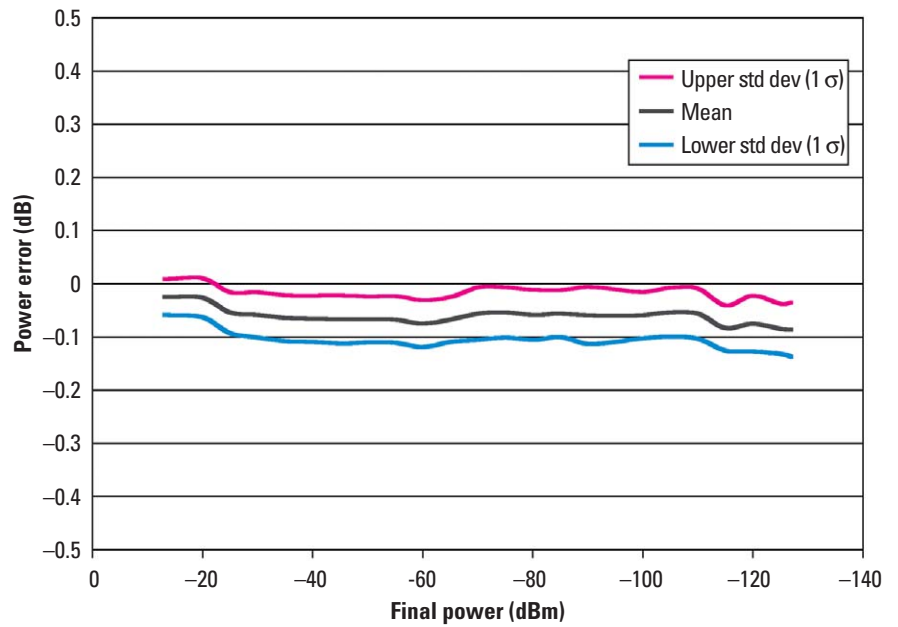

Relative level accuracy measures the accuracy of a step change from any power level to any other power level. This is useful for large changes (i.e. 5 dB steps).

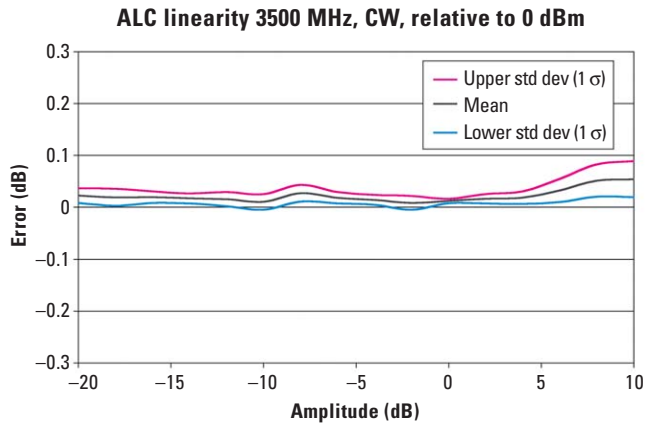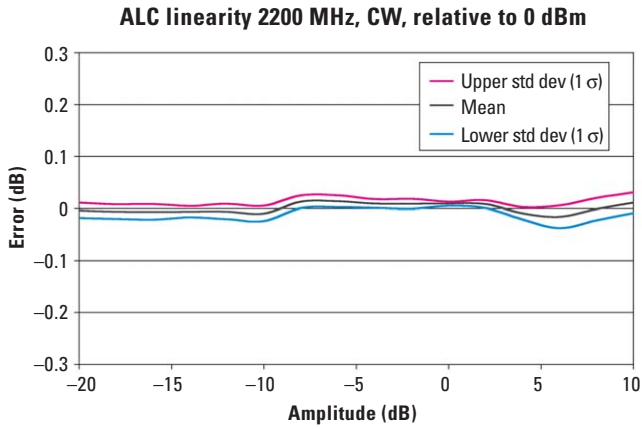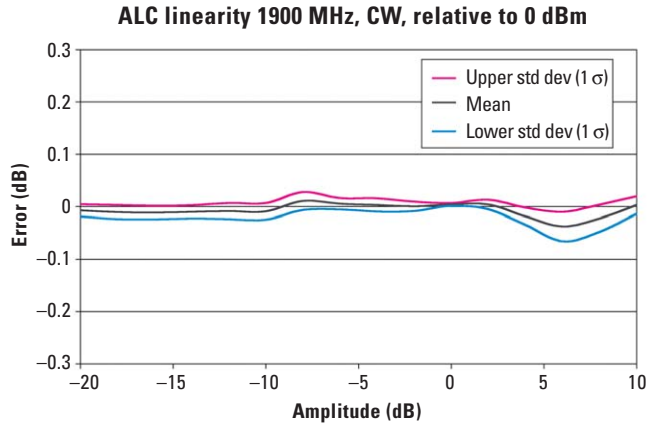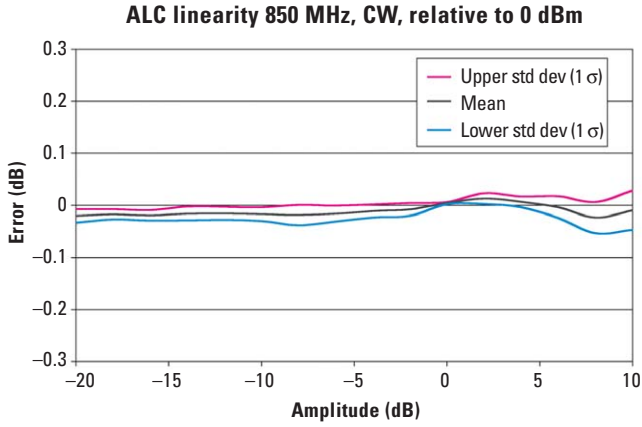

Linearity measures the accuracy of small changes while the attenuator is held in a steady state. This is useful for fine resolution changes.

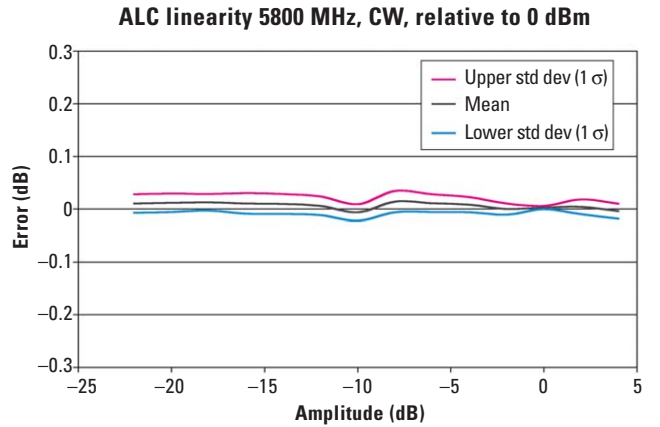

User flatness correction

Number of points	1601
Number of tables	Dependent on available free memory in instrument

Digital sweep modes

Operating modes	Step sweep (evenly spaced amplitude steps) List sweep (arbitrary list of amplitude steps) Can also simultaneously sweep frequency and waveforms. See frequency and baseband generator sections for more detail.
-----------------	--


Sweep range	Within instrument amplitude range
Dwell time	100 μ s to 100 s
Number of points	2 to 65535 (step sweep) 1 to 1601 (list sweep)
Step change	Linear
Triggering	Free run, trigger key, external, timer, bus (GPIB, LAN, USB)

Spectral Purity


Single sideband phase noise [at 20 kHz offset]

500 MHz	≤ -126 dBc/Hz (typ)	3 GHz	≤ -110 dBc/Hz (typ)
1 GHz	≤ -121 dBc/Hz (typ)	4 GHz	≤ -109 dBc/Hz (typ)
2 GHz	≤ -115 dBc/Hz (typ)	6 GHz	≤ -104 dBc/Hz (typ)

Single sideband phase noise in CW mode

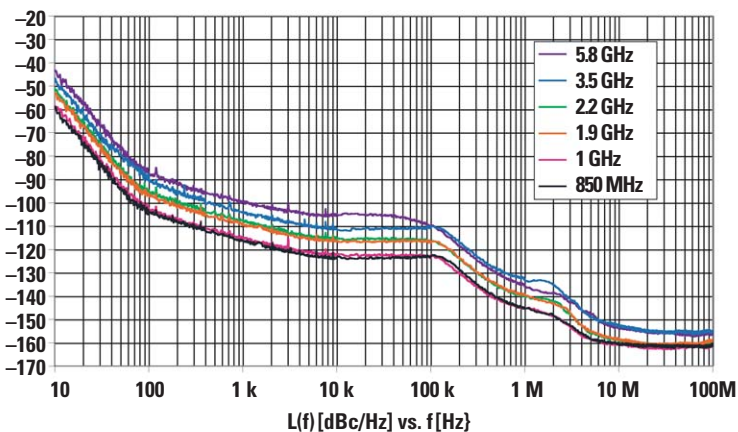

Single sideband phase noise with I/Q modulation

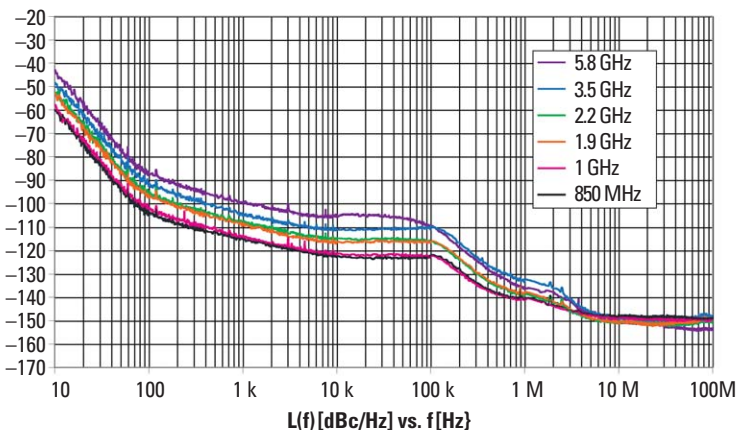

Residual FM [CW mode, 300 Hz to 3 kHz BW, CCITT, rμs] < N x 2 Hz (typ)

Harmonics¹ [CW mode, output level < 4 dBm]

≤ 3 GHz < -30 dBc
> 3 to 6 GHz < -44 dBc (typ)

Nonharmonics¹ [CW mode]

> 10 kHz offset
250 kHz to 250 MHz < -54 dBc, < -70 dBc (typ)
> 250 to 375 MHz < -61 dBc, < -81 dBc (typ)
> 375 to 750 MHz < -55 dBc, < -73 dBc (typ)
> 750 MHz to 1.5 GHz < -48 dBc, < -62 dBc (typ)
> 1.5 to 3 GHz < -48 dBc, < -62 dBc (typ)
> 3 to 6 GHz < -42 dBc, < -56 dBc (typ)

Subharmonics¹ [CW mode]

≤ 4 GHz < -76 dBc
> 4 to 5 GHz < -64 dBc
> 5 to 5.5 GHz < -50 dBc
> 5.5 to 6 GHz < -46 dBc

Jitter²

Carrier	SONET/SDH			
<i>Frequency</i>	<i>Data rate</i>	<i>rms jitter BW</i>	<i>μUI rms</i>	<i>Femtoseconds</i>
155 MHz	155 MB/s	100 Hz to 1.5 MHz	84	537
622 MHz	155 MB/s	1 kHz to 5 MHz	47	75
2.488 GHz	2488 MB/s	5 kHz to 20 MHz	178	72

1. Harmonics, sub-harmonics, and non-harmonics outside the frequency range of the instrument are typical.
2. Calculated from phase noise performance in CW mode at +10 dBm. For other frequencies, data rates, or bandwidths, please consult your sales representative.

Analog Modulation

Frequency modulation

(Option UNT)

Max deviation	N times 10 MHz (nom)	
Resolution	0.1% of deviation or 1 Hz, which ever is greater (nom)	
Deviation accuracy [1 kHz rate, deviation is N x 100 kHz]	< $\pm 2\%$ + 20 Hz	
Modulation frequency response [at 100 kHz deviation]	<i>1 dB bandwidth</i>	<i>3 dB bandwidth</i>
DC coupled	DC to 3 MHz (nom)	DC to 7 MHz (nom)
AC coupled	5 Hz to 3 MHz (nom)	5 Hz to 7 MHz (nom)
Carrier frequency accuracy relative to CW in DCFM	< $\pm 0.2\%$ of set deviation + (Nx1 Hz) ¹ < $\pm 0.06\%$ of set deviation + (Nx1 Hz) (typ) ²	
Distortion [1 kHz rate, deviation is N x 100 kHz]	< 0.4%	
Sensitivity when using external input	+1V peak for indicated deviation (nom)	

Phase modulation

(Option UNT)

Modulation deviation and frequency response:

	<i>Max dev</i>	<i>3 dB bandwidth</i>
Normal BW	N times 10 radians (nom)	DC to 1 MHz (nom)
High BW mode	N time 1 radian (nom)	DC to 4 MHz (nom)
Resolution	0.1% of deviation (nom)	
Deviation accuracy [1 kHz rate, normal BW mode]	< $+0.5\%$ + 0.01 rad (typ)	
Distortion [1 kHz rate, deviation normal BW mode]	< 0.2% (typ)	
Sensitivity when using external input	+1V peak for indicated deviation (nom)	

Amplitude modulation³

(Option UNT)

AM depth type	Linear or exponential
Depth	
Maximum	90%
Resolution	0.1% of depth (nom)
Depth accuracy [1 kHz rate]	< $\pm 4\%$ of setting +1% (typ)
Modulation rate [3 dB BW]	
DC coupled	0 to 10 kHz (typ)
AC coupled	5 Hz to 10 kHz (typ)
Distortion [1 kHz rate]	< 2% (typ)
Sensitivity when using external input	+1V peak for indicated depth (nom)

1. Specification valid for temperature changes of less than $\pm 5^\circ\text{C}$ since last DCFM calibration.
2. Typical performance immediately after a DCFM calibration.
3. AM is specified at carrier frequencies from 500 kHz to 3 GHz, power levels $\leq \pm 4$ dBm, and depths $\leq 90\%$.

Pulse modulation

(Option UNU)¹

On/Off ratio	> 80 dB (typ)
Rise time	< 50 ns (typ)
Fall time	< 50 ns (typ)
Minimum width	
ALC on	≥ 2 μs (typ)
ALC off	≥ 500 ns
Resolution	20 ns (nom)
Pulse repetition frequency	
ALC on	DC to 500 kHz
ALC off	DC to 2 MHz
Level accuracy (relative to CW, ALC on or off)	< 1 dB (typ)
Video feedthrough	< 0.5 V (typ)
Pulse overshoot	< 15% (typ)
Pulse compression	15 ns (typ)
Pulse delay	
Internal delay	50 ns (nom)
External delay	65 ns (nom)
External input	
Input impedance	50 ohm (nom)
Level	+1V _{peak} = ON (nom)
Internal pulse generator	
Modes	Free-run, square, triggered, adjustable doublet, trigger doublet, gated, and external pulse
Square wave rate	0.1 Hz to 10 MHz, 0.1 Hz resolution (nom)
Pulse period	500 ns to 42 seconds (nom)
Pulse width	500 ns to pulse period – 10 ns (nom)
Resolution	10 ns
Adjustable trigger delay:	–pulse period + 10 ns to pulse period to pulse width –10 ns
Settable delay	
Free run	–3.99 to 3.97 μs
Triggered	0 to 40 s
Resolution [delay, width, period]	10 ns (nom)
Pulse doublets	
1st pulse delay (relative to sync out)	0 to 42 s – pulse width – 10 ns
1st pulse width	500 ns to 42 s – delay – 10 ns
2nd pulse delay (relative to pulse 1)	0 to 42 s – (delay1 + width2) – 10 ns
2nd pulse width	20 ns to 42 s – (delay1 + delay2) – 10 ns

1. Pulse specifications apply to frequencies > 10 MHz.

Internal analog modulation source

(Option UNT)

Waveform	Sine
Rate range	100 mHz to 2 MHz
Resolution	1 mHz
Frequency accuracy	Same as RF reference source (nom)

External modulation inputs

Modulation types	FM, AM, phase mod, pulse mod
Input impedance	50 Ω (nom)

Simultaneous modulation ¹


All modulation types (FM, AM, ϕ M and pulse modulation) may be simultaneously enabled except: FM and phase modulation can not be combined; two modulation types can not be simultaneously generated using the same modulation source. For example the baseband generator, AM, and FM can run concurrently and all will modulate the output RF. This is useful for simulating signal impairments.

1. If AM or pulse modulation are on then phase and FM specifications do not apply


Vector Modulation

External I/Q inputs
Impedance 50 Ω (nom)
Full scale input 1.0 V_p ($\sqrt{I^2 + Q^2}$) = 0.15 V_{rms} (nom)

I/Q bandwidth using external I/Q source (ALC off).

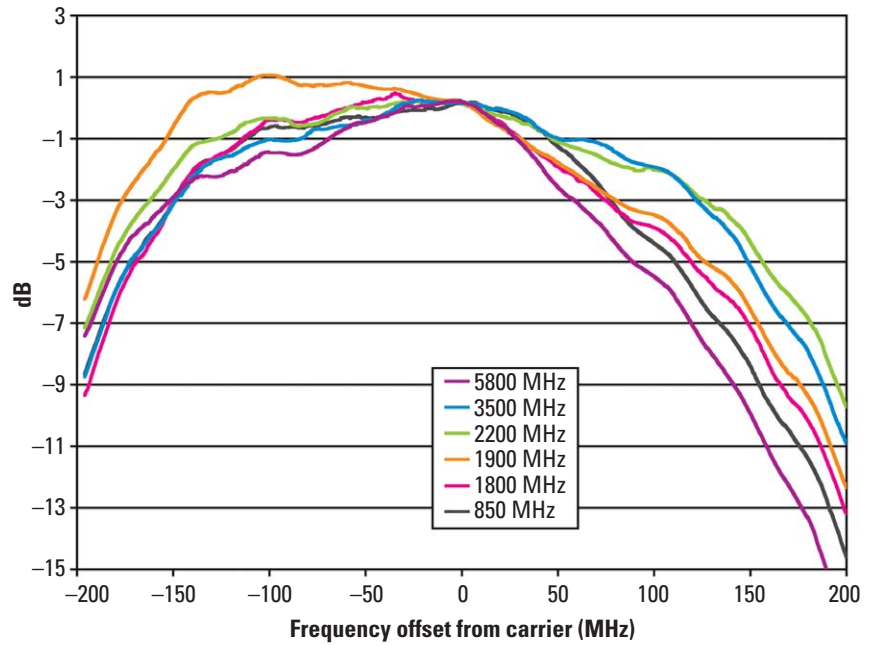

I/Q bandwidth plot using optional internal baseband generator

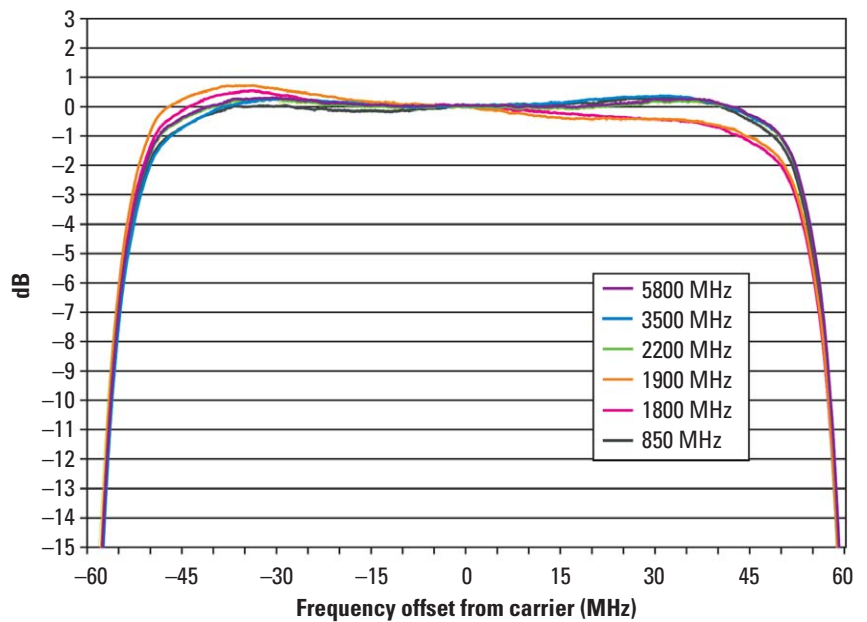

I/Q input and output data ¹

External I/Q inputs		
Impedance	50 Ω (nom)	
Bandwidth	100 MHz baseband (nom) 200 MHz RF (nom)	
I offset	± 100 mV	
Q offset	± 100 mV	
Quadrature angle adjustment	± 200 units	
Internal I/Q from baseband generator		
I offset	$\pm 20\%$	
Q offset	$\pm 20\%$	
I/Q gain	± 1 dB	
Quadrature angle adjustment	$\pm 10^\circ$	
I/Q skew	± 800 ns	
I/Q delay	± 400 ns	
External I/Q outputs		
Impedance	50 Ω (nom)	
Type	Single ended or differential (Option 1EL)	
Full scale output voltage	± 1.5 V _{peak} (nom), high impedance	
Bandwidth	50 MHz baseband (nom) 100 MHz RF (nom)	
Common mode I/Q offset	± 2.5 V	
Differential mode I offset	± 25 mV	
Differential mode Q offset	± 25 mV	

Baseband Generator

(Options 651, 652, 654)		
Channels	2 [I and Q]	
Sample rate and bandwidth	Clock rate	Bandwidth
Option 651	1 kSa/s to 30 MSa/s	24 MHz
Option 652	1 kSa/s to 60 MSa/s	48 MHz
Option 654	1 kSa/s to 125 MSa/s	100 MHz
Effective DAC resolution	11 bits 16 bits (Option UNV)	
Reconstruction filter	50 MHz	
Baseband frequency offset range	± 50 MHz	
Waveform switching speed	Standard	Option UNZ
SCPI mode	≤ 5 ms (typ)	≤ 1.2 ms (typ)
List/Step sweep mode	≤ 5 ms (typ)	≤ 900 μ s (typ)

1. I/Q adjustments represent user interface parameter ranges and not "specifications".

Digital sweep modes	In list sweep mode each point in the list can have independent waveforms along with user definable frequencies and amplitudes. See the amplitude and frequency sections for more detail.
Data transfer rates	
LAN to non-volatile storage	161 kSa/s (meas)
LAN to baseband generator	265 kSa/s (meas)
Non-volatile storage to baseband generator	262 kSa/s (meas)
Arbitrary waveform memory	
Maximum playback capacity	8 Msa, 64 Msa (Option 019)
Maximum storage capacity including markers	100 Msa
Waveform segments	
Segment length	60 samples to 8 MSa 60 samples to 64 MSa (Option 019)
Maximum number of segments in playback memory	1024, 8192 (Option 019)
Maximum number of segments in non-volatile memory	1024
Minimum memory allocation per segment	256 samples
Waveform sequences	
Maximum number of sequences	Up to 2000 depending on memory usage
Maximum number of segments/sequence	1024
Maximum number of repetitions	65535
Triggers	
Types	Continuous, single, gated, segment advance
Source	Trigger key, external, bus (GPIO, LAN, USB)
Modes	
Continuous	Free run, trigger and run, reset and run
Single	No retrigger, buffered trigger, immediate retrigger
Gated	Negative polarity or positive polarity
Segment advance	Single or continuous
External delay time	8 ns to 30 s
External delay resolution	8 ns
Trigger latency	490 ns + 1 sample clock period (nom)
Trigger accuracy	±4 ns (nom)

Markers

[Markers are defined in a segment during the waveform generation process, or from the front panel. A marker can also be routed to the RF blanking and ALC Hold functions]

Marker polarity	Negative, positive
Number of markers	4
Burst on / off ratio	> 80 dB (typ)
AWGN [Option 403]	
Type	Real-time, continuously calculated and played using DSP
Modes of operation	Standalone or digitally added to arbitrary waveform
Bandwidth ¹	1 Hz to 100 MHz
Crest factor	15 dB
Randomness	90 bit pseudo-random generation, repetition period 313 x 10 ⁹ years
Carrier to noise ratio	± 100 dB when added to arbitrary waveforms
Carrier to noise ratio error	Magnitude error ≤ 0.2 dB at baseband I/Q outputs

EVM performance data ^{2, 3}

Format	GSM	EDGE	cdma2000/1xEV-DO		W-CDMA	
Modulation type	GMSK (burst)	3pi/8 8PSK (burst)	OQPSK		QPSK	
Modulation rate	270.833 ksps	270.833 ksps	1.2288 Mcps		3.84 Mcps	
Channel configuration	1 timeslot	1 timeslot	pilot channel		1 DPCH	
Frequency ⁴	800 to 900 MHz 1800 to 1900 MHz	800 to 900 MHz 1800 to 1900 MHz	800 to 900 MHz 1800 to 1900 MHz		1800 to 2200 MHz	
EVM power level	≤ 7 dBm	≤ 7 dBm	≤ 7 dBm		≤ 7 dBm	
EVM	Global phase error		Spec Typ		Spec Typ	
	Spec	Typ	1.2%	0.7%	1.7%	1.3%
	rms 0.8 °	0.2 °				
	peak 1.5 °	0.6 °				

Format	802.11a/g	802.16e WiMAX ⁵	QPSK ⁶		16QAM ⁶	
Modulation type	64QAM	64QAM	QPSK		16QAM	
Modulation rate	54 Mbps	—	4 MSps		4 MSps	
Frequency ⁴	2400 to 2484 MHz 5150 to 5825 MHz	2300 to 2690 MHz 3300 to 3800 MHz	≤ 3 GHz		≤ 6 GHz	≤ 3 GHz ≤ 6 GHz
EVM power level	≤ 7 dBm	≤ 7 dBm	≤ 4 dBm		≤ 4 dBm	≤ 4 dBm
EVM	0.5% (typ)		0.4% (typ)		Spec	Typ
			1.2%	0.8%	1.9%	1.1%
			Spec	Typ	Spec	Typ
			1.1%	0.6%	1.5%	0.9%

- Maximum bandwidth depends on installed baseband generator options.
- EVM specifications apply for the default ARB file setup conditions with the default ARB files supplied with the instrument.
- EVM specifications apply after execution of an I/Q calibration when the instrument is maintained within ±5 °C of the calibration temperature.
- Performance evaluated at bottom, middle and top of bands shown.
- 802.16e WiMAX signal configuration: bandwidth: 10 MHz, FFT: 1024, frame length: 5ms, guard period: 1/8, symbol rolloff: 5%, content: 30 symbols of PN9 data.
- The QPSK and 16QAM signals were tested with a root Nyquist filter with $\alpha = 0.25$.

3GPP W-CDMA distortion performance

Offset	Configuration	Frequency ¹	Standard		Option UNV	
			Spec	Typ	Spec	Typ
Adjacent (5 MHz)	1 DPCH, 1 carrier ²	1800 to 2200 MHz	-68 dBc	-70 dBc	-71 dBc	-73 dBc
Alternate (10 MHz)			-69 dBc	-70 dBc	-71 dBc	-75 dBc
Adjacent (5 MHz)	Test model 1 with 64 DPCH, 1 carrier ²	1800 to 2200 MHz	-64 dBc	-65 dBc	-71 dBc	-73 dBc
Alternate (10 MHz)			-67 dBc	-67 dBc	-71 dBc	-75 dBc
Adjacent (5 MHz)	Test Model 1 with 64 DPCH, 4 carrier ³	1800 to 2200 MHz	-57 dBc	-59 dBc	-65 dBc	-67 dBc
Alternate (10 MHz)			-57 dBc	-60 dBc	-66 dBc	-68 dBc

3GPP2 cdma2000 distortion performance²

Offset	Configuration	Frequency ¹	Standard	Option UNV
885 kHz to 1.98 MHz	9 channel forward link	800 to 900 MHz	-78 dBc (typ)	-78 dBc (typ)
1.98 to 4 MHz		1800 to 1900 MHz	-83 dBc (typ)	-85 dBc (typ)
4 to 10 MHz		-88 dBc (typ)	-93 dBc (typ)	




GSM / EDGE output RF spectrum (ORFS)⁴

Offset	Configuration	Frequency ¹	GSM		EDGE	
			Standard	Option UNV	Standard	Option UNV
200 kHz	1 normal timeslot, burst	800 to 900 MHz	-33 dBc (typ)	-37 dBc (typ)	-35 dBc (typ)	-39 dBc (typ)
400 kHz			-67 dBc (typ)	-71 dBc (typ)	-67 dBc (typ)	-71 dBc (typ)
600 kHz		1800 to 1900 MHz	-79 dBc (typ)	-83 dBc (typ)	-78 dBc (typ)	-82 dBc (typ)
800 kHz			-80 dBc (typ)	-84 dBc (typ)	-80 dBc (typ)	-84 dBc (typ)
1200 kHz			-82 dBc (typ)	-86 dBc (typ)	-81 dBc (typ)	-85 dBc (typ)


802.16e mobile WiMax distortion performance²

Offset	Configuration ^{5,6}	Frequency	Standard	Option UNV
10 MHz	QPSK modulation	2.5 and 3.5 GHz	-63 dBc (typ)	-68 dBc (typ)


1. Performance evaluated at bottom, middle and top of bands shown.
2. Specifications apply for power levels ≤ -7 dBm.
3. Specifications apply for power levels ≤ -8 dBm.
4. Specifications apply for power levels $\leq +7$ dBm.
5. 802.16e WiMAX signal configuration: bandwidth: 10 MHz, FFT: 1024, frame length: 5ms, guard period: 1/8, symbol rolloff: 5%, content: 30 symbols of PN9 data.
6. Measurement configuration: reference channel integration BW: 9.5 MHz, offset channel integration BW: 9 MHz, channel offset: 10 MHz.

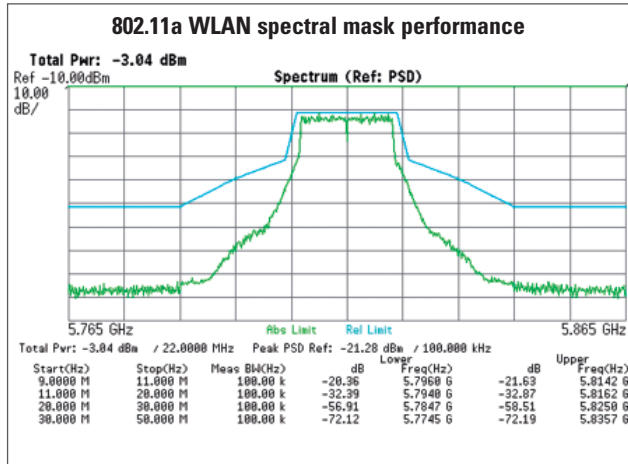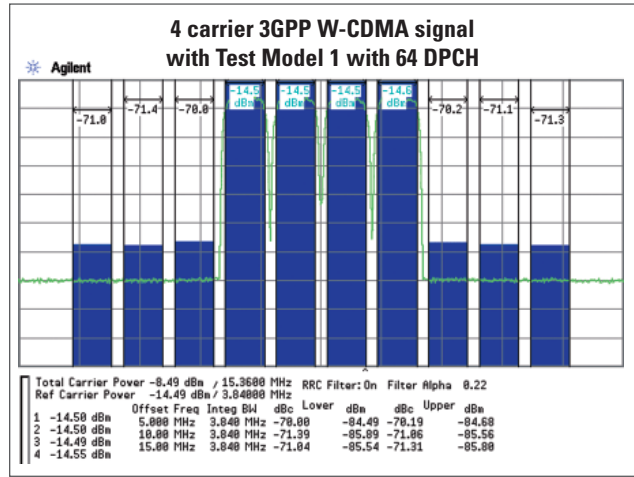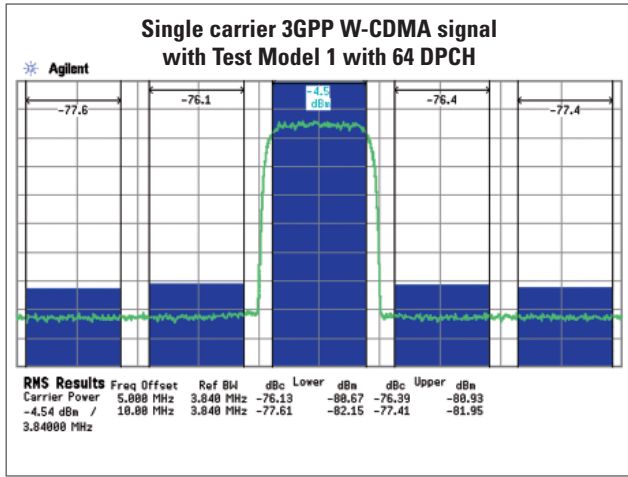


Signal configuration: OSR: 4
 Window length: 16
 Power level: 0 dBm
 Carrier frequency: 5.805 GHz

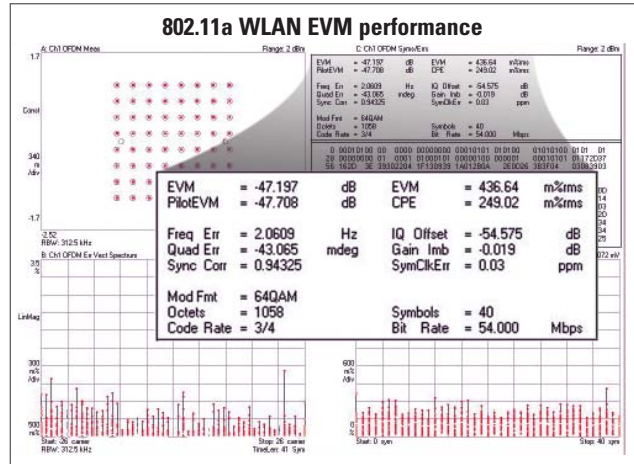


Signal configuration: OSR: 4
 Window length: 16
 Power level: 0 dBm
 Carrier frequency: 5.805 GHz

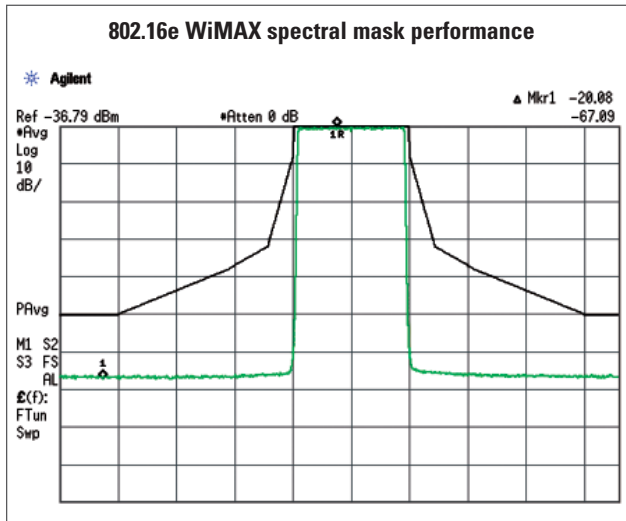


Signal configuration: Downlink signal, 30 symbols, QPSK, 10 MHz bandwidth
 Power level: -7 dBm

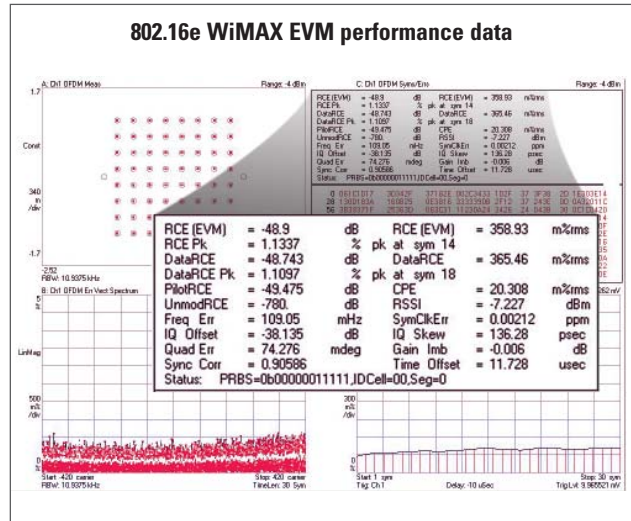

Signal configuration: Downlink signal, 30 symbols, 64QAM, 10 MHz bandwidth
 Power level: -7 dBm

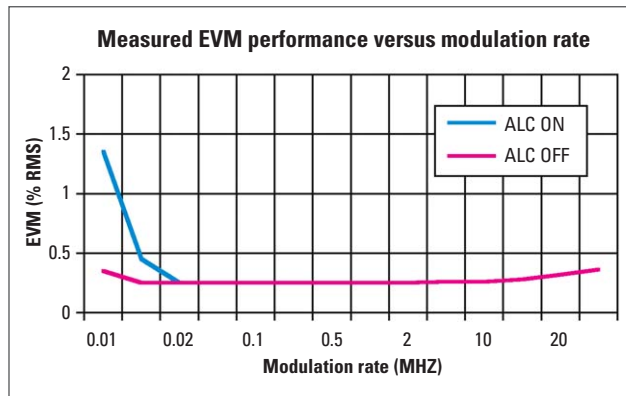

Signal configuration: QPSK modulation
 Alpha: 0.25
 Power level: +4 dBm
 Carrier frequency: 2.2 GHz

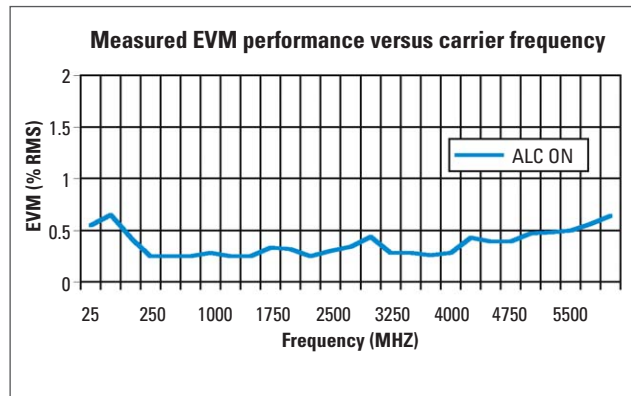

Signal configuration: QPSK modulation
 Alpha: 0.25
 Power level: +4 dBm
 Symbol rate: 4 MSymb/s

General Characteristics

Remote programming

Interfaces	GPIB	IEEE-488.2, 1987 with listen and talk
	LAN	100BaseT LAN interface, LXI class C compliant
	USB	Version 2.0
Control languages	SCPI	Version 1997.0

Compatibility languages supporting a subset of common commands¹

Agilent Technologies	E4438C, E4428C, E442xB, E443xB, E8241A, E8244A, E8251A, E8254A, E8247C, E8257C/D, E8267C/D, 8648 series, 8656B, E8663B, 8657A/B
Aeroflex Incorporated	3410 series
Rohde & Schwarz	SMU200A, SMJ100A, SMATE200A, SMIQ, SML, SMV
Power requirements	100 to 120 VAC, 50 to 60 Hz 220 to 240 VAC, 50 to 60 Hz 250 W maximum
Operating temperature range	0 to 55 °C
Storage temperature range	-40 to 70 °C
Operating and storage altitude	15,000 feet
Environmental stress	Samples of this product have been type tested in accordance with the Agilent Environmental Test Manual and verified to be robust against the environmental stresses of Storage, Transportation and End-use; those stresses include but are not limited to temperature, humidity, shock, vibration, altitude and power line conditions. Test Methods are aligned with IEC 60068-2 and levels are similar to MIL-PRF-28800F Class 3.
Safety	Complies with European Low Voltage Directive 73/23/EEC, amended by 93/68/EEC <ul style="list-style-type: none"> • IEC/EN 61010-1 • Canada: CSA C22.2 No. 61010-1 • USA: UL 61010-1
EMC	Complies with European EMC Directive 89/336/EEC, amended by 93/68/EEC <ul style="list-style-type: none"> • IEC/EN 61326 • CISPR Pub 11 Group 1, class A • AS/NZS CISPR 11:2002 • ICES/NMB-001
Memory	Memory is shared by instrument states, user data files, sweep list files, waveform sequences, and other files. There is 512 MB of flash memory available in the N5182A MXG. Depending on how the memory is utilized, a maximum of 1000 instrument states can be saved.
Security (Option 006)	Memory sanitizing, memory sanitizing on power on, and display blanking
Self test	Internal diagnostic routines test most modules in a preset condition. For each module, if its node voltages are within acceptable limits, the module “passes” the test.

1. Firmware version A.01.10 and later.

Weight	≤ 12.5 kg (27.5 lb.) net, ≤ 27.2 kg (60 lb.) shipping
Dimensions	103 mm H x 426 mm W x 432 mm L [4.07 in H x 16.8 in W x 17 in L]
Recommended calibration cycle	24 months
ISO compliant	The Agilent N5182A MXG is manufactured in an ISO-9001 registered facility in concurrence with Agilent Technologies' commitment to quality.
Front panel connectors ¹	
RF output I and Q inputs	Outputs the RF signal via a precision N type female connector. Accepts "in-phase" and "quadrature" input signals for I/Q modulation. Nominal input impedance is 50 Ω. Damage levels are 1 V _{rms} and 5 V _{peak} .
USB 2.0	Used with a memory stick for transferring waveforms, instrument states, and other files into or out of the instrument. Licenses can only be transferred into the instrument. For a current list of supported memory sticks, visit www.agilent.com/find/MXG , click on Technical Support, and refer to FAQs: Waveform Downloads and Storage.
Rear panel connectors ¹	
RF output (Option 1EM) I and Q outputs	Outputs the RF signal via a precision N type female connector. Outputs the analog I/Q modulation signals from the internal baseband generator. Nominal output impedance 50 Ω, DC coupled. Damage levels ± 2 V.
\bar{I} and \bar{Q} outputs (Option 1EL)	Outputs the complement of the I and Q signals for differential applications. Nominal output impedance is 50 Ω, DC-coupled. Damage levels are ± 2 V.
EXT Clk Event 1	Reserved for future use. This connector outputs the programmable timing signal generated by marker 1. The marker signal can also be routed internally to control the RF blanking and ALC hold functions. This signal is also available on the AUX I/O connector. This output is TTL and 3.3 V CMOS compatible. Damage levels are > +8 V and < -4 V.
Pattern trigger	Accepts signal to trigger internal pattern generator to start single pattern output, for use with the internal baseband generator (Option 651, 652, 654). This input is TTL and CMOS compatible. Damage levels are > +8 V and < -4 V.
Sweep out	Generates output voltage, 0 to +10 V when the signal generator is sweeping. This output can also be programmed to indicate when the source is settled or output pulse video and is TTL and CMOS compatible in this mode. Output impedance < 1 Ω, can drive 2k Ω. Damage levels are ±15 V.
AM	External AM input. Nominal input impedance is 50 Ω. Damage levels are ± 5 V.
FM	External FM input. Nominal input impedance is 50 Ω. Damage levels are ± 5 V.
Pulse	External pulse modulation input. This input is TTL and CMOS compatible. Low logic levels are 0 V and high logic levels are +1 V. Nominal input impedance is 50 Ω. Input damage levels are ≤ -0.3 V and ≥ +5.3 V.

1. All connectors are BNC unless otherwise noted.

Trigger in	Accepts TTL and CMOS level signals for triggering point-to-point in sweep mode. Damage levels are ≤ -0.3 V and $\geq +5.3$ V.
Trigger out	Outputs a TTL and CMOS compatible level signal for use with sweep mode. The signal is high at start of dwell, or when waiting for point trigger in manual sweep mode; low when dwell is over or point trigger is received. This output can also be programmed to indicate when the source is settled, pulse synchronization, or pulse video. Nominal output impedance 50 ohms. Input damage levels are ≤ -0.3 V and $\geq +5.3$ V.
Reference input	Accepts a 10 MHz reference signal used to frequency lock the internal timebase. Option 1ER adds the capability to lock to a frequency from 1 MHz to 50 MHz. Nominal input level -3.5 to +20 dBm, impedance 50 Ω .
10 MHz out	Outputs the 10 MHz reference signal used by internal timebase. Level nominally +3.9 dBm. Nominal output impedance 50 Ω . Input damage level is +16 dBm.
Digital bus I/O	Reserved for future use.
Aux I/O (25 pin SCSI II connector)	The AUX I/O connector provides additional digital signal outputs as follows. Event 1 - 4 (Pin 1 - 4) This connector outputs programmable timing signals generated by markers 1 - 4. The marker signals can also be routed internally to control the RF blanking and ALC hold functions. This output is TTL and 3.3 V CMOS compatible. Damage levels are $> +8$ V and < -4 V.
USB 2.0	The USB connector provides remote programming functions via SCPI.
LAN (100 BaseT)	The LAN connector provides the same SCPI remote programming functionality as the GPIB connector. The LAN connector is also used to access the internal web server and FTP server. The LAN supports DHCP, sockets SCPI, VXI-11 SCPI, connection monitoring, dynamic hostname services, TCP keep alive. This interface is LXI class C compliant.
GPIB	The GPIB connector provides remote programming functionality via SCPI.

Ordering Information

Frequency	503	Frequency range from 250 kHz to 3 GHz
	506	Frequency range from 250 kHz to 6 GHz
Performance enhancements	UNZ	Fast switching
	1EQ	Low power (<-110 dBm)
	UNU	Pulse modulation
	UNT	AM, FM, phase modulation
	006	Instrument security
	1ER	Flexible reference input (1-50 MHz)
	1EM	Move RF output to rear panel
	UK6	Commercial calibration certificate with test data
Vector specific options	651	Internal baseband generator (30 MSa/s, 8 MSa)
	652	Internal baseband generator (60 MSa/s, 8 MSa)
	654	Internal baseband generator (125 MSa/s, 8 MSa)
	019	Increase baseband generator memory to 64 MSa
	1EL	Differential I/Q outputs
	403	Calibrated AWGN
	UNV	Enhanced dynamic range
Signal Studio software	N7600B	Signal Studio for 3GPP W-CDMA with HSDPA/HSUPA
	N7601B	Signal Studio for 3GPP2 CDMA
	N7602B	Signal Studio for GSM/EDGE
	N7617B	Signal Studio for 802.11 WLAN
	N7615B	Signal Studio for 802.16 WiMax
	N7612B	Signal Studio for TD-SCDMA
Accessories	1CM	Rackmount kit
	1CN	Front handle kit
	1CP	Rackmount and front handle kit
	1CR	Rack slide kit

Related Literature

Application literature

- ***RF Source Basics, a self-paced tutorial*** (CD-ROM), literature number 5980-2060E.
- ***Accurate amplifier ACLR and ACPR testing with the Agilent MXG Vector Signal Generator***, literature number 5989-5471EN
- ***Improving Throughput with Fast RF Signal Generator Switching***, literature number 5989-5487EN
- ***Digital Modulation in Communications Systems-An Introduction***, Application Note 1298, literature number 5965-7160E.
- ***Testing CDMA Base Station Amplifiers***, Application Note 1307, literature number 5967-5486E.

Product literature

- ***Agilent MXG Signal Generator***, Brochure, literature number 5989-5074EN
- ***Agilent MXG Signal Generator***, Configuration Guide, literature number 5989-5485EN
- ***Agilent N5181A analog signal generator***, Data Sheet, literature number 5989-5311EN
- ***E4438C ESG Vector Signal Generator***, Brochure, literature number 5988-3935EN.
- ***E4438C ESG Vector Signal Generator***, Configuration Guide, literature number 5988-4085EN.
- ***E4438C ESG Vector Signal Generator***, Data Sheet, literature number 5988-4039EN



Agilent Email Updates

www.agilent.com/find/emailupdates

Get the latest information on the products and applications you select.



www.agilent.com/find/open

Agilent Open simplifies the process of connecting and programming test systems to help engineers design, validate and manufacture electronic products. Agilent offers open connectivity for a broad range of system-ready instruments, open industry software, PC-standard I/O and global support, which are combined to more easily integrate test system development.

See the Agilent MXG Web page for the latest information

Get the latest news, product and support information, application literature, firmware upgrades and more.

www.agilent.com/find/MXG

Remove all doubt

Without a doubt, our repair and calibration services will get your equipment back to performing like new. Without a doubt, we will get it back to you fast and when promised. We help you get full value out of your Agilent equipment throughout its lifetime. Your equipment will be serviced by Agilent-trained technicians using the latest factory calibration procedures, automated repair diagnostics and genuine parts, drawing from our unique access to the factory experts when necessary. This means that you will always have the utmost confidence in your measurements, so remove all doubt – use Agilent repair and calibration services for your instruments.

Agilent offers a wide range of additional expert test and measurement services for your equipment, including initial start-up assistance, onsite education and training, as well as design, system integration, and project management.

For more information on repair and calibration services, go to:

www.agilent.com/find/removealldoubt

www.agilent.com

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

www.agilent.com/find/contactus

Phone or Fax

United States:

(tel) 800 829 4444

(fax) 800 829 4433

Canada:

(tel) 877 894 4414

(fax) 800 746 4866

China:

(tel) 800 810 0189

(fax) 800 820 2816

Europe:

(tel) 31 20 547 2111

Japan:

(tel) (81) 426 56 7832

(fax) (81) 426 56 7840

Korea:

(tel) (080) 769 0800

(fax) (080)769 0900

Latin America:

(tel) (305) 269 7500

Taiwan:

(tel) 0800 047 866

(fax) 0800 286 331

Other Asia Pacific Countries:

(tel) (65) 6375 8100

(fax) (65) 6755 0042

Email: tm_ap@agilent.com

Revised: 08/03/06

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2006

Printed in USA, November 8, 2006

5989-5261EN



Agilent Technologies