



Agilent Technologies
E7490A CDMA
Base Station Over Air Test
Wireless Solutions

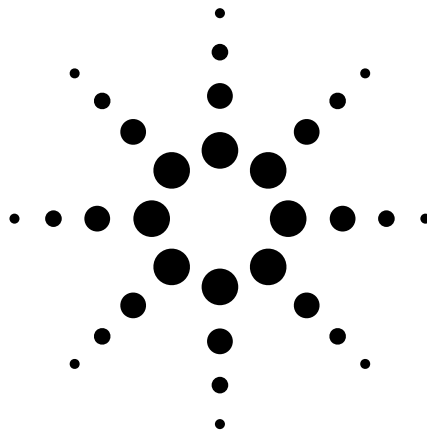

System Information
Guide

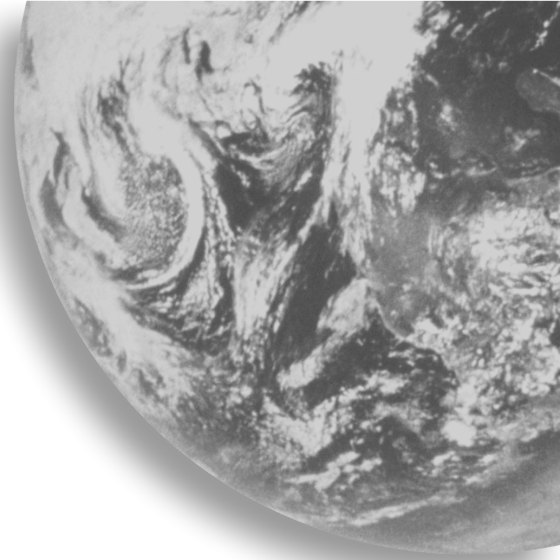

Agilent Technologies

System Information Guide

**Agilent Technologies E7490A CDMA
Base Station Over Air Test
Wireless Solutions**

**Manual part number
E7490-90003**

Edition/Print Date

All Editions and Updates of this manual and their creation dates are listed below.

First Edition ... September 2000

Notices

Copyright © Agilent Technologies, Inc 1997, 1998, 1999, 2000 All Rights Reserved.

No part of this manual may be reproduced in any form or by any means (including electronic storage and retrieval or translation into a foreign language) without prior agreement and written consent from Agilent Technologies, Inc. as governed by United States and international copyright laws.

Trademarks

ArcView ® is a registered trademark of Environmental Systems Research Institute, Inc.

MapInfo ® is a registered trademark of MapInfo Corporation.

Pentium ® is a registered trademark of Intel Corporation.

PlaNET ® is a registered trademark of Mobile Systems International.

Adobe ® is a trademark of Adobe Systems Incorporated.

Windows NT ® and Windows 95 ® and Windows 98 ® are U.S. registered trademarks of Microsoft Corporation.

Hewlett-Packard ® is a registered trademark of Hewlett-Packard Limited.

Warranty

The material contained in this document is subject to change without notice. Agilent Technologies makes no warranty of any kind with regard to this material, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose. Agilent Technologies shall not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance, or use of this material.

Technology Licenses Notice

The Hardware and/or Software described in this document are furnished under a license and may be used or copied only in accordance with the terms of such license.

Restricted Rights Legend

If Software is for use in the performance of a U.S. Government prime contract or subcontract, Software is delivered and licensed as “Commercial computer software” as defined in DFAR 252.227-7014 (June 1995), or as a “commercial item” as defined in FAR 2.101(a) or as “Restricted computer software” as defined in FAR 52.227-19 (June 1987) or any equivalent agency regulation or contract clause. Use, duplication or disclosure of Software is subject to Agilent Technologies’ standard commercial license terms, and non-DOD Departments and Agencies of the U.S. Government will receive no greater than Restricted Rights as defined in FAR 52.227-19(c)(1-2) (June 1987). U.S. Government users will receive no greater than Limited Rights as defined in

FAR 52.227-14 (June 1987) or DFAR 252.227-7015 (b)(2) (November 1995), as applicable in any technical data.

Agilent Technologies
1400 Fountaingrove Parkway
Santa Rosa, CA 95403-1799

Contents

Welcome to Your Product Information Guide	5
Introduction	7
Specifications and Hardware Information	11
Calibration Cycle	11
General System Software Functionality	12
Data Export	12
Alarms and Alerts	16
Link Editor	19
Real-time Mapping (Option 160)	19
Report Generation	20
Virtual Front Panel Printing	21
Indoor Measurements (Option 180)	21
Agilent E7490A Software Specifications	23
Software Measurement Specifications	23
CDMA Code Domain Power (CDP) Analysis	23
CDMA Base Station Spectrum Analysis	25
CDMA Mobile Station Test Measurement (MOST)	26
General Hardware Specifications	29
Personal Computer Recommendations, Minimum	29
External GPS Receiver Requirements	30
GPS and Vehicle Fitted Navigation Systems Supported	30
Differential GPS Receiver Requirements	30
Antennas	30
Agilent E7490A Hardware Specifications	31
Supported Phones	36
Agilent E7490A System Options	37
Software License Options	38
Receiver Options	39
Agilent 86154A, 86153A, and N3419A System Accessories	45

General System Accesories	45
86153A Retrofit Option	52
Agilent N3419A vehicle-mounted display system	52
Power Localization Options	54
Agilent E7490A System Accesories	55
Part Number Summary	57
RF Connectors and Antennas	61

Welcome to Your Product Information Guide

Thank you for choosing Agilent Technologies. In this Guide, you'll find the necessary information needed to support your Wireless Solutions system.

For Information on...	See This
Overview of the Agilent Wireless Solutions System	"Introduction" on page 7
Software Specifications	"General System Software Functionality" on page 12
Hardware Specifications	"General Hardware Specifications" on page 29
E7490A Over Air System Options	"Agilent E7490A System Options" on page 37
System Accessories	"Agilent 86154A, 86153A, and N3419A System Accessories" on page 45
System Part Number Summary	"Part Number Summary" on page 57

If You Need Help...

To Do This...	See This
View and Print this Guide	Additional Documentation, Chapter 3, <i>Getting Started Guide</i>
Contact Agilent Technologies and the Product Web site	http://www.agilent.com/find/networks

Introduction

The E74xx drive test system is a scalable integrated air interface measurement system, used to obtain comprehensive RF measurement and call performance data versus location. Depending on the hardware options you have purchased, you will be able to make measurements on the following technology types:

- CDMA Cellular and PCS band
- TDMA Cellular and PCS band
- GSM900, DCS1800, GSM1900, or GSM900/DCS1800 Dual-band
- W-CDMA (UMTS) (currently not supporting phone measurements), or cdma2000

Receiver-based, phone-based, or combined measurement capabilities are selected via stackable software licenses that reside on a supplied software protection key. Measurement receivers, which can be supplied with or without an internal GPS receiver, are supplied with magnetic mounting antennas, car mounting brackets, and RS-232 connection cables to link to a laptop PC (available as an accessory). Phone software licenses are supplied with dual-port ruggedized PCMCIA serial I/O cards.

The E74xx drive test system is a scalable measurement system for wireless optimization. It has four basic configurations:

- Phone-based measurement system using a single or multiple test mobile phones
- Receiver-based measurement system using a single or multiple digital measurement receivers
- Combined phone and receiver measurement system using a single or multiple receivers and phones
- Basestation Over Air Testing (Model E7490A, CDMA only)

Introduction


All of the above configurations can be used for indoor measurement. Measurements are matched to an imported floor plan or map in the absence of GPS.

The system requires a PC with Windows 95/98 or NT 4.0 (or later) running the receiver and/or phone-based measurement software. A navigation system, such as a GPS receiver and GPS antenna, is required to obtain longitude and latitude information for logging the position at which the measurements are taken by the receiver or the phone. This type of measurement can also be accomplished by use of the indoor option in lieu of the GPS option. The GPS receiver may be integrated into the digital receiver or it may be an external device. A suitable laptop PC and external GPS receiver can be supplied as drive test accessory products. The complete system is transportable in a lightweight briefcase that can be supplied as an accessory product.

[Figure 1 on page 9](#) illustrates a four phone and four receiver system.

Introduction

Figure 1 Four phone and four receiver system

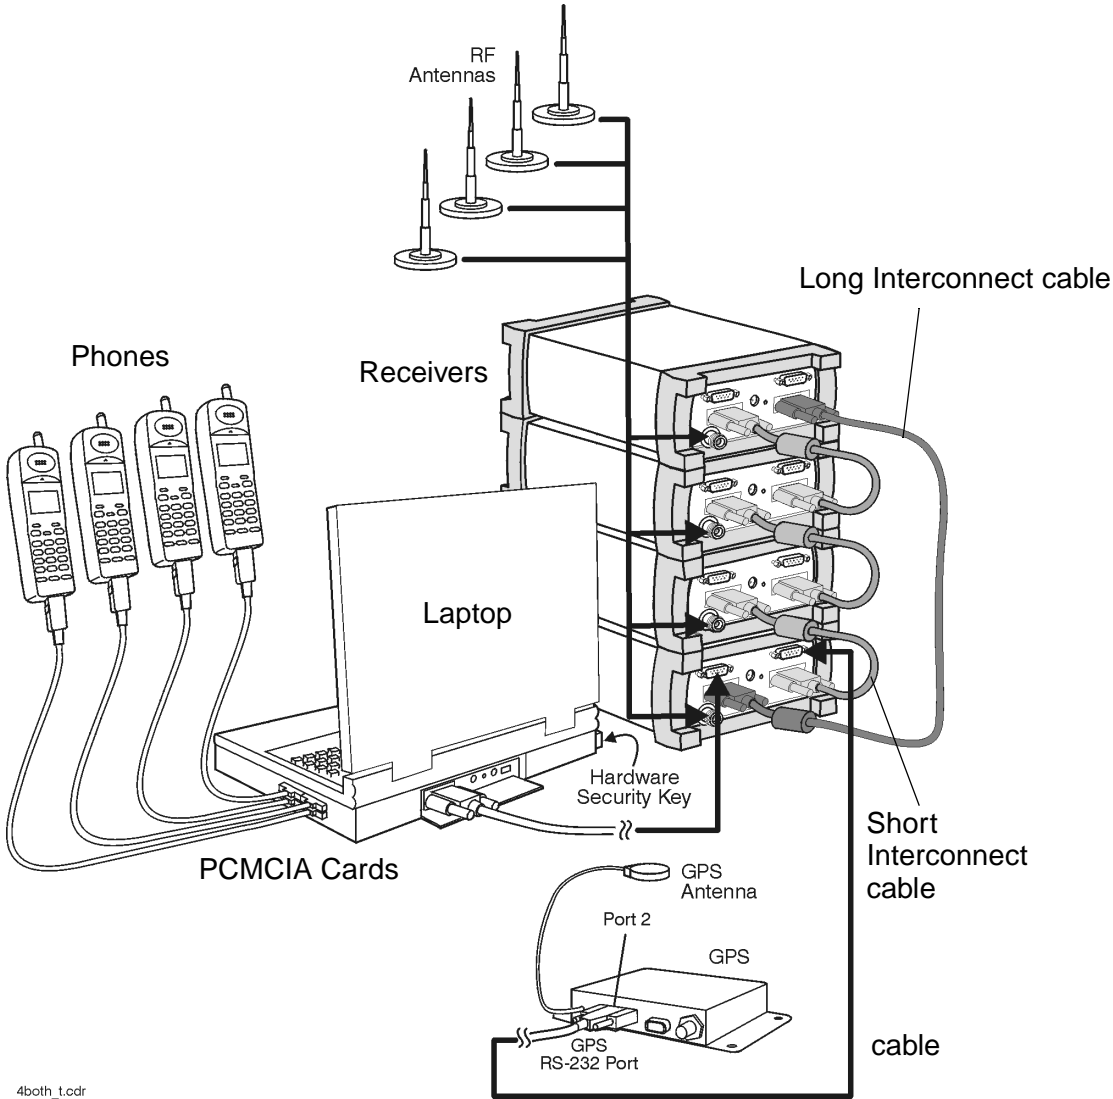

4both_t.cdr

Specifications and Hardware Information

This section lists specifications and characteristics of the systems.

Specifications	Describes warranted performance over the temperature range 0°C to +55°C (unless otherwise noted) after the temperature of the Receiver has been stabilized by 30 minutes of continuous operation.
Typical	Provides useful information by giving non-warranted performance parameters. Typical refers to test data at the fiftieth percentile for a 25°C room temperature.
Characteristics	Provides useful information by giving non-warranted performance parameters. Characteristics describe product information for parameters that are either not subject to variation, non-measurable, verifiable through functional pass/fail tests, or as a matter of routine, not measured. <i>Characteristics are printed in italics.</i>

Calibration Cycle

Agilent Technologies warrants instrument specifications over the recommended calibration interval. To maintain specifications, periodic recalibrations are necessary. We recommend that the Receiver be calibrated at an Agilent Technologies service facility every 12 months.

General System Software Functionality

Some of the functionality of the system is common across all wireless solutions. The following sections describe these cross-solution features.

- [“Data Export” on page 12](#)
- [“Alarms and Alerts” on page 16](#)
- [“Link Editor” on page 19](#)
- [“Real-time Mapping \(Option 160\)” on page 19](#)
- [“Report Generation” on page 20](#)
- [“Virtual Front Panel Printing” on page 21](#)
- [“Indoor Measurements \(Option 180\)” on page 21](#)

Data Export

All measurement data can be exported from the Agilent Wireless Solutions database for display and post-processing. Any measurement data can be exported. The export function provides flexible filtering capability enabling you to define the specific data to be exported. Multiple data types can be exported to a single output file.

You can save export plans, and once saved, those plans can be quickly accessed for easy data export. An export plan is made up of:

Export Plan Element	Description
Data type	Defines which data will be exported. Column order is user-definable.
Alarm	Defines which alarms will be exported.
Note	Exports any user note or auto-note entered while recording data

General System Software Functionality

Export Plan Element	Description
Processing functions	Defines the functions that will be applied to the data during export.
Exclusion rules	Defines a set of conditions that, if true, the associated data will be excluded from the export.
Geographic binning	Defines data-reduction process in which the data is averaged based on geographic area or distance

Several different operations can be executed in order to extract the desired data in the desired format.

Processing functions

- None
- Choose
- Count - counts number of values above or below a specified threshold
- Field
- Match
- Maximum
- Minimum
- Sort - ascend or descend
- Value(x)

Conditionals

- Greater than (>) a threshold
- Less than (<) a threshold
- All values

Geographic binning methods

- **Bin size**
User defines the size in meters of bin to be used.
- **Percentage of low and high values to discard**
User defines the percentage of values to ignore from new raw data before calculating the bin.

General System Software Functionality

- **Bin by location (grid binning)**

Define the reference bin and point of bin to be used, choices are:

- Center of bin
- Corner of bin

Each bin then has the following secondary choices:

- Southwest extent of drive data
 - ▲ Southeast extent of drive data
 - ▲ Northwest extent of drive data
 - ▲ Northeast extent of drive data
 - ▲ User-defined reference coordinates

- **Bin by distance travelled (linear binning)**

Data is averaged based on the distance traveled.

Data Output Formats

The output formats supported by the Agilent Wireless Solutions are listed below. The system is designed to work with MapInfo®¹ in an integrated manner via an OLE (object link embedded) link to the MapInfo application (MapInfo via COM). With “Run MapBasic” checked, this exports the data, launches MapInfo, creates the necessary MapInfo table, and creates a thematic map display in MapInfo. This functionality requires MapInfo be present.

- Arcview®² compatible file
- MapInfo via COM (optional - run MapBasic program after export)
- MapInfo compatible file
- Planet ®³ compatible file
- Text file

1. MapInfo® is a registered trademark of MapInfo Corp.
2. ArcView ® is a registered trademark of Environmental Systems Research Institute, Inc.
3. Planet ® is a registered trademark of Metapath.

Export Column Data Delimiters

- Tab
- Comma
- Space

Optional Data Parameters

- Position
- Altitude
- Time
- Date

Optional Settings

- Fill column data
- Column headings
- Sequence Number

Position Formats

- Decimal degrees with direction
- Deg: Min: Sec with direction
- Signed decimal degrees
- Signed Deg: Min: Sec
- UTM (Universal Transverse Mercator)

Coordinate Datums

It is possible to change the coordinate datum being applied by the application. It can be changed during the plan configuration.

The following datums are available:

- AGD66
- AGD84
- European
- Hu-Tzu-Shan
- NAD27 (default) (North American)

General System Software Functionality

- NAD83 (North American)
- OS36 (GB)
- SAD69 (Brazil)
- SAD69 (Mean)
- Tokyo (J6)
- Tokyo-Korea
- WGS72 (World Geodetic System)
- WGS84 (World Geodetic System)

Alarms and Alerts

The Wireless Solutions Software has sophisticated alarm and alert capabilities. An alarm is a boolean expression made up of one or more conditions on single or multiple measurements, including comparisons of measurement results. An alert is a simplified alarm, defined as a single condition on a single measurement. An action, or actions, can be executed when an alarm or alert occurs. The re-trigger feature re-executes an alarm's actions if all the conditions have continuously been satisfied for a specified amount of time (alarm actions are normally executed only when the conditions transition from unsatisfied to satisfied). If an alert or alarm condition occurs, while data is being logged, each data record includes the alert/alarm information.

Alarm Wizard

The alarm wizard can be used to simplify setting up some of the more common alarms.

Features of the Alarm Wizard Set up

- Specify type of alarm required
- Receive notification of new or changed measurements
- Receive notification of resources required
- Customize settings, actions and other user-definable aspects
- Set default Male and Female voice alarm messages

General System Software Functionality

Actions (Alarms and Alerts)

- Play a .WAV audio file
- Display a text message
- Pause recording, Continue (resume) recording, or Stop recording measurements

Alert Conditions

- Greater than ($>$)
- Greater than or equal to (\geq)
- Less than ($<$)
- Less than or equal to (\leq)
- Equal to ($=$)
- Not equal to (\neq)

Alert Operators

- Value
- Delta
- Maximum
- Minimum

Alarm Conditions

- Greater than ($>$)
- Greater than or equal to (\geq)
- Less than ($<$)
- Less than or equal to (\leq)
- Equal to ($=$)
- Not equal to (\neq)
- Is a subset
- Is not a subset
- Sets intersect
- Sets do not intersect
- Range (inclusive)
- Range (exclusive)

General System Software Functionality

Alarm Preprocess Operators

- Value
- Maximum
- Minimum
- Subset
- Average
- Count
- Delta
- dField (a change in field value)
- Field
- MaxField
- MinField
- Median

Alarm Condition Operators

- OR
- AND
- XOR (exclusive OR)

Any measurement can be an operand in an alert or alarm. Below are some examples of alerts and alarms.

- **Alerts**
 1. Minimum (CW Power Trace) > -90 dBm
 2. Maximum(Spectrum) < -100 dBm
- **Alarms**
 3. (Heading < 300) and (GPS FIX Type = GPS 3D)
 4. Subset (CW Power Trace) NOT Subset (value Channel Power List)

System status parameters can also be used as operands in alerts and alarms. For example, an alert can be set to trigger when the available disk space on the PC drops below 10 MB or when the GPS position fix is lost.

Link Editor

The Link Editor is available from the Tools menu and enables you to link controls in one virtual front panel (the source) with parameters in another virtual front panel (the destination). Links can be configured from either Configuration mode or Collection mode. You can:

- Link simple measurement results to parameters for other measurements.
- Link measurement parameters to parameters for other measurements.
- Invoke an action (such as a button click) on all virtual front panels of the same type.
- Invoke an action (such as a button click) on a select set of virtual front panels of the same type.

Real-time Mapping (Option 160)

Using the Positioning virtual front panel, you can display vector and raster-based maps against a real-time, plotted measurement result. The following features are available:

- Load and control map layers (TAB format).
- Add raster maps (GIF, TIF, and PNG format).
- Zoom in and Zoom out of map detail.
- Pan automatically and manually.
- Scale automatically and manually.
- Add labels and identify points.
- Display alarms or notes on map. Click on alarm or note symbol to display the message associated with the alarm or note.
- Link a measurement result, via the link editor for display on the map as a thematic value.

General System Software Functionality

- Map result values, in color, via the legend button. Pre-defined legends exist for most common measurement results.
- Specify base stations in StationInfo.txt to have them display on the map.
- Link the active server for a phone to the map and the program will draw a vector line from the current position to the appropriate base station.

Report Generation

The report generator is accessed using the **Tools > New Report (Ctrl+R)** menu option, or by clicking the report generator button in Collection mode. The reports generated are in HTML format with referenced images, which are captured in PNG format. The reports and images are stored in the report folder (if default installation was used:

C:\Program Files\Agilent Technologies\E74xx\Reports\reportname\). The following details can be entered by the user:

- Title (also used for the report folder name)
- User name
- Company name
- Time report generated. By default, this is the PC system time.
- Date. By default, this is the PC system date.
- Location. By default, these are the GPS coordinates identified at the time the report was generated.
- Comments. This is optional text, entered by the user.
- A report can include all opened Virtual Front Panels, or just those minimized.
- A report may also contain textual and/or table information for specific measurements.

General System Software Functionality

Once the report has been generated, it is displayed on the screen, using your default browser. Reports can be viewed by selecting the Reports tab while in Configuration mode. Reports can be imported and exported.

Virtual Front Panel Printing

It is possible to print virtual front panels. This feature is accessed from the File menu. There are two print commands:

- Print (Ctrl+P) prints the application main window and all other virtual front panels.
- Print VFP prints just the active virtual front panel.

The active virtual front panel is the window with the blue title bar (if default windows colors are used).

Indoor Measurements (Option 180)

The Agilent Wireless Solutions Software can be used for testing and measuring indoor coverage areas. These measurements are taken without reference to GPS or dead-reckoning position information.

An indoor system supports the following hardware:

- Phones
- Receivers (no PN correlation for CDMA)
- Pen tablet computer
- Computer pen input devices
- Full set of backpack accessories
- Portable power supply for computer and receiver

The measurement control virtual front panel has the following features

- Selection of data points, such as user features like CW sources

General System Software Functionality

- Waypoint information to specify distribution of data between two waypoints.
- Automatic interpolation of data between waypoints, during recording
- Imported maps converted to layer map files. Supports GIF, TIF, and PNG formats
- Zoom in and zoom out of map area.
- Automatic and manual pan.
- Automatic and manual scaling.
- Display alarms and notes on map. Click on alarm or note symbol to display the message associated with the alarm or note.
- Link measurements to display thematic values.
- Map result values in color via the legend button. Pre-defined legends exist for most common measurement results.

Agilent E7490A Software Specifications

Software Measurement Specifications

The Agilent E7490A Base Station Over Air Test System measurement software has the following measurement capabilities and functionality:

- “CDMA Code Domain Power (CDP) Analysis” on page 23
- “CDMA Base Station Spectrum Analysis” on page 25
- “CDMA Mobile Station Test Measurement (MOST)” on page 26

CDMA Code Domain Power (CDP) Analysis

Part of Agilent E7490A option 111.

Measurement Types

- **Top N**

The system measures all signals in the network and returns the ‘N’ strongest power pilot signals received, where ‘N’ is a user definable integer from 1 to 2 for Agilent E7490A and ‘N’ is from 1 to 20 for Agilent E7473A. The results are displayed in bar graph format.
- **CDP Trace**

The system shows the power of each Walsh code and their relative status.
- **CDP Stats**

The system reports the statistics from one or more predefined lists selected from the display controls. These lists are:

 - Modulation Stats

Agilent E7490A Software Specifications

- Channel Stats
- All (both)

Measurement Controls

- Carrier frequency
 - Frequency
 - Channel
- Measurement types
 - Top N
 - CDP trace
 - CDP stats and CDP reset
 - PN increment
- Band
 - Uplink
 - Downlink

Display Controls

- Power display (Y-axis parameter)
 - Ec/Io
 - Ec
- Show value (bar graphs only)
 - None
 - Delay (chips)
 - Ec (dBm)
 - Ec/Io (dB)
 - Aggregate - Ec (dBm)
 - Aggregate - Ec/Io (dB)
 - Delay spread(chips)
 - Aggregate - Peak (dB)
 - Aggregate - Peak (dBm)
- CDP stats display list
 - Modulation statistics
 - ▲ PN
 - ▲ Delay

- ▲ Estimated rho
- ▲ Delta paging
- ▲ Delta Sync
- ▲ Noise floor
- ▲ Carrier feedthrough
- ▲ Multiplath power
- ▲ Pilot dominance
- ▲ Pilot power, Ec
- ▲ Channel power, Io
- ▲ Channel, carrier
- Channel Statistics
 - ▲ Multipath power
 - ▲ Pilot dominance
 - ▲ Percentage amplitude
 - ▲ Relative power of traffic channel
 - ▲ Average relative power of active traffic channel
 - ▲ Number of active traffic channels
 - ▲ Peak held across all active traffic channels
 - ▲ Average across all active channels
- All lists

CDMA Base Station Spectrum Analysis

Part of Agilent E7490A option 111.

The spectral mask measurement enables you to visually determine whether the signals in your band meet the IS-97C specifications.

Measurement Types

- Spectral mask
 - Frequency segments against which the spectrum is measured.
 - Pass or fail of transmit power within each frequency segment.
 - Frequency difference between center and spur of worst spurious signal.
 - Amplitude difference from spur to limit line for worst spurious signal.

Measurement Controls

- Frequency units
 - Frequency
 - Channel
- Carrier
- Band
- Span
- Averages

Display Controls - Markers

- Multiple markers
- Delta markers
- To Max function
- Drag and drop
- Marker to center

CDMA Mobile Station Test Measurement (MOST)

Part of Agilent E7490A option 101.

The Mobile station test measurement (MOST) measures quality, automates the measurement actions, and records the results of the measurement. You enter the call number, the length of the call, and the code key sequence. The MOST test forces the phone to hand the call to the next channel element. It records data for the phone on the forward link, including notes, date, and time. FER and Walsh codes are recorded for every channel element tested.

Call Status Fields

- Channel
- Site
- Face
- Cluster control
- Channel unit
- Channel element

Agilent E7490A Software Specifications

- FER
- Sequence number
- Walsh code

Automatic Redial

- On a dropped call
- On a blocked call (failed origination)
- Redial interval (wait duration after drop or block)
- Maximum redial attempts

Call Test Setup Fields

- Directory number
- Function code
- Test interval
- Number of iterations

General Hardware Specifications

Personal Computer Recommendations, Minimum

The PC requirements differ depending on the operating system, and on whether you wish to collect data from a single phone or multiple phones.

Single phone

- Windows 95/98
 - Minimum: 233 MHz Pentium, 64 Mbytes RAM
 - Recommended: 266 MHz Pentium II or III, 64 Mbytes RAM
- Windows NT/2000
 - Minimum: 233 MHz Pentium, 64 Mbytes RAM
 - Recommended: 266 MHz Pentium II or III, 128 Mbytes RAM

Multiple phone

- Windows 95/98
 - Minimum: 266 MHz Pentium, 64 Mbytes RAM
 - Recommended: 366 MHz Pentium II or III, 64 Mbytes RAM
- Windows NT/2000
 - Minimum: 266 MHz Pentium, 64 Mbytes RAM
 - Recommended: 366 MHz Pentium II or III, 128 Mbytes RAM

Common Requirements

- RS-232 DB9 Serial Port
- Parallel port: 25-pin bidirectional
- 90 Mbytes disk space for software installation
- 200 Mbytes disk space for data (recommended)
- CD-ROM drive recommended
- 800 x 600 display resolution minimum

General Hardware Specifications

- For multiple phone capability
 - Two PCMCIA slots
 - USB port with USB/serial hub (recommended)

External GPS Receiver Requirements¹

- TSIP, TAIP, or NMEA communication protocol
- RS-232 (DB9) interface

GPS and Vehicle Fitted Navigation Systems Supported

- Bosch Travel Pilot RGS08 Professional
- Magneti Marelli RP Nav200
- GARMIN GPSII/III/IIIplus
- Trimble DR
- Trimble 455/DR and 450
- Trimble SVeeSix
- Trimble 400

Differential GPS Receiver Requirements

- DCI RDS-3000

Antennas

- Receiver RF input specifications:
 - Input impedance: 50 Ω
 - Connector type: Type-N

1. For Agilent E7473A CDMA options 110, 111, or 120 and Agilent E7490A option 111, or Agilent E7476A option 110, any external GPS will have to output a GPS 1 pulse/second signal for improved frequency accuracy.

Agilent E7490A Hardware Specifications

For full details on receiver types and options, refer to the appropriate system options section in this guide.

Agilent E7490A Option 300/310, 380/381 Cellular Receiver Specifications

Model		E6452A Receiver Options 300, 310	E6452A-H02 Options 380, 381
Frequency	Frequency range	824 to 849 MHz 869 to 894 MHz	832 to 870 MHz 887 to 925 MHz
	Frequency accuracy <i>With GPS time synchronization</i>	±1 ppm ±0.05 ppm, characteristic	
	IF bandwidth	1.25 MHz, characteristic 30 kHz, characteristic	1.25 MHz, characteristic 30 kHz, characteristic
	Aging of TCXO	±1 ppm/year	
Amplitude	Accuracy, 1.25 MHz IF	±1 dB from -40 dBm to -100 dBm (20° to 30°C)	±1 dB from -40 dBm to -100 dBm (20° to 30°C)
		±2 dB from -40 dBm to -100 dBm (0° to 55°C)	±2 dB from -50 dBm to -100 dBm (0° to 55°C)
			±3 dB from -40 dBm to -50 dBm (0° to 55°C)
	Accuracy, 30 kHz IF	±1.5 dB from -40 dBm to -100 dBm (20° to 30°C) ±2.5 dB from -40 dBm to -100 dBm (0° to 55°C)	
	Noise figure	8.0 dB typical	
	Maximum safe input level	+10 dBm, 20V DC, characteristic	

Agilent E7490A Hardware Specifications

Model	E6452A Receiver Options 300, 310	E6452A-H02 Options 380, 381
	1 dB compression point ^a	-15 dBm, characteristic
	Adjacent channel desensitization ^b	-25 dBm typical
	Adjacent channel rejection ^c	45 dB typical
	Internally generated spurious, input referred	-120 dBm
Input/Output	RF input	50Ω Type-N
Connectors	Computer	RS-232 (DB9) Male
	GPS	RS-232 (DB9) Male
	Power	DC power jack 100 mils, positive center
Miscellaneous	Operating temperature range	0°C to 55°C
	Maximum relative humidity	80% for temperatures up to 31°C, decreasing linearly to 50% relative humidity at 40°C
	Storage temperature range	-40°C to +70°C
	Dimensions	6 in × 3-5/8 in × 8 in 15.24 cm x 9.21 cm x 20.32 cm
	Weight	4.6 lbs (2.1 kg)
	Power (option 300, 380)	9 to 34 V DC, 9W
	Power (internal GPS, option 310, 381)	9 to 34 V DC, 10W
	Transformer AC Power (supplied with receiver)	100 - 240 Volts AC 50 - 60 Hz

Agilent E7490A Hardware Specifications

Model		E6452A Receiver Options 300, 310	E6452A-H02 Options 380, 381
Internal GPS ^d (Option 310, 381)	GPS Receiver	8 Channel internal GPS receiver	
	Connector type	SMA	
Differential compatible without dead reckoning			

- a. It is recommended the input signal level not exceed -40 dBm.
- b. Adjacent channel desensitization: 1 dB compression of tuned signal with interfering signal 1.25 MHz from tuned signal.
- c. Adjacent channel rejection applies to the narrowband mode (30 kHz IF filter) and is defined as: Suppression of interfering signal ± 30 kHz from tuned signal for 30 kHz.
- d. Systems fitted with an internal GPS do not support connection to external GPS receivers.

Agilent E7490A Hardware Specifications

Agilent E7490A Option 320/330, 390/391 PCS Receiver Specifications

Model		E6450B Receiver Options 320, 330	E6453A Receiver Options 390, 391
Frequency	Frequency range	1850 to 1910 MHz 1930 to 1990 MHz	1710 to 1785 MHz 1805 to 1880 MHz
	Frequency accuracy <i>With GPS time synchronization</i>	±1 ppm ±0.05 ppm, characteristic	
	IF bandwidth (wideband mode)	1.25 MHz, characteristic	1.25 MHz characteristic
	IF bandwidth (narrowband mode)	30 kHz, characteristic	200 kHz, characteristic
	Aging of TCXO	±1 ppm/year	
Amplitude	Accuracy 1.25 MHz IF	±1 dB from -40 dBm to -100 dBm (20° to 30°C) ±2 dB from -40 dBm to -100 dBm (0° to 55°C)	± 0.5 typical (-25 dBm to -100 dBm)
	Accuracy, 30 kHz IF	±1.5 dB from -40 dBm to -100 dBm (20° to 30°C) ± 2.5 dB from -40 dBm to -100 dBm (0° to 55°C)	
	Accuracy, 200 kHz IF		± 0.5 typical (-25 dBm to -100 dBm)
	Noise figure	8.0 dB typical	
	Maximum safe input level	+10 dBm, 20V DC, characteristic	
	1 dB compression point ^a	-15 dBm, characteristic	
	Adjacent channel desensitization ^b	-25 dBm typical	
	Adjacent channel rejection ^c	45 dB typical	
	Internally generated spurious, input referred	-120 dBm	

Agilent E7490A Hardware Specifications

Model		E6450B Receiver Options 320, 330	E6453A Receiver Options 390, 391
Input/Output	RF input	50Ω Type-N	
Connectors	Computer	RS-232 (DB9) Male	
	GPS	RS-232 (DB9) Male	
	Power	DC power jack 100 mils, positive center	
Miscellaneous	Operating temperature range	0°C to 55°C	
	Maximum relative humidity	80% for temperatures up to 31°C, decreasing linearly to 50% relative humidity at 40°C	
	Storage temperature range	-40°C to +70°C	
	Dimensions	6 in x 3-5/8 in x 8 in 15.24 cm x 9.21 cm x 20.32 cm	
	Weight	4.6 lbs (2.1 kg)	
	Power (option 320, 390)	9 to 34 V DC, 9W	
	Power (internal GPS option 330, 391)	9 to 34 V DC, 10W	
	Transformer AC Power (supplied with receiver)	100 - 240 Volts AC 50 - 60 Hz	
Internal GPS ^d (Option 330, 391)	GPS Receiver	8 Channel internal GPS receiver	
	Connector type	SMA	
Differential compatible without dead reckoning			

- a. It is recommended the input signal level not exceed -40 dBm.
- b. Adjacent channel desensitization applies to wideband mode (1.25 MHz IF filter) and is defined as: 1 dB compression of tuned signal with interfering signal 1.25 MHz from tuned signal.
- c. Adjacent channel rejection applies to the narrowband mode (30 kHz and 200 kHz IF filter) and is defined as: Suppression of interfering signal ± 30 kHz from tuned signal and ± 200 kHz from tuned signal for 200 kHz.
- d. Systems fitted with an internal GPS do not support connection to external GPS receivers.

Supported Phones

- Qualcomm QCP-800, QCP-820, QCP-860, QCP-1900, QCP-1920, QCP-1960, QCP-2700, QCP-2760
- Sony CM-D500, CM-D600, CM-M1300, CM-B1201SPR, CM-S1101SPR
- Samsung SCH-1000
- Lucky Goldstar LG1300 Korean PCS
- Toshiba CM10 for Cellular J-CDMA

Agilent E7490A System Options

For details on the measurement capabilities and setting up your system, refer to the *Getting Started Guide* shipped with your system. Contact your local Agilent sales and service office for information about ordering these options.

Option	Description	More Details On Page
101	CDMA Phone Mobile Station Test (MOST) software license	page 38
111	CDMA Code Domain and Spectrum Mask software license	page 38
300	Cellular Band Receiver (824-849 MHz and 869-894 MHz)	page 39
310	Cellular Band Receiver (824-849 MHz and 869-894 MHz) with internal GPS	page 39
320	PCS Band Receiver (1850-1910 MHz and 1930-1990 MHz)	page 40
330	PCS Band Receiver (1850-1910 MHz and 1930-1990 MHz) with internal GPS	page 40
380	J-CDMA Band Receiver (832-870 MHz and 887-925 MHz)	page 41
381	J-CDMA Band Receiver (832-870 MHz and 887-925 MHz) with internal GPS	page 41
390	Korean PCS Band Receiver (1710-1785 MHz and 1805-1880 MHz)	page 42
391	Korean PCS Band Receiver (1710-1785 MHz and 1805-1880 MHz) with internal GPS	page 42

Agilent E7490A System Options

Software License Options

Option	Part Number	Description
101		<ul style="list-style-type: none">• CDMA Phone Mobile Station Test (MOST) software license• Software CD• Software License security key• Single Port I/O Card or Dual Port I/O Card
	E7474-90035	<ul style="list-style-type: none">• Getting Started Guide
	E7490-90003	<ul style="list-style-type: none">• E7490A System Information Guide
111		<ul style="list-style-type: none">• CDMA Code Domain and Spectrum Mask software license• Software CD• Software License security key
	E7474-90035	<ul style="list-style-type: none">• Getting Started Guide
	E7490-90003	<ul style="list-style-type: none">• E7490A System Information Guide

Agilent E7490A System Options

Receiver Options

Option	Part Number	Description
300		Cellular Band (E6452A) Receiver (824-849 MHz and 869-894 MHz)
	0950-2679	AC/DC Power Supply for Receiver
	1150-2061	Magnetic Mount Cellular Band Antenna
	1200-1897	Antenna Adapter Connector (N Type to TNC)
	5182-4794	Receiver RS-232 9-pin to 9-pin Cable
	E6450-60007	Firmware Write Enable Key
	E6450-60010	Cigarette Lighter Power Adapter
	E7450-60001	15-pin Interconnection Cable 380mm (15in) (short)
86154-60033	Vehicle Mounting Kit	
310		Cellular Band (E6452A) Receiver (824-849 MHz and 869-894 MHz) with internal GPS
	0950-2679	AC/DC Power Supply for Receiver
	1150-2061	Magnetic Mount Cellular Band Antenna
	1150-2085	Magnetic Mount GPS Antenna for internal GPS
	1200-1897	Antenna Adapter Connector (N Type to TNC)
	5182-4794	Receiver RS-232 9-pin to 9-pin Cable
	E6450-60007	Firmware Write Enable Key
	E6450-60010	Cigarette Lighter Power Adapter
E7450-60001	15-pin Interconnection Cable 380mm (15in) (short)	
86154-60033	Vehicle Mounting Kit	

Agilent E7490A System Options

Option	Part Number	Description
320		PCS Band (E6450B) receiver (1850-1910 MHz and 1930-1990 MHz)
	0950-2679	AC/DC Power Supply for Receiver
	E7475-60007	Magnetic Mount PCS Band Antenna
	1200-1897	Antenna Adapter Connector (N Type to TNC)
	5182-4794	Receiver RS-232 9-pin to 9-pin Cable
	E6450-60007	Firmware Write Enable Key
	E6450-60010	Cigarette Lighter Power Adapter
	E7450-60001	15-pin Interconnection Cable 380mm (15in) (short)
86154-60033	Vehicle Mounting Kit	
330		PCS Band (E6450B) receiver (1850-1910 MHz and 1930-1990 MHz) with internal GPS
	0950-2679	AC/DC Power Supply for Receiver
	E7475-60007	Magnetic Mount PCS Band Antenna
	1150-2085	Magnetic Mount GPS antenna for internal GPS
	1200-1897	Antenna Adapter Connector (N Type to TNC)
	5182-4794	Receiver RS-232 9-pin to 9-pin Cable
	E6450-60007	Firmware Write Enable Key
	E6450-60010	Cigarette Lighter Power Adapter
E7450-60001	15-pin Interconnection Cable 380mm (15in- short)	
86154-60033	Vehicle Mounting Kit	

Agilent E7490A System Options

Option	Part Number	Description
380		J-CDMA Band (E6452A-H02) Receiver (832-870 MHz and 887-925 MHz)
	0950-2679	AC/DC Power Supply for Receiver
	E7450-80005	Magnetic Mount 900 MHz Band Antenna Assembly
	5182-4794	Receiver RS-232 9-pin to 9-pin cable
	E6450-60007	Firmware Write Enable Key
	E6450-60010	Cigarette Lighter Power Adapter
	E7450-60001	15-pin Interconnection Cable 380mm (15in) (short)
	86154-60033	Vehicle Mounting Kit
381		J-CDMA Band (E6452A-H02) Receiver (832-870 MHz and 887-925 MHz) with internal GPS
	0950-2679	AC/DC Power Supply for Receiver
	E7450-80005	Magnetic Mount 900 MHz Band Antenna Assembly
	1150-2085	Magnetic Mount GPS Antenna for internal GPS
	5182-4794	Receiver RS-232 9-pin to 9-pin Cable
	E6450-60007	Firmware Write Enable Key
	E6450-60010	Cigarette Lighter Power Adapter
	E7450-60001	15-pin Interconnection Cable 380mm (15in) (short)
86154-60033	Vehicle Mounting Kit	

Agilent E7490A System Options

Option	Part Number	Description
390		Korean-CDMA (E6453A) Receiver (1710-1785 MHz and 1805-1880 MHz)
	0950-2679	AC/DC Power Supply for Receiver
	E7450-80004	Magnetic Mount 1.7-1.9 MHz Band Antenna Assembly
	5182-4794	Receiver RS-232 9-pin to 9-pin Cable
	E6450-60007	Firmware Write Enable Key
	E6450-60010	Cigarette Lighter Power Adapter
	E7450-60001	15-pin Interconnection Cable 380mm (15in) (short)
	86154-60033	Vehicle Mounting Kit
391		Korean-CDMA (E6453A) Receiver (1710-1785 MHz and 1805-1880 MHz) with internal GPS
	0950-2679	AC/DC Power Supply for Receiver
	E7450-80004	Magnetic Mount 1.7-1.9 MHz Band Antenna Assembly
	1150-2085	Magnetic Mount GPS Antenna for internal GPS
	5182-4794	Receiver RS-232 9-pin to 9-pin Cable
	E6450-60007	Firmware Write Enable Key
	E6450-60010	Cigarette Lighter Power Adapter
	E7450-60001	15-pin Interconnection Cable 380mm (15in) (short)
86154-60033	Vehicle Mounting Kit	

Agilent E7490A System Options

Option	Part Number	Description
300		Cellular Band (E6452A) Receiver (824-849 MHz and 869-894 MHz)
	0950-2679	AC/DC Power Supply for Receiver
	1150-2061	Magnetic Mount Cellular Band Antenna
	1200-1897	Antenna Adapter Connector (N Type to TNC)
	5182-4794	Receiver RS-232 9-pin to 9-pin Cable
	E6450-60007	Firmware Write Enable Key
	E6450-60010	Cigarette Lighter Power Adapter

Agilent 86154A, 86153A, and N3419A System Accessories

The following options are offered by Agilent Technologies. By following the general setup and specifications, you can build your own system according to your needs, based on the standard system. The system can be integrated with a GPS receiver and mapping software. The digital receiver is not intended for stand-alone usage and does not function unless properly connected to one of the Agilent Wireless Solutions Systems.

NOTE

To order any of the following options and accessories, specify model number 86154A and the option number, unless otherwise stated

General System Accessories

Agilent Order Number	Option	Description	More Details On Page
N3419A		Agilent N3419A vehicle-mounted display system	page 52
86153A		Retrofit internal GPS to Digital Receiver	page 52
86154A	010	Laptop PC Omnibook 4150 series model	page 48
86154A	020	Extra dual port ruggedized PCMCIA serial I/O card	page 48
86154A	030	Fujitsu Pen Tablet PC	page 49
86154A	032	Standard Pen Tablet PC Accessories	page 49
86154A	034	Pen Tablet PC Battery Kit	page 49

Agilent 86154A, 86153A, and N3419A System Accessories

Agilent Order Number	Option	Description	More Details On Page
86154A	036	Universal Serial Bus (USB) 4 port adapter	page 50
86154A	099	Multi-Receiver Connection Kit	page 48
86154A	210	Trimble Placer 455-DR GPS Receiver	page 47
86154A	211	Adapter Cable for use with a Trimble Placer GPS/DR Receiver	page 47
86154A	212	Adapter Box for use with Trimble Placer GPS 455 Receiver	page 47
86154A	230	Differential GPS Receiver Kit	page 47
86154A	425	Multiband Antenna	page 50
86154A	500	Receiver Power Kit	page 51
86154A	510	Vehicle Mounting Kit	page 51
86154A	507	Indoor Backpack	page 51
86154A	531	Briefcase Carrier	page 46
86154A	ABA to ARS	Country specific power localization	page 54

Agilent 86154A, 86153A, and N3419A System Accessories

External GPS Receiver Options

Option	Part Number	Description
210		Trimble Placer 455-DR GPS Receiver ^a with:
	E6450-80002	Magnetic Mount GPS Antenna for Trimble Placer
	8120-8650	Interconnect Cable (3) RS-232 DB9-M to DB9-F
	5182-1290	GPS Cigarette Lighter Power Adapter
	E7450-60005	Adapter Box Trimble Placer Receiver
		Documentation and software to calibrate the gyroscope and odometer is available on the Web at http://www.trimble.com
211		GPS/DR Receiver Adapter Cable
	E7450-60003	Adapter Cable
212	E7471-60007	Adapter Box for GPS/DR 455 Receiver with:
	E7450-60005	Adapter Box
	8120-8650	Interconnect Cables (3) RS-232 DB9-M to DB9-F
230	1150-5057	Differential GPS Receiver, RDS 3000 manufactured by DCI (Differential Corrections, Inc.). Includes utilities disk and Installation and Operator's Manual and:
	0960-0979	FM Antenna
	8120-8650	Serial Cable DB9-M to DB9-F
	5182-4794	Interconnect Cable RS-232 DB9-F to DB9-F

a. The Trimble Placer GPS 455 provides Dead Reckoning for use when the GPS signal cannot be received.

Agilent 86154A, 86153A, and N3419A System Accessories

Laptop PC Option

Option	Part Number	Description
010	E7450-60014	Laptop PC with a minimum specification of: Pentium II Processor Windows 95/98 (loaded) 64 Mbytes RAM 6 Gbytes Hard Disc 24 x CD-ROM Enhanced lithium ion battery pack
	F1445A	Auto power adapter 14.1 inch XGA TFT display

Miscellaneous Accessories

Option	Part Number	Description
020		Dual Port Ruggedized PCMCIA Serial I/O Card
	E7471-80004	Socket dual port ruggedized serial I/O card connects to two phones to the computer through the PCMCIA slot. Connecting four phones requires two PCMCIA slots on the computer and two dual port ruggedized serial I/O cards.
099		Receiver Interconnect Cable Kit
	E7450-60001	15-pin Interconnection Cable 380mm (15in) (short)
	E7450-60002	15-pin Interconnection Cable 635mm (24in) (long)

Agilent 86154A, 86153A, and N3419A System Accessories

Fujitsu Pen Tablet PC Options

Option	Part Number	Description
030	86154-60007	Pen Computer Kit including Pen Tablet PC Stylistic 2300 with a 1 year warranty and the following minimum specification and parts. Note: More information on the Stylistic 2300 pen computer can be found on the Fujitsu web site, http://www.fpsi.fujitsu.com/product/st2300.htm
		Pentium II Processor
		4 Gbytes Hard Drive
		64 Mbytes RAM
		Windows 98 (loaded)
	86154-60012	External 3.5" Floppy Disc Drive
	86154-90009	Pen Tablet Stylus
	86154-60008	AC Adapter
	E7474-90010	Pen Tablet Getting Started Guide
	86154-60055	Travel Case
86154-60009	In Service Case	
86154-60056	Harness for Service Case	
86154-60054	Hands Free Platform	
86154-60015	PCMCIA LAN Card	
032	86154-60016	Car Auto Power System (12-24 VDC input)
034		Pen Tablet PC Battery Kit, consisting of:
	86154-60010	Lithium Ion Battery Pack (spare)
	86154-60011	External Battery Charger
	86154-60008	AC Adapter

Agilent 86154A, 86153A, and N3419A System Accessories

Option	Part Number	Description
036	86154-60004	Universal Serial Bus (USB) 4 Port Adapter kit
	86154-60021	4 Port USB Hub
	8121-0136	Extension Cable

Indoor Antenna Options

Option	Part Number	Description
425	86154-60047	Multiband Antenna Kit
	86154-60059	PCS/Cellular/JCDMA Antenna (green)
	86154-60058	GSM/DCS/Korean CDMA Antenna (orange)
	86154-60061	3GPP Antenna (yellow)
	E6450-00013	Ground Plane
	E6450-60057	Cable: Antenna to Receiver
	1250-1753	F SMA Connector

Agilent 86154A, 86153A, and N3419A System Accessories

Portable Accessory Options

Option	Part Number	Description
500	86154-60005	Receiver Power Kit
	E6450-60051	Receiver Battery and Cable
	86154-60019	Receiver Battery Charger
507	86154-60006	Indoor Backpack and Accessories
	86154-60020	Indoor System Backpack
	86154-60057	Phone Pouch
	E7474-90010	Pen Computer Getting Started Guide
	E7474-90024	Back Pack Packing Information Sheet
510	86154-60033	Vehicle Mounting Kit
		Mounting Screws
507	86154-60006	Indoor Backpack and Accessories
	86154-60020	Indoor System Backpack
	86154-60057	Phone Pouch

86153A Retrofit Option

It is possible to have an internal GPS receiver retrofitted to your Agilent digital receiver. These are ordered using the **86153A** Internal GPS retrofit products. You will need to return your receiver to the [address](#) shown below to have the retrofit carried out.

The internal GPS retrofit includes:

Magnetic Mount GPS Antenna for internal GPS (Part Number: 1150-2085)

The process for obtaining an internal GPS retrofit is as follows:

- Order the **86153A** upgrade.
- Include the **serial and model number** of your existing digital receiver on the order to ensure that the retrofit is performed on the correct receiver.
- Ship your digital receiver to:

Agilent Technologies
1212 Valley House Drive
Rohnert Park, CA 94928
Attn: Factory Repair

For more information on packing and sending the receiver, refer to “Returning the Instrument for Service” in Chapter 5 of the *Getting Started Guide*.

Agilent N3419A vehicle-mounted display system

All N3419A vehicle-mounted display system components are independent of wireless access technology. They work with any Agilent wireless solutions.

Display

- 12.1-inch diagonal, flat-panel color LCD display with 800 x 600 resolution
- View multiple virtual front panels (VFPs) at the same time

Agilent 86154A, 86153A, and N3419A System Accessories

- Power cords included for use with both 120 V ac from a power inverter, or 12 V dc from a vehicle
- Laptop connections - RS232
- Large, bright display for use in direct sunlight, with adjustable brightness for nighttime viewing
- Pedestal mounted
- Application-specific keypad
- Transmission hump mounting (typical in sport utility vehicles)
- Flat floor mounting (typical in minivans)

Functions during the drive including:

- "Freeze" and re-start measurements
- Start and stop recording
- Maximize, normalize and minimize measurement (VFPs)
- Navigate between VFPs
- Start and stop calls
- Show or hide measurement and display controls
- Show or hide toolbars
- Add an auto-numbered note to the measurement data
- Open and navigate the window menu in the drive-test software
- Create a report
- Perform a tools re-configure
- Clear alarms and other dialog boxes
- Move between open windows applications
- Turn alarms on and off
- Enable/disable links

Power Localization Options

In order that the correct power supplies and mains cables are supplied with your system, it is necessary to have the correct power localization. The localization options listed below only change the power cord and charger types supplied. They do not affect the software or manual language, which is U.S. English.

Option	Description	
ARM	Argentina - English	
ARS	Asia Pacific (UK Cord) / English	
ABG	Australia - English	
A1X	Chile - English	
AKM	China - English	
ACE	Denmark - English	
ABB	Europe - English	
AKJ	Israel - English	
ACQ	South Africa / India - English	
ACD	Switzerland - English	
AKL	Thailand	
ABA	U.S. - English	
ABU	United Kingdom - English	

Agilent E7490A System Accesories

Agilent Order Number	Option	Description	More Details On Page
86154A	410	Magnetic Mount PCS Band Antenna	page 55
86154A	430	Magnetic Mount Cellular Band Antenna	page 55
86154A	710	Interconnect Cable for QCP-800, QCP-1900, Sony CM-D500, Sony CM-D600 phones	page 56
86154A	711	Interconnect cable for QCP 2700, QCP 820, QCP-1920, Sony CM-M1300, Sony CM-B1201SPR, and Sony CM-S1101STR phones	page 56
86154A	712	Interconnect cable for the Samsung SCH-1000 phone	page 56
86154A	713	Powered interface cable for QCP-800, QCP-1900, Sony CM-D500, Sony CM-D600 phones	page 56
86154A	714	Powered interface cable for QCP 2700, QCP 820, QCP-1920, Sony CM-M1300, Sony CM-B1201SPR, and Sony CM-S1101STR phones	page 56
86154A	715	Interface cable for Toshiba CD-10T J-CDMA Phone	page 56
86154A	716	Powered interface cable for Toshiba CD-10T J-CDMA Phone	page 56
86154A	717	Interconnect cable for QCP 2760, QCP 860, QCP-1960 Phones	page 56
86154A	718	Powered interface cable for QCP 2760, QCP 860, QCP-1960 Phones	page 56

Antenna Options

Option	Part Number	Description
410	1150-5059	Magnetic Mount PCS Band Antenna
430	1150-2061	Magnetic Mount Cellular Band Antenna

CDMA Phone Parts Options

Option	Part Number	Description
710	E6450-60029	Interconnect Cable for QCP-800, QCP- 1900, Sony CM-D500, Sony CM-D600 phones
711	E6450-60030	Interconnect Cable for QCP 2700, QCP 820, QCP-1920, Sony CM-M1300, Sony CM-B1201SPR, and Sony CM-S1101STR phones
712	8120-8754	Interconnect Cable for the Samsung SCH-1000 phone
713	E6450-60034	Powered Interface Cable for QCP-800, QCP-1900, Sony CM-D500, Sony CM-D600 phones
714	E6450-60033	Powered Interface Cable for QCP 2700, QCP 820, QCP-1920, Sony CM-M1300, Sony CM-B1201SPR, and Sony CM-S1101STR phones
715	E7452-60003	Interface Cable for Toshiba CD-10T J-CDMA Phone
716	E7474-60008	Powered interface cable kit for Toshiba CD-10T J-CDMA Phone
717	E7474-60023	Cable Kit for QCP-860, 1960, 2760 Phones
718	E7474-60031	Powered Cable Kit for QCP-860, 1960, 2760 Phones

Part Number Summary

The following list summarizes the part numbers that can be ordered from Agilent Technologies.

NOTE

When ordering parts from Agilent Technologies, it is recommended that you **order using the system option numbers**

CDMA Systems - Agilent E7473A

TDMA Systems - Agilent E7474A

GSM Systems - Agilent E7475A

W-CDMA Systems - Agilent E7476A

cdma2000 Systems - Agilent E7477A

Over Air Systems - Agilent E7490A

Accessories - see Agilent 86154A and 86153A options.

However, if you have a need for a specific part, the following numbers can be used.

For more information on ordering parts or options, contact your local Agilent Technologies sales and service office.

Description	Part Number
Receiver	
AC/DC Power Supply for receiver	0950-2679
Magnetic Mount Cellular Band Antenna	1150-2061
Magnetic Mount Mini GPS Antenna for internal GPS – SMA	1150-2085
Magnetic Mount Mini GPS Antenna for internal GPS (Obsolete) – SMB	E6450-80002
Magnetic Mount PCS Band Antenna	E7475-60007

Part Number Summary

Description		Part Number
Receiver (continued)	Antenna Adapter Connector (N Type to TNC)	1200-1897
	Firmware Write Enable Key	E6450-60007
	Cigarette Lighter Power Adapter	E6450-60010
	2 AMP, 32 V, FB fuse for Cigarette Power Adapter	2110-0002
	15-pin Interconnection Cable 380mm (15in) (short)	5182-4794
	15-pin Interconnection Cable 635mm (24in) (long)	E7450-60002
	Pulse trigger interface cable	E7450-60015
	Magnetic Mount 1.7-1.9 GHz Band Antenna	E7450-80004
	Magnetic Mount 1.9 - 2.1 GHz Band Antenna	E6455-80003
	Magnetic Mount 900 MHz Band Antenna	E7450-80005
	Magnetic Mount GSM 900 RF Antenna	E7471-60009
	Vehicle Mounting Kit	86154-60033
	Universal Adapter (TNC) for RF Antenna	1200-1897
	Magnetic Mount DCS 1800 RF Antenna	E7475-60006
	Magnetic Mount GSM/PCS 1900 RF Antenna	E7475-60007
Universal Adapter for RF Antenna	E7475-80005	
External GPS	Bulkhead Mount GPS antenna for Trimble Placer (Obsolete)	1150-5061
	Trimble Placer 455 GPS Receiver	1150-5058
	GPS Cigarette Lighter Power Adapter	5182-1290
	Interconnect Cable RS-232 DB9-M to DB9-F	8120-8650
	Magnetic Mount Mini GPS Antenna for internal GPS	E6450-80002
	Adapter Cable for use with a Trimble Placer GPS/DR Receiver	E7450-60003
	Adapter Box for use with Trimble Placer GPS 455 Receiver	E7450-60005

Part Number Summary

Description	Part Number
Adapter Box and RS-232 Interconnect Cables (quantity 3)	E7471-60007
Differential GPS	FM Antenna 0960-0979
	Differential GPS Receiver, RDS 3000 manufactured by DCI (Differential Corrections, Inc.). Includes utilities disk and Installation and Operator's Manual. 1150-5057
	Interconnect Cable RS-232 DB9-F to DB9-F 5182-4794
Phone Parts	Interconnect Cable for QCP 2700, QCP 820, QCP-1920, Sony CM-M1300, Sony CM-B1201SPR, and Sony CM-S1101STR phones E6450-60029
	Interconnect Cable for QCP-800, QCP-1900, Sony CM-D500, Sony CM-D600 phones E6450-60030
	Interconnect Cable for the Samsung SCH-1000 phone 8120-8754
	Powered Interface Cable for QCP-800, QCP-1900, Sony CM-D500, Sony CM-D600 phones E6450-60034
	Powered Interface Cable for QCP 2700, QCP 820, QCP-1920, Sony CM-M1300, Sony CM-B1201SPR, and Sony CM-S1101STR phones E6450-60033
	Interface Cable for Toshiba CD-10T J-CDMA Phone E7452-60003
	Powered Interface Cable for Toshiba CD-10T J-CDMA Phone E7474-60008
	GSM Phone Data Cable E7471-62005
	GSM Car phone and data kit E7475-60028
	Interface Cable for Motorola StarTAC TDMA Phone E7474-60004
	Powered Interface Cable for Motorola StarTAC TDMA Phone E7474-60006
	Power Interface Cable for Sagem Test Mobile E7475-62010
	Interface Cable for QCP-860, 1960, 2760 Phones E7474-60023
	Powered Interface Cable for QCP-860, 1960, 2760 Phones E7474-60031
Accessories	Extra Dual Port Ruggedized PCMCIA Serial I/O Card 1150-2067

Part Number Summary

Description	Part Number
Dual Port PCMCIA Serial I/O Card	E7471-80004
Single Port PCMCIA Serial I/O Card	0960-0992
Auto Power Adapter	86154-85001
Blank Software License Security Key	E7474-10007
Documentation	
Getting Started Guide	E7474-90035
Indoor Getting Started Guide	E7474-90038
E7473A CDMA System Information Guide	E7473-90019
E7474A TDMA System Information Guide	E7474-90034
E7475A GSM System Information Guide	E7475-90011
E7476A W-CDMA (UMTS) System Information Guide	E7476-90004
E7477A cdma2000 System Information Guide	E7477-90004
E7490A Over Air Test System Information Guide	E7490-90003

RF Connectors and Antennas

Options	Receiver Type	RF Connector Adapter	RF Antenna Part Number
300, 310	Cellular Band	1200-1897	1150-2061
320, 330	PCS Band GPS	1200-1897	E7475-60007
380, 381	J-CDMA Band	NA	E7450-80005
390, 391	Korean Band	NA	E7450-80004