


# Agilent E1330B

## Quad 8-Bit Digital Input/Output

### Data Sheet

- 1-Slot, B-size, register based
- Quad 8-bit input or output data ports
- Interface to industry standard opto-isolator racks
- Standard GPIO handshake modes
- Wide variety of output data types
- Four-port digital input/output module

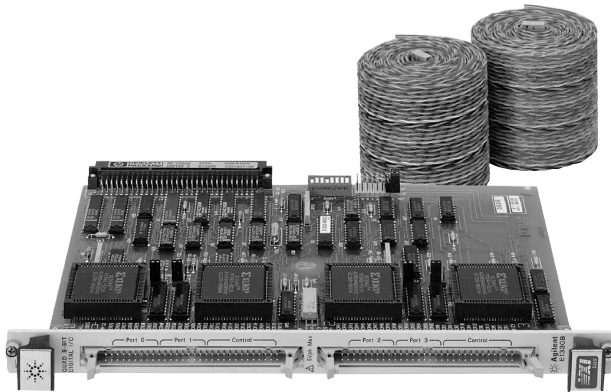

Agilent E1330B

## Description

The Agilent E1330B Quad 8-bit Digital Input/Output module is a **B-size, 1-slot, register-based VXI device**. It is a four-port digital input/output module intended for data communication and digital control.

Each 8-bit port is identical consisting of data and handshake/control lines. Each 8-bit port can be configured for output or input and positive or negative true logic. Ports can be combined allowing data transmission using bytes, words (16-bit), and long words (32-bit). Bit data transmissions are also allowed. Three handshake and control lines are provided for each port when using SCPI programming. The flag line from each of the individual ports can be used independently, or they can be combined when using word or long-word data transmission.

Refer to the Agilent Technologies Website for instrument driver availability and downloading instructions, as well as for recent product updates, if applicable.

## Handshake and Control Lines

Three handshake and control lines are provided for each port when using SCPI programming. These lines provide the following functions:

**FLG** Flag line. Data handshaking line input to the digital I/O module.

**CTL** Control line. Data handshaking line output by the digital I/O module.

**I/O** Input/output status line. Output line on the module describing the current status of the port.

The flag line from each of the individual ports can be used independently, or they can be combined when using word or long-word data transmission.

Each port has three additional control lines available for custom handshaking and interrupt functions: **PIR** (peripheral

interrupt), **/RES** (peripheral reset), and **STS** (status). Control of these three lines is accomplished using register-based programming.

## C-size Adapter

For adapting this product to a C-size mainframe, refer to the section on Accessories in this catalog for a description of the E1403C Adapter.

## Product Specifications

### General

<b>Number of channels:</b>	32
<b>Channel type:</b>	Input or Output
<b>Output or input type:</b>	TTL
<b>Memory:</b>	none
<b>Max. pattern rate:</b>	n/a
<b>Max. pattern rate:</b>	325 Kb/s
<b>Test synchronization:</b>	Software triggers, hardware handshaking
<b>Logic levels:</b>	TTL compatible, 5 V max

### Data Lines

<b>Output characteristics:</b>	
<b>I<sub>out</sub> (High):</b>	-5.2 mA @ V <sub>out</sub> = 2.5 V (Pullup Enabled)
<b>I<sub>out</sub> (Low):</b>	48 mA @ V <sub>out</sub> = 0.5 V
<b>Input characteristics:</b>	
<b>I<sub>in</sub> (High):</b>	<2.5 mA @ V <sub>in</sub> = 2.5 V
<b>I<sub>in</sub> (Low):</b>	<-3.2 mA @ V <sub>in</sub> = 0.4 V
<b>V<sub>in</sub> (High):</b>	>2.0 V (5.0 V max)
<b>V<sub>in</sub> (Low):</b>	<0.8 V

### Handshake Lines

<b>Output characteristics:</b>	
<b>I<sub>out</sub> (High):</b>	250 $\mu$ A @ V <sub>out</sub> (High) = 5 V
<b>I<sub>out</sub> (Low):</b>	40 mA @ V <sub>out</sub> (Low) = 0.7 V
<b>I<sub>out</sub> (Low):</b>	16 mA @ V <sub>out</sub> (Low) = 0.4 V
<b>Input characteristics:</b>	
<b>V<sub>in</sub> (High):</b>	>2.0 V
<b>V<sub>in</sub> (Low):</b>	<0.8 V
<b>I<sub>in</sub> (Low):</b>	<1.75 mA

### Block Mode Transfers

<b>8-bit wide:</b>	@ 90 KB/s
<b>32-bit wide:</b>	@ 325 KB/s

## General Specifications

### VXI Characteristics

<b>VXI device type:</b>	Register based
<b>Data transfer bus:</b>	A16/D16 slave
<b>Size:</b>	B
<b>Slots:</b>	1
<b>Connectors:</b>	P1
<b>Shared memory:</b>	No
<b>VXI busses:</b>	No
<b>C-size compatibility:</b>	Yes, with E1403C Adapter

### Instrument Drivers

See the Agilent Technologies Website ([http://www.agilent.com/find/inst\\_drivers](http://www.agilent.com/find/inst_drivers)) for driver availability and downloading

<b>Command module firmware:</b>		Downloadable
<b>Command module firmware rev:</b>		A.03
<b>I-SCPI Win 3.1:</b>		Yes
<b>I-SCPI Series 700:</b>		Yes
<b>C-SCPI LynxOS:</b>		Yes
<b>C-SCPI Series 700:</b>		Yes
<b>Panel Drivers:</b>		Yes
<b>VXIplug&amp;play Win Framework:</b>		Yes
<b>VXIplug&amp;play Win 95/NT Framework:</b>		Yes
<b>VXIplug&amp;play HP-UX Framework:</b>		No

### Module Current


	I <sub>PM</sub>	I <sub>DM</sub>
+5 V:	0.5	0.01
+12 V:	0	0
-12 V:	0	0
+24 V:	0	0
-24 V:	0	0
-5.2 V	0	0
-2 V:	0	0

### Cooling/Slot

<b>Watts/slot:</b>	2.50
<b><math>\Delta</math>P mm H<sub>2</sub>O:</b>	0.04
<b>Air Flow liter/s:</b>	0.21

## Ordering Information

Description	Product No.
Quad 8-bit Digital Input/Output	E1330B
Service Manual	E1330B 0B3
Japan - Japanese Localization	E1330B ABJ
Cable Assy Ribbon 60P	E1330-61601

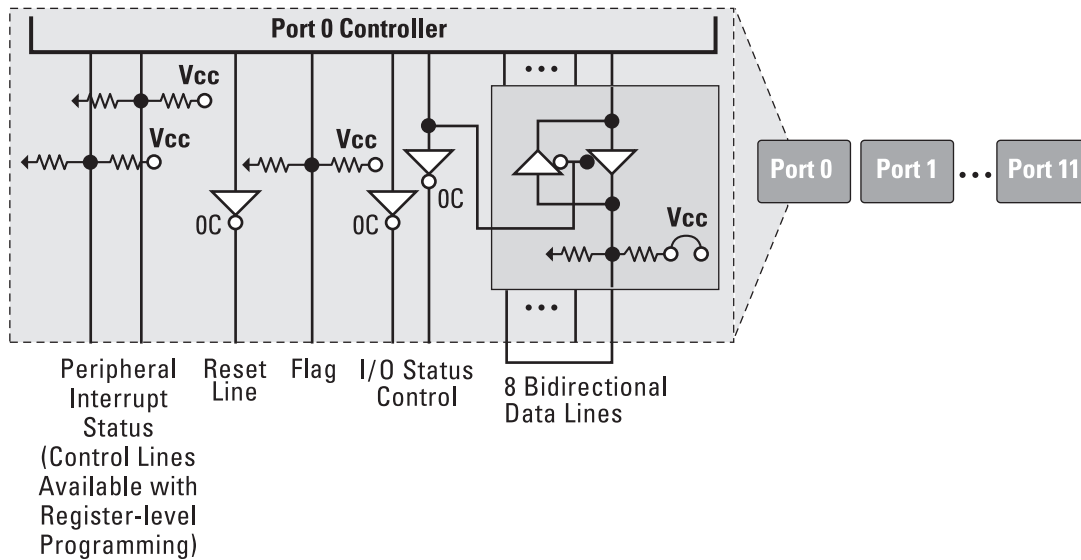

Agilent E1330B Block Diagram

## Related Literature

*2000 Test System and VXI Catalog CD-ROM*,  
Agilent Pub. No. 5980-0308E (detailed specifications for VXI products)

*2000 Test System and VXI Catalog*,  
Agilent Pub. No. 5980-0307E (overview of VXI products )

*1998 Test System and VXI Products Data Book*,  
Agilent Pub. No. 5966-2812E

## Online

Internet access for Agilent product information, services and support  
[www.agilent.com/find/tmdir](http://www.agilent.com/find/tmdir)

VXI product information  
[www.agilent.com/find/vxi](http://www.agilent.com/find/vxi)

Defense Electronics Applications  
[www.agilent.com/find/defense\\_ATE](http://www.agilent.com/find/defense_ATE)

Agilent Technologies VXI Channel Partners  
[www.agilent.com/find/vxichanpart](http://www.agilent.com/find/vxichanpart)

Agilent Technologies' HP VEE Application Website  
[www.agilent.com/find/vee](http://www.agilent.com/find/vee)

Agilent Technologies Data Acquisition and Control Website  
[www.agilent.com/find/data\\_acq](http://www.agilent.com/find/data_acq)

Agilent Technologies Instrument Driver Downloads  
[www.agilent.com/find/inst\\_drivers](http://www.agilent.com/find/inst_drivers)

Agilent Technologies Electronics Manufacturing Test Solutions  
[www.agilent.com/go/manufacturing](http://www.agilent.com/go/manufacturing)

**Get assistance with all your test and measurement needs at**  
[www.agilent.com/find/assist](http://www.agilent.com/find/assist)  
**or check your local phone book for the Agilent office**  
**near you.**

## Agilent Technologies' test and measurement service/support commitment

Agilent strives to maximize the value our test and measurement products give you, while minimizing your risk and service/support problems. We work to ensure that each product is realistically described in the literature, meets its stated performance and functionality, has a clearly stated global warranty, and is supported at least five years beyond its production life. Our extensive self-help tools include many online resources ([www.agilent.com](http://www.agilent.com)).

Experienced Agilent test engineers throughout the world offer practical recommendations for product evaluation and selection. After you purchase an Agilent product, they can provide no-charge assistance with operation verification and basic measurement setups for advertised capabilities. To enhance the features, performance, and flexibility of your test and measurement products—and to help you solve application challenges—Agilent offers free or extra-cost product options and upgrades, and sell expert engineering, calibration, and other consulting services.

## Phone or Fax

**United States:**  
(tel) 1 800 829 4444

**Canada:**  
(tel) 1 877 894 4414  
(fax) (905) 282 6495

**China:**  
(tel) 800 810 0189  
(fax) 800 820 2816

**Europe:**  
(tel) (31 20) 547 2323  
(fax) (31 20) 547 2390

**Japan:**  
(tel) (81) 426 56 7832  
(fax) (81) 426 56 7840

**Korea:**  
(tel) (82 2) 2004 5004  
(fax) (82 2) 2004 5115

**Latin America:**  
(tel) (305) 269 7500  
(fax) (305) 269 7599

**Taiwan:**  
(tel) 0800 047 866  
(fax) 0800 286 331

**Other Asia Pacific Countries:**  
(tel) (65) 6375 8100  
(fax) (65) 6836 0252  
(e-mail) [tm\\_asia@agilent.com](mailto:tm_asia@agilent.com)

Data Subject to Change  
© Agilent Technologies, Inc. 2000  
Printed in the U.S.A. May 1, 2004  
5965-5556E