


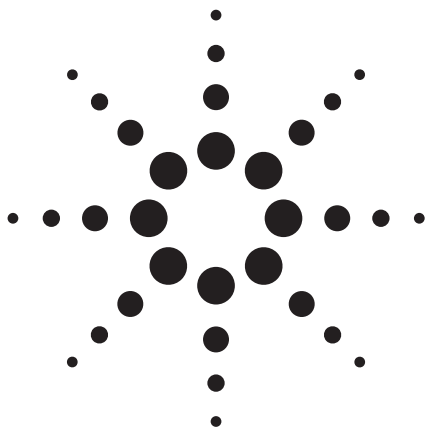


Agilent E1361A

2-Wire 4x4 Relay Matrix Switch

Data Sheet

- 1-Slot, B-size, register based
- Multiple inputs connect to multiple outputs
- Flexible dual 2x4 or single 4x4 2-wire matrix
- 250 V, 1 A dc or ac signal switching, latching relays
- Modules connect for larger matrixes
- Each crosspoint switches two-wire, Hi and Lo

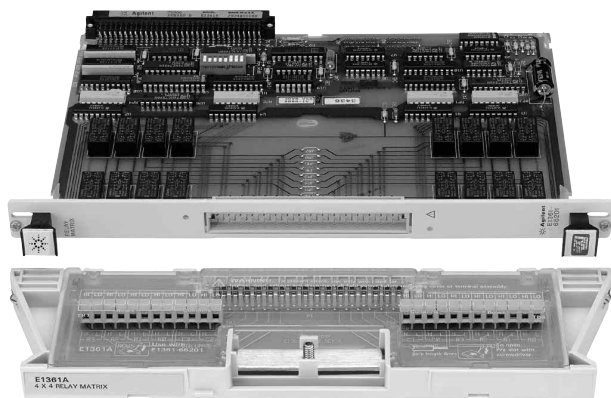

Agilent E1361A

Description

The Agilent E1361A Relay Matrix Switch is a **B-size, 1-slot, register-based VXI module**. It consists of 16 latching relays arranged as a 4x4 matrix. The 4x4 matrix can be reconfigured as a dual 2x4 matrix by removing factory-installed jumpers. Capable of switching voltages up to 250 Vdc and 354 Vpk, the E1361A Relay Matrix Switch has the highest voltage rating of any Agilent matrix module.

All relays remain in their programmed state during power-down and are reset at power-on. After reset, all relays are open. Each crosspoint switches 2-wire, Hi and Lo. The E1361A can be reconfigured as an 8:1, 2-wire multiplexer.

Refer to the Agilent Technologies Website for instrument driver availability and downloading instructions, as well as for recent product updates, if applicable.



Agilent Technologies

Product Specifications

Input

Maximum voltage (any terminal to any other terminal or chassis):

DC:	250 V
AC rms:	250 V
Peak:	354 V

Maximum Current
(per channel common,
non-inductive):

n/a

Maximum power:

Per channel:	40 W
Per module:	320 W, 960 VA

DC

Maximum thermal offset
per channel, differential

Hi-Lo: 14 μ V

Closed channel resistance (per channel):

Initial:	<1.5 Ω (typ)
End of life:	<3.5 Ω

Insulation resistance (between any two points):

$\leq 40^\circ\text{C}$, $\leq 95\%$ RH:	n/a
$\leq 40^\circ\text{C}$, $\leq 65\%$ RH:	>10E7 Ω
$\leq 25^\circ\text{C}$, $\leq 40\%$ RH:	>10E8 Ω

Minimum bandwidth
(-3 dB, $Z_L = Z_X = 50 \Omega$): 10 MHz

AC

Crosstalk (dB, channel-to-channel typical):

Note: Crosstalk, insulation resistance, and bandwidth specifications are for a single matrix module only. Matrix expansion will degrade these specifications.

<10 kHz:	n/a
<100 kHz:	<-80
<1 MHz:	n/a
<10 MHz:	<-30

Closed channel capacitance:

Hi-Lo:	<150 pF (All contacts closed)
Hi-Chassis:	<150 pF
Lo-Chassis:	<150 pF
Hi-Hi:	<20 pF
Insertion loss:	<0.1 dB @ ≤ 100 kHz <3 dB @ ≤ 10 MHz

General

Minimum relay life:

No load: 10E6 operations

Screw terminal wire size:

16 AWG
(15 mm) max

General Specifications

VXI Characteristics

VXI device type:	Register based, A16, slave only
Size:	B
Slots:	1
Connectors:	P1
Shared memory:	None
VXI busses:	None
C-size compatibility:	Requires E1403C

Instrument Drivers

See the Agilent Technologies Website (http://www.agilent.com/find/inst_drivers) for driver availability and downloading.

Command module firmware:	Downloadable
Command module firmware rev:	A.01
I-SCPI Win 3.1:	Yes
I-SCPI Series 700:	Yes
C-SCPI LynxOS:	Yes
C-SCPI Series 700:	Yes
Panel Drivers:	Yes
VXIplug&play Win Framework:	Yes
VXIplug&play Win 95/NT Framework:	Yes
VXIplug&play HP-UX Framework:	No

Module Current


	I_{PM}	I_{DM}
+5 V:	0.1	0.01
+12 V:	0.24	0.01
-12 V:	0	0
+24 V:	0	0
-24 V:	0	0
-5.2 V:	0	0
-2 V:	0	0

Cooling/Slot

Watts/slot:	1.00
ΔP mm H ₂ O:	0.02
Air Flow liter/s:	0.10

Ordering Information

Description	Product No.
2-wire 4x4 relay Matrix	E1361A
Service Manual	E1361A 0B3
Japan - Japanese Localization	E1361A ABJ
Extra terminal block for the E1361A	E1361-80001

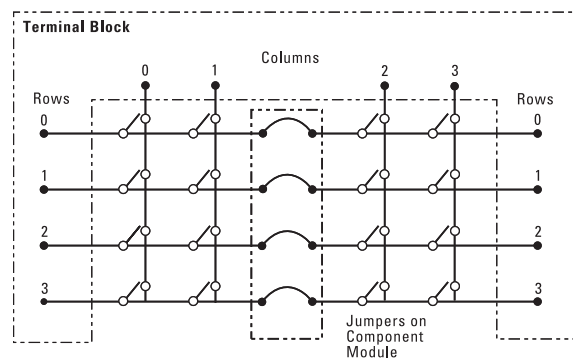

E1361A Each crosspoint switches 2-wire, Hi and Lo

Related Literature

2000 Test System and VXI Catalog CD-ROM,
Agilent Pub. No. 5980-0308E (detailed specifications for VXI products)

2000 Test System and VXI Catalog,
Agilent Pub. No. 5980-0307E (overview of VXI products)

1998 Test System and VXI Products Data Book,
Agilent Pub. No. 5966-2812E

Online

Internet access for Agilent product information, services and support
www.agilent.com/find/tmdir

VXI product information
www.agilent.com/find/vxi

Defense Electronics Applications
www.agilent.com/find/defense_ATE

Agilent Technologies VXI Channel Partners
www.agilent.com/find/vxichanpart

Agilent Technologies' HP VEE Application Website
www.agilent.com/find/vee

Agilent Technologies Data Acquisition and Control Website
www.agilent.com/find/data_acq

Agilent Technologies Instrument Driver Downloads
www.agilent.com/find/inst_drivers

Agilent Technologies Electronics Manufacturing Test Solutions
www.agilent.com/go/manufacturing

Get assistance with all your test and measurement needs at
www.agilent.com/find/assist
or check your local phone book for the Agilent office
near you.

Agilent Technologies' test and measurement service/support commitment

Agilent strives to maximize the value our test and measurement products give you, while minimizing your risk and service/support problems. We work to ensure that each product is realistically described in the literature, meets its stated performance and functionality, has a clearly stated global warranty, and is supported at least five years beyond its production life. Our extensive self-help tools include many online resources (www.agilent.com).

Experienced Agilent test engineers throughout the world offer practical recommendations for product evaluation and selection. After you purchase an Agilent product, they can provide no-charge assistance with operation verification and basic measurement setups for advertised capabilities. To enhance the features, performance, and flexibility of your test and measurement products—and to help you solve application challenges—Agilent offers free or extra-cost product options and upgrades, and sell expert engineering, calibration, and other consulting services.

Phone or Fax

United States:
(tel) 1 800 829 4444

Canada:
(tel) 1 877 894 4414
(fax) (905) 282 6495

China:
(tel) 800 810 0189
(fax) 800 820 2816

Europe:
(tel) (31 20) 547 2323
(fax) (31 20) 547 2390

Japan:
(tel) (81) 426 56 7832
(fax) (81) 426 56 7840

Korea:
(tel) (82 2) 2004 5004
(fax) (82 2) 2004 5115

Latin America:
(tel) (305) 269 7500
(fax) (305) 269 7599

Taiwan:
(tel) 0800 047 866
(fax) 0800 286 331

Other Asia Pacific Countries:
(tel) (65) 6375 8100
(fax) (65) 6836 0252
(e-mail) tm_asia@agilent.com

Data Subject to Change
© Agilent Technologies, Inc. 2000
Printed in the U.S.A. May 1, 2004
5965-5590E



Agilent Technologies