


HP E1431A

Technical Specifications

An 8-Channel 25.6 kHz Measurement Frontend

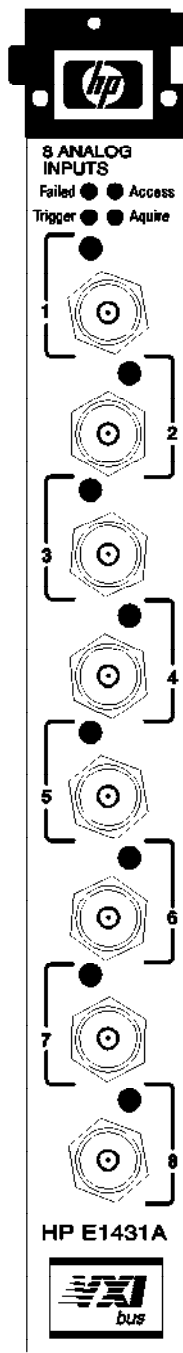

Creating a VXI data acquisition system from several VXI modules can be complicated. Guaranteeing system-wide performance is even harder.

Creating a multi-channel data acquisition system just got easier

The HP E1431A simplifies system integration by implementing the entire measurement front-end - everything you need - all in a single-wide C-size VXI module. It's not only easier - it's smaller, more reliable, and less expensive than multi-module solutions.

- 8 differential/grounded inputs
- AC/DC coupling
- ICP® power for accelerometers
- Individually programmable gains
- Programmable digital filters
- Simultaneous sample and hold
- Separate 16-bit A/Ds for each channel

Versatile signal conditioning

The HP E1431A ensures data integrity. With full-scale ranges from 5 mVolts to 10 Volts in 1, 2, 5 steps, you can look at a wide variety of signals. Each range has 2 dB of headroom to help prevent

ICP is a U.S. registered trademark of Piezotronic Inc.

overloads. And if an overload does occur, built-in overload detection notifies you, to prevent bad data from contaminating your measurement.

Input channels can either be grounded, or differential to remove contaminating common-mode signals from power lines. Tight cross-channel phase and time delay accuracy is maintained with simultaneous sample and hold amplifiers. And for mechanical vibration measurements, built-in ICP power for piezoelectric transducers saves the cost and complexity of external supplies.

Guaranteed system performance

When you build data acquisition systems from separate signal conditioning and A/D modules, measurement errors add up. With the HP E1431A, the entire signal path is contained in a single module. This has two big advantages - the number of places errors can enter the system is reduced, and the performance of the complete signal path can be

guaranteed. You don't have to wonder what performance you're getting. With the HP E1431A complicated calibration with an external source is not required to achieve specified performance. It has an internal calibrator that guarantees measurement accuracy.

Performance in both frequency and time domains

Most simple A/D modules either don't provide anti-alias filters, or have only one filter at the maximum input frequency. As you decrease the sample rate, alias


products can contaminate your measurement. The HP E1431A uses a fixed high frequency analog filter followed by programmable digital filters to guarantee alias protection down to frequency spans as low as 0.39 Hz. Since the filters are digital, they are stable and repeatable. The analog anti-alias filter cutoff frequency is 56.2 kHz, high enough to make its effects negligible below 25.6 kHz. For especially critical time domain measurements, the analog and digital filters can be turned off.

High-speed local bus support

The HP E1431A supports high-speed data transfers to other VXI modules over the VXI local bus. Use it with the HP E1562A/B Data Disk Module to attain transient captures with aggregate sample rates up to 2.62 Msamples/sec - that's 40 channels at 25.6 kHz bandwidth, or 80 channels at 12.8 kHz. Or use it with the HP E1485A/B signal processor module to create custom high-speed digital signal processing applications. The data rate to an embedded HP V743 computer over the VXI backplane is 1.38 Mbytes per second.

Block Diagram

1 of 8 Identical Channels

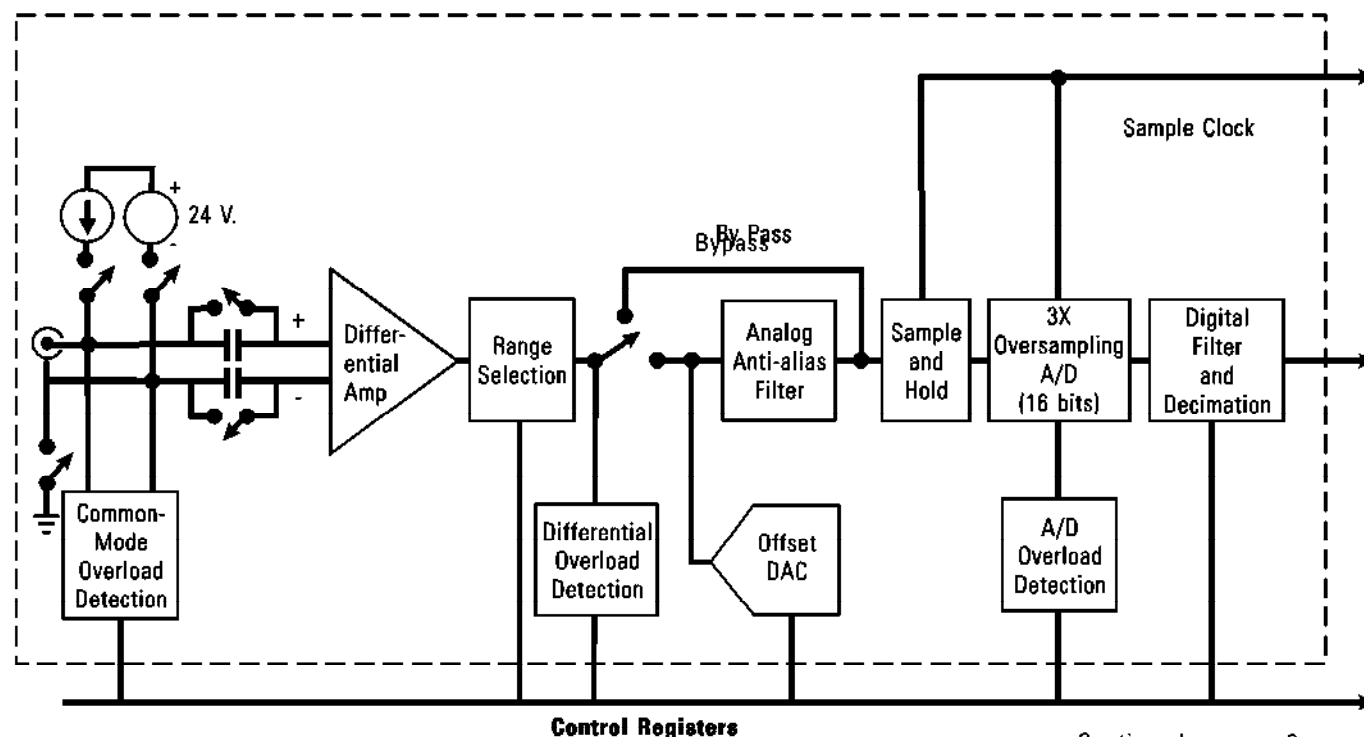

Continued on page 3

Versatile software support


Hardware requires software to control it. The HP E1431A is accessible from HP-UX, MS-DOS®, and Microsoft® Windows. C programming using libraries provides complete functionality and the highest data transfer speed. SCPI and compiled SCPI provide the simplicity and familiarity of ASCII programming at reduced functionality and data transfer speeds. If you need to create a solution in the least time, use HP VEE. Its graphical programming lets you quickly integrate the HP E1431A's dynamic measurements with static measurements from the HP E1413B 64 Channel Scanning A/D.

Software Support for the HP E1431A

| | HP-UX | DOS |
|-----------------|----------------|----------------|
| C Libraries | X ¹ | |
| SCPI | X | X ² |
| Compiled SCPI | X ² | |
| VEE | X | X ³ |
| C Demo programs | X | |

- ¹ Libraries for Hewlett-Packard Series 300, 700, and HP E1485A/B provided
- ² Not all functionality available with C libraries is available from SCPI
- ³ VEE for Windows support requires Windows 3.1

MS DOS and Microsoft are U.S. registered trademarks of Microsoft Corporation.

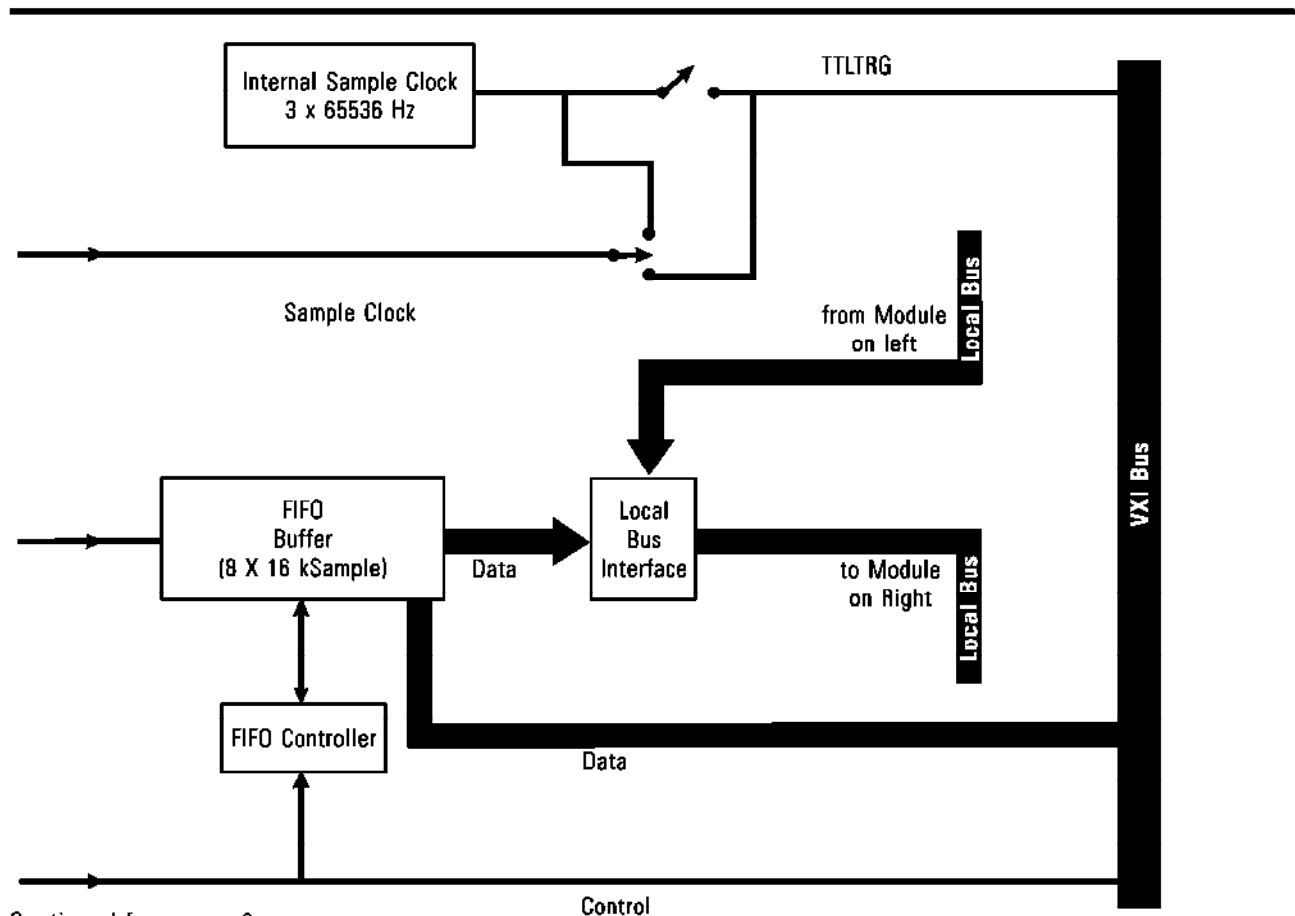

Continued from page 2

Specifications

Frequency

| | |
|------------------------------------|-------------------------------------|
| Input Frequency Range | dc to 25.6 kHz |
| Frequency Spans¹ | 25.6 kHz to 0.39 Hz in 2X steps |
| Sampling Frequency | |
| Fixed Internal Sample Rate | 65,536 Hz |
| External Sample Rate ² | ≤ 65,536 Hz |
| External Sample Clock ³ | 3 × External Sample Rate |
| Sample Clock Accuracy | ±0.01% (100 ppm) |
| Block Sizes | 1 to 16384 samples in integer steps |
| Word Sizes | 16 or 32 bit word transfers |
| FIFO Size | 8 x 16 KSamples |

- ¹ Digital filters are used to change frequency spans and sampling rates by factors of 2.
- ² Requires user-provided external alias filters for external sample rates < 65,536 Hz. Internal anti-alias filters can be turned off with a software command.
- ³ The user must provide an external sample clock that is three times the desired sample rate.

Input

| | |
|---|-----------------------------------|
| Full Scale Input Ranges | 5 mVpk to 10 Vpk in 1, 2, 5 steps |
| Input Impedance (DC Coupled) | |
| Differential | 2MΩ Nominal |
| High Side to Chassis — Floating Mode | 1MΩ, 35 pF Nominal |
| Low Side to Chassis — Floating Mode | 1MΩ, 0.01μF Nominal |
| Low Side to Chassis — Grounded Mode | < 90Ω Typical |
| AC Coupling 3 dB Corner Frequency | < 1 Hz |
| Common Mode Rejection Ratio | |
| DC coupled < 67 Hz | ≥65 dB |
| DC coupled 67 Hz to 1000 Hz | ≥55 dB |
| AC coupled 45 Hz to 1000 Hz | ≥45 dB |
| AC coupled Common Mode Voltage Range ⁴ | ± 10 Vpk Maximum |
| Amplitude Over-Range Detection⁵ | |
| Common Mode Overload | ±12.5 Vpk |
| Differential Mode Overload, Broadband Detector | +3 dBfs nominal (at 100 kHz) |
| ADC Overload | +3 dBfs nominal |
| Residual DC (after auto-zero) | ≤1 % of Full Scale, or ≤1 mVdc |

- ⁴ Maximum signal present on either the high or low side of the input connector relative to chassis ground.
- ⁵ If an overload of any kind occurs, a status register is set indicating the type of overload, and the overload LED on the front panel lights. The register can be read with a C library function.

Amplitude

| | |
|--|--|
| Amplitude Accuracy at 1 kHz⁶ | $\pm 1\%$ ($\pm 0.086\text{dB}$) $\pm 0.035\%$ of Full Scale |
| Flatness relative to 1 kHz, at full scale | $\pm 0.5\%$ ($\pm 0.043\text{ dB}$) |

- ⁶ A combination of full scale accuracy and amplitude linearity.

Cross Channel Matching (any HP E1431A module in the same VXI mainframe)

| | |
|---|---|
| Cross Channel Magnitude⁷ | $\pm 3\%$ ($\pm 0.26\text{ dB}$) |
| Cross Channel Phase Match⁸ | |
| At 25.6 kHz span | $\pm 1.0^\circ$ |
| At 12.8 kHz span | $\pm 0.5^\circ$ |
| At 1 kHz | $\pm 0.1^\circ$ |
| Cross Channel Time Delay Match⁸ | |
| At 25.6 kHz span | $\pm 200\text{ nSec}$ |
| At 12.8 kHz span | $\pm 100\text{ nSec}$ |
| At < 1 kHz | $\pm 100\text{ nSec}$ |
| Cross-Mainframe Time Delay Match | 70 nSec delay typical plus 6 nSec per meter of cable |

- ⁷ DC coupled, AC coupled above 10 Hz, full scale.
- ⁸ DC coupled, AC coupled above 500 Hz, accurate within $\pm 5^\circ\text{C}$ of temperature when calibration was run.

Dynamic Range

| | |
|--|--------------------------------|
| Resolution | 16 bits |
| FFT Noise floor⁹ | < -90 dB |
| Spurious-free Dynamic Range¹⁰ | > 80 dB |
| Channel to Channel Crosstalk¹¹ | -125 dB |
| Input Noise Level ($\geq 100\text{ Hz}$) | < 40 nVrms/ $\sqrt{\text{Hz}}$ |

- ⁹ Hanning window, 800 lines resolution, 16 RMS averages.
- ¹⁰ Includes all spurious responses, intermodulation distortion, and alias products. Harmonic distortion for measurements less than 5 kHz.
- ¹¹ Any combination of ranges, source impedance = 50 Ω

Trigger

| | |
|---|---|
| Trigger Modes | Input Channel (Same HPE1431A module) Input Channel (Other HP E1431A) |
| Maximum Trigger Delay | |
| Pre Trigger | 16383 Sample Periods |
| Post Trigger | > 10 ⁶ Sample Periods |
| Input Channel Trigger Level Resolution | 14 bits |
| Trigger Uncertainty | $\pm 0.5 \times 1/65,536$ Hz |

ICP Current Source

| | |
|--|----------------------|
| Current Source Accuracy | 4.5 mA, ± 0.5 mA |
| Open Circuit Voltage | ≥ 24 Vdc |
| Harmonic Distortion ¹² | < -80 dBfs |
| Intermodulation Distortion | < -75 dBfs |

¹² For measurements less than 5 kHz.

VXI System Level Specifications

General Specifications

| | | |
|--|---|-----------------|
| Safety Standards | CSA Certified for Electronic Test and Measurement Equipment per CSA C22.2, No. 231 This product is designed for compliance to: UL1244, Fourth Edition IEC 348, 2nd Edition, 1978 | |
| EMI / RFI Standards | CISPR 11, Group 1, Class A ¹² | |
| VXI bus Standards | VXI (Rev. 1.4); Register based; A16/D16, VME bus slave; requires two TTLTRG lines for multi-module synchronization | |
| VXI Power Requirement | DC | Dynamic Current |
| +5 V | 1.05 A | 0.27 A |
| -5.2V | 0.66 A | 0.03 A |
| -2 V | 0.23 A | 0.15 A |
| +12V | 1.50 A | 0.01 A |
| -12 V | 0.52 A | 0.00 A |
| +24V | 0.22 A | 0.01 A |
| -24 V | 0.24 A | 0.00 A |
| +5 VStandby | 0.00 A | 0.00 A |
| VXI Cooling Requirement (10°C rise) | 3.5 liters/second 0.5 mm H ₂ O | |
| Warm-Up Time | 60 minutes | |
| Weight | 4.6 lbs., 2.09 kg | |
| Dimensions | Single slot, C-size VXI module | |

¹² Requires VXI mainframe, RFI boots, and single slot filler panels.

Environmental

Operating Restrictions

| | |
|--------------------------|--------------------------|
| Ambient Temperature | 0° to 55°C |
| Humidity, Non-condensing | 20% RH to 95% RH at 40°C |
| Maximum Altitude | 2300 meters (7,500 feet) |

Storage and Transport Restrictions

| | |
|--------------------------|---------------------------|
| Ambient Temperature | -40° to 65°C |
| Humidity, Non-condensing | 20% RH to 90% RH at 65°C |
| Maximum Altitude | 4600 meters (15,000 feet) |

Benchmarks

| E1431A Module Count for Real Time Data | | Transmission at Full Span |
|--|------------------|---------------------------|
| Local Bus | | 5 modules |
| VXI Bus ¹³ | V743 | 1 Module |
| | V382 | 1 Module |
| | S715/50 with MXI | <1 Module |

Transmission Rate

| | | |
|-----------------------|------------------|----------------------|
| Local Bus | | 2.62 Msamples/second |
| VXI Bus ¹³ | V743 | 1.38 Mbytes/second |
| | V382 | 1.07 Mbytes/second |
| | S715/50 with MXI | 777 Kbytes/second |

¹³ The number of bytes per sample can be 2, 4, or 8 depending on the data transfer mode selected.

Abbreviations:

Vpk = Peak of the AC Voltage.

dBfs, %fs = Relative to full scale of a particular range. (0 dBfs = 100% of Full Scale)

FS, fs = Full Scale; synonymous with Input Range. The Full Scale measure is a limit to the peak input voltage.

Typical = typical, non-warranted performance specification included to provide general product information.

Signal "High" side refers to input BNC center pin.

Signal "Low" side refers to input BNC shell.

