
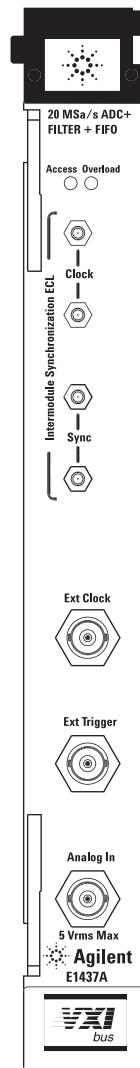


# Agilent E1437A

## 20 MSample/Second ADC with Filter and FIFO

### Technical Specifications

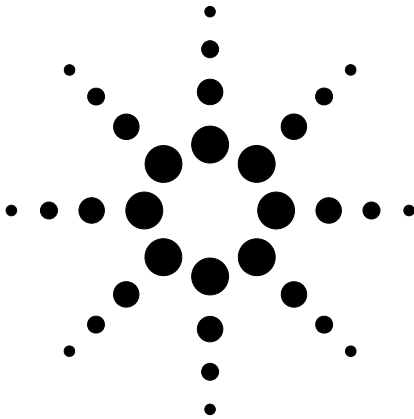

Agilent E1437A

Whether you analyze spectra or capture waveforms, the Agilent E1437A ADC will help you see signal features you may have never seen before.

#### A Remarkable Digitizer

At the heart of the E1437A is an exceptionally low distortion digitizer. Low distortion means high quality data will reveal even more about your signal when averaged, filtered or FFT processed.

#### Analog Signal Conditioning

You aren't restricted to operating the E1437A at a specific amplitude operating point thanks to built-in analog signal conditioning.

#### Digital Filtering and LO

Use the 24 real-time digital filters built-in to the E1437A to increase the precision of the output samples, or filter out extraneous signals.

#### FIFO Memory

The FIFO means you won't lose new samples while you are transferring a data block out.

#### VXIplug&play Programming

The E1437A is VXI*plug&play* compatible and is shipped with software and documentation to support a broad set of controllers, and operating systems.

#### High Speed Data Transfers

VXI Local Bus capability means the E1437A can output data at 40 MB/s continuously and as high as 60 MB/s when transferring blocks of data.

## Specifications

### Input

<b>Input Modes</b>	DC coupled, AC coupled. Input grounded, input connected. Input BNC shell grounded, floating.
<b>Full Scale Input Ranges</b> (ADC clipping levels, dBm values are approximate )	
<b>Volts peak</b>	<b>dBm, 50Ω</b>
10.24V	30
5.12V	24
2.56V	18
1.28V	12
640 mV	6
320 mV	0
160 mV	-6
80 mV	-12
40 mV	-18
20 mV	-24
<b>Maximum Input Level</b> (for any time interval > 10 ms)	10 Vrms for 5.12V and 10.24V ranges, 5 Vrms for all other ranges
<b>Return loss of 50W Input Impedance</b> (± 1%, DC coupled, BNC shell grounded, frequency < 8 MHz)	> 40 dB
<b>AC Coupling Characteristics</b> (A 0.2 μF capacitor is placed in series with the input signal)	0.2 μF (typical) Maximum DC voltage is ± 50V
<b>Common Mode Characteristics</b>	
Shell floating impedance	50Ω in parallel with 0.04 μF (typical)
Shell grounded impedance	< 0.1 (typical)
Maximum Current (diode clamped to < ± 1V peak)	± 1 amp peak
<b>Common Mode Response</b> (Response to a sine wave voltage source of amplitude Vcom (in mV) applied through a 50Ω series resistor; frequency < 8 MHz.)	
<b>Range</b>	<b>Response in dBfs</b>
30 dBm to 0 dBm	< (-90 + 20 x LOG(Vcom))
-6 dBm	< (-80 + 20 x LOG(Vcom))
-12 dBm to -24 dBm	< (-65 + 20 x LOG(Vcom))

## Accuracy

---

### Resolution

Raw ADC resolution	23 bits, two's complement
After digital zoom and filter operations	32 bits, full resolution mode 16 bits, reduced resolution mode

---

### Amplitude Accuracy:

(< 100 kHz, 25°C, analog alias filter on, digital decimation filters off, DC coupled)

Absolute voltage measurement accuracy 12 dBm range	± 0.03 dB
Range accuracy relative to 12 dBm range	± 0.03 dB (for all ranges)
Alias filter off relative to alias filter on mode at 12 kHz	± 0.02 dB
Temperature drift	< 0.001 dB/°C (typical) of deviation from 25 °C

---

### DC offset

Temperature drift 30 dBm to -6 dBm ranges	< ± 0.01%/°C (typical)
-12 to -24 dBm ranges	< ± 0.1 mV/°C (typical)
Input bias current (in parallel with 50Ω input load)	< 64 μA

---

### Flatness

(dB peak-to-peak, excluding digital filter response)

Alias filter on	
freq < 100 kHz	< 0.03 dBpp
freq < 5 MHz	< 0.25 dBpp
freq < 8 MHz	< 0.80 dBpp
Alias filter off	
freq < 8 MHz	< 0.25 dBpp
freq < 40 MHz	3 dBpp (typical)

---

<b>Anti-alias filter stopband rejection</b> (12 MHz to 20 MHz)	> 100 dB
---	----------

## Dynamic Range

---

NOTE: The performance specifications for the spurious response and discrete sidebands characteristics require that the mainframe containing the E1437A have Option 918 (connector shields E1400-80920) installed. In addition all modules in the mainframe must comply with the VXI 1.4 specification for ECL trigger lines; and the 10-MHz VXI system clock must be turned off. External clock input must be disconnected when not being used for ADC clock.

---

### Signal to Noise Ratio

(The reference signal is a sine wave with peaks at the clipping voltage of the current range; typical values)

Alias filter on		
-6 dBm to 30dBm ranges	71 dB	
-12 dBm range	70 dB	
-18 dBm range	68 dB	
-24 dBm range	65 dB	
Alias filter off		
-6 dBm to 30dBm ranges	68 dB	
-12 dBm range	66 dB	
-18 dBm range	61 dB	
-24 dBm range	57 dB	

---

### Input Noise Density

(Alias filter on, Internal sample clock)

-6 dBm to 30dBm ranges		
1 MHz to 8 MHz	-140 dBfs/Hz	
100 kHz to 1 MHz	-138 dBfs/Hz	
10 kHz to 100 kHz	-135 dBfs/Hz	
1 kHz to 10 kHz	-131 dBfs/Hz	
100 Hz	-120 dBfs/Hz	
-12 dBm range		
1 MHz to 8 MHz	-139 dBfs/Hz	-151 dBm/Hz
100 kHz to 1 MHz	-137 dBfs/Hz	-149 dBm/Hz
10 kHz to 100 kHz	-134 dBfs/Hz	-146 dBm/Hz
1 kHz to 10 kHz	-129 dBfs/Hz	-141 dBm/Hz
100 Hz	-118 dBfs/Hz	-130 dBm/Hz
-18 dBm range		
1 MHz to 8 MHz	-137 dBfs/Hz	-155 dBm/Hz
100 kHz to 1 MHz	-135 dBfs/Hz	-153 dBm/Hz
10 kHz to 100 kHz	-131 dBfs/Hz	-149 dBm/Hz
1 kHz to 10 kHz	-125 dBfs/Hz	-143 dBm/Hz
100 Hz	-114 dBfs/Hz	-132 dBm/Hz
-24 dBm range		
1 MHz to 8 MHz	-134 dBfs/Hz	-158 dBm/Hz
100 kHz to 1 MHz	-132 dBfs/Hz	-156 dBm/Hz
10 kHz to 100 kHz	-127 dBfs/Hz	-151 dBm/Hz
1 kHz to 10 kHz	-120 dBfs/Hz	-144 dBm/Hz
100 Hz	-108 dBfs/Hz	-132 dBm/Hz

---

**Spurious Response**

(2 kHz to 8 MHz, terminated with 50Ω,  
input BNC shell grounded)

DSP clock = ADC clock, alias filter on	< -110 dBfs
DSP clock ≠ ADC clock, alias filter on	< -95 dBfs
DSP clock = ADC clock, alias filter off	< -70 dBfs

---

**Phase Noise**

Phase noise density

(Single sideband power density of a 5 MHz  
signal, vibration < 0.05G)

	20 MHz clock	20.48 MHz clock
$\Delta f = 100$ kHz	< -138 dBc/Hz	< -138 dBc/Hz
$\Delta f = 1$ kHz	< -130 dBc/Hz	< -130 dBc/Hz
$\Delta f = 100$ Hz	< -105 dBc/Hz	< -120 dBc/Hz

Discrete sidebands

(100 Hz <  $\Delta f$  < 1 MHz, other modules must  
comply with VXI 1.4 specification for ECL  
trigger lines, External Clock disconnected)

Internal clock	< -100 dBc
Internal clock (distributed on backplane with CLK10 backplane clock disabled)	< -80 dBc (typical)

---

**Distortion**

Harmonic distortion products to 8 MHz  
(Includes aliased distortion components)

for inputs < -6 dBfs	< -75 dBc or < -110 dBfs
for inputs > -6 dBfs	< -70 dBc or < -110 dBfs

Intermodulation Distortion products to 8 MHz  
(Includes aliased distortion components)

for inputs < -9 dBfs	< -75 dBc or < -110 dBfs
for inputs > -9 dBfs	< -70 dBc or < -110 dBfs

## Clock

---

### Clock Input/Output Characteristics

External ADC clock input (AC coupled with small-signal input impedance of 100 k $\Omega$ above 10 kHz. Large signals are diode clamped through 100 $\Omega$ )	TTL, ECL, or > -6 dBm sine waves, BNC input
Intermodule Synchronization Clock/SYNC	ECL-10 K compatible, SMB

---

### Clock Source Frequencies

Internal ADC clock	20 MHz or 20.48 MHz
External sample clock frequency range	
DSP clock = ADC clock	2 MHz to 20.60 MHz
DSP clock $\neq$ ADC clock	0 Hz to 20 MHz
DSP clock	
Internal	20 MHz or 20.48 MHz
ADC	ADC clock must be > 2 MHz in this mode

---

### Internal Clock Characteristics

Frequency Accuracy (20 MHz or 20.48 MHz, 0 °C to 40 °C)	$\pm$ 100 Hz
Jitter	< 5 ps rms (typical) (see phase noise specification for spectral content of jitter)

---

### Sampling Skew (typical)

Within mainframe (rear clock distribution)	< 10 ns (typical)
Between mainframes (clock extended via a 1m coaxial cable)	< 25 ns (typical)

**Trigger**

---

<b>Trigger sources</b>	External TTL/ECL/sine wave, level, LOG(magnitude), software (via register write)
<b>Slope</b>	Positive/negative
<b>Threshold</b>	
Level trigger	Vrange x N/128, $-128 \leq N \leq 128$ ; hysteresis is $\frac{Vrange}{256}$
LOG (magnitude) trigger	Vrange (dBm) - N x 0.3762574 dBm, $0 \leq N \leq 255$ ; hysteresis is 1.5 dB
<b>External trigger input</b>	
	BNC Connector, AC-coupled comparator with 1 k $\Omega$ TTL/ECL/SINE wave
Sine wave frequency	> 50 kHz
Detects pulses	> 100 ns with edges > 100 mV
<b>Trigger offset</b>	
Resolution (in output sample periods)	1 sample, 32-bit complex data 2 samples, 16-bit complex or 32-bit real data 4 samples, 16-bit real data
Maximum pre-trigger delay	$(132 - \frac{dram\ size}{8}) \times$ trigger offset resolution
Maximum post-trigger delay	16,777,116 x trigger offset resolution

## Filtering

$$H(f) = H_{\text{analog}}(f) \cdot H_{\text{digital}}\left(N \frac{f - f_0}{f_s}\right)$$

where:

$f$  = input signal frequency

$f_0$  = zoom center frequency (zero in baseband mode)

$f_s$  = ADC sampling frequency

$N$  = Digital filter bandwidth selector;  $N = 0, 1, 2, 3, \dots, 24$

### Analog frequency response function

(typical), with alias filter off.

$$H_{\text{analog}} = \prod_{n=1}^5 \frac{1}{1 - jf/B_n}$$

n	Poles, Bn (MHz)
1	-80.234 +j 0.0
2	-103.94 +j 0.0
3	-103.94 -j 0.0
4	-72.9774 +j 49.94437
5	-72.9774 -j 49.94437

### Analog Frequency Response Function

(typical), with alias filter on.

$$H_{\text{analog}} = \prod_{n=1}^{11} \frac{1 - jf/A_n}{1 - jf/B_n}$$






n	Zeros, An (MHz)	Poles, Bn (MHz)
1	$\infty$	-3.423881 +j 0.0
2	-0.278765 +j37.0	-3.122370 +j 3.010688
3	-0.278765 -j 37.0	-3.122370 -j 3.010688
4	-0.085700 +j 19.5	-2.397607 +j 5.453639
5	-0.085700 -j 19.5	-2.397607 -j 5.453639
6	-0.053075 +j 14.6	-1.579759 +j 7.117287
7	-0.053075 -j 14.6	-1.579759 -j 7.117287
8	-0.042453 +j 12.6	-0.864515 +j 8.088296
9	-0.042453 -j 12.6	-0.864515 -j 8.088296
10	-0.038826 +j 11.84	-0.271817 +j 8.524792
11	-0.038826 -j 11.84	-0.271817 -j 8.524792

### Digital Frequency response function

$$H_{\text{digital}}\left(N \frac{f - f_0}{f_s}\right) = \begin{cases} 1, & N = 0 \\ \prod_{n=1}^N \left( \frac{z^3 + 2z^2 + 3z + 1}{4z^3 + 2z} \right)^5 \Big|_{z = e^{j2\pi p(f - f_0)/f_s}}, & N > 0 \end{cases}$$







Filter characteristics for nominal analog alias filter, N = 0

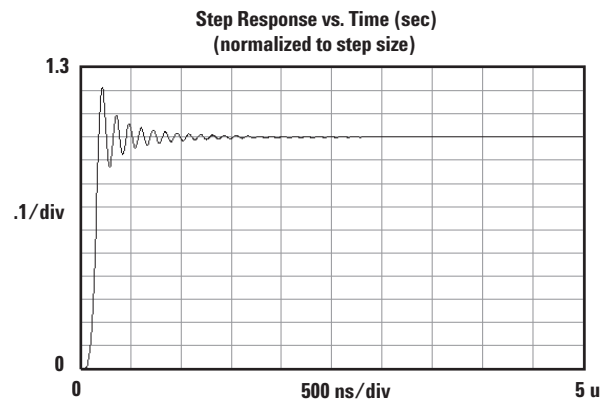
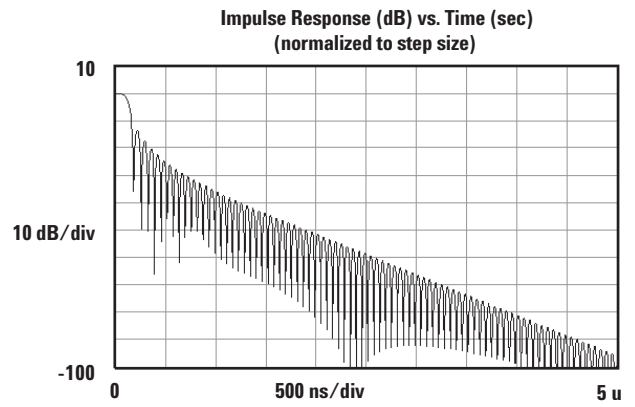
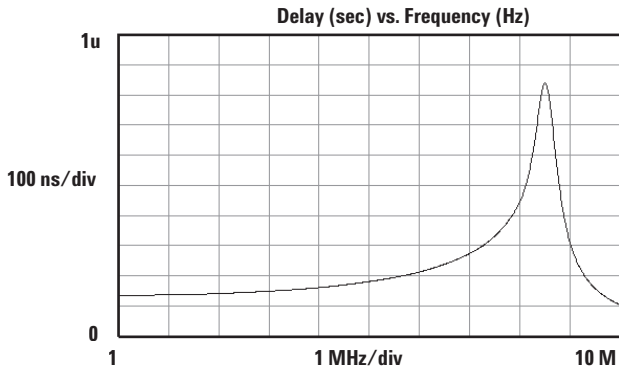
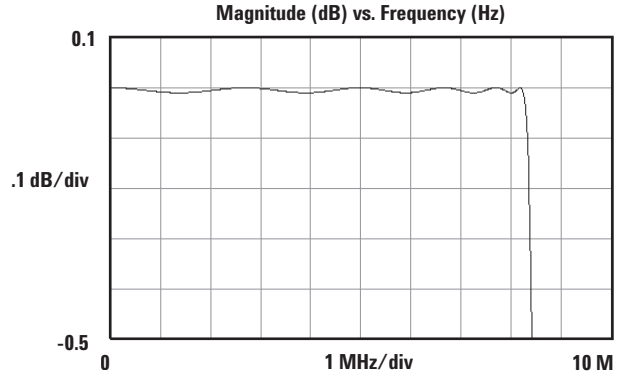
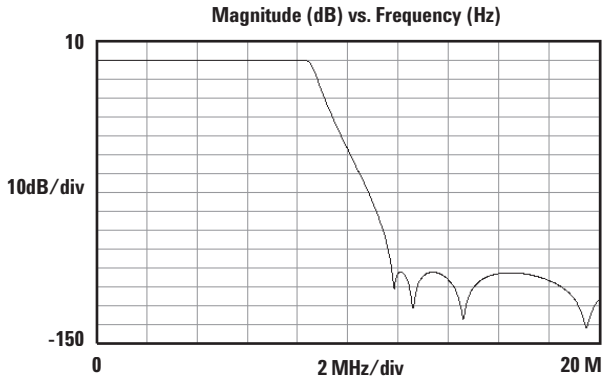


Filter characteristics with all alias filtering turned off, N = 1

---

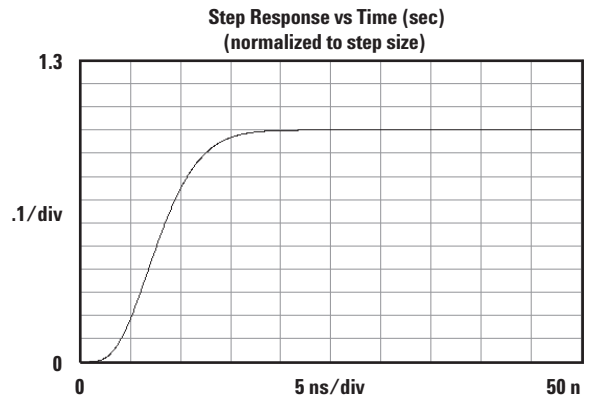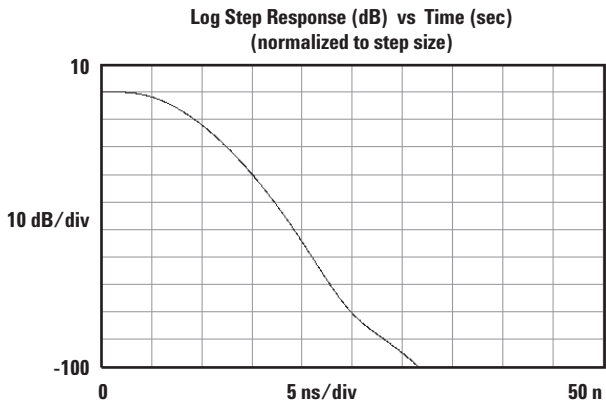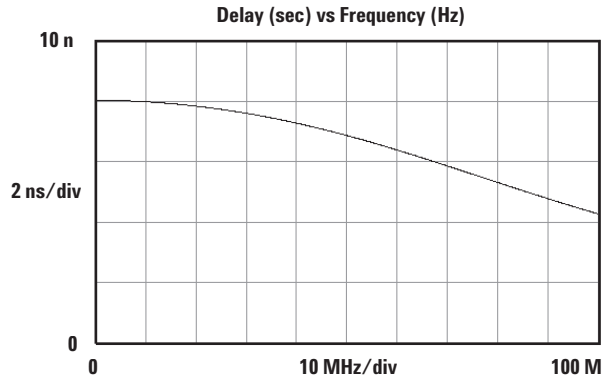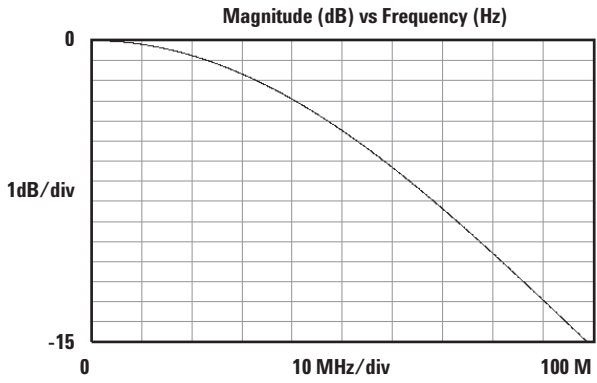

Filter characteristics for 3rd pass digital filter + analog filter (dominated by digital), N = 3

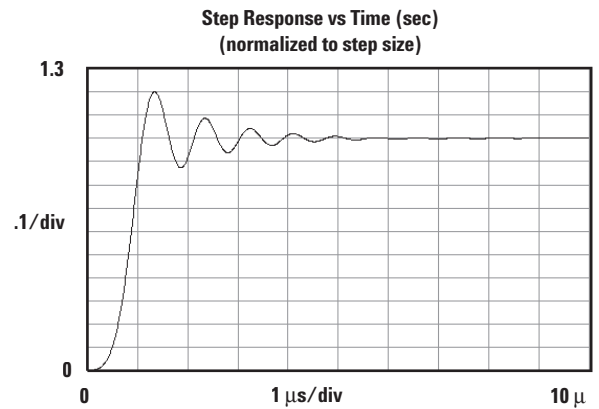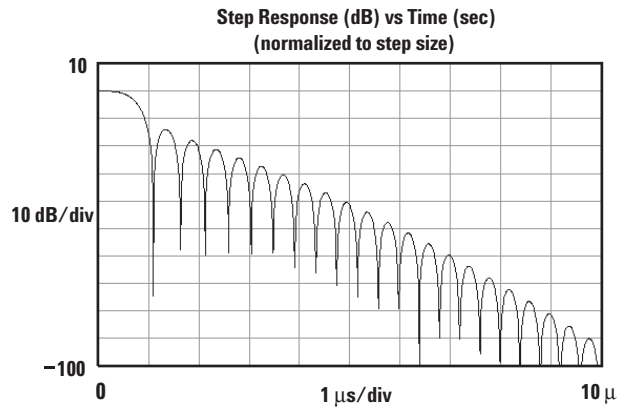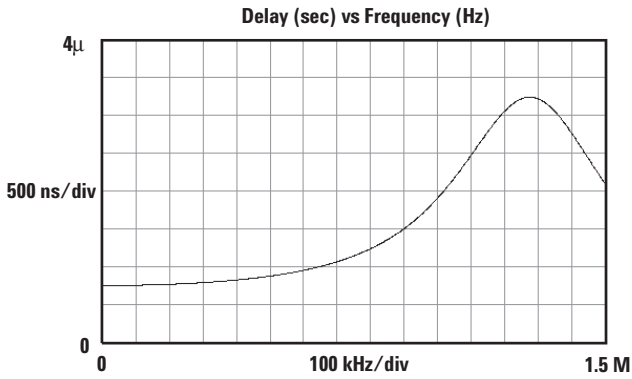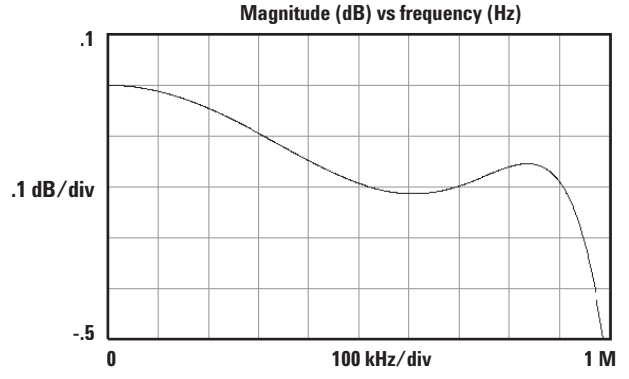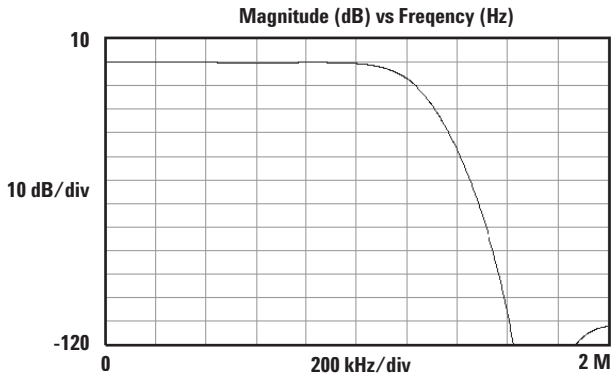

## Programming

(all functions are programmable via the VXI register interface)

### Center frequency

Resolution	ADC clock frequency $\div$ (1024 $\times$ 10 <sup>9</sup> )
Range	$\pm$ ADC clock frequency $\div$ 2

### Filtering and decimation

Bandwidths (-15 dB) (See the frequency response section for filter characteristics)	$\pm 0.5 \times F_s/2^N$ , $0 \leq N \leq 24$
Output sample rate	$F_s/2^N$ (nyquist sampled) $2 \times F_s/2^N$ (2X over-sampled)

### Data output

Type	real, complex
Resolution	16 bits, 32 bits
Output ports	VME data transfers Local Bus data transfers
Transfer rate	60 MByte/s, burst 40 MByte/s, sustained 2 MByte/s,VME
Block sizes	8, 16, 32, ..., up to memory size bytes

<b>Measurement modes</b>	Block mode (individually triggered blocks) Continuous mode
--------------------------	---

### Information available in read registers

Manufacturer's code	4095 decimal (Agilent Technologies)
Model code	534 decimal (E1437A)
Other Status bits	Measurement loop status, Ready, ADC error, Ext clk error, Set-up error, Sync/Idle complete, Read Valid, Measure done, Armed, FIFO overflow, Overload, Error, Mod ID, Hardware set.

<b>Interrupts</b>	Two independent priority interrupts initiated by masked status bits
-------------------	---

### Memory

Type	FIFO
Capacity	8 MBytes (4 MSamples, 16 bits) 16 MBytes (8 MSamples, 16 bits) option UFC 32 MBytes (16 MSamples, 16 bits) option ANC 64 MBytes (32 MSamples, 16 bits) option ANE

## VXI System Level Specifications

---

### VXI Standard Information

Conforms to VXI Rev. 1.4  
C-size, single slot width  
Register/Message based programming  
"Slave" Data Transfer Bus functionality  
A16 address capability  
D16 data capability  
Local Bus capability  
Requires ECLTRG0 and ECLTRG1 lines for module synchronization

---

### Size (single slot, C-size VXI module)

Dimensions 14 inches deep, 9.2 inches high, 1.2 inches wide  
(approx 36 cm deep, 23 cm high, 3 cm wide)

Weight 3.9 pounds (approx 1.8 kg)

### Software Drivers

---

**Driver Type** C libraries with source code

---

**Supported Operating Systems** MS Windows<sup>®</sup> 3.1, Windows 95,  
Windows NT<sup>®</sup>, HP-UX\* 9.X

---

**Supply Media** Disk, DAT

\* HP-UX 9.X and 10.0 for HP 9000 Series 700 and 800 computers are X/Open Company UNIX 93 branded products.

MS Windows and Windows NT are U.S. registered trademarks of Microsoft Corporation.



## General Characteristics

### VXI Power Requirements

Range	DC Current	Dynamic Current
+5V	5.0A	0.50A
-5.2V	5.0A	0.50A
-2V	0.3A	0.10A
+12V	1.0A	0.050A
-12V	1.2A	0.050A
+24V	0.0A	0.0A
-24V	0.0A	0.0A

<b>VXI Cooling Requirements</b>	4.0 liters/second
15° C rise	0.5 mm H <sub>2</sub> O

<b>Calibration interval</b>	1 year
-----------------------------	--------

<b>Warm-up time</b>	15 minutes
---------------------	------------

## Ordering Information

<b>Agilent E1437A</b>	20 MSa/s AD with filter and FIFO
<b>Option UFC</b>	16 MB FIFO memory
<b>Option ANC</b>	32 MB FIFO memory
<b>Option ANE</b>	64 MB FIFO memory
<b>Option 0B0</b>	Delete manual set
<b>Option 0B1</b>	Add manual set

## Specification Note

Specifications describe warranted performance over the temperature range of 0° to 55 °C, after a 15-minute warm-up from ambient conditions and automatic calibrations enabled unless otherwise noted. Supplemental characteristics identified as “typical” or “characteristic,” provide useful information by giving non-warranted performance parameters. Typical performance is applicable from 20° to 30 °C.

## Abbreviations

**dBm** = dB relative to 1 mW into 50Ω

**dBfs** = dB relative to full scale amplitude range.

**dBc** = dB relative to carrier amplitude.

**Typical** = typical, non-warranted, performance specification included to provide general product information.

## Related Agilent Literature

*E1437A 20 MSample/Second ADC with Filter and FIFO*  
*Product Overview*  
literature number 5965-6893E

*E1438A 100 MSample/Second Digitizer with DSP and Memory*  
*Product Overview*  
literature number 5968-7348E

*E1438A 100 MSample/Second Digitizer with DSP and Memory*  
*Technical Specifications*  
literature number 5968-8233E

*E1439A VXI 70MHz IF ADC with Filters and Memory*  
*Product Overview*  
literature number 5980-1261E

*E1439A VXI 70MHz IF ADC with Filters and Memory*  
*Technical Specifications*  
literature number 5980-1260E

*E9830A Delay Memory Module*  
*Product Overview*  
literature number 5968-7349E

*Test Systems and VXI Products Catalog*  
literature number 5980-0307E

## Visit our Websites

Agilent Communications  
Intelligence Information –  
[www.agilent.com/find/COMINT](http://www.agilent.com/find/COMINT)

Agilent VXI Product Information –  
[www.agilent.com/find/vxi](http://www.agilent.com/find/vxi)

## Warranty

This product is distributed, warranted, and supported by Agilent Technologies.

The E1437A comes with a 3-year warranty. During that period, the unit will either be replaced or repaired, at Agilent Technologies' option, and returned to the customer without charge.

## Agilent Technologies' Test and Measurement Support, Services, and Assistance

Agilent Technologies aims to maximize the value you receive, while minimizing your risk and problems. We strive to ensure that you get the test and measurement capabilities you paid for and obtain the support you need. Our extensive support resources and services can help you choose the right Agilent products for your applications and apply them successfully. Every instrument and system we sell has a global warranty. Support is available for at least five years beyond the production life of the product. Two concepts underlie Agilent's overall support policy: "Our Promise" and "Your Advantage."

### Our Promise

Our Promise means your Agilent test and measurement equipment will meet its advertised performance and functionality. When you are choosing new equipment, we will help you with product information, including realistic performance specifications and practical recommendations from experienced test engineers. When you use Agilent equipment, we can verify that it works properly, help with product operation, and provide basic measurement assistance for the use of specified capabilities, at no extra cost upon request. Many self-help tools are available.

### Your Advantage

Your Advantage means that Agilent offers a wide range of additional expert test and measurement services, which you can purchase according to your unique technical and business needs. Solve problems efficiently and gain a competitive edge by contracting with us for calibration, extra-cost upgrades, out-of-warranty repairs, and on-site education and training, as well as design, system integration, project management, and other professional engineering services. Experienced Agilent engineers and technicians worldwide can help you maximize your productivity, optimize the return on investment of your Agilent instruments and systems, and obtain dependable measurement accuracy for the life of those products.

By internet, phone, or fax, get assistance with all your test & measurement needs

**Online assistance:**  
[www.agilent.com/find/assist](http://www.agilent.com/find/assist)

Phone or Fax  
**United States:**  
(tel) 1 800 452 4844

**Canada:**  
(tel) 1 877 894 4414  
(fax) (905) 282-6495

**China:**  
(tel) 800-810-0189  
(fax) 1-0800-650-0121

**Europe:**  
(tel) (31 20) 547 2323  
(fax) (31 20) 547 2390

**Japan:**  
(tel) (81) 426 56 7832  
(fax) (81) 426 56 7840

**Korea:**  
(tel) (82-2) 2004-5004  
(fax) (82-2) 2004-5115

**Latin America:**  
(tel) (305) 269 7500  
(fax) (305) 269 7599

**Taiwan:**  
(tel) 080-004-7866  
(fax) (886-2) 2545-6723

**Other Asia Pacific Countries:**  
(tel) (65) 375-8100  
(fax) (65) 836-0252  
**Email: [tm\\_asia@agilent.com](mailto:tm_asia@agilent.com)**

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2001  
Printed in USA  
August 17, 2001

**5965-9774E**



**Agilent Technologies**