


Agilent E1452A Terminating 20 MHz Pattern I/O Module

Data Sheet

- 32 I/O pins (4 ports of 8 bits each)
- Maximum 20 MHz pattern rate using an external clock
- 64 K segmentable pattern depth
- Output, record, real-time comparison per port
- Programmatic or triggered tri-state on the fly

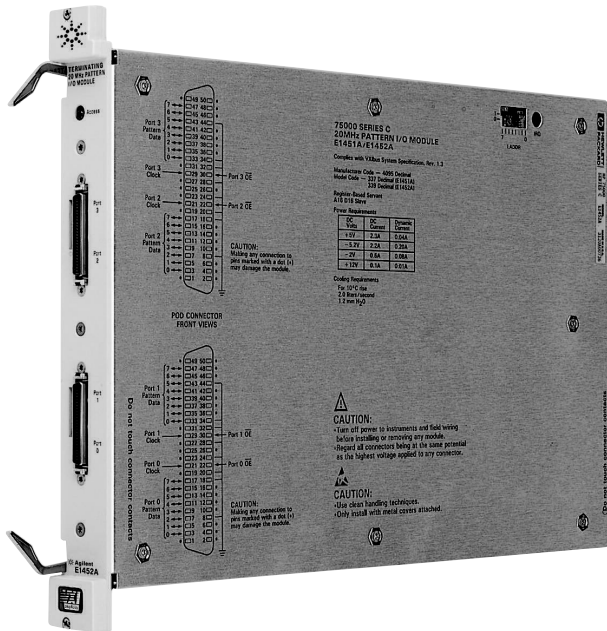

Agilent E1452A

Description

The Agilent E1452A Pattern Input/Output Module is a **C-size, 1-slot, register-based VXI** module that is used to send data to and receive data from a device under test. Since it does not contain an internal time base, the E1452A is clocked by an externally supplied signal.

Refer to the Agilent Technologies Website for instrument driver availability and downloading instructions, as well as for recent product updates, if applicable.

Programming

The pattern I/O module must be programmed using the SCPI instrument control language. Therefore, your VXI system requires an Agilent E1406A Command Module and a downloadable SCPI driver. Register-based programming is not supported.

32 Input/Output Pins per Module

Each pattern module contains 32 I/O pins arranged in four ports of eight bits. Each port can be statically programmed to output, record, or perform a real-time compare. Each port can also be tri-stated on the fly, either programmatically or externally. This allows two ports to be paralleled for bi-directional data transfers or to double I/O speed.



Deep Memory

The pattern module contains 64 KB of memory behind each I/O port. This memory is segmentable and may be dedicated to one large test or split into multiple tests. **Note:** This memory is not dual-ported FIFO memory. Instead, generator/capture activity must be stopped when reading or writing to the memory.

Connecting the E1452A to the DUT

The Agilent E1454A Pattern Pod is a 16-pin active device with a 2-meter cable. This pod allows for full drive capability at a 2-meter distance from the module.

There are two basic ways to connect the pattern I/O module to the DUT:

(1) Using the Agilent E1454A Pattern Pod and making a connection to the pattern pod via:

- The E1493-61601 Pod Cable Assembly, which provides a mating connector for the pattern pod's connector and 61 cm of ribbon cable.
- The 1251-8832 right-angle PC board connector, which mates to the pattern pod's connector. The 1251-8832 connector is a 2x25-pin, male dual in-line connector (3M 3596-5002).
- The 1251-8262 straight PC board connector, which mates to the pattern pod's connector. The 1251-8262 connector is a 2x25-pin, male dual in-line connector (3M 3596-6002).

(2) Direct connection to the pattern I/O module's front panel connector via the E1454-61601 Pattern Module Cable Assembly or by a user-supplied connector and cable.



Agilent E1454A Pattern Pod

Product Specifications

Specifications include the E1454A pod and apply with a 50 pf, 500 Ω (to ground) load.

General

Number of channels:	32
Channel type:	Input or Output
Output or input type:	TTL/CMOS
Memory:	64 K-vectors
Max. pattern rate:	20 M/s
32-bit block transfer:	n/a
Test synchronization:	Hardware triggers, software triggers

Memory

Depth:	65,536 (64 k) vectors
---------------	-----------------------

Timing

Pattern rate:	See external clock specifications
Skew:	3 ns typical (between I/O Pins, same port)
Rise time:	6.5 ns typical
Fall time:	7.0 ns typical

Output Levels

High, open circuit:	4.4 V min
Low, open circuit:	0.1 V max
High, sourcing 24 mA:	3.7 V min
Low, sinking 24 mA:	0.44 V max

Input Levels	
High:	>2.0 V
Low:	<0.8 V

Tri-state Control Input Levels	
High:	>2.0 V
Low:	<0.8 V

External Tri-state Delay	
With pod:	11 ns max
Without pod:	14 ns max

External Clock	
Minimum pulse width:	6 ns

Input Levels	
High:	>2.0 V
Low:	<0.8 V

General Specifications

VXI Characteristics	
VXI device type:	Register based
Size:	C
Slots:	1
Connectors:	P1/2
Shared memory:	No
VXI buses:	Local Bus A (specialized)

Instrument Drivers - See the Agilent Technologies Website (http://www.agilent.com/find/inst_drivers) for driver availability and downloading.

Command module firmware:	Downloadable
Command module firmware rev:	A.06
I-SCPI Win 3.1:	Yes
I-SCPI Series 700:	Yes (not supported on V743)
C-SCPI LynxOS:	No
C-SCPI Series 700:	Yes (not supported on V743)
Panel Drivers:	Yes
VXI <i>plug&play</i> Win Framework:	No
VXI <i>plug&play</i> Win 95/NT Framework:	No
VXI <i>plug&play</i> HP-UX Framework:	No

Module Current		
	I _{PM}	I _{DM}
+5 V:	1.5	0.04
+12 V:	0.1	0.01
-12 V:	0	0
+24 V:	0	0
-24 V:	0	0
-5.2 V:	2.2	0.2
-2 V:	0.6	0.08

Cooling/Slot	
Watts/slot:	22.00
ΔP mm H ₂ O:	0.12
Air Flow liter/s:	2.00

Ordering Information

Description	Product No.
Terminating 20 MHz Pattern Input/Output Module	E1452A
3 Yr. Retn. to Agilent to 1 Yr. OnSite Warr.	E1452A W01
Pattern I/O Pod for the E1451A/52A	E1454A
3 Yr. Retn. to Agilent to 1 Yr. OnSite Warr.	E1454A W01
Pattern I/O Cable	E1454-61601
Cable Customer Interface	E1493-61601

Agilent Technologies' Test and Measurement Support, Services, and Assistance

Agilent Technologies aims to maximize the value you receive, while minimizing your risk and problems. We strive to ensure that you get the test and measurement capabilities you paid for and obtain the support you need. Our extensive support resources and services can help you choose the right Agilent products for your applications and apply them successfully. Every instrument and system we sell has a global warranty. Support is available for at least five years beyond the production life of the product. Two concepts underlie Agilent's overall support policy: "Our Promise" and "Your Advantage."

Our Promise

Our Promise means your Agilent test and measurement equipment will meet its advertised performance and functionality. When you are choosing new equipment, we will help you with product information, including realistic performance specifications and practical recommendations from experienced test engineers. When you use Agilent equipment, we can verify that it works properly, help with product operation, and provide basic measurement assistance for the use of specified capabilities, at no extra cost upon request. Many self-help tools are available.

Your Advantage

Your Advantage means that Agilent offers a wide range of additional expert test and measurement services, which you can purchase according to your unique technical and business needs. Solve problems efficiently and gain a competitive edge by contracting with us for calibration, extra-cost upgrades, out-of-warranty repairs, and on-site education and training, as well as design, system integration, project management, and other professional engineering services. Experienced Agilent engineers and technicians worldwide can help you maximize your productivity, optimize the return on investment of your Agilent instruments and systems, and obtain dependable measurement accuracy for the life of those products.

By internet, phone, or fax, get assistance with all your test & measurement needs.

Online assistance:

www.agilent.com/find/assist

Phone or Fax

United States:
(tel) 1 800 452 4844

Canada:
(tel) 1 877 894 4414
(fax) (905) 282 6495

China:
(tel) 800 810 0189
(fax) 1 0800 650 0121

Europe:
(tel) (31 20) 547 2323
(fax) (31 20) 547 2390

Japan:
(tel) (81) 426 56 7832
(fax) (81) 426 56 7840

Korea:
(tel) (82 2) 2004 5004
(fax) (82 2) 2004 5115

Latin America:
(tel) (305) 269 7500
(fax) (305) 269 7599

Taiwan:
(tel) 080 004 7866
(fax) (886 2) 2545 6723

Other Asia Pacific Countries:
(tel) (65) 375 8100
(fax) (65) 836 0252
Email: tm_asia@agilent.com

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2001
Printed in USA September 1, 2001
5965-5557E



Agilent Technologies