

High resolution progressive scan monochrome CCD camera
(Frame shutter)

KP-F100B

Specifications (preliminary)

DWN	<i>K. Ueno</i>	<i>Nov 6 '02</i>
DSGN	<i>K. Ueno</i>	<i>Nov 6 '02</i>
CHKD	<i>N. Fujimura</i>	<i>Nov 6 '02</i>
APPD	<i>N. Fujimura</i>	<i>Nov 6 '02</i>

1/15

Hitachi Kokusai Electric Inc.
Tokyo Japan

1. Outline

Hitachi's KP-F100B is a 2/3-inch size black and white CCD camera designed for high resolution and versatile functions. Progressive scan with full pixel independent readout and full frame shutter provide images of unparalleled quality at 15 frames per second non-interlaced output. Effective picture elements number 1.45 million, while the broad array of functions includes digital output, multi-step electronic shutter, HD/VD external sync and frame on demand. The square lattice pixel format also provides excellent suitability for image processing applications.

2. Outstanding features

(1) High resolution

High grade CCD with 1392 (H) × 1040 (V) effective pixels.

(2) Frame shutter

The frame shutter function improves vertical resolution of moving objects..

(3) Multistep electronic shutter

The shutter speed can be selected in 8 steps from 1/30th to 1/50,000th of a second.

(4) Frame on demand

An external trigger signal input can be used to capture an image at a desired timing for instant view or processing. The capture time can be adjusted by the trigger and shutter.

(5) The self-contained CPU permits using RS-232C control for setting each function. The functions can also be set from rear panel switches.

(6) Digital output

An EIA-644 digital output is provided.

A

B

C

D

E

F


DWN		• •	2/15	Hitachi Kokusai Electric Inc. Tokyo Japan	
DSGN		• •			
CHKD		• •			
APPD		• •			

3. Specifications


- | | |
|---|--|
| (1) Pickup element | 2/3-inch interline CCD |
| Total pixels | 1432 (H) × 1050(V) |
| Effective pixels | 1392 (H) × 1040 (V) |
| Pixel pitch | 6.45 (H) × 6.45 (V) μm (square lattice) |
| (2) Imaging area | 8.98 (H) × 6.71 (V) mm |
| (3) Scanning system | Non-interlaced |
| (4) Aspect ratio | 4 :3 |
| (5) Frame rate | 15frames/second (full pixel readout)
60fps (4× accelerated mode)
Factory setting is 15 fps.
Selected by rear panel switch. |
| (6) Horizontal scanning frequency | 16 kHz |
| (7) Vertical scanning frequency | 15 Hz |
| (8) Synchronization | Internal/external (automatic switching) |
| (9) Lens mount | C mount |
| (10) Flange focal distance | 17.526 mm |
| (11) Video output | Digital output or analog output for image checking
Analog output (option) |
| Digital output | EIA-644 |
| Note: Maximum digital out cable length is 10meters. | Data : single channel 10 bits, 28.64 MHz |
|
 | |
| (12) External sync input | HD/VD negative
Level: see page 11(External signal level)
Input impedance: 1 kΩ
Frequency deviation: ±1% |
|
 | |
| (13) Electronic shutter speed | Selectable by external switches: Off (frame rate), 1/30, 1/125,
1/250, 1/1000, 1/2000, 1/4000, 1/10000
1/50000 second.
Off: Normal exposure (frame rate)
Set by external switch; factory setting is off (1/15 second). |
| (14) Gamma compensation | $\gamma = 1$ |
| (15) Frame on demand | External switch setting on/off and modes (fixed shutter two trigger and one trigger). Factory setting is all off. |

Fixed shutter mode


DWN		• •	3/15	Hitachi Kokusai Electric Inc. Tokyo Japan
DSGN		•		
CHKD		• •		
APPD		• •		

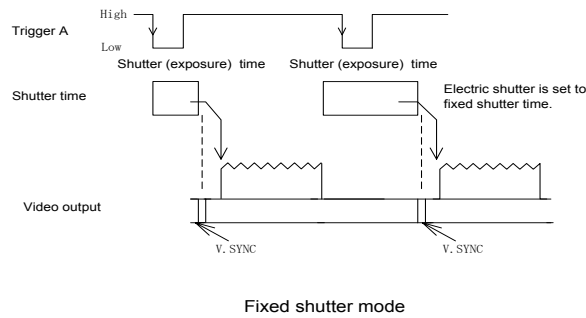

Two trigger mode

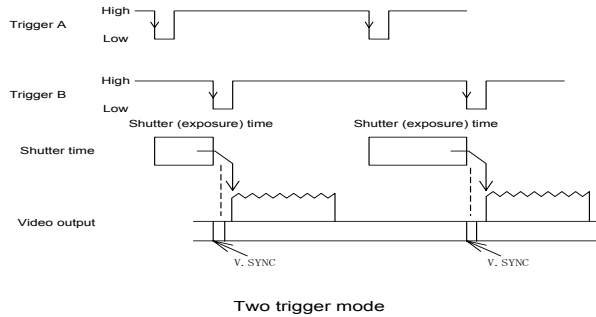

One trigger mode

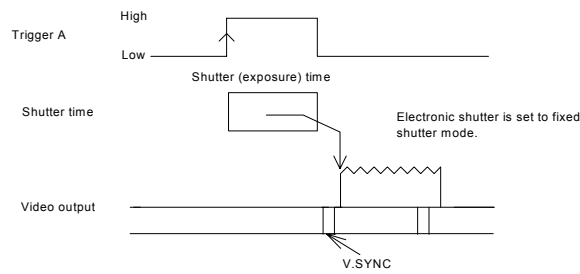

(16) Power supply voltage

12 ± 1 VDC

(17) Current consumption

Approx. 320 mA

(18) Ambient, operating

0 to +40 °C(+32 to ; 104 F), less than 90 % RH

Ambient, storage

-10 to +50 °C(+14 to +122 F), less than 70 % RH

Note: If operated continuously, be sure to use at less than +40 °C(104 F) for long term stable performance.

(19) Vibration endurance

29.42 m/s² (3 directions, 30 minutes each)

(20) Shock endurance

294.2 m/s² (vertical, horizontal, once each face)

(21) External dimensions

44 (W) × 44 (H) × 78 (D) mm

(22) Mass

Approx. 180 g

DWN		• •
DSGN		•
CHKD		• •
APPD		• •

(23) RS-232C control

(a) Signal system

Control system	Start-stop synchronization system
Transmission rate	9600 bps
Data length	8 bits
Start bit	1
Stop bits	2
Parity	None
Bit transfer	LSB first

(b) Communications control system

Full control by remote control software, data send/receive by text data transfer to camera microprocessor (BSC system handshake)

(C) Control items

- 1. Shutter speed (1/30, 1/125, 1/250, 1/1000, 1/2000, 1/4000, 1/10000, 1/50000 second)
- 2. FD (frame on demand) On/off
- 3. Mode Fixed shutter, two trigger, one trigger
- 4. V-binning On/off
- 5. Gain Variable in 50 steps
- 6. Black level Variable in 50 steps
- 7. Input trigger Negative/Positive

A

B

C

D

E

DWN	5/15	• •	Hitachi Kokusai Electric Inc. Tokyo Japan
DSGN		• •	
CHKD		• •	
APPD		• •	

F

4. Composition

- (1) Camera (with infrared blocking filter)
- (2) Operating instructions

5. Optional accessories

- | | |
|--------------------------------|--------------------------|
| (1) Tripod adaptor | TA-M1 |
| (2) 12 pin plug | HR10A-10P-12S(01) |
| (3) D. OUT connector (26 pins) | DX30AM-26P or equivalent |
| (4) Junction box | JU-M1A JU-F1* |
| (5) Dummy glass (AR coated) | ARC1214 |
| (6) Camera cable | |

	Molded type	Assembly type	Shield type
2 m	C-201-KSM	C-201KS	C-201KSS
5 m	C-501KSM	C-501KS	C-501KSS
10 m	C-102KSM	C-102KS	C-102KSS

Note : Assembly type made to order

In Europe, use the Shield type

* 12-pin connector output pin differences

Pin	JU-F1	KP-F100B output
4	VIDEO 1	VIDEO
6	HD/TRIG-B	EXTHD
9	VIDEO 2	TRIG-B

DWN		• •	6/15	Hitachi Kokusai Electric Inc. Tokyo Japan
DSGN		• •		
CHKD		• •		
APPD		• •		

6. DC input and sync connections

(1) Connections to DC IN and SYNC

Pin No.	Int. sync	Ext. sync			
		Ext. HD/VD	Frame on demand		
			Fixed shutter	Two trigger	One trigger
1	GND	GND	GND	GND	GND
2	+12V	+12V	+12V	+12V	+12V
3	GND	GND	GND	GND	GND
4	VIDEO	VIDEO	VIDEO	VIDEO	VIDEO
5	————	EXTHD (GND)	————	————	————
6	————	EXTHD (SIGNAL)	EXTHD (SIGNAL)	EXTHD (SIGNAL)	————
7	————	EXTVD (SIGNAL)	TRIG-A (SIGNAL)	TRIG-A (SIGNAL)	TRIG-A (SIGNAL)
8	————	————	————	TRIG-B (GND)	————
9	————	————	————	TRIG-B (SIGNAL)	————
10	GND	GND	GND	GND	GND
11	+12V	+12V	+12V	+12V	+12V
12	————	EXTVD (GND)	TRIG-A (GND)	TRIG-A (GND)	TRIG-A (GND)

Connector (camera side) : Hirose HR10A-10R-12PB(01)
 Plug (matching cable plug) : Hirose HR10A-10P-12S (01)

DWN		• •	7/15	Hitachi Kokusai Electric Inc. Tokyo Japan
DSGN		• •		
CHKD		• •		
APPD		• •		

(2) Signal connections to D. OUT (26 pin)

Pin No.	Signal	Pin No.	Signal	Pin No.	Signal	Pin No.	Signal
1	DATA 0-H	8	DATA 3-L	15	DATA 7-H	22	VD-L
2	DATA 0-L	9	DATA 4-H	16	DATA 7-L	23	HD-H
3	DATA 1-H	10	DATA 4-L	17	DATA 8-H	24	HD-L
4	DATA 1-L	11	DATA 5-H	18	DATA 8-L	25	CLK-H
5	DATA 2-H	12	DATA 5-L	19	DATA 9-H	26	CLK-L
6	DATA 2-L	13	DATA 6-H	20	DATA 9-L		
7	DATA 3-H	14	DATA 6-L	21	VD-H		

Connector (camera side) : Hirose DX10GM-26S or an equivalent
 Plug(matching cable plug) : Hirose DX30AM-26P or an equivalent
 Cover : Hirose DX30M-26CV or an equivalent

The digital out cable should be comprised of a twisted pair of wires having 100Ω characteristic impedance and an outer sheath shield type conductor. Connect the shield (ground) of the digital out cable to the ground terminal of the video equipment, frame grabber, etc.

(3) Remote (RS-232C control) cable pin connections

(Connect the cable between the camera Remote connector and the personal computer serial interface connector (D-SUB 9 pin).

Pin no.	Signal name
1	-
2	RD
3	TD
4	Manual/remote
5	Ground
6	-

Connector (camera) HR10-7R-6SA (Hirose) or equivalent

Plug (cable matching plug) HR10A-7P-6P (Hirose) or equivalent

Notes: At the camera Remote plug, connect pin 4 Manual/remote and pin 5 ground.


At the computer serial interface connector (D-SUB), short pins 7 (RTS) and 8 (CTS).

DWN		• •	8/15	Hitachi Kokusai Electric Inc. Tokyo Japan
DSGN		• •		
CHKD		• •		
APPD		• •		


7. Rear panel switches

The rear panel includes switches for electronic shutter data, readout rate, and field on demand on/off and mode switches.

(1) Electronic shutter switches

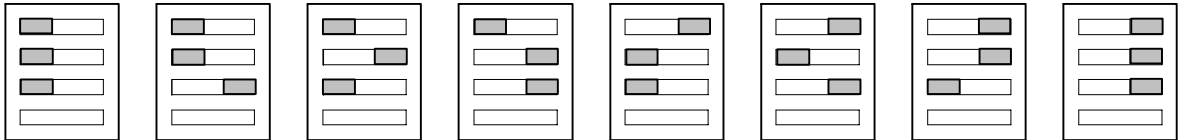


(2) Remote hold




(Factory setting)

	Remote hold	
	ON	OFF
Remote cable Connection	REMOTE	REMOTE
Remote cable Non Connection	REMOTE	SWITCH

(3) Frame on demand (FD) on/off switch

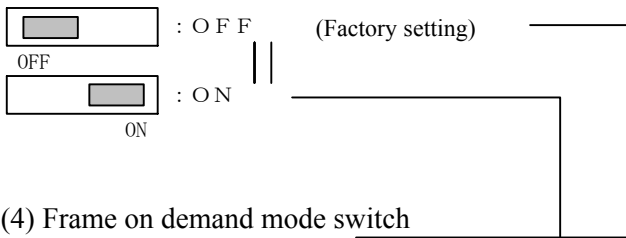

(4) Frame on demand mode switch

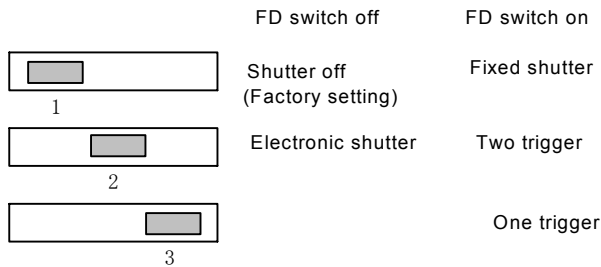


DWN	/	.	.
DSGN	/	.	.
CHKD	/	.	.
APPD	/	.	.

A
B
C
D
E
F


8. Input/output signal levels and timing

(1) Digital output H sync phase relationship

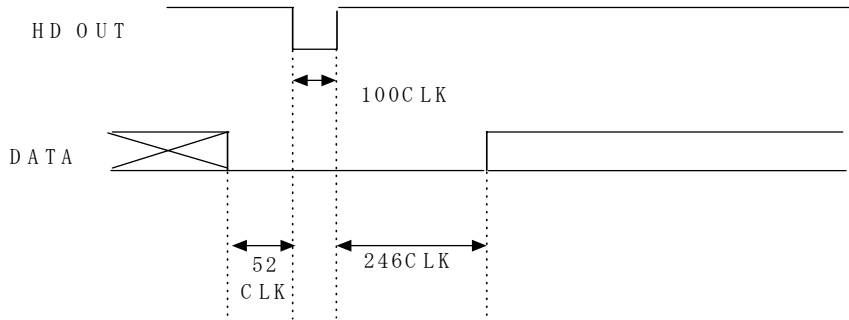


HD OUT is obtained at EIA-644 rating from the digital connector pins 23 and 24.
 $HD = 16\text{kHz} = 1790\text{CLK}$

V sync phase relationship

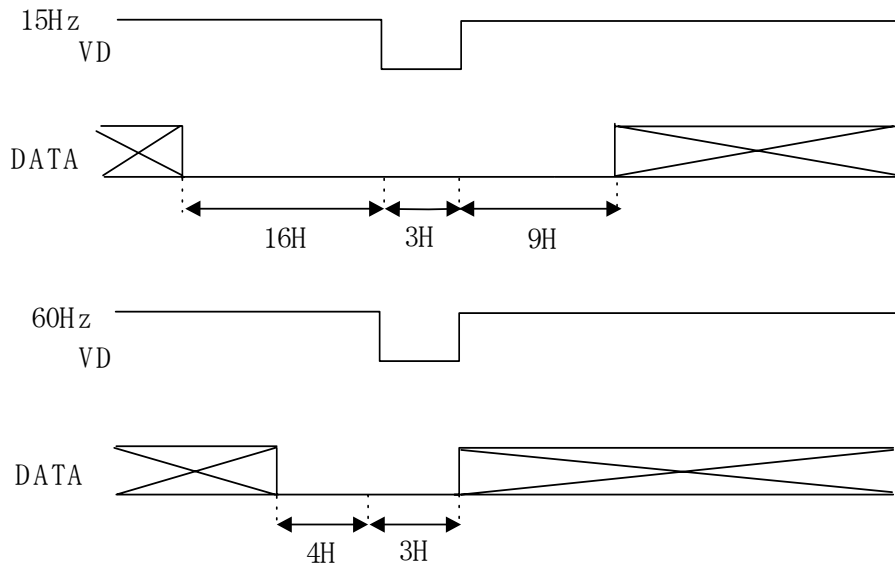

DWN	/	.	.
DSGN		.	.
CHKD		.	.
APPD		.	.

CLK,HD,VD,DATA phase relationship

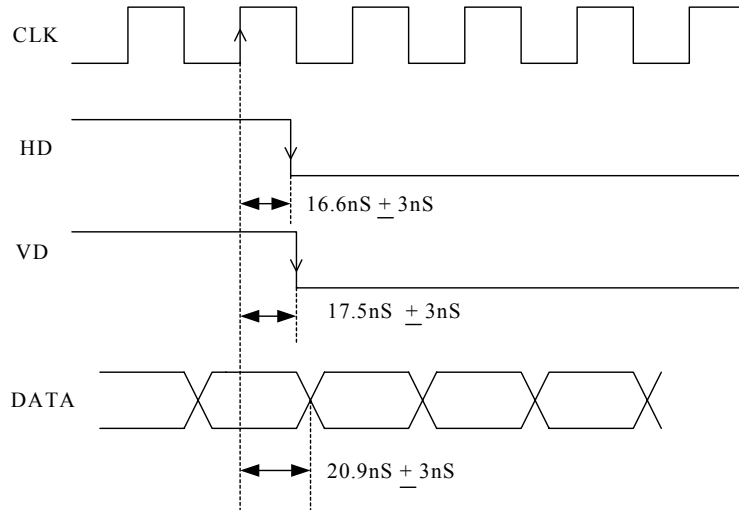


Level: EIA-644A (Hi: more than 1.41V, Low: less than 1.075V)



External signal level

Condition of external signal input

Ringing of external signal input(Trig-A / Trig-B / Ext-HD / Ext-VD) : 0.3V or less

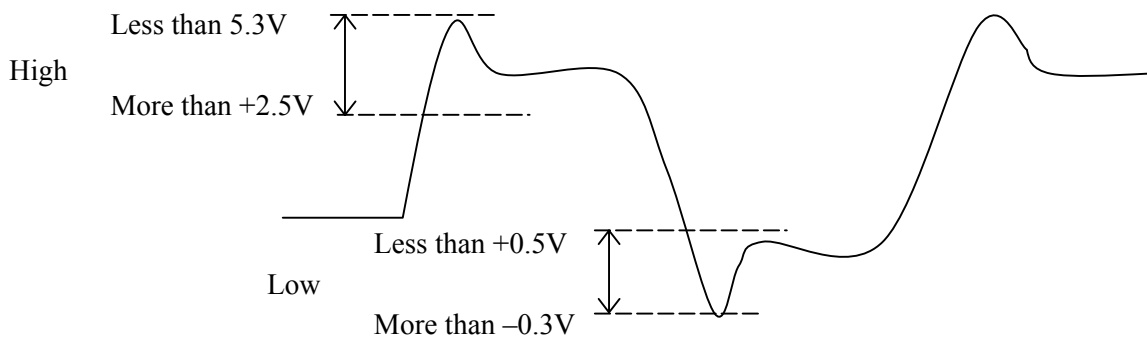


External signal input waveform

DWN	/	.	.
DSGN		.	.
CHKD		.	.
APPD		.	.


(2)TRIG-A input and HD & VD phase during Fixed shutter mode

TRIG-A level: see page 11(External signal level)

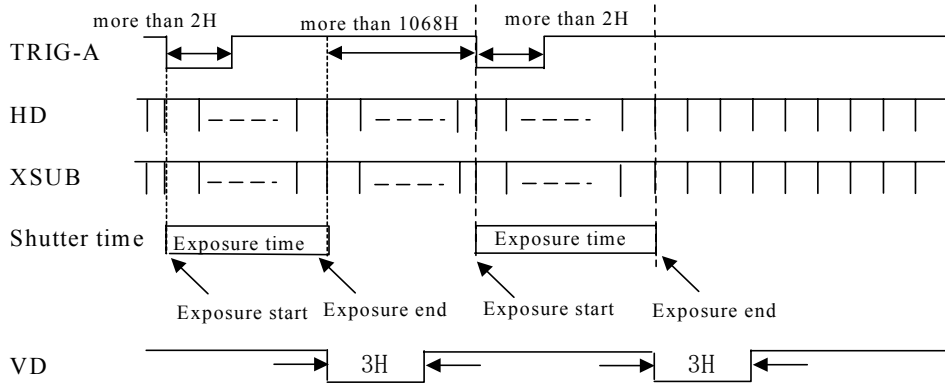

(3)TRIG-A & B input phase and HD & VD phase during Two trigger mode

TRIG-A & B level: see page 11(External signal level)

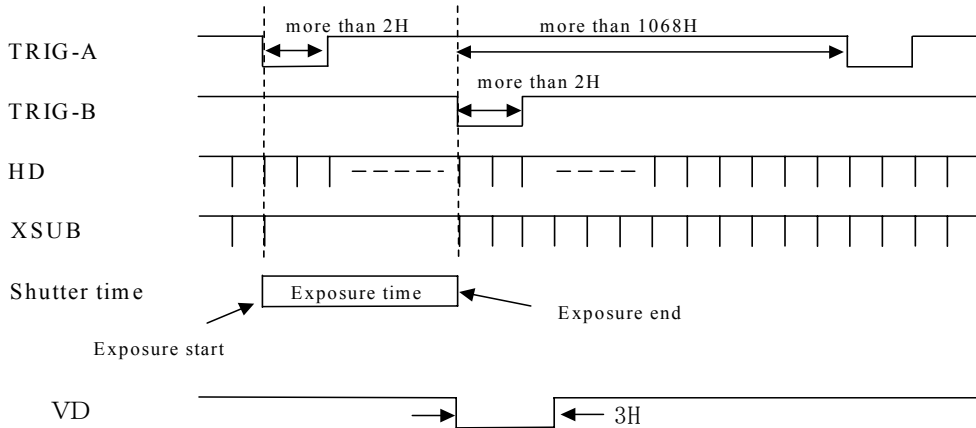

DWN	/	.	.
DSGN		.	.
CHKD		.	.
APPD		.	.

A

B


C

D

E


F

(4)One trigger mode

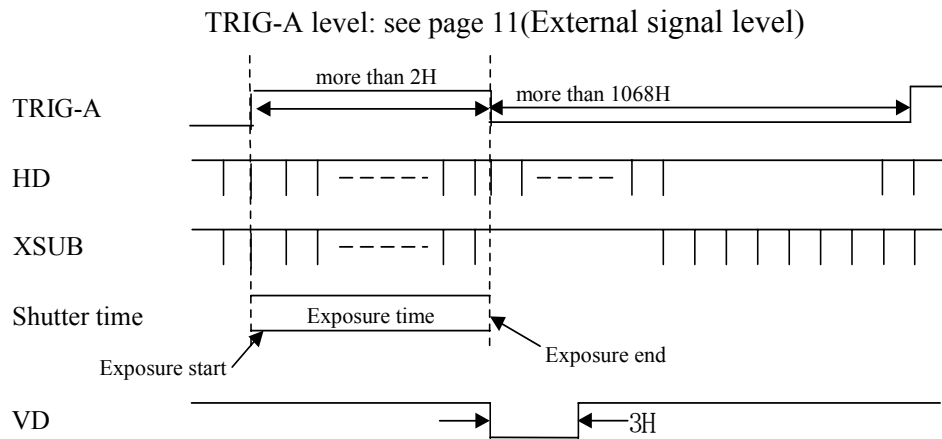

(5) External HD & VD input levels and phase

level: see page 11(External signal level)

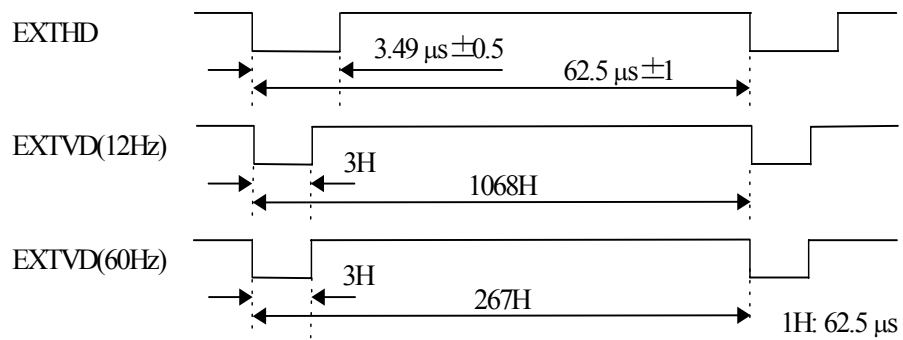

Align falling edges of external HD and VD.
VD output is delayed 2H compared to EXTVD

DWN	/	.	.
DSGN		.	.
CHKD		.	.
APPD		.	.

A
B
C
D
E
F

Notice:
 These specifications are subject to change without prior notice due to product improvement.
 Confirm the most recent specifications at time of order.
 Hitachi Denshi certifies this product complies with the standard warranty conditions of Hitachi Denshi, and that quality control is implemented to the extent required to comply with these conditions.

Warranty and service:

- (1) The guarantee period is one year after the data purchase. However, the defects due to erroneous use or intentional act are excluded.
- (2) As the defect after expiration of the guarantee period, where product repair is possible, repair will be performed at charge. .
- (3) The present Warranty pertains only to the camera unit. Secondary malfunctions attributable to camera failure as well as expenses incurred by disassembly and reassembly of the related system, are beyond the scope of this Warranty.
- (4) Compensation for loss of business, loss or damage to software, database and other contingent losses are beyond the scope of this Warranty.
- (5) Hitachi Kokusai Electric Inc. is not liable for the losses caused when the equipment is used in a system, use for business trades, production process, medical fields, crime prevention applications, etc.
- (6) The parts used in the equipment have their respective lives. The lives of such parts will be shortened under the environments of high temperature or high humidity.
 When the stable operation is required for a long time, it is recommended to perform periodical maintenance and inspection every year or every two years.

DWN		• •	14/15	Hitachi Kokusai Electric Inc. Tokyo Japan
DSGN		• •		
CHKD		• •		
APPD		• •		

A

B






C

D

E


F

KP-F100B

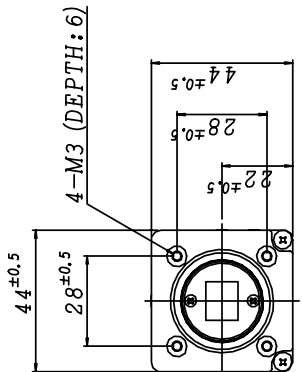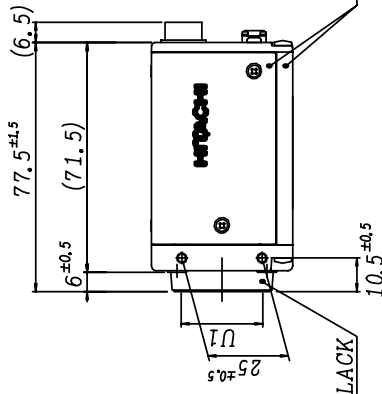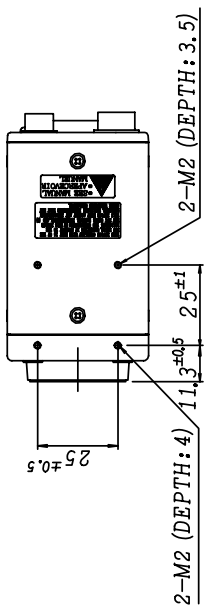

COLOR: BLACK

COLOR: BLACK

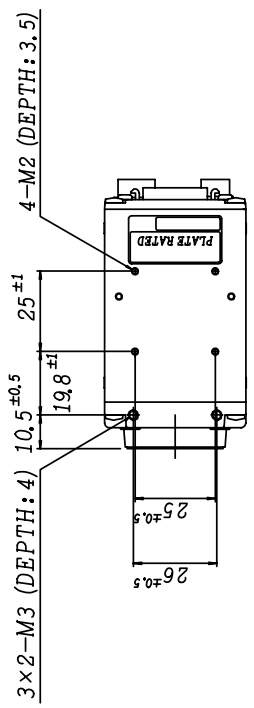

SCALE : NTS
 UNIT : mm
 MASS : APPROX 180 g

DWN		
DSGN		
CHKD		
APPD		

Hitachi Kokusai Electric Inc.
 Tokyo, Japan