



VHF TRANSCEIVER

IC-F51V



128 ch/
8 zones

2-Tone, 5-Tone
BLS-1200 compatible

5W RF
700mW AF

IP67 Dust-tight
and Waterproof

8-character
LCD display

Voice
recorder

Vibration
alert

Radio

Pager



VIBRATION ALERT



700 mW (typ.) AUDIO OUTPUT



VOICE STORAGE




Never miss in with loud audio, vibration

Vibration alert function

When a pre-programmed 2-tone/5-tone code or call from a specific group user (BIIS mode) or a status message (BIIS mode) is received, the radio vibrates powerfully enough to be felt through heavy clothing.

8 minute voice recorder

When a pre-programmed 2-tone/5-tone code or a call from a specific group user (BIIS mode) is received, the voice recorder automatically starts recording the incoming message. You will not miss an important call even when you are temporarily away from the radio. You can manually start recording incoming calls and also your own message. It records up to a maximum of 8 minutes (Or up to 48 calls of 10 sec. recording time).



" * " icon on the display shows you have a new message.

700mW audio output

The IC-F51V delivers a loud 700mW* audio output with the built-in BTL amp. The built-in audio compander provides clear, low noise communications. Improved bass characteristics also betters the audio quality. * Typical with internal speaker.

Lone worker function for remote check in

When the radio is not operated for a preset period (1 to 255 min.), the radio sounds a beep and requires you to push the emergency button. If the emergency button is not pushed for a preset time (1 to 255 sec.), an emergency signal automatically transmits and informs your co-worker or dispatcher that something may have happened to the individual worker.

IP67, dust-tight and waterproof protection

The IC-F51V has outstanding protection against dust and water that is equivalent to IP67. The IC-F51V can withstand submersion in 1m depth of water for up to 30 minutes and has dust-tight construction that prevents the ingress of dust.



Most popular signalings built-in

Use the built-in CTCSS, DTCS, 2-Tone, 5-Tone and BIIS signaling capabilities to set up your talk group or selective calling. The IC-F51V can decode ten 2-Tone codes or eight 5-Tone codes on a channel. When a matched tone is received, the following actions are programmable for each code.

- Bell icon
- Answer back call
- Beep sound
- Auto transmit
- Radio Stun/Kill/Revive
- Voice recorder
- Vibration alert



VHF TRANSCEIVER

IC-F51V

Important calls alert and voice recorder!

BIIS 1200 Compatible

The following selective calling and ANI features are available with the built-in BIIS signaling.

The following selective calling and data communication features are available with the BIIS system.

- 32 abbreviated call memories
- RS-232C interface
- 7 group IDs
- 24-status Messages
- Radio stun
- 8-character SDM (Short Data Message)
- Position data transmission with optional HM-170GP

Mode dependent scan

In the mode dependent setting, the scanning setting is dependent on the operating channel. When you change the operating channel, the scanning list automatically changes to the operating channel setting. It is convenient when you move to a different operating area and change an operating channel, you don't have to change the scanning setting.

Enhanced scanning

The Tx channel while scanning can be programmed per scanning list. The talk back function allows you to transmit on the channel detected after scanning resumes after a preset time, prior to the Tx channel setting. The nuisance delete function temporarily deletes a busy channel from the scanning list. Backlight at stop scan automatically turns on the LCD backlight when the scan stops.

Compact body

56(W)×97(H)×36.4(D) mm compact body with durable, dependable construction, has been tested to MIL standard specifications.

Li-Ion battery pack

The large capacity 1700mAh Lithium-Ion (Li-Ion) battery pack, BP-227 provides a practical 9–10 hours* of operating time.

* Typical operation Tx:Rx: Stand-by=5:5:90

Other features

- 128 memory channels with 8 zones
- Inversion type*1 voice scrambler built-in
- Optional VOX headsets available
- Optional GPS speaker-microphone
- Power ON password
- 8 DTMF autodial
- Normal and priority scans
- 2-step power saver and 2-step low battery beep
- MDC 1200 mode programmable
- BTL only version (no vibration alert and no voice recorder) and BTL/Vibration alert version (no voice recorder) available*2 and more...

*1 Inversion type voice scrambler is not compatible with UT-109/UT-110 voice scrambler. UT-109/UT-110 cannot be physically installed into the IC-F51V.

*2 Not available in some countries.

OPTIONS

Some options may not be available in some countries. Please ask your dealer for details.



BP-226 : AA (LR6)×5 BATTERY CASE
BP-226 is water-resistant, equivalent to IPX4.
BP-227 : 7.2V/1700mAh Li-Ion BATTERY PACK
Provides 9–10 hours operating time* (approx.).
Operating temp. range: -20°C to +60°C; -4°F to +140°F.
* Tx: Rx: standby=5:5:90.




BC-152 DESKTOP CHARGER
+ **BC-147** AC ADAPTER
Regularly charges the BP-227 in 9–10 hours.



BC-119N DESKTOP CHARGER
+ **AD-100** CHARGER ADAPTER
+ **BC-145** AC ADAPTER
Rapidly charges the BP-227 in 2–2.5 hrs.



BC-121N MULTI-CHARGER + **AD-100** CHARGER
ADAPTER + **BC-157** AC ADAPTER
Rapidly charges up to 6 battery packs (Six AD-100s are required) in 2–2.5 hrs.

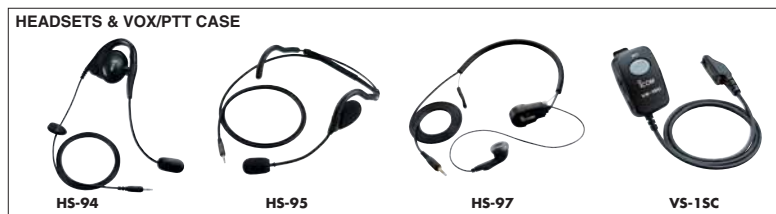

HS-94 : Earhook headset with flexible boom microphone.
HS-95 : Behind-the-head headset with flexible boom microphone.
HS-97 : Throat microphone fits around your neck and picks up speech vibration.
VS-15C : VOX/PTT CASE. Required when using these headsets with the transceiver.
These headsets and VS-15C are water-resistant, equivalent to IPX4.




HM-138 : Full sized speaker-microphone. Equivalent to IPX7.
HM-168 : Compact type speaker-microphone. Equivalent to IPX7.
HM-169 : Rugged type speaker-microphone. Equivalent to IP57.
HM-170GP: GPS speaker-microphone for BIIS mode. Equivalent to IP57.




MB-86 : Swivel type. Prevents accidental dropping from your belt.
MB-98 : Alligator type. Same as supplied.
MB-96F : Fixed type belt hanger for use with MB-98.
MB-96N : Swivel type belt hanger.



FA-S24V : 136–150MHz (Blue ring)
FA-S59V : 150–174MHz (Red ring)
FA-S62VS: 150–162MHz (90mm stubby type, red)
FA-S63VS: 160–174MHz (90mm stubby type, green)

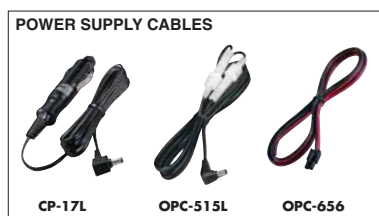

CP-17L : 12V cigarette lighter cable for BC-119N or BC-152.
OPC-515L: DC power cable for BC-119N or BC-152.
OPC-656 : DC power cable for BC-121N.

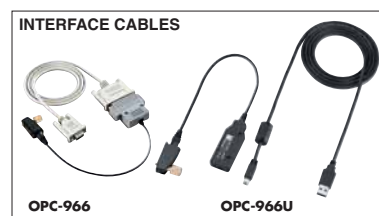

OPC-966 : RS-232C interface cable for connection with a PC.
OPC-966U: USB interface cable for connection with a PC.

SPECIFICATIONS

GENERAL

- Frequency range : 136–174MHz
- Number of Channels : Max. 128 channels/ 8 zones
- Channel spacing : 12.5/20/25kHz
- PLL channel step : 2.5/3.125kHz
- Antenna impedance : 50Ω (SMA Type)
- Power supply requirement : 7.2V DC
- Current drain (approx.) :
 - Transmit at 5W 1.8A
 - at 1W 0.7A
 - Receive AF max. 500mA (Internal speaker)
 - 350mA (External speaker)
 - Stand-by 85mA
- Operating temperature range : –25°C to +55°C
- Dimensions (W×H×D) : 56 × 97 × 36.4mm (projections not included)
- Weight (approx.) : 280g (With BP-227)

TRANSMITTER

- Output power : 5.0W
- Modulation system : Variable reactance frequency modulation
- Max. frequency deviation : ±5kHz (wide)
- ±4kHz (middle)
- ±2.5kHz (narrow)
- Frequency error : ±2.5ppm
- Spurious emissions : 0.25μW (≤ 1GHz)
- 1.0μW (> 1GHz)
- Modulation limiting : 60–100% of Max. deviation
- Audio harmonic distortion : 3% typ. (AF 1kHz, 40% deviation)
- Adjacent channel power : 70dB Min. (wide, middle)
- 60dB Min. (narrow)
- External MIC impedance : 9-pin multi connector/2.2kΩ

Measurements made in accordance with ETS 300-086.
All stated specifications are subject to change without notice or obligation.

RECEIVER

- Sensitivity : –4dBμV typ. (emf, at 20dB SINAD)
- Squelch sensitivity : –4dBμV typ. (emf, at threshold)
- Adjacent channel selectivity : 75dB typ. (wide, middle)
- 65dB typ. (narrow)
- Spurious response : 70dB
- Intermodulation : 67dB typ.
- Hum and noise : 55dB typ. (wide)
- (With CCITT filter) 53dB typ. (middle)
- 50dB typ. (narrow)
- Audio output power : 0.7W typ. (Internal speaker)
- 0.5W typ. (External speaker)
- at 5% distortion with an 8Ω load
- External SP connector : 9-pin multi connector/8Ω

Applicable U.S. Military Specifications

Icom makes rugged products that have been tested to and passed the following MIL-STD requirements and strict environmental standards.

| Standard | MIL 810F | |
|-------------------|----------|-----------|
| | Method | Procedure |
| Low Pressure | 500.4 | I, II |
| High Temperature | 501.4 | I, II |
| Low Temperature | 502.4-3 | I, II |
| Temperature Shock | 503.4 | I |
| Solar Radiation | 505.4 | I |
| Rain | 506.4 | I, III |
| Humidity | 507.4 | – |
| Salt Fog | 509.4 | – |
| Dust Blowing | 510.4 | I |
| Vibration | 514.5 | I |
| Shock | 516.5 | I, IV |

Also meets equivalent MIL-STD-810-C, -D and -E.

Ingress Protection Standard

| | |
|--------------|---|
| Dust & Water | IP67 (Dust-tight and waterproof protection) |
|--------------|---|

Supplied accessories:

- Antenna (Length may differ according to version)



- Alligator-type belt clip, MB-98
- Battery pack, BP-227

Icom, Icom Inc. and the Icom logo are registered trademarks of Icom Incorporated (Japan) in the United States, the United Kingdom, Germany, France, Spain, Russia and/or other countries.

Icom Inc.

1-1-32, Kami-minami, Hirano-ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013 URL: <http://www.icom.co.jp/world/index.html>

Count on us!

Icom America Inc.

2380 116th Avenue NE,
Bellevue, WA 98004, U.S.A.
Phone : +1 (425) 454-8155
Fax : +1 (425) 454-1509
E-mail : sales@icomamerica.com
URL : <http://www.icomamerica.com>

Icom New Zealand

146A Harris Road, East Tamaki,
Auckland, New Zealand
Phone : +64 (09) 274 4062
Fax : +64 (09) 274 4708
E-mail : inquiries@icom.co.nz
URL : <http://www.icom.co.nz>

Icom (UK) Ltd.

Unit 9, Sea St., Herne Bay,
Kent, CT6 8LD, U.K.
Phone : +44 (01227) 741741
Fax : +44 (01227) 741742
E-mail : info@icomuk.co.uk
URL : <http://www.icomuk.co.uk>

Asia Icom Inc.

6F No. 68, Sec. 1 Cheng-Teh Road,
Taipei, Taiwan, R.O.C.
Phone : +886 (02) 2559 1899
Fax : +886 (02) 2559 1874
E-mail : sales@asia-icom.com
URL : <http://www.asia-icom.com>

Icom Canada

Glenwood Centre #150-6165 Highway 17,
Delta, B.C., V4K 5B8, Canada
Phone : +1 (604) 952-4266
Fax : +1 (604) 952-0090
E-mail : info@icomcanada.com
URL : <http://www.icomcanada.com>

Icom (Europe) GmbH

Communication Equipment
Himmelgeister Str. 100,
D-40225 Düsseldorf, Germany
Phone : +49 (0211) 346047
Fax : +49 (0211) 333639
E-mail : info@icom-europe.com
URL : <http://www.icomeurope.com>

Icom France s.a.s.

Zac de la Plaine,
1 Rue Brindejonc des Moulinais, BP 45804,
31505 Toulouse Cedex 5, France
Phone : +33 (5) 61 36 03 03
Fax : +33 (5) 61 36 03 00
E-mail : icom@icom-france.com
URL : <http://www.icom-france.com>

Beijing Icom Ltd.

10C07, Long Silver Mansion, No.88, Yong Ding
Road, Haidian District, Beijing, 100039, China
Phone : +86 (010) 5889 5391/5392/5393
Fax : +86 (010) 5889 5395
E-mail : bjicom@bjicom.com
URL : <http://www.bjicom.com>

Your local distributor/dealer:

Icom (Australia) Pty. Ltd.

Unit 1 / 103 Garden Road,
Clayton, VIC 3168 Australia
Phone : +61 (03) 9549 7500
Fax : +61 (03) 9549 7505
E-mail : sales@icom.net.au
URL : <http://www.icom.net.au>

Icom Spain S.L.

Ctra. Rubi, No. 88 "Edificio Can Castanyer"
08190, Sant Cugat del Valles, Barcelona, Spain
Phone : +34 (93) 590 26 70
Fax : +34 (93) 589 04 46
E-mail : icom@icomspain.com
URL : <http://www.icomspain.com>

Icom Polska

Sopot, 3 maja 54, Poland
Phone : +48 (59) 550 7135
Fax : +48 (58) 551 0484
E-mail : icompolksa@icompolksa.com.pl
URL : <http://www.icompolksa.com.pl>