

 ICOM

FM TRANSCEIVER

IC-T8A

(U.S.A. version)

IC-T8E

(Europe version)




Meets  
**MIL-STD 810**

## The world's smallest full-featured tri-band transceiver.

### Switchable tri-bander

Three band operation, 144, 430(440) and 50 MHz bands, is possible one band at a time. Simply push the "BAND" switch to select the active band—uniquely simple for 3-band operation.

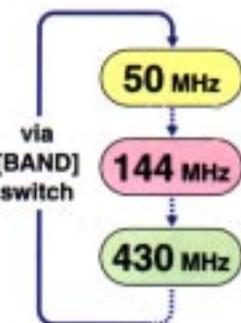

### Compact body

Measuring only 58(W) × 107(H) × 28.5(D) mm\*, the IC-T8A/E has the dimensions of a single band handheld and yet offers operation on 3 bands.

\*with BP-198/199; 2 $\frac{1}{2}$ (W) × 4 $\frac{7}{8}$ (H) × 1 $\frac{1}{8}$ (D) in

### Ample RF output power

A powerful 5 W\* of RF output is available for all operating bands—50\*, 144 and 430/440 MHz.

\*13.5 V DC; 50 MHz band is receive only for Europe/Italy versions.

### Rugged construction, meets MIL-STD 810

Conforms to the demanding MIL-STD requirements for shock (MIL 810 C, D, E) and vibration (MIL 810 C, D, E).

### Water-resistant\* construction

No need to worry when the weather turns for the worse. The IC-T8A/E is water-resistant\* and can be safely operated under wet conditions.

\*Meets grade 4 JIS water-protection specifications.

### Tone squelch with pocket beep


Tone squelch and pocket beep functions are standard, providing quiet stand-by. Pocket beep also provides a 'pager-like' function. In addition, a tone scan function is standard, allowing you to determine subaudible tones required to access repeaters.

### Ni-MH battery standard

The IC-T8A/E comes with a Ni-MH battery pack providing longer operating times than comparable Ni-Cd battery packs.

### Other features

- PC programmable (optional cloning software and cable are required)
- LCD backlight with timer
- DTMF encoder with 9 DTMF memories
- Mic. simple remote control function is available (optional HM-75A is required)
- Narrow and wide FM capability and AM receive
- Built-in guide function and more...

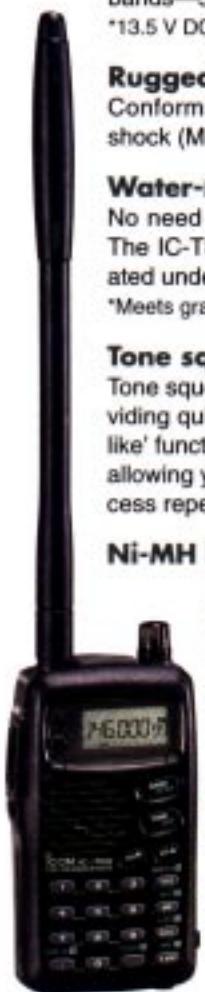

Icom Inc.

## SPECIFICATIONS

## GENERAL

| Version | 50 MHz band        | 144 MHz band                                           | 430/440 MHz band                                       |
|---------|--------------------|--------------------------------------------------------|--------------------------------------------------------|
| USA     | 50-54              | Tx: 140-150 <sup>**</sup><br>Rx: 118-174 <sup>**</sup> | Tx: 430-450 <sup>**</sup><br>Rx: 400-470 <sup>**</sup> |
| Europe  | 50-52<br>(Rx only) | 144-146                                                | 430-440                                                |
| Italy   | 50-52<br>(Rx only) | 136-174 <sup>**</sup>                                  | Tx: 430-440<br>Rx: 400-470 <sup>**</sup>               |
| Asia    | 50-54              | Tx: 140-150 <sup>**</sup><br>Rx: 118-174 <sup>**</sup> | 430-440                                                |

<sup>\*\*</sup>Guaranteed range: 144-148 MHz<sup>\*\*</sup>Guaranteed range: 430-440 MHz<sup>\*\*</sup>Guaranteed range: 440-450 MHz

- Mode : FM, WFM (Rx only), AM (118-136; Rx only)
- No. of memory ch.: 123 (incl. 10 scan edges and 1 call for each band)
- Frequency stability : ±5 ppm (0°C to +60°C)
- Operating temperature range: transceiver only -10°C to +60°C; +14°F to +140°F  
w/Ni-MH battery 0°C to +50°C; +32°F to +122°F

- Power supply requirement: 4.5-16 V DC (negative ground)
- Current drain (at 13.5 V DC):
  - Tx at 5 W 1.4 A (typical)
  - at 0.5 W 0.6 A (typical)
  - Rx max. audio 200 mA (typical)
  - standby 70 mA (typical)
  - power saved 30 mA (typical) 1:8
- Antenna connector : SMA (50 Ω)
- Dimensions (proj. not incl.; w/BP-198/199): 58(W)×107(H)×28.5(D) mm; 2 1/2(W)×4 1/2(H)×1 1/8(D) in
- Weight : 280g; 9.9 oz (with BP-196)

## OPTIONS

## BATTERY PACKS AND CASE

| BP-197                 | BP-198                 | BP-199                 | BP-200                 |
|------------------------|------------------------|------------------------|------------------------|
| Re (AA)<br>batteries×3 | Ni-MH<br>4.8 V/700 mAh | Ni-MH<br>6.0 V/700 mAh | Ni-MH<br>9.6 V/680 mAh |



Approx. output powers and operating times (Tx: high); Rx: Stand-by; S: Standby

| BATTERY PACK | OUTPUT POWER  | BATTERY LIFE |
|--------------|---------------|--------------|
| BP-198       | 1.3 W typical | 8 hrs.       |
| BP-199       | 2.0 W typical | 5 hrs.       |
| BP-200       | 4.5 W typical | 4 hrs.       |

## LC-147 CARRYING CASE



Helps protect the transceiver from scratches, etc. Fits any battery pack.

## HS-51 HEAD SET



Allows you hands-free operation. Includes VOX, PTT, "one-touch PTT" (TOT).

## Icom Inc.

6-9-16, Kamigasho, Hirano-ku, Osaka 547, Japan Phone: 06 793 5302 Fax: 06 793 0013

## Icom America Inc.

<Corporate Headquarters>  
2360 116th Avenue N.E., Bellevue, WA 98004, U.S.A.  
Phone: (425) 454-9155 Fax: (425) 454-1509  
Telex: 152210 ICOM AMER BVUE

## &lt;Customer Service&gt;

Phone: (425) 454-7619

## Icom Canada

A Division of Icom America Inc.  
3671 #5 Road, Unit 9, Richmond, B.C., V6X 2T4, Canada  
Phone: (604) 273-7400 Fax: (604) 273-1900

## Icom (Australia) Pty. Ltd.

A.C.N. 008 082 575  
290-294 Albert Street, Brunswick, Victoria, 3056, Australia  
Phone: 03 9387 0096 Fax: 03 9387 0022

## Icom (Europe) GmbH

Communication Equipment  
Hirnweg 100, D-40225 Düsseldorf, Germany  
Phone: 0211 346047 Fax: 0211 333639

## Icom Telecommunications s.l.

"Edificio Can Castanyer" Ctra. Gracia a Manresa km. 14,750  
08190 Sant Cugat Del Vallès Barcelona, SPAIN  
Phone: (3) 589 46 82 Fax: (3) 589 04 46

## Icom (UK) Ltd.

Unit 9, Sea St., Herne Bay, Kent, CT6 8LD, U.K.  
Phone: 01227 741741 Fax: 01227 741742  
Telex: 317210 BUREAU G

## Icom France S.a.

Zac de la Plaine Rue Brindepont des Moulins  
BP 5804, 31500 Toulouse Cedex, France  
Phone: 561 36 03 03 Fax: 561 36 03 00  
Telex: 521515 ICOM FRA

## RECEIVER

- Receiver system : Double superheterodyne
- Intermediate freq. : 1st 41.85 MHz  
2nd 13.35 MHz (WFM)  
450 kHz (except WFM)
- Sensitivity (at 12 dB SINAD) : Less than 0.18 μV (WFM)
- Squelch sensitivity (at threshold) : Less than 5.6 μV (WFM)
- Selectivity : Less than 15 kHz/6 dB  
More than 30 kHz/60 dB
- Spurious response (except IF and 2nd image frequency):  
50, 144 MHz bands -60 dB (typical)  
430/440 MHz band -50 dB (typical)  
(-50 dB for all bands at 1/2 IF image frequency)
- Audio output power : 250 mW typical with an 8 Ω load
- Ext. SP connector : 3-conductor 3.5 (d) mm (1/8")  
8 Ω

## Supplied accessories

- Battery back\*
- Antenna
- Belt clip
- Wall charger\*

\*depending on version

All stated specifications are subject to change without notice or obligations.

## TRANSMITTER

- Output power (at 13.5 V DC):  
High 5 W  
Low 0.5 W
- Variable reactance frequency modulation
- Spurious emissions : Less than -60 dB
- Max. freq. deviation : ±5 kHz
- Ext. mic. connector : 3-conductor 2.5 (d) mm (1/8")  
/2 kΩ

## SPEAKER-MICROPHONES



HM-46: Compact and lightweight. Equipped with an earphone jack.

HM-54: Durable, full-sized speaker-microphone.

HM-75A: Allows you to remotely select memory channels operating frequency, etc. Simple remote and normal remote are selectable.

## BC-110A/D/V

WALL CHARGER  
Regularly charges battery packs. The same as supplied with some versions.

## CS-18 CLONING SOFTWARE

-OPC-478 CLONING CABLE  
Provides quick and easy programming of items, including memory channels, memory names and set mode contents, for local repeater frequencies, etc., via an IBM compatible PC.

## OPC-474 CLONING CABLE

Used for handheld-handheld data cloning.

## Count on us!

Your local distributor/dealer: