


## **9516/ 303X User manual**

**MAIN**

Push the crown to change Mode.

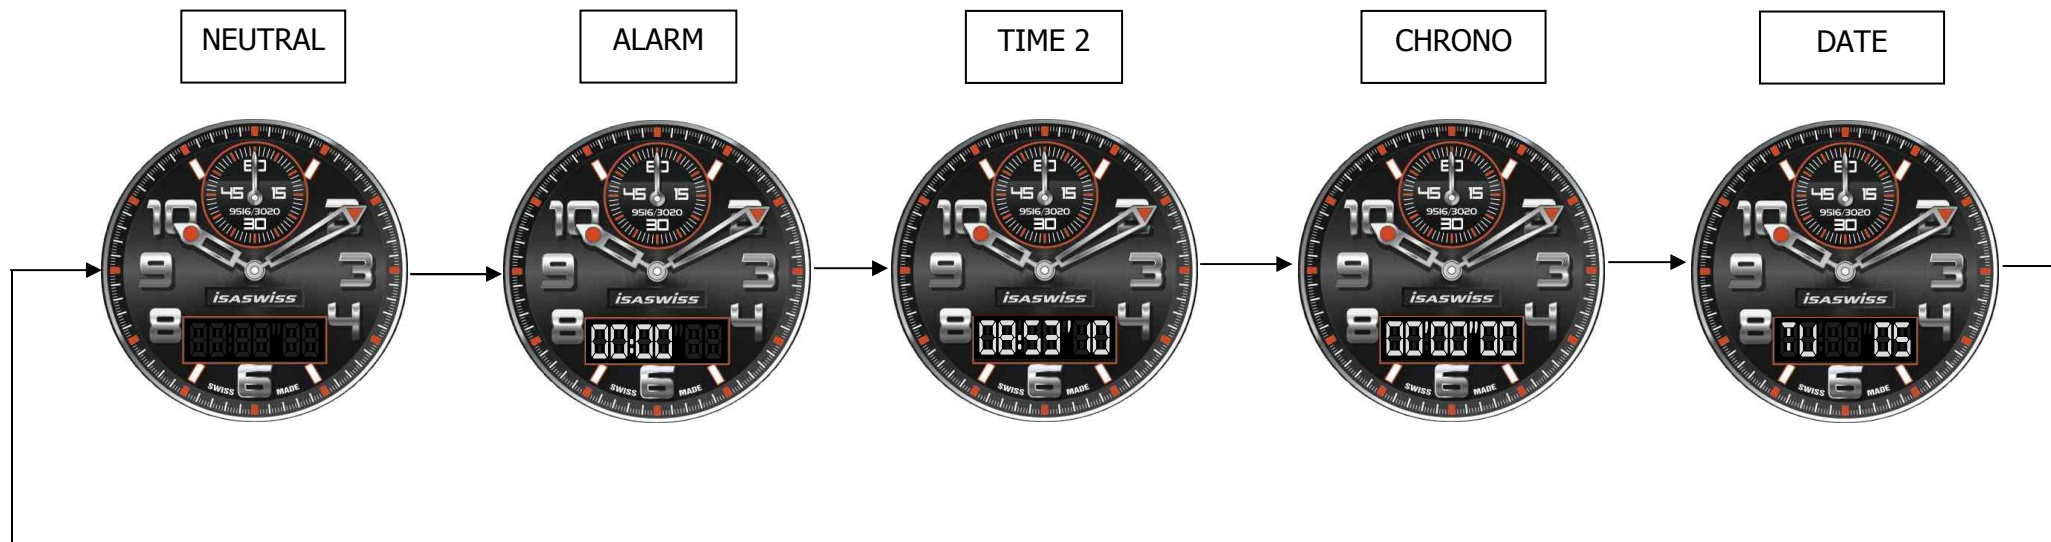

### SYNCHRONIZING THE HANDS

From each mode, push the crown at least 3 seconds. Movement is going into synch mode for adjust and synchronize the hands position.



*Push A  
Small second hand runs*



*Turn up or down the crown  
Minute hand runs*

*Push the crown to get out*

### TIME SETTING

From each mode, pull the crown. Movement is going into time setting mode. The small second hand stops.



*Turn up or down the crown  
to set hour,  
the display will follow hands*



*Push A  
changes between 12h/24h mode*

### NEUTRAL FUNCTION



### Actions:

- A: not used
- B: not used
- B 1 second: not used
- Crown push: Change mode

**ALARM FUNCTION**



*ON*



*OFF*

**Actions:**

- A: Change alarm status
- B: not used
- B 1 second: Alarm setting
- Crown up or down: EL on for 5 seconds
- Crown push: Change mode

**To adjust Alarm push B at least 1 second.**



To go out of setting mode quickly, push the crown, else wait for 5 seconds.

**TIME 2 FUNCTION**



**Actions:**

- A: not used
- B: not used
- B 1 second: Time 2 setting
- Crown up or down: EL on for 5 seconds
- Crown push: Change mode

**To adjust Time 2 push B at least 1 second.**



To go out of setting mode quickly, push the crown, else wait for 5 seconds.



### CHRONO FUNCTION



### Actions:

Read description down

**1. Measure of elapsed time**

Push on A to start the chrono. Push on A to stop the chrono, display shows the elapsed time.  
Push on B to reset the chrono.

**2. Measure of cumulated time**

Same operations as **1.** but replace "push on B" by push on A to restart the chrono

**3. Reading of a partial time when chrono display is frozen**

Push on A to start the chrono.  
Push on B to freeze the display.  
Push on B to defreeze the display that gives again the time really elapsed.

**4. Measure of a second time**

This operation is a combination of the preceding points:

- Push on A to start the chrono
- Push on B to freeze the display (The chrono still count)
- Push on A to stop the chrono (pictograms don't blink because chrono is stop)
- Push on B to defreeze the display: display gives the time elapsed at the moment of chrono stop.  
Push on B to reset the chrono


### DATE FUNCTION



### Actions:

- A: not used
- B: not used
- B 1 second: Date setting
- Crown up or down: EL on for 5 seconds
- Crown push: Change mode

**To adjust Date push B at least 1 second.**

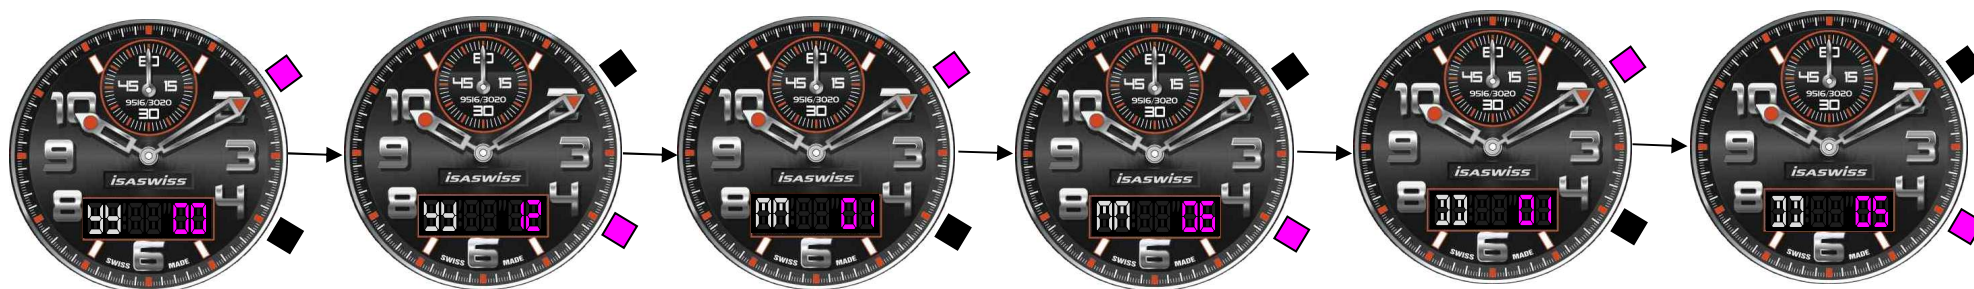

To go out of setting mode quickly, push the crown, else wait for 5 seconds.

### LOW BATTERY

When Low battery is detected all functions are disabled, small second is stopped.  
If Alarm was ON it will not be disabled until ring.

