

# JVC

# SERVICE MANUAL

## COLOUR TELEVISION

BASIC CHASSIS

MD

### AV-32WL1EU AV-32WL1EI AV-32WL1EK

Supplementary

Since some details of the AV-32WL1EU / AV-32WL1EI / AV-32WL1EK service manual (No.51733 Jun. 2000) were changed, we are informing you of these changes and of the new descriptions.

#### 1. OUTLINE OF CHANGE

To improve CRT performance, CRT manufacturer has changed location of VM coil wire connector on the CRT neck.


When changing CRT from old to new type, it is necessary to add extension cable CHHB03-100R-SA, between CRT SKT PCB and new VM coil connector.

When ordering replacement CRT, Please order CHHB03-100R-SA at same time.


#### 2. HOW TO IDENTIFY MODEL (CRT : W76ERF031X044)

Old type: Has a short VM wire, coming from the CRT VM PCB/Coil Assy for connecting to CRT PCB VM coil wire.

New type: VM coil wire is connected directly into the right hand side of CRT neck.

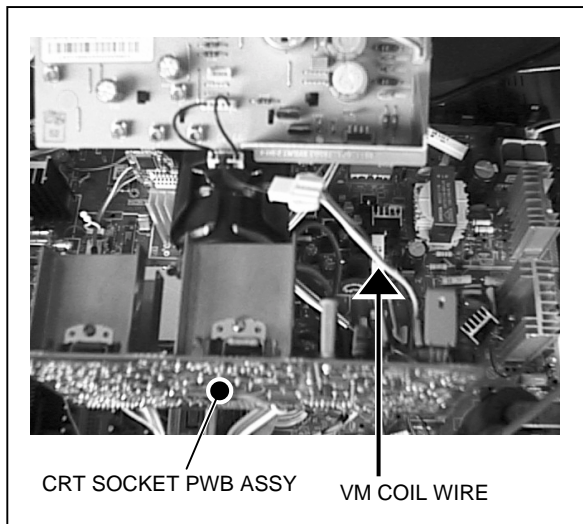

[Fig.1]

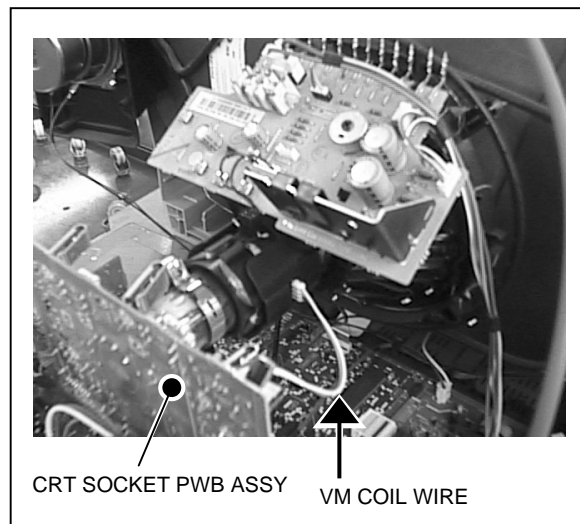

[Fig.2]


### 3. LIST OF NEW TYPE CRT USING LONGER VM COIL WIRE (No need to add additional extension wire)

All sets listed before the serial numbers below require additional extension wire.

Model name	Start serial number (New long VM wire)
AV-32WL1EU	15583431 Onwards
AV-32WL1EI	16580231 Onwards
AV-32WL1EK	14583631 Onwards

### 4. METHOD FOR CHANGING, FROM OLD TO NEW CRT TYPE

- ① Order CHHB03-100R-SA, at the same time as CRT.
- ② Attach one end of CHHB03-100R-SA, to VM coil Wire. (See Fig 3)
- ③ Insert opposite end of CHHB03-100R-SA wire, into CRT's VM coil wire connection. (See Fig 2)

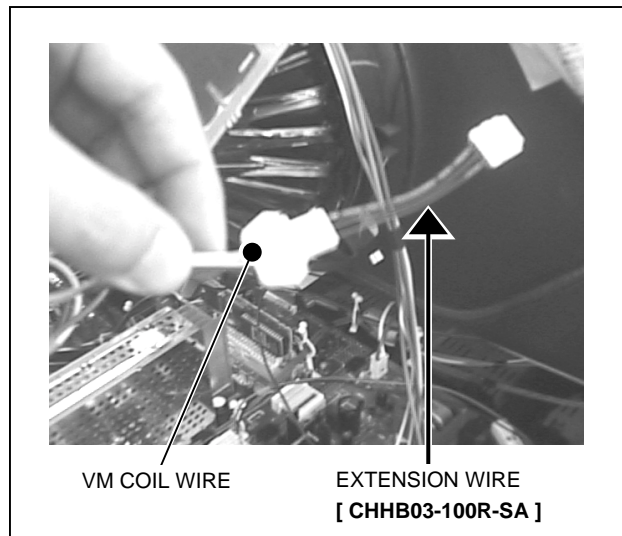

[Fig.3]

# JVC

VICTOR COMPANY OF JAPAN, LIMITED  
HOME AV NETWORK BUSINESS UNIT 1106 Heta, Iwai-city, Ibaraki-prefecture, 306-0698, Japan

AV-32WL1EU-U #10  
AV-32WL1EI-U #11  
AV-32WL1EK-U #5



Printed in Japan  
VP 0102  
MS